# Safe Shipyard Practices Program (S2P2) Post-Test Answer Sheet

### Introduction

True or False: For each statement below, circle True or False.

1.	Τ	F	OSHA Stands for Occupational Safety and Health Administration
2.	Т	F	Since 1970 (the date OSHA was created) work related fatalities have been cut by 62%
3.	Т	F	Employers are responsible to keep a safe and healthy workplace
4.	Т	F	Under certain conditions, employees are not required to comply with OSHA standards
5.	Т	F	An MSR is approved by OSHA and is solely responsible for meeting safety requirements

### Walking Working Surfaces


Multiple Choice: For each of the following questions, circle the most appropriate letter.

6. One of the most common reasons for slipping is:	
a) Wearing wrong foot wear	
b) Slippery Surfaces	
c) Both a and b	
d) None of the above	
7. What often separates walking from working areas?	
a) Fencing	
b) Blue line	
c) Yellow line	

8.	To keep hoses clear of a walkway you must:
a)	Elevate the hoses over the walkway
b)	Place hoses under the walkway
c)	Both are acceptable
d)	Neither are acceptable

### **Personal Protective Equipment (PPE)**

Draw a line from the eye/face protection on the left to its key feature(s) on the right.

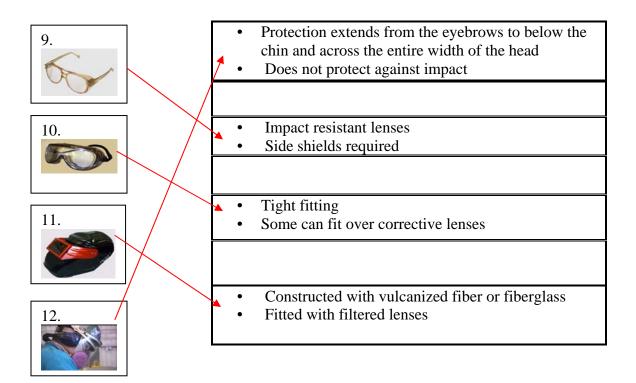

True or False: For each statement below, circle True or False.

13.	Т	F	You must wear a hard hat and safety glasses on board ship at <i>all</i> times
14.	Т	F	Welders must tie back their hair while welding
15.	Т	F	Your footwear must have steel toes if you are on-board
16.	Т	F	You can never wear contact lenses in production areas

### Fall Protection/Scaffolding

Fill In the Blank.

17. Fall protection is required when working <i>five</i> feet or more above a lower level
18. A step ladder <i>can't</i> (can or cant) be used as a straight ladder
19. A <i>fixed</i> ladder is permanently attached to a structure, building or equipment
20. Platforms of staging shall be not less than <i>two</i> 10 inch planks in width
21. You <i>may not</i> (may or may not) modify scaffolding if it's in the way

## **Electrical/Lockout-Tagout**

True or False: For each statement below, circle True or False.

22.	Т	F	Voltage is the opposition to current flow
23.	Т	F	We get shocked when we become part of the current flow
24.	Т	F	Grounding is the physical connection to the earth
25.	Т	F	An overcurrent device is designed to make a strong link in the circuit
26.	Т	F	You may use a flexible cord that runs through a wall

Multiple Choice: For each of the following questions, circle the most appropriate letter.

27. Typically, Piping, pumps and actuators can release what type of hazardous energy?
a) Chemical
b) Hydraulic (Pneumatic)
c) Mechanical
28. Which rule below is not one of the 3 basic rules?
a) Never shut down equipment without authorization

b)	Never work on an energized system
c)	Never operate any tagged device
<b>29</b>	. Who will remove tags and return to normal operation?
a)	Supervisor
b)	Journeyman
c)	Ship's Force
d)	Safety Technician

### **Confined Spaces**

Place the correct Term Number (Column 1) in the answer box for each definition.

	Term	Answer	Definition
30.	Dangerous Atmosphere	35	Spaces bordering a subject space in all directions
31.	Hazardous Material	31	One characteristic is a flashpoint below 140 degrees
32.	Hotwork	30	Atmosphere that may expose employees to risk
33.	Confined Space		Atmosphere that poses an immediate threat to life or acute adverse health effects
34.	IDLH	32	Spark producing operation
35.	Adjacent Space	33	Small size and limited access

### **Fire Protection**

True or False: For each statement below, circle True or False.

36.	Т		Organizations must use either an outside fire response team or an internal fire response team. They can not use a combination of the two
37.	Т	F	If a fire watch must leave for any reason all hot work must stop
38.	Т	F	The emergency response audio signal is the same in all of the yards
39.	Т	F	While performing hotwork on a bulkhead or deck you must post a fire watch on each side
40.	Т	F	If you report to a muster area you may leave without contacting the supervisor in charge, provided you let your buddy know
41.	Т	F	The muster area is always the same regardless of where you are

#### **Hazardous Communication**

True or False: For each statement below, circle True or False.

43.	Т	F	In both the HMIS and NFPA the color red represents Reactivity
44.	Т	F	In both the HMIS and NFPA the number 2 represents a Slight Hazard Level
45.	Т	F	A label must describe the required PPE needed to handle the hazardous material
46.	Т	F	All MSDS must provide information regarding toxicity

### **Respirator Protection**

Multiple Choice: For each of the following questions, circle the most appropriate letter.

47. To wear a respirator you must:	
a. Be clean shaven at the seal	
b. Be fit tested	
c. Both a and b	
48. Which of the substances below should you use to clean your respirator	
a. Alcohol	
b. Acetone	
c. Water	
49. Prior to wearing contact lenses in the production area you must	
a. You can never wear contact lenses in production areas	
b. Get approval by your supervisor	
c. Receive written verification of need by your optometrist	
50. Who provides respirator cartridges to subcontract workers on a host site	
a. Subcontract employer	
b. Host yard tool shed	
c. Host yard safety department	