

ELEVATED WATER TANK - MUMFORD POINT CAMP No. 2


BORING No. 626 -

	0.8	SAND HUMUS AND CLAY	EL. TOP OF GROUND = +21.5
FOOTERS ↓ 0.4	2.6	SAND AND CLAY (10 TO 20% CLAY)	EL. GROUND WATER = +6.5
	1.0	SAND AND CLAY (50-50)	
	1.3	SAND	
3.2 COVER ↓	0.5	SAND	
	1.0	SAND AND CLAY (50-50)	
	3.0	FAIRLY STIFF CLAY ?	
	0.8	SAND AND CLAY (20 TO 30% CLAY)	
	0.7	SAND AND CLAY (10 TO 20% CLAY)	
G.W. ↓	3.3	SAND	
	1.2	SAND AND CLAY (5 TO 10% CLAY)	
	0.4	SAND AND CLAY (20 TO 30% CLAY)	
	0.4	SAND AND CLAY (30 TO 40% CLAY)	
	17.0	HOLE CAVING IN - IMPOSSIBLE TO GO DEEPER	

ELEVATED WATER TANK - MUMFORD POINT CAMP No. 2

BORING No. 627 - WEST LEG OF WATER TANK

	1.0	HUMUS SAND AND CLAY	EL. TOP OF GROUND = +22.0
	2.3	SAND AND CLAY (5 TO 10% CLAY)	EL. GROUND WATER = +6.6
FOOTERS ↓ 0.7	0.4	SAND AND CLAY (10 TO 20% CLAY)	
	1.0	SAND AND CLAY (50-50)	
3.6 COVER ↓	1.5	SAND	
	1.4	SAND AND CLAY (50-50)	
	2.1	FAIRLY STIFF CLAY ?	
	0.5	FAIRLY STIFF CLAY AND SAND (10 TO 20% SAND) ?	
	1.1	SAND AND CLAY (30 TO 40% CLAY)	
	0.4	SAND AND CLAY (20 TO 30% CLAY)	
	1.9	SAND AND CLAY (5 TO 10% CLAY)	
G.W. ↓	2.4	SAND	
	0.8	SAND AND CLAY (5 TO 10% CLAY)	
	0.2	FAIRLY STIFF CLAY ?	
	1.1	SAND AND CLAY (30 TO 40% CLAY)	
	0.9	SAND AND CLAY (10 TO 20% CLAY)	
	19.0	HOLE CAVING IN AT BOTTOM - CAN'T GO ANY FARTHER WITHOUT CASING	

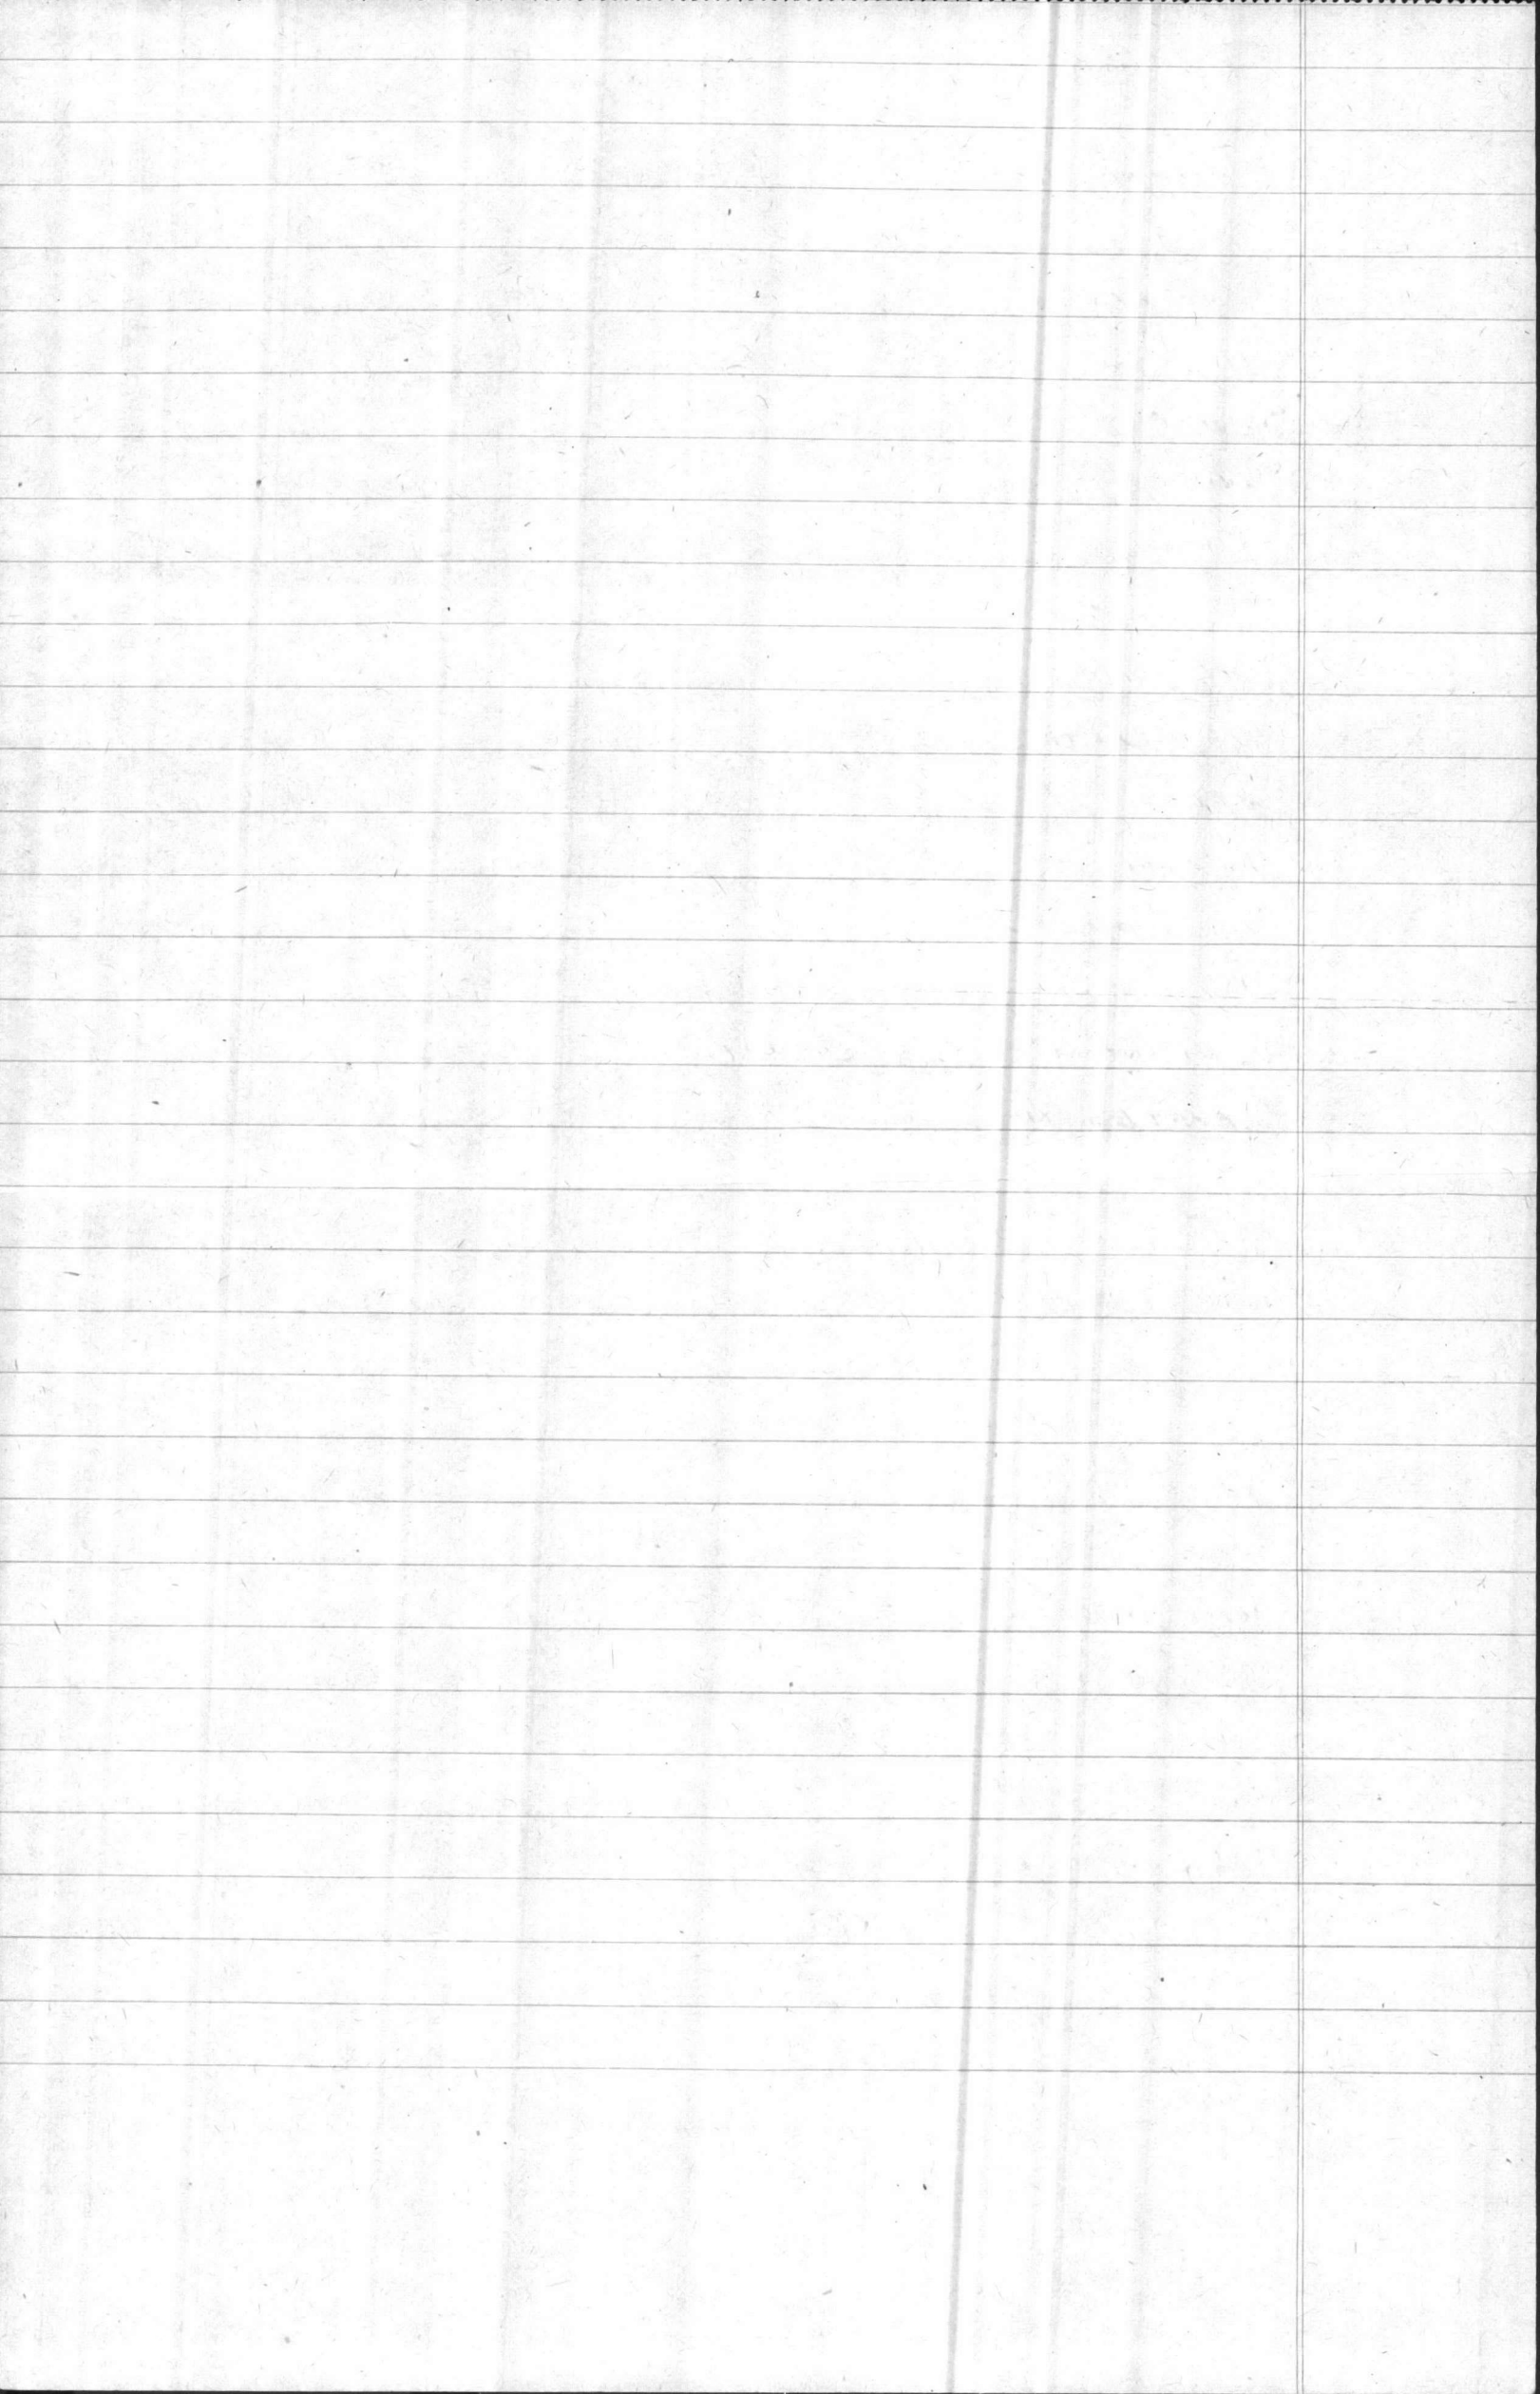

ELEVATED WATER TANK - MUMFORD POINT CAMP No. 2

BORING No. 628 -

	0.5	HUMUS SAND AND CLAY	EL. TOP OF GROUND = +21.4
FOOTER	2.7	SAND AND CLAY (20 TO 30% CLAY)	EL. GROUND WATER = +5.9
↓ 2.1	0.9	SAND AND CLAY (50-50)	
3.1 COVER	1.7	SAND	
	1.3	SAND AND CLAY (50-50)	
	2.1	FAIRLY STIFF CLAY ?	
	1.9	SAND AND CLAY (30 TO 40% CLAY)	
	1.0	SAND AND TRACE OF CLAY	
G ↓ W	3.4	SAND	
	0.9	SAND AND CLAY (5 TO 10% CLAY)	
	0.4	SAND AND CLAY (5 TO 10% CLAY)	
	1.2	SAND AND CLAY (10 TO 20% CLAY)	

18.0 BORING IS CARVING IN AT ELEVATION 6. IMPOSSIBLE TO GO DEEPER

ELEVATED WATER TANK - MUMFORD POINT CAMP No. 2

BORING No. 629

	0.6	HUMUS SAND AND CLAY	EL. TOP OF GROUND = +21.4
FOOTER	1.5	HUMUS SAND AND CLAY	EL. GROUND WATER = +7.6
↓ 1.8	3.7	SAND AND CLAY (20 TO 30% CLAY)	
3.8 COVER	0.7	SAND AND A TRACE OF CLAY	
	1.3	SAND AND CLAY (50-50)	
	2.8	FAIRLY STIFF CLAY ?	
	1.5	SAND AND CLAY (30 TO 40% CLAY)	
	1.7	SAND AND CLAY (ABOUT 5% CLAY)	
	1.6	SAND	
	0.7	SAND AND CLAY (ABOUT 5% CLAY)	
	0.5	SAND AND CLAY (5 TO 10% CLAY)	
	16.6	HOLE CARVING IN	

