APPENDIX C

PART 572, SUBPART N (6-YEAR-OLD) DUMMY PERFORMANCE CALIBRATION TEST PROCEDURE

APPENDIX C

PART 572, SUBPART N DUMMY PERFORMANCE CALIBRATION TEST PROCEDURE

		TABLE OF CONTENTS	PAGE
1.	PURPOSE /	AND APPLICATION	
2.	GENERAL F	REQUIREMENTS	C-1
3.	SECURITY		C-1
4.	GOOD HOL	JSEKEEPING	C-2
5.	TEST SCHE	EDULING AND MONITORING	C-2
6.	TEST DATA	DISPOSITION	C-2
7.	GOVERNM	ENT FURNISHED PROPERTY (GFP)	C-3
8.	CALIBRATI	ON AND TEST INSTRUMENTATION	C-3
9.	PHOTOGRA	APHY	C-4
10.	DEFINITION	VS	C-4
11.	PRETEST F	REQUIREMENTS	C-5
	11.1 11.2 11.3 11.4 11.5	TRANSDUCER REQUIREMENTS OTHER TRANSDUCER CONDITIONS THORAX IMPACTOR PROBE KNEE IMPACTOR PROBE GENERAL TEST CONDITIONS	C-6 C-6 C-7
12.	CALIBRATI	ON TEST EXECUTION	C-10
13.	POST TEST	REQUIREMENTS	C-10
14.	REPORTS		C-10
	14.1 14.2	APPARENT TEST FAILURE FINAL PERFORMANCE CALIBRATION REPORTS	
15.	C1 C2 C3 C4 C5 C6 C7 C8 C9	ETS DUMMY DAMAGE CHECKLIST EXTERNAL MEASUREMENTS HEAD DROP TEST NECK FLEXION TEST NECK EXTENSION TEST THORAX IMPACT TEST TORSO FLEXION TEST LEFT KNEE IMPACT TEST	C-13 C-15 C-22 C-25 C-27 C-32 C-32 C-37 C-40 C-42
	C10	INSTRUMENTATION CALIBRATION INFORMATION	C-4

ILLUSTRATIONS

		PAGE
1C.	SIGN CONVENTION	C-8
2C.	EXTERNAL DIMENSIONS SPECIFICATIONS	C-19
3C.	EXTERNAL DIMENSIONS TEST SETUP FRONT VIEW	C-20
4C.	EXTERNAL DIMENSIONS TEST SETUP SIDE VIEW	C-21
5C.	HEAD DROP TEST SET-UP SPECIFICATION	C-24
6C.	NECK PENDULUM SPECIFICATIONS	C-29
7C.	NECK FLEXION TEST SETUP SPECIFICATIONS	C-30
8C.	NECK EXTENSION TEST SETUP SPECIFICATIONS	C-31
9C.	THORAX IMPACT TEST SETUP SPECIFICATIONS	
10C.	THORAX HYSTERESIS	C-36
11C.	TORSO FLEXION TEST SETUP SPECIFICATIONS	C-39
12C.	KNEE IMPACT TEST SETUP SPECIFICATIONS	C-44

TABLES

1C.	SIGN CONVENTION FOR HYBRID III TRANSDUCER OUTPUTS	C-8
-----	---	-----

1. PURPOSE AND APPLICATION

The purpose of this laboratory procedure is to provide dummy users (independent testing laboratories under contract with the Office of Vehicle Safety Compliance) with standard test procedures for performing receiving-inspection and performance calibration tests on the Part 572, Subpart N dummy so that repetitive and correlative test results can be obtained. The following tests have been developed to establish a uniform calibration procedure for all users as the means of verifying the performance of the dummy.

- A. EXTERNAL DIMENSIONS (drawing 127-0000 sheet 5 of 6, & PADI)
- B. HEAD DROP TEST (572.122)
- C. NECK FLEXION TEST (572.123(b)(1))
- D. NECK EXTENSION TEST 572.123(b)(2)
- E. THORAX IMPACT TEST ((572.124)
- F. TORSO FLEXION (572.125)
- G. KNEE IMPACT TESTS (572.126)

This laboratory procedure for the calibration of Part 572, Subpart N dummies must be used by National Highway Traffic Safety Administration (NHTSA) contract laboratories performing FMVSS 213 testing for the Office of Vehicle Safety Compliance (OVSC).

2. GENERAL REQUIREMENTS

The Code of Federal Regulations (49CFR), Parts 571 and 572, was amended to adopt the Hybrid III, 6-Year-Old Child Dummy as the means of determining a Child Restraint System's (CRS's) conformance to the performance requirements of FMVSS 213. Each Part 572, Subpart N dummy used in a compliance test must meet the specifications and performance criteria of Part 572.

The Part 572, Subpart N Hybrid III, 6-Year-Old Child Dummy consists of components and assemblies specified in the drawing and specifications package which is available from Reprographics Technologies, 9000 Virginia Manor Road, Beltsville, MD 20705,

3. SECURITY

All NHTSA Part 572, Subpart N test dummies delivered to the contract laboratory as Government Furnished Property (GFP) will be stored in a safe and secure area such as the dummy calibration laboratory. The contractor is financially responsible for any acts of theft and/or vandalism which occur during the storage of GFP. Any security problems shall be reported by telephone to the Industrial Property Manager (IPM), Office of Contracts and Procurement, within two working days after the incident. A letter containing specific details of the security problem will be sent to the IPM (with copy to the COTR) within 48 hours. The contractor is responsible for maintaining the NHTSA test dummies in good working order, and shall protect and segregate the data that evolves from conducting Part 572, Subpart N dummy calibration tests before and after each CRS test.

No Information concerning the Part 572, Subpart N dummy calibration data shall be released to anyone except the COTR, unless specifically authorized by the COTR or the COTR's Branch or Division Chief.

NOTE: No Individuals, other than contractor personnel directly involved in the dummy calibration test program, shall be allowed to witness dummy calibration tests unless specifically authorized by the COTR.

4. GOOD HOUSEKEEPING

Contractors shall maintain the entire dummy calibration laboratory, test fixtures, and instrumentation in a neat, clean, and painted condition with test instruments arranged in an orderly manner consistent with good test laboratory housekeeping practices.

5. TEST SCHEDULING AND MONITORING

The Part 572, Subpart N dummies are being calibrated as test tools to be used in determining CRS compliance with the requirements of FMVSS 213. The schedule for these performance calibration tests must be correlated with that of the CRS tests. All testing shall be coordinated to allow monitoring by the COTR.

6. TEST DATA DISPOSITION

The contractor shall make all dummy calibration data available to the COTR for review and analysis as required. All calibration test data for each particular Part 572, Subpart N dummy will be sent to the COTR with each test report.

All backup data sheets, strip charts, recordings, plots, technicians notes, etc. shall be either sent to the COTR or destroyed at the conclusion of each delivery order, purchase order, etc.

7. GOVERNMENT FURNISHED PROPERTY (GFP)

Part 572, Subpart N test dummies will be furnished to the contract laboratory by the OVSC. The dummies shall be stored in an upright sitting position with the weight supported by the internal structure of the pelvis. The dummies head shall be held upright by using a strap around the chest or the base of the neck so that the neck is not supporting the weight of the dummy. These dummies shall be stored in a secured room that is kept between 55°F and 85°F. The contractor will check dummy components for damage after each crash test and complete a dummy damage checklist that will be included with the posttest dummy calibration. The COTR will be kept informed of the dummies condition in order that replacement parts can be provided.

8. CALIBRATION AND TEST INSTRUMENTATION

Before the contractor initiates the dummy performance calibration test program, a test instrumentation calibration system must be implemented and maintained in accordance with established calibration practices. The calibration system shall be set up and maintained as follows:

- A. Standards for calibrating the measuring and test equipment shall be stored and used under appropriate environmental conditions to assure their accuracy and stability.
- B. All measuring instruments and standards shall be calibrated by the contractor, or a commercial facility, against a higher order standard at periodic intervals not exceeding 6 months for instruments and 12 months for calibration standards. Records, showing the calibration traceability to the National Institute of Standards and Technology (NIST), shall be maintained for all measuring and test equipment.
- C. All measuring and test equipment and measuring standards shall be labeled with the following information:
 - (1) Date of calibration
 - (2) Date of next scheduled calibration
 - (3) Name of the technician who calibrated the equipment
- D. The contractor shall provide a written calibration procedure that includes, as a minimum, the following information for all measurement and test equipment:
 - (1) Type of equipment, manufacturer, model number, etc.

- (2) Measurement range
- (3) Accuracy
- (4) Calibration interval
- (5) Type of standard used to calibrate the equipment (calibration traceability of the standard must be evident)
- (6) The actual procedures and forms used to perform calibrations.
- E. The contractor shall keep records of calibrations for all test instrumentation in a manner that assures the maintenance of established calibration schedules. All such records shall be readily available for inspection when requested by the COTR. The calibration system will need the written acceptance of the COTR before testing begins.
- F. Test equipment shall receive a calibration check immediately prior to and after each test. This check shall be recorded by the test technician(s) and submitted with the final report.

9. RESERVED

10. **DEFINITIONS**

PADI: Procedures for Assembly, Disassembly, and Inspection

11. PRETEST REQUIREMENTS

11.1 TRANSDUCER REQUIREMENTS

The contractor shall provide and install the following instrumentation to the GFP dummies (excluding the chest deflection transducer).

 HEAD – The head accelerometers shall have dimensions, response characteristics and sensitive mass locations specified in drawing SA572-S4 and be mounted in the head as shown in drawing 127-0000 sheet 3. (572.127(c))

Three accelerometers shall be mounted in the head cavity to measure orthogonal accelerations (Ax, Ay, Az) at the center of gravity (CG) of the head assembly.

- B. NECK The upper neck force transducer shall have the dimensions, response characteristics, and sensitive axis locations specified in drawing SA572-S11 and shall be mounted in the head neck assembly as shown in drawing 127-0000, sheet 3. (572.127(d))
- C. CHEST The chest accelerometers shall have the dimensions, response characteristics, and sensitive mass locations specified in drawing SA572-S4 and be mounted in the torso assembly in triaxial configuration at T4 as shown in drawing 127-0000 sheet 3. The chest accelerometers are not required for dummy calibration testing but are required for FMVSS 213 CRS testing. (572.126(e))

The chest deflection transducer shall have the dimensions and response characteristics specified in drawing SA572-S50 and be mounted to the upper torso assembly as shown in drawing 127-0000 sheet 3. (572.127(f))

D. TEST FIXTURE – The neck pendulum, thorax and knee probe accelerometers shall have the dimensions and characteristics of drawing SA572-S4.

11.2 OTHER TRANSDUCER CONDITIONS

- A. TRANSDUCER MOUNTS The mountings for sensing devices shall have no resonance frequency less than 3 times the frequency range of the applicable channel class. (572.127(m))
- B. TRANSDUCER SIGN CONVENTION The sign convention for outputs of transducers mounted within the dummy that measure head and chest accelerations, chest deflection and femur loads are located in Figure 1C and Table 1C. For other transducers see SAE J1733DEC94. (572.127(I))
- C. TRANSDUCER OUTPUTS and FILTERING The outputs of acceleration and force-sensing devices installed in the dummy and in the test apparatus specified by this part are recorded with individual data channels. Each data channel will be comprised of a sensor, signal conditioner, data acquisition device, and all interconnecting cables, and must conform to the requirements of SAE Recommended Practice J211/1 MAR95, "Instrumentation for Impact Test," with channel classes as follows: (572.127(k))
 - (1) Head acceleration
 - (2) Neck force
 - (3) Neck pendulum acceleration
 - (4) Neck moment transducers
 - (5) Thorax and thorax pendulum acceleration
 - (6) Sternum deflection
 - (7) Knee pendulum acceleration
 - (8) Femur force
 - (9) Torso flexion

Class 1000 (572.127(k)(1)) Class 1000 (572.127(k)(2)(i)) Class 180 (572.127(k)(2)(iii)) Class 600 (572.127(k)(2)(ii)) Class 180 (572.127(k)(3)(ii))

Class 600 (572.127(k)(3)(iii)) Class 600 Class 600 (572.127(k)(6)) Class 60

All filter classes should be of the "phaseless" type to be compatible with the "time" dependent test parameters.

11.3 THORAX IMPACTOR PROBE (572.127(a))


- A. The test probe for thoracic impacts shall be of rigid metallic construction, concentric about its longitudinal axis.
- B. It shall have a mass of 2.86 ± 0.02 kg (6.3 ± 0.05 lbs). 1/3 of the weight of the suspension cables and any attachments to the impact probe must be included in the calculation of mass, and such components may not exceed 5 percent of the total weight of the test probe.
- C. It shall have a minimum mass moment of inertia of 160 kg-cm² (0.141 lbs-in-sec²) in yaw and pitch about the center of gravity.

- D. The impacting end of the probe is perpendicular to and concentric with the longitudinal axis. It must have a flat, continuous, and non-deformable face with diameter of 101.6 ± 0.25 mm (4.00 ± 0.01 in) and a edge radius of 7.6-12.7 mm (0.3-0.5 in).
- E. The impactor is a cylinder with a diameter of 101-103 mm (4.0-4.1 in) and it is at least 12.5 mm (0.5 in) long.
- E. The probe's end opposite to the impact face must have provisions for mounting of an accelerometer with its sensitive axis collinear with the longitudinal axis of the probe.
- F. The impact probe shall have a free air resonant frequency of not less than 1000 Hz in the direction of the longitudinal direction of the impactor.

11.4 KNEE IMPACTOR PROBE (572.127(b))

- A. The test probe for knee impacts shall be of rigid metallic construction, concentric in shape and symmetric about is longitudinal axis.
- B. It shall have a mass of 0.82 ± 0.02 kg (1.8 ± 0.05 lbs). 1/3 of the weight of the suspension cables and any attachments to the impact probe must be included in the calculation of mass, and such components may not exceed 5 percent of the total weight of the test probe.
- C. It shall have a minimum mass moment of inertia of 34 kg-cm² (0.03 lbs-in-sec²) in yaw and pitch about the center of gravity.
- D. The impacting end of the probe is perpendicular to and concentric with the longitudinal axis. It must have a flat, continuous, and non-deformable face with diameter of 76.2 ± 0.2 mm (3.00 ± 0.01 in) and a maximum edge radius of 7.6-12.7 mm (0.3-0.5 in).
- E. The impactor is a cylinder with a diameter of 76-77 mm (3.0-3.1 in) and it is at least 12.5 mm (0.5 in) long.
- F. The probe's end opposite to the impact face must have provisions for mounting of an accelerometer with its sensitive axis collinear with the longitudinal axis of the probe.
- G. The impact probe shall have a free air resonant frequency of not less than 1000 Hz in the direction of the longitudinal direction of the impactor.

SIGN CONVENTION FOR PART 572 TEST DUMMIES

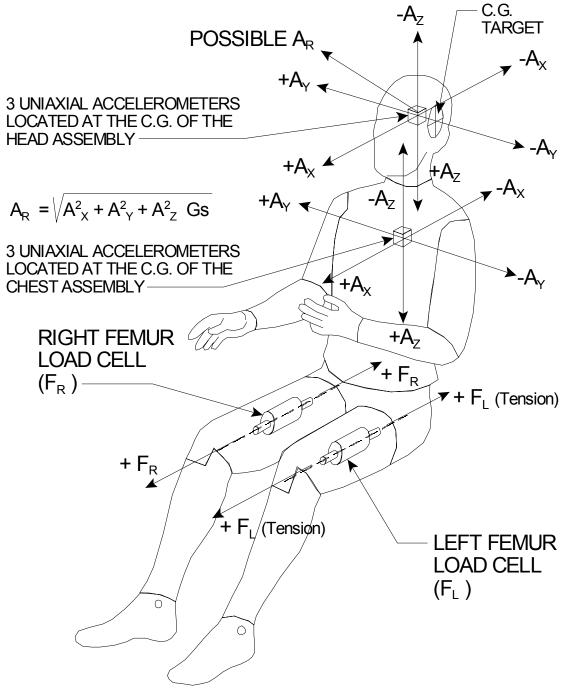

SIGN CONVENTION FOR HYBRID III TRANSDUCER OUTPUTS			
BODY SEGMENT — MEASURED FORCE	POSITIVE OUTPUT DIRECTION		
NECK FX SHEAR FY SHEAR FZ AXIAL	HEAD REARWARD OR CHEST FORWARD HEAD LEFTWARD, CHEST RIGHTWARD HEAD UPWARD, CHEST DOWNWARD		
MX MOMENT (ROLL) MY MOMENT (PITCH) MZ MOMENT (YAW)	LEFT EAR TOWARD LEFT SHOULDER CHIN TOWARD STERNUM CHIN TOWARD LEFT SHOULDER		
FEMUR FX SHEAR FY SHEAR FZ AXIAL	KNEE UPWARD, UPPER FEMUR DOWNWARD KNEE RIGHTWARD, UPPER FEMUR LEFTWARD KNEE FORWARD (TENSION), PELVIS REARWARD		
MX MOMENT (ROLL) MY MOMENT (PITCH) MZ MOMENT (YAW)	KNEE LEFTWARD, HOLD UPPER FEMUR IN PLACE KNEE UPWARD, HOLD UPPER FEMUR IN PLACE KNEE ROTATED CCW WHEN FACING FRONT OF DUMMY		
KNEE CLEVIS - FZ AXIAL	TIBIA DOWNWARD (TENSION), FEMUR UPWARD		
UPPER TIBIA MX MOMENT MY MOMENT	ANKLE LEFTWARD, HOLD KNEE IN PLACE ANKLE FORWARD, BOTTOM OF KNEE CLEVIS REARWARD		
LOWER TIBIA FX SHEAR FY SHEAR FZ AXIAL	ANKLE FORWARD, KNEE REARWARD ANKLE RIGHTWARD, KNEE LEFTWARD ANKLE DOWNWARD (TENSION), KNEE UPWARD		
MX MOMENT MY MOMENT	ANKLE LEFTWARD, HOLD KNEE IN PLACE ANKLE FORWARD, BOTTOM OF KNEE CLEVIS REARWARD		
CHEST DISPLACEMENT	CHEST COMPRESSED - NEGATIVE		
KNEE SHEAR DISPLACEMENT	PUSH ON FRONT OF TIBIA - NEGATIVE		

TABLE 1C

NOTE: DIRECTIONS ARE DEFINED IN RELATION TO A SEATED DUMMY

11.5 GENERAL TEST CONDITIONS

- A. Surfaces of dummy components are not painted unless otherwise specified. (572.127(p))
- B. Dummy performance tests of the same component, segment, assembly, or fully assembled dummy are separated in time by a period of not less than 30 minutes unless otherwise specified. (572.127(o))
- C. Except for neck assembly and thorax assembly testing, the dummy performance tests are conducted at any temperature from 18.9°C (66°F) to 25.6°C (78°F) and at any relative humidity from 10% to 70% after exposure of the dummy to these conditions for a period of not less than 4 hours. For the neck assembly and thorax assembly, the temperature range is 20.6°C (69°F) to 22.2°C (72°F)
- D. Dummy limb joints are set at 1 G, barely restraining the weight of the limb when it is extended horizontally. The force required to move a limb segment does not exceed 2 Gs throughout the range of limb motion. (572.127(n))
- E. Dummies will be clothed for the thorax calibration tests with a cotton stretch above-the-elbow sleeved shirt and above-the-knee pants. (572.124(c)(2))

12. CALIBRATION TEST EXECUTION

Complete the Data Sheets in section 15.

13. POST TEST REQUIREMENTS

The contractor shall verify all instrumentation and check data sheets and photographs. Make sure data is recorded in all data blocks on every performance calibration test data sheet.

14. **REPORTS**

14.1 APPARENT NONCONFORMANCE

During the post test calibration verification, any indication of apparent nonconformance to the requirements of Regulation P572 shall be communicated by telephone to the COTR within 24 hours with written notification mailed within 48 hours (Saturdays and Sundays excluded). Written notification shall be submitted with a copy of the particular test data sheet(s) and preliminary data plot(s). In the event of an apparent nonconformance, a post test calibration check of some critically sensitive test equipment and instrumentation may be required for verification of accuracy. The necessity for the calibration shall be at the COTR's discretion and shall be performed without additional costs to the OVSC.

14.2 FINAL PERFORMANCE CALIBRATION REPORTS

14.2.1 COPIES

A report containing the pre-test calibration and post test calibration verification data for each Part 572, Subpart N dummy used in the CRS compliance test shall be submitted with FMVSS 213 final test reports.

Contractors are required to PROOF READ all Final Test Reports before submittal to the COTR. The OVSC will not act as a report quality control office for contractors. Reports containing a significant number of errors will be returned to the contractor for correction, and a "hold" will be placed on invoice payment for the particular test.

14.2.2 REQUIREMENTS

Performance calibration report Table of Contents shall include the following:

- A. Section 1 Purpose of Calibration Test
- B. Section 2 Calibration Data Summary
- C. Section 3 Test Data
- D. Section 4 Test Equipment List and Calibration Information
- E. Section 5 Photographs (if applicable)

The test data for each dummy will be presented in separate sections. Each section shall contain a title page, test results summary and the test data. The title page shall include the dummy's serial number and he manufacturer's name. It will also indicate whether the calibration data is pre or post test. The test results sheets will provide a summary of each test and describe any damage, failures and/or corrective action taken. The test data shall include the pass/fail data sheets, the time histories for each data channel used to determine the pass or fail status, and instrumentation calibration data sheets.

14.2.3 FIRST PAGE

FRONT COVER

A heavy paperback cover (or transparency) shall be provided for the protection of the final report. The information required on the cover is as follows:

A. Final Report Title And Subtitle such as

DUMMY PERFORMANCE CALIBRATION IN SUPPORT OF CHILD RESTRAINT SYSTEM TESTING FMVSS No. 213

B. Contractor's Name and Address such as



ABC TESTING LABORATORIES, INC. 405 Main Street Detroit, Michigan 48070

NOTE: DOT SYMBOL WILL BE PLACED BETWEEN ITEMS B AND C

- C. Date of Final Performance Calibration Report completion
- D. The sponsoring agency's name and address as follows

U. S. DEPARTMENT OF TRANSPORTATION National Highway Traffic Safety Administration Enforcement Office of Vehicle Safety Compliance 400 Seventh Street, SW Room 6111 (NVS-222) Washington, DC 20590

15. Data Sheets

DATA SHEET C1 DUMMY DAMAGE CHECKLIST

Dummy Serial Number _____ Test Date _____

Technician _____

This check sheet is completed as part of the post test calibration verification.

___ Perform general cleaning.

Dummy Item	Inspect for	Comments	Damaged	OK
Outer skin	Gashes, rips, cracks			
Head	Ballast secure			
	General appearance			
Neck	Broken or cracked			
	rubber			
	Upper neck bracket			
	firmly attached to			
	the lower neck			
	bracket			
	Looseness at the			
	condyle joint			
	Nodding blocks			
	cracked or out of			
	position			
Spine	Broken or cracks in			
	rubber.			
Ribs	Broken or bent ribs			
	Broken or bent rib			
	supports			
	Damping material			
	separated or			
	cracked			
	Rubber bumpers in			
	place			
Chest	Bent shaft			
Displacement				
Assembly				
	Slider arm riding in			
	track			
Abdomen	Proper positioning			
Transducer	Torn cables			
leads				

Dummy Item	Inspect for	Comments	Damaged	OK
Accelerometer	Head mounting			
Mountings	secure			
	Chest mounting			
	secure			
Knees	Skin condition			
	Insert (do not			
	remove)			
	Casting			
Limbs	Normal movement			
	and adjustment			
Knee Sliders	Wires intact			
	Rubber returned to			
	"at rest" position			
Pelvis	Broken			
Other				

If upon visual examination, damage is apparent in any of these areas, the appropriate engineer or engineering technician is to be consulted for a decision on repair or replacement of parts.

Repair or Replacement approved by:

Signature

Date

Describe the repair or replacement of parts:

Checked by

Signature

DATA SHEET C2 EXTERNAL MEASUREMENTS

Dummy Serial Number _____

Test Date _____

Technician _____

_Pretest calibration

Post test calibration verification

- ___1. Remove the dummy's chest jacket and the abdominal insert.
- 2. Seat the dummy on a flat, rigid, smooth, clean, dry, horizontal surface as shown in Figure 3C and 4C. The seating surface is at least 215.9 mm (8.5 in) wide and 330.2 mm (13 in) in depth with a vertical section at least 215.9 mm (8.5 in) wide and 635 mm (25 in) high attached to the rear of the seating fixture. The dummy's midsagittal plane is vertical and centered on the test surface.
- __3. Remove the four $\frac{1}{4}$ -20 x 7/8 SHCS that attach the lumbar spine bracket to the pelvis. Torque the spine cable to 0.22 ± .02 NM (2.0 ± 0.2 in-lbs).

NOTE: At this point the thorax is to be inspected for damage. The thorax displacement transducer may be removed for calibration if required (pretest calibration only). Extreme caution to be used so as not to damage the instrumentation cables.

- _4. Reassemble the lumbar spine bracket to the pelvis.
- 5. Secure the dummy to the test fixture so that the rear surfaces of the upper thorax and the buttock are tangent to the rear vertical surface of the fixture. (or as near tangent as possible). The dummy's midsagittal plane should be vertical.
- 6. Position the dummy's H-point so it is $68.6 \pm 5.1 \text{ mm} (2.7 \pm 0.2 \text{ in})$ above the horizontal seating surface and $94.0 \pm 5.1 \text{ mm} (3.7 \pm 0.2 \text{ in})$ forward of the rear vertical surface of the fixture. The H-point is located 34.5 mm (1.36 in) forward and 48.7 mm (1.92 in) downward from the center pelvic angle reference hole.
- _7. Extend the dummy's neck so that the plane perpendicular to the skull to skullcap interface is level both fore-and-aft and side-to-side, within 0.5 degrees. (The vertical mating surface between the skull and skull cap will be vertical.) The rear surface of the skullcap should be 20.3 ± 2.5 mm (0.8 ± 0.1 in) from the vertical surface of the test fixture. A strap or bungee cord may be placed around the forehead of the dummy to stabilize the head in this position.
- 8. Position the upper and lower legs parallel to the midsagittal plane so the knee and ankle pivots centerlines are parallel, forming a 90° angle between the tibia and femur.
- __9. Position the feet parallel to the dummy's midsagittal plane with the bottoms horizontal and parallel to the seating surface.
- ___10. Position the upper arms downward vertically so the centerlines of the shoulder yoke and elbow pivots are parallel.

- ___11. Position the lower arms horizontally so the centerline of the elbow and wrist pivot are parallel.
- ___12. Record the dimensions listed in following table, except for dimension Y and Z (reference figure 2C).
- ___13. Install the abdominal insert and chest jacket. Reposition the dummy on the test fixture. The head need not be level as previously specified.
- _____14. Mark the locations AA, and BB, and record the dimensions Y, Z, as specified in following table and figure 2C.

Signature


Date


EXTERNAL DIMENSIONS

HYBRID III, P	HYBRID III, PART 572, SUBPART N EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT	
А	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	622.3 - 647.7		
В	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	348.0 - 363.2		
С	H-POINT HEIGHT	Reference	63.5 - 73.7		
D	H-POINT LOCATION FROM BACKLINE	Reference	88.9 - 99.1		
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	53.3 - 63.5		
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	88.9 - 104.1		
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	182.9 - 198.1		
Н	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	17.8 - 22.8		
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the broad upper surface of clavicle link below the collar ot the lowest part of the flesh of the elbow in line with the elbow pivot bolt.	215.9 - 231.1		
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	157.4 - 177.8		
К	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	370.8 - 391.2		
L	POPLITEAL HEIGHT	Seat surface to the horizontal plane at the bottom of the feet.	269.2 - 289.6		
Μ	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	307.4 - 322.6		

HYBRID III, SUBPART N EXTERNAL DIMENSIONS, continued					
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT	
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	320.0 - 340.4		
0	CHEST DEPTH WITHOUT JACKET	Measured 330.2 ± 5.1 mm above seat surface	129.6 - 144.8		
Р	FOOT LENGTH	Tip of toe to rear of heal	170.2 - 185.4		
Q	STATURE	(THEORETICAL) (Q = A - C - D + R + M)	1099.9 - 1181.1	N/A	
R	BUTTOCK TO KNEE PIVOT LENGTH	The rear surface of the buttocks to the knee pivot bolt	342.9 - 363.3		
S	HEAD BREADTH	The widest part of the head	137.1 - 147.3		
Т	HEAD DEPTH	Back of the head to the forehead	167.6 - 177.8		
U	HIP BREADTH	The widest part of the hips	208.3 - 223.5		
V	SHOULDER BREADTH	Outside shoulder edges, in line with the shoulder pivot bolts	259.1 - 274.3		
W	FOOT BREADTH	The widest part of the foot	62.3 - 77.5		
Х	HEAD CIRCUMFERENCE	Measured at the point as in dim. "T"	510.5 - 530.9		
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 3330.2 ± 5.1 mm above seat surface	596.9 - 622.3		
Z	WAIST CIRCUMFERENCE (with chest jacket and abdominal insert)	Measured 158.8 ± 5.1 mm above seat surface	558.8 - 584.2		
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	325.1 - 335.3		
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	153.7 - 163.9		

EXTERNAL DIMENSION SPECIFICATIONS

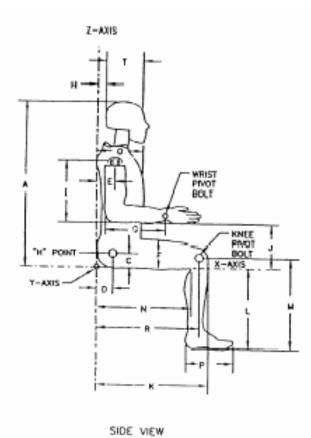



Notes: $Q \approx A - C - D + R + M$

FIGURE 2C

EXTERNAL DIMENSIONS TEST SETUP


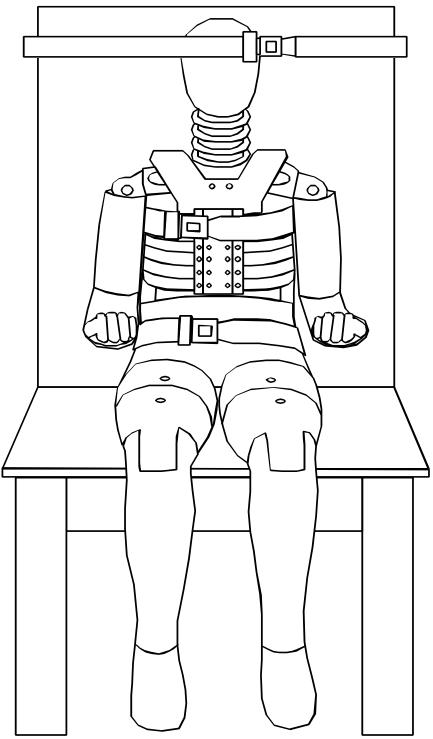


FIGURE 3C

EXTERNAL DIMENSIONS TEST SETUP

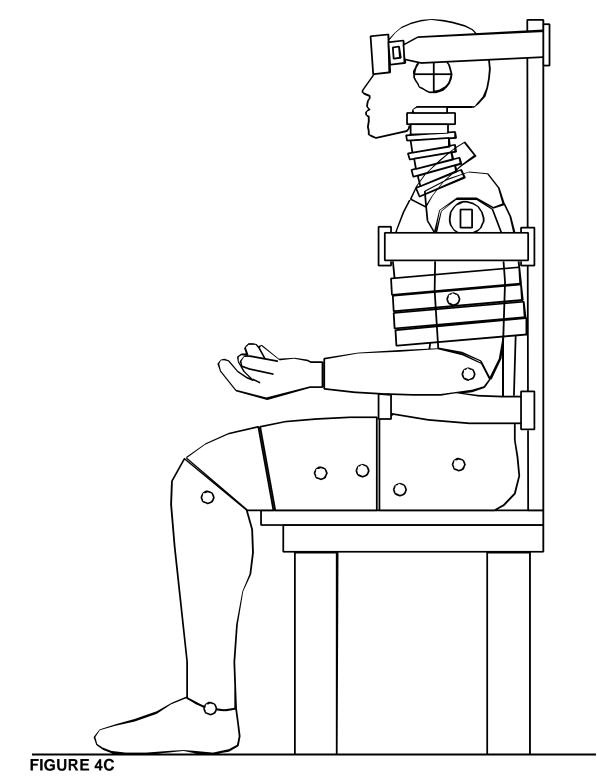

DATA SHEET C3 HEAD DROP TEST (572.122)

Dumm	ny Serial Number Test Date
Techn	ician
	test calibration st test calibration verification
Test a	attempt no (when successive head drops are necessary)
1. 2.	It has been at least 2 hours since the last head drop. (572.122(c)(5)) N/A, ONLY one head drop performed The head assembly consists of the complete head (127-1000), a six-axis neck transducer (SA572-S11) or its structural replacement (78051-383X), a head to
3. 4. 5.	neck pivot pin (78051-339), and three (3) accelerometers (SA572-S4). (572.122(a)) Torque the skull cap screws (10-32 x 1/2 SHCS) to 10.2 Nm. Accelerometers and their respective mounts are smooth and clean.
	The head accelerometer mounting plate screws ((10-24 x 3/8 SHCS) are torqued to 9.0 Nm.
6. 7.	The data acquisition system, including transducers, conforms to the requirements of SAE Recommended Practice J211/1 MAR95. (572.127(k)) The head assembly soaked at a temperature between 18.9°C (66°F) and 25.6°C (78°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to a test. (572.122(c)(1)) Record the maximum temperature Record the minimum temperature Record the maximum humidity
8.	Record the minimum humidity
Q	Clean the impact surface of the skin and the impact surface of the fixture with

_9. Clean the impact surface of the skin and the impact surface of the fixture with isopropyl alcohol, trichloroethane or equivalent prior to the test. (572.122(c)(2))

10. Suspend and orient the head assembly as shown in Figure 5C. The lowest point on the forehead is 376.0 ± 1.0 mm (14.8±0.04 inch) from the impact surface. (572.122(c)(3)) Record the actual distance

NOTE: The masses of the suspension device and the accelerometer cables are to be kept as lightweight as possible to minimize their effect on the test results.

- __11. The 1.57 mm (0.062 inch) diameter holes located on either side of the dummy's head are equidistance within 2 mm from the impact surface. A typical test setup is shown in Figure 5C. (572.122(c)(3)) Record the right side distance ______ Record the left side distance
- ____12. The impact surface is clean and dry and has a micro finish in the range of 203.2x10⁻⁶ mm (8 micro inches) to 2032.0x10⁻⁶ mm (80 micro inches) (RMS). (572.122(c)(4))

Record actual micro finish

- __13. The impact surface is rigidly supported. (572.122(c)(4))
- __14. The impact surface is a flat horizontal steel plate 50.8 mm (2 inches) thick and 610 mm (24 inches) square. (572.122(c)(4)) Record thickness Record width Record length
- __15. Drop the head assembly from a height of 376.0 ± 1.0 mm (14.8 inches ± 0.04 inches) by a means that ensures a smooth, instant release onto the impact surface. (572.122(b) & (572.122(c)(4))
- __16. Complete the following table using channel class 1000 data. (572.122(b)):


Parameter	Specification	Result
Peak resultant acceleration	$245 \text{ g} \le x \le 300 \text{ g}$	
Resultant versus time history curve	Unimodal	
Oscillations after the main pulse	Less than 10% of the peak	
	resultant acceleration	
Lateral acceleration	y-axis acceleration \leq 15 g	

___17. Plots of the x, y, z, and resultant acceleration data follow this sheet.

Signature

Date

HEAD DROP TEST SET-UP SPECIFICATIONS

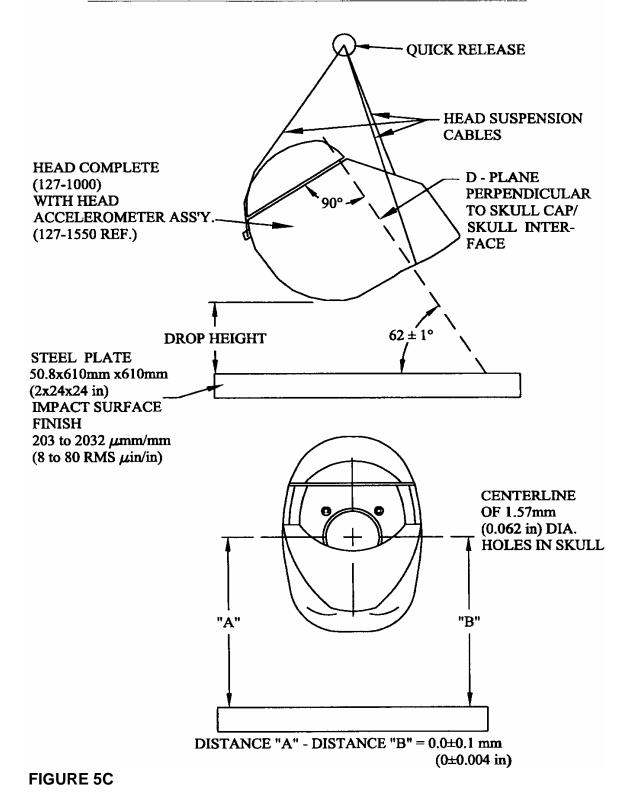

DATA SHEET C4 NECK FLEXION TEST (572.123)

Dummy Serial Number	Test Date	
2		

Technician _____

Pretest calibration

___Post test calibration verification

Test attempt no. _____ (when successive flexion tests are necessary)

- __1. It has been at least 30 minutes since the last neck test. (572.127(o)) __N/A, ONLY one flexion test performed
- _2. The components required for the neck tests include the head assembly (127-1000), neck (127-1015), pivot pin (78051-339), bib simulator (TE127-1025), neck bracket assembly (127-8221), six axis neck transducer (SA572-S11), neck mounting adaptor (TE-2208-001) and three accelerometers (SA572-S4) installed in the head assembly as specified in S572.122. Data from the accelerometers are not required. (572.123(b))
- _3. The assembly soaked at a temperature between 20.6°C (69°F) and 22.2°C (72°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to a test. (572.123(c)(1)) Record the maximum temperature Record the minimum temperature Record the maximum humidity
- Record the minimum humidity ______
 4. Visually inspect neck assembly for cracks, cuts and separation of the rubber from the metal segments. Note: If the damage resulted from the vehicle crash test in which the dummy was an occupant, the damaged area is to be documented with photography and the post test calibration verification testing completed before any replacement or repairs are made. Record findings and actions: ______
- _5. Inspect the nodding blocks (127-1020, 127-1021) for splits or deformation. Inspect the Neck Cable (127-1016) for deformation. Inspect the mounting plate insert (910420-048) and the nylon shoulder bushing (9001373) and replace if they are torn or worn. When replacement is necessary, ONLY replace during pretest calibration.

Record findings and actions:

- __6, Torque the jam nut (9000341) on the neck cable (127-1016) to 0.23 ± 0.02 Nm (2.0 ± 0.2 in-lb). (572.123(c)(2)
- ___7. The data acquisition system, including transducers, conforms to the requirements of SAE Recommended Practice J211/1 MAR95. (572.127(k))
- __8. The test fixture pendulum conforms to the specifications in Figure 6C. (572.123(c)(3))
- ___9. The head-neck assembly is mounted on the pendulum so the midsagittal plane of the head is vertical and coincides with the plane of motion of the pendulum longitudinal centerline as shown in Figure 7C for the flexion test. (572.123(c)(3))
- ____10. With the pendulum resting against the honeycomb material, the neck bracket was adjusted until the longitudinal centerline of the pendulum was perpendicular ± 1 degree to plane "D" on the dummy's head.
- ___11. Release the pendulum and allow it to fall freely from a height to achieve an impact speed of 4.83 m/s to 5.07 m/s as measured at the center of the pendulum accelerometer. (572.123(c)(4))
- ___12. Complete the following table:

Neck Flexion Test Results (572.123(b)(1) & (572.123(c)(4)(i & ii)

Neck Flexion Test Results (372.123(b)(1) & (372.123(c)(4)(1 & 1)				
Parameter		Specification	Result	
Pendulum impac	t speed	4.83 m/s \leq speed \leq 5.07 m/s		
Pendulum	@ 10ms	$1.2 \text{ m/s} \le \Delta V \le 1.6 \text{ m/s}$		
ΔV with respect	@ 20 ms	$2.4 \text{ m/s} \leq \Delta V \leq 3.4 \text{ m/s}$		
to impact	@30ms	$3.8 \text{ m/s} \le \Delta V \le 5.0 \text{ m/s}$		
speed				
Plane D Rotation		Peak moment*	Nm @	
		27 Nm \leq moment \leq 33 Nm during the	degrees	
		following rotation range $74^{\circ} \le angle \le 92^{\circ}$		
Positive Moment Decay**		Time to decay to 5 Nm		
(Flexion)		103 ms \leq time \leq 123 ms		

*Moment about the occipital condyle = $M_y - (0.01778 \text{ m x F}_x) (572.123(b)(1)(iii))$

- My = Moment in Nm measured by the transducer
- Fx = Force, in N measured by the transducer
- **Time zero is defined as the time of initial contact between the pendulum striker plate and the honeycomb material. (572.123(b)(3)
- ___14. Plots of acceleration, velocity, y-axis moment, and x-axis force and y-axis moment about the occipital condyle follow this sheet.

Signature

Date

DATA SHEET C5 NECK EXTENSION TEST (572.123)

Dummy Serial Number _____

Test Date _____

Technician _____

Pretest calibration

__Post test calibration verification

Test attempt no. ____ (when successive extension tests are necessary)

- __1. It has been at least 30 minutes since the last neck test. (572.127(o)) __N/A, ONLY one extension test performed
- 2. The components required for the neck tests include the head assembly (127-1000), neck (127-1015), pivot pin (78051-339), bib simulator (TE127-1025), neck bracket assembly (127-8221), six axis neck transducer (SA572-S11), neck mounting adaptor (TE-2208-001) and three accelerometers (SA572-S4) installed in the head assembly as specified in S572.122. Data from the accelerometers are not required. (572.123(b))
- _3. The assembly soaked at a temperature between 20.6°C (69°F) and 22.2°C (72°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to a test. (572.123(c)(1)) Record the maximum temperature Record the minimum temperature Record the maximum humidity
- Record the minimum humidity ______
 4. Visually inspect neck assembly for cracks, cuts and separation of the rubber from the metal segments. Note: If the damage resulted from the vehicle crash test in which the dummy was an occupant, the damaged area is to be documented with photography and the post test calibration verification testing completed before any replacement or repairs are made. Record findings and actions: ______
- _5. Inspect the nodding blocks (127-1020, 127-1021) for splits or deformation. Inspect the Neck Cable (127-1016) for deformation. Inspect the mounting plate insert (910420-048) and the nylon shoulder bushing (9001373) and replace if they are torn or worn. When replacement is necessary, ONLY replace during pretest calibration.

Record findings and actions:

- 6, Torque the jam nut (9000341) on the neck cable (127-1016) to 0.23 ± 0.02 Nm $(2.0 \pm 0.2 \text{ in-lb}). (572.123(c)(2))$
- 7. The data acquisition system, including transducers, conforms to the requirements of SAE Recommended Practice J211/1 MAR95. (572.127(k))
- The test fixture pendulum conforms to the specifications in Figure 6C. 8. (572.123(c)(3))
- 9. The head-neck assembly is mounted on the pendulum so the midsagittal plane of the head is vertical and coincides with the plane of motion of the pendulum longitudinal centerline as shown in Figure 8C for the extension test. (572.123(c)(3))
- 10. With the pendulum resting against the honeycomb material, the neck bracket was adjusted until the longitudinal centerline of the pendulum was perpendicular ± 1 degree to plane "D" on the dummy's head.
- 11. Release the pendulum and allow it to fall freely from a height to achieve an impact speed of 4.18 m/s to 4.42 m/s as measured at the center of the pendulum accelerometer. (572.123(c)(4))
- 12. Complete the following table:

Neck Extension Test Results $(572.123(D)(2) \& (572.123(C)(4)(1 \& 11))$			
Parameter		Specification	Result
Pendulum impact speed		4.18 m/s \leq speed \leq 4.42 m/s	
Pendulum	@ 10ms	$1.0 \text{ m/s} \le \Delta V \le 1.4 \text{ m/s}$	
ΔV with	@ 20 ms	$2.2 \text{ m/s} \le \Delta V \le 3.0 \text{ m/s}$	
respect to	@30ms	$3.2 \text{ m/s} \le \Delta V \le 4.2 \text{ m/s}$	
impact speed			
Plane D Rotation		Peak moment*	Nm @
		-24 Nm \leq moment \leq -19 Nm during the	degrees
		following rotation range $85^{\circ} \le angle \le 103^{\circ}$	
Negative Moment Decay**		Time to decay to -5 Nm	
(Extension)		123 ms \leq time \leq 147 ms	

Neck Extension Test Desults (572 123(b)(2) & (572 123(c)(4)(i & ii)

*Moment about the occipital condyle = $M_y - (0.01778 \text{ m x F}_x) (572.123(b)(2)(iii))$

My = Moment in Nm measured by the transducer

Fx = Force, in N measured by the transducer

**Time zero is defined as the time of initial contact between the pendulum striker plate and the honeycomb material. (572.123(b)(3)

14 Plots of acceleration, velocity, y-axis moment, and x-axis force and y-axis moment about the occipital condyle follow this sheet.

Signature

Date

PENDULUM SPECIFICATIONS


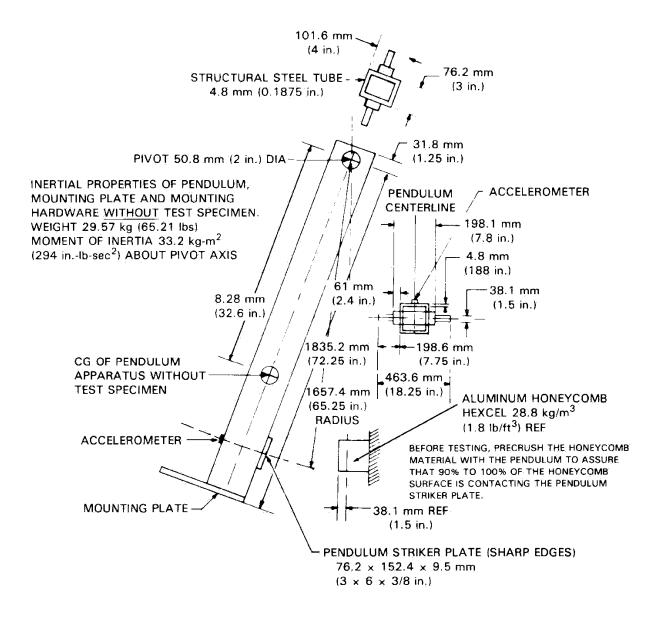



FIGURE 6C

NECK FLEXION TEST SET-UP SPECIFICATIONS



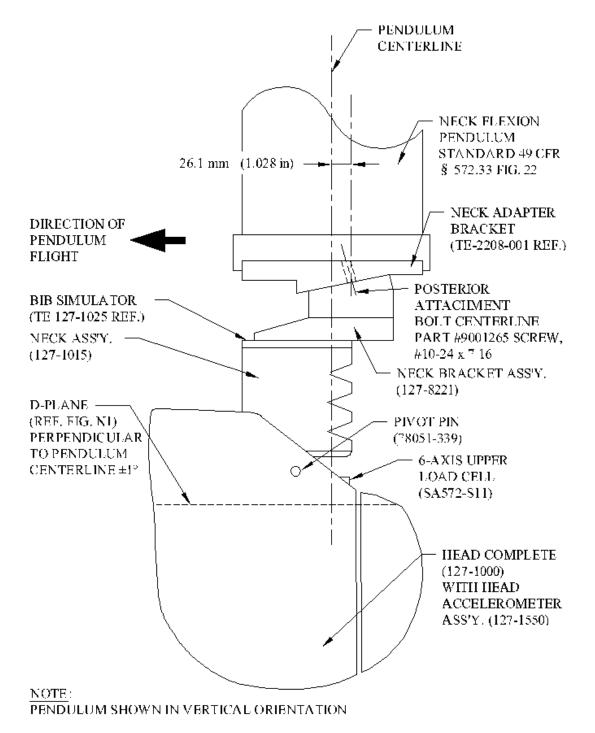

NECK EXTENSION TEST SET-UP SPECIFICATIONS

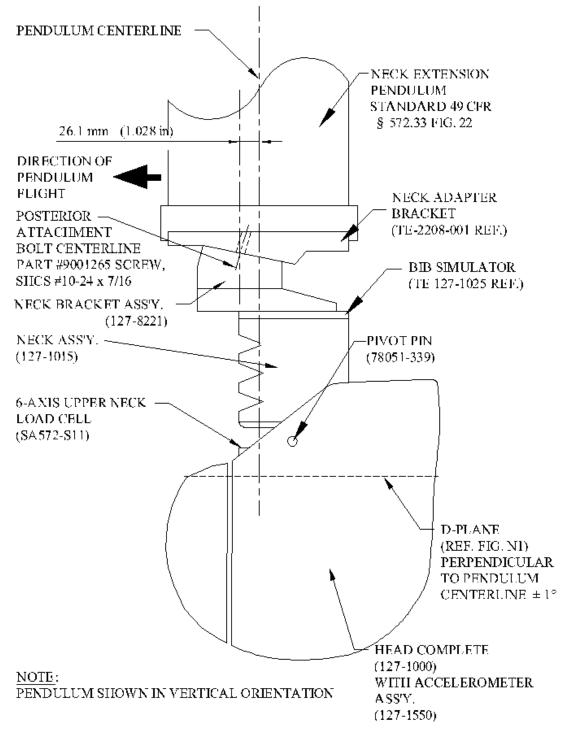



DATA SHEET C6 THORAX IMPACT TEST (572.124)

Dummy Serial Number _____

Test Date _____

Technician _____

Pretest calibration

__Post test calibration verification

Test attempt no. _____ (when successive thorax impact tests are necessary)

- __1. It has been at least 30 minutes since the last thorax impact test. (572.127(o)) __N/A, ONLY one thorax impact test performed
- __2. The test fixture conforms to the specifications in Figure 11C.
- 3. The complete assembled dummy (127-0000) is used (572.124(b)).
- 4. The dummy assembly soaked at a temperature between 20.6°C (69°F) and 22.2°C (72°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to this test. (572.124(c)(1)) Record the maximum temperature ______ Record the minimum temperature ______ Record the maximum humidity ______

Record the minimum humidity

- _5. Remove the chest skin and visually inspect the thorax assembly for cracks, cuts, abrasions, etc. Particular attention should be given to the rib damping material, chest displacement transducer assembly and the rear rib supports. Inspect for rib deformation using the chest depth gage. If any damage is noted repair and/or replace the damaged components unless the damage resulted from the vehicle crash test in which the dummy was an occupant in which case the damage must be documented and post test calibration verification testing completed before any repairs or replacements are made.
 - ___ No damage

_____ - Damage from crash test, no repairs or replacement because this is a post test calibration verification. Record damage ______

____ - The following repairs or replacement was performed. Record

- ___6. The dummy is dressed in a size 4 pair of long pants having a weight of less than 0.090 kg (0.2 lb) with the legs cut off sufficiently above the knee to allow the knee target to be visible. (572.124(c)(2))
- __7. Seat the dummy, (chest skin still removed) without back support on the test fixture surface as shown in Figure 9C. The surface must be long enough to support the pelvis and outstretched legs. (572.124(c)(2))

- 8. Level the ribs both longitudinally and laterally $\pm 0.5^{\circ}$ and adjust the pelvis angle to $8^{\circ} \pm 2^{\circ}$. The angle may be measured at the pelvis lumbar joining surface.
- _9. The midsagittal plane of the dummy is vertical within $\pm 1^{\circ}$. (572.124(c)(3))
- 10. The longitudinal centerline of the test probe is centered within ±2.5 mm of the midsagittal plane of the dummy and is 12.7 mm ± 1mm below the horizontal peripheral centerline of the No. 3 rib and is within 0.5° of a horizontal line in the dummy's midsagittal plane. (572.124(c)(3))
- 11. Record locations such as the rear surfaces of the thoracic spine and the lower neck bracket reference with respect to locations such as the rear surfaces of the thoracic spine and the lower neck bracket. These reference measurements are necessary to ensure the dummy is in the same position after the chest skin is installed. The reference locations must be accessible after installation of the chest skin. It may be necessary to leave the chest skin zipper unfastened until the references are checked and fasten it just prior to the test.
- ___12. Install the chest skin and reposition the dummy as described in the preceding paragraph using the reference measurements recorded.
- __13. The dummy is dressed in a tight-fitting size 5 short sleeve shirt. (572.124(c)(2))
- 14. Place the arm assemblies horizontal ± 2° and parallel to the midsagittal plane. The arms are held in place by tightening the adjustment nut which holds the arm yoke to the clavicle assembly.
- __15. The data acquisition system, including transducers, must conform to the requirements of SAE Recommended Practice J211/1 MAR95 (572.127(k))
- ____16. Impact the anterior surface of the thorax with the test probe so the longitudinal centerline of the probe is within 2° of a horizontal line in the dummy's midsagittal plane at the moment of impact. (572.124(c)(4)) The velocity of the test probe at the time of impact is 6.71 m/s \pm 0.12m/s. (572.124(b)) The probe is guided so there is no significant lateral, vertical or rotational movement during the impact. (572.124(c)(5) Neither the suspension hardware, suspension cables, nor other attachments to the probe, including the velocity vane, make contact with the dummy. (572.124(c)(6)

___17. Complete the following table:

Thorax Impact Results (572.124(b) and 572.124(b)(1)&(2)

Parameter*	Specification	Result
Test Probe Speed	$6.59 \text{ m/s} \le \text{speed} \le 6.83 \text{ m/s}$	
Chest Compression	38.0 mm \leq compression \leq 46.0 mm	
Peak force** between	$1150N \le peak$ force $\le 1380N$	
38.0 and 46.0 mm chest		
compression		
Peak force** between	Max. 1.05 times the peak force	
12.5 and 38.0 mm chest	between 38.0 and 46.0 mm chest	
compression	compression	
Internal Hysteresis***	$65\% \le hysteresis \le 85\%$	

*Time zero is defined as the time of initial contact between the test probe and the chest skin.


**Force = impactor mass x acceleration

***Area under loading curve minus the area under the unloading curve divided by the area under the loading curve. (Figure 10C)

18. Plots of chest compression, acceleration, force, force versus deflection follow this sheet.

Signature

THORAX IMPACT TEST SET-UP SPECIFICATIONS

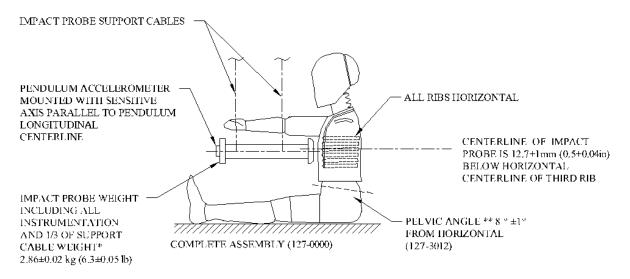

* 1/3 CABLE WEIGHT NOT TO EXCEED 5 $\,$ % OF THE TOTAL $\,$ IMPACT PROBE WEIGHT ** PELVIS LUMBAR JOINING SURFACE

Probe specifications:

- 1. Rigid metallic construction, concentric about its longitudinal axis.
- 2. A mass of 2.86 ± 0.02 kg (6.3 ± 0.05 lbs). 1/3 of the weight of the suspension cables and any attachments to the impact probe are included in the calculation of mass, and such components may not exceed 5 percent of the total weight of the test probe.
- 3. Minimum mass moment of inertia of 160 kg-cm² (0.141 lbs-in-sec²) in yaw and pitch about the center of gravity.
- 4. The impacting end of the probe is perpendicular to and concentric with the longitudinal axis. It has a flat, continuous, and non-deformable face with diameter of 101.6 ± 0.25 mm (4.00 ± 0.01 in) and a edge radius of 7.6-12.7 mm (0.3-0.5 in).
- 5. The impactor is a cylinder with a diameter of 101-103 mm (4.0-4.1 in) and it is at least 12.5 mm (0.5 in) long.
- 6. The probe's end opposite to the impact face must have provisions for mounting of an accelerometer with its sensitive axis collinear with the longitudinal axis of the probe.
- 7. The impact probe shall have a free air resonant frequency of not less than 1000 Hz in the direction of the longitudinal direction of the impactor.

FIGURE 9C

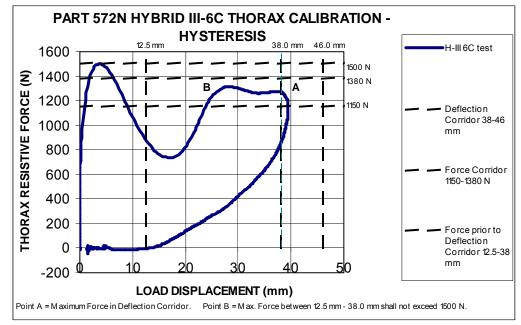


FIGURE 10C

DATA SHEET C7 TORSO FLEXION TEST (572.125)

Dumm	ny Serial Number Test Date
Techn	ician
	test calibration st test calibration verification
Test a	ttempt no (when successive torso flexion tests are necessary)
1.	It has been at least 30 minutes since the last torso flexion test. (572.127(o))
2.	N/A, ONLY one torso flexion test performed The test fixture conforms to the specifications in Figure 11C.
<u></u> 3.	The complete assembled dummy (127-0000) is used (572.125(c)(2)).
	with legs below the femurs.
	without legs below the femurs.
4.	The dummy assembly soaked at a temperature between 18.9°C (66°F) and
	25.6° C (78°F) and at a relative humidity from 10% to 70% for a period of at least
	four (4) hours prior to this test. (572.135(c)(1)) Record the maximum temperature
	Record the minimum temperature
	Record the maximum humidity
	Record the minimum humidity
5.	Secure the pelvis to the fixture at the pelvis instrument cavity rear face by
	threading four $\frac{1}{4}x20x\frac{1}{2}$ inch cap screws into the available threaded attachment holes. Tighten the mountings so that the test material is rigidly affixed to the test fixture and the pelvic lumbar joining surface is horizontal. (572.125(c)(3))
6.	Attach the loading adapter bracket to the spine of the dummy as shown in
	Figure 11C. (572.125(c)(6))
7.	Flex the dummy forward and back 3 times such that the angle reference plane
	moves between 0° and 30° with respect to the vertical transverse plane.
8.	(572.125(c)(4)) Support the dummy such that the angle reference plane is at or near 0° (vertical
0.	with respect to the vertical transverse plane). Wait at least 30 minutes before
	continuing. (572.125(c)(4))
10.	Remove all external support that was implemented in 9 above. (572.125(c)(5))
	Measure the initial orientation angle of the torso reference plane of the seated,
	unsupported dummy. (572.135(c)(5))
	Record reference plane angle (max. allowed 22°)
	Attach the pull cable and the load cell. (572.125(c)(6))
13.	Apply a tension force in the midsagittal plane to the pull cable at any upper torso deflection rate between 0.5° and 1.5° per second, until the angle reference plane
	is at $45^{\circ} \pm 0.5^{\circ}$ of flexion relative to the vertical transverse plane. (572.125(c)(7))

- ___14. Maintain angle reference plane at $45^{\circ} \pm 0.5^{\circ}$ of flexion for 10 seconds. (572.125(c)(8))
- ___15. As quickly as possible release the force applied to the attachment bracket. (572.125(c)(9))
- ____16. 3 minutes after the release of the force, measure the reference plane angle. (572.125(c)(9))
- ____17. Complete the following table:

Torso Flexion Results (572.125(b), 572.125(c)(7), (572.125(c)(8))

Parameter	Specification	Result	
Initial ref. plane angle	Angle $\leq 22^{\circ}$		
Torso rotation rate	$0.5^{\circ}/s \le rate \le 1.5^{\circ}/s$		
Force at 45° ±0.5°	147 N \leq force \leq 200 N		
Final ref. plane angle	Initial ref. plane angle ±8°		

Signature

TORSO FLEXION TEST SET-UP SPECIFICATIONS

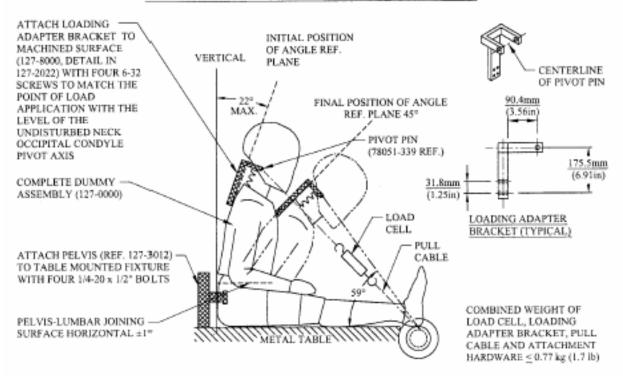


FIGURE 11C

DATA SHEET C8 LEFT KNEE IMPACT TEST (572.126)

Dumm	ny Serial Number	Test Date		
Techn	ician			
	test calibration at test calibration verification			
Test a	ttempt no (when succ	essive knee impact tests are necessary)		
1. 2. 3.	N/A, ONLY one knee impact test performed 2. The test fixture conforms to the specifications in Figure 12C.			
4.	 4007)) were used. (572.126(b)) _4. The knee assembly soaked at a temperature between 18.9°C (66°F) and 25.6°C (78°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to this test. (572.126(c)(1)) Record the maximum temperature			
5. 6. 7.	_6. No parts of the foot or tibia contact any exterior surface. (572.126(c)(2))			
8.				
9.				
_	 10. Contact the knee with the test probe at a speed between 2.07 m/s and 2.13 m/s. (572.126(c)(5)) Neither the suspension hardware, suspension cables, nor other attachments to the probe, including the velocity vane, make contact with the dummy. (572.126(c)(6) 11. Complete the following table: 			
r		126(b)(1) and 572.126(c)(5))		
·	Parameter Probe speed	Specification2.07 m/s \leq speed \leq 2.13 m/s	Result	

2000 N \leq force \leq 3000 N

Peak resistance force*

*Force = impactor mass x deceleration

___12. Plots of acceleration versus time and force versus time follow this sheet.

Signature

DATA SHEET C9 RIGHT KNEE IMPACT TEST (572.126)

Dumm	ny Serial Number	Test Date		
Technician				
	test calibration st test calibration verification			
Test a	attempt no (when succ	essive knee impact tests are necessary)		
1. 2. 3.	N/A, ONLY one knee impact test performed 2. The test fixture conforms to the specifications in Figure 12C.			
4.	The knee assembly soaked	a temperature between 18.9°C (66°F) nidity from 10% to 70% for a period of at 1 2.126(c)(1)) erature erature dity		
5. 6. 7.	5. Mount the test specimen and secure it to the rigid test fixture. (572.126(c)(2)) 6. No parts of the foot or tibia contact any exterior surface. (572.126(c)(2))			
8.	The probe is guided so there is no significant lateral, vertical or rotational movement during the impact with the knee. (572.126(c)(4))			
9.	The data acquisition system, including transducers, must conform to the requirements of SAE Recommended Practice J211/1 MAR95 (572.127(k)) Class 600.			
_	 _10. Contact the knee with the test probe at a speed between 2.07 m/s and 2.13 m/s. (572.126(c)(5)) Neither the suspension hardware, suspension cables, nor other attachments to the probe, including the velocity vane, make contact with the dummy. (572.126(c)(6) _11. Complete the following table: 			
	Knee Impact Results (572.	126(b)(1) and 572.126(c)(5))		
	Parameter Probe speed	Specification2.07 m/s \leq speed \leq 2.13 m/s	Result	

2000 N \leq force \leq 3000 N


Peak resistance force*

*Force = impactor mass x deceleration

___12. Plots of acceleration versus time and force versus time follow this sheet.

Signature

KNEE IMPACT TEST SET-UP SPECIFICATIONS

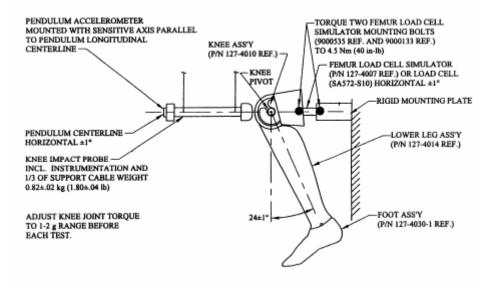

Probe specifications (572.127(b)):

- 1. Rigid metallic construction, concentric in shape and symmetric about is longitudinal axis.
- 2. A mass of 0.82 ± 0.02 kg (1.8 ± 0.05 lbs). 1/3 of the weight of the suspension cables and any attachments to the impact probe must be included in the calculation of mass, and such components may not exceed 5 percent of the total weight of the test probe.
- 3. Minimum mass moment of inertia of 34 kg-cm² (0.03 lbs-in-sec²) in yaw and pitch about the center of gravity.
- 4. The impacting end of the probe is perpendicular to and concentric with the longitudinal axis. It must have a flat, continuous, and non-deformable face with diameter of $76.2 \pm 0.2 \text{ mm} (3.00 \pm 0.01 \text{ in})$ and an edge radius of 7.6-12.7 mm (0.3-0.5 in).
- 5. The impactor is a cylinder with a diameter of 76-77 mm (3.0-3.1 in) and it is at least 12.5 mm (0.5 in) long.
- 6. The probe's end opposite to the impact face must have provisions for mounting of an accelerometer with its sensitive axis collinear with the longitudinal axis of the probe.
- 7. The impact probe shall have a free air resonant frequency of not less than 1000 Hz in the direction of the longitudinal direction of the impactor.

FIGURE 12C

DATA SHEET C10 PART 572 INSTRUMENTATION CALIBRATION INFORMATION

I.D. NO.	MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF LAST CALIBRATION	DATE OF NEXT CALIBRATION
		DUMMY INSTRUM	ENTATION		
		HEAD ACCELER	OMETERS		
(1) LONGITUDINAL					
(2) LATERAL					
(3) VERTICAL					
NECK TRANSDUCER					
	CHEST ACCELEROMETERS				
(1) LONGITUDINAL					
(2) LATERAL					
(3) VERTICAL					
CHEST POTENTIOMETER					
		FEMUR LOAD	CELLS		
(1) RIGHT FEMUR					
(2) LEFT FEMUR					
	·	LABORATORY INSTR	UMENTATION		<u>.</u>
NECK PENDULUM ACCELEROMETER					
THORAX PENDULUM ACCELEROMETER					
KNEE PENDULUM ACCELEROMETER					
NECK ROTATION TRANSDUCER 1 (OPTIONAL)					
NECK ROTATION TRANSDUCER 2 (OPTIONAL)					

LABORATORY TECHNICIAN: _____