APPENDIX D

PART 572, SUBPART P (3 YEAR-OLD) DUMMY PERFORMANCE CALIBRATION TEST PROCEDURE

APPENDIX D

PART 572, SUBPART P DUMMY PERFORMANCE CALIBRATION TEST PROCEDURE

TABLE OF CONTENTS

1.	PURPOSE AND APPLICATION			
2.	GENERAL R	GENERAL REQUIREMENTS		
3.	SECURITY	SECURITY		
4.	GOOD HOU	SEKEEPING	D-2	
5.	TEST SCHE	DULING AND MONITORING	D-2	
6.	TEST DATA	DISPOSITION	D-2	
7.	GOVERNME	ENT FURNISHED PROPERTY (GFP)	D-2	
8.	CALIBRATIO	ON AND TEST INSTRUMENTATION	D-5	
9.	PHOTOGRA	\PHY	D-6	
10.	DEFINITION	IS	D-6	
11.	PRETEST REQUIREMENTS		D-6	
	11.1 11.2 11.3 11.4	TRANSDUCER REQUIREMENTSOTHER TRANSDUCER CONDITIONSTHORAX IMPACTOR PROBEGENERAL TEST CONDITIONS	D-7	
12.	CALIBRATIO	ON TEST EXECUTION	D-11	
13.	POST TEST	REQUIREMENTS	D-11	
14.	REPORTS		D-11	
	14.1 14.2	APPARENT TEST FAILUREFINAL PERFORMANCE CALIBRATION REPORTS		
15.	DATA SHEE D1 D2 D3 D4 D5 D6 D7 D8	DUMMY DAMAGE CHECKLIST EXTERNAL MEASUREMENTS HEAD DROP TEST NECK FLEXION TEST NECK EXTENSION TEST THORAX IMPACT TEST TORSO FLEXION TEST INSTRUMENTATION CALIBRATION INFORMATION	D-14 D-16 D-22 D-25 D-27 D-32	

ILLUSTRATIONS

1D.	HANGER PLATE	PAGE
2D.	DUMMY HANGER	
3D.	SIGN CONVENTION	
4D.	EXTERNAL DIMENSIONS SPECIFICATIONS	
5D.	EXTERNAL DIMENSIONS TEST SETUP FRONT VIEW	
6D.	EXTERNAL DIMENSIONS TEST SETUP SIDE VIEW	D-21
7D.	HEAD DROP TEST SETUP SPECIFICATION	D-24
8D.	NECK PENDULUM SPECIFICATIONS	D-29
9D.	NECK FLEXION TEST SETUP SPECIFICATIONS	D-30
10D.	NECK EXTENSION TEST SETUP SPECIFICATIONS	
11D.	THORAX IMPACT TEST SETUP SPECIFICATIONS	D-35
12D.	THORAX HYSTERESIS	D-36
13D.	TORSO FLEXION TEST SETUP SPECIFICATIONS	
	TABLES	
1D	SIGN CONVENTION FOR HYBRID III TRANSDUCER OUTPUTS	D-10

1. PURPOSE AND APPLICATION

The purpose of this laboratory procedure is to provide dummy users (independent testing laboratories under contract with the Office of Vehicle Safety Compliance) with standard test procedures for performing receiving-inspection and performance calibration tests on the Part 572, Subpart P dummy so that repetitive and correlative test results can be obtained. The following tests have been developed to establish a uniform calibration procedure for all users as the means of verifying the performance of the dummy.

- A. EXTERNAL DIMENSIONS (PADI)
- B. HEAD DROP TEST (572.142)
- C. NECK FLEXION TEST (572.143(b)(1))
- D. NECK EXTENSION TEST 572.143(b)(2)
- E. THORAX IMPACT TEST ((572.144)
- F. TORSO FLEXION (572.145)

National Highway Traffic Safety Administration (NHTSA) contract laboratories performing FMVSS 213 testing for the Office of Vehicle Safety Compliance (OVSC) must use this laboratory procedure for the calibration of Part 572, Subpart P dummies.

2. GENERAL REQUIREMENTS

The Code of Federal Regulations (49CFR), Parts 571 and 572, was amended to adopt the Hybrid III, 3-Year-Old Child Dummy as the means of determining a Child Restraint System's (CRS's) conformance to the performance requirements of FMVSS 213. Each Part 572, Subpart P dummy used in a compliance test must meet the specifications and performance criteria of Part 572 before and after each CRS test in order to be an acceptable compliance test tool.

The Part 572, Subpart P Hybrid III, 3-Year-Old Child Dummy consists of components and assemblies specified in the drawing and specifications package which is available from Reprographics Technologies, 9000 Virginia Manor, Beltsville, MD 20705, telephone - (301) 419-5070.

3. SECURITY

All NHTSA Part 572, Subpart P test dummies delivered to the contract laboratory as Government Furnished Property (GFP) will be stored in a safe and secure area such as the dummy calibration laboratory. The contractor is financially responsible for any acts of theft and/or vandalism that occur during the storage of GFP. Any security problems shall be reported by telephone to the Industrial Property Manager (IPM), Office of Contracts and Procurement, within two working days after the incident. A letter containing specific details of the security problem will be sent to the IPM (with copy to the COTR) within 48 hours.

The contractor is responsible for maintaining the NHTSA test dummies in good working order, and shall protect and segregate the data that evolves from conducting Part 572, Subpart P dummy calibration tests before and after each low risk deployment usage.

No Information concerning the Part 572, Subpart P dummy calibration data shall be released to anyone except the COTR, unless specifically authorized by the COTR or the COTR's Branch or Division Chief.

NOTE: No Individuals, other than contractor personnel directly involved in the dummy calibration test program, shall be allowed to witness dummy calibration tests unless specifically authorized by the COTR.

4. GOOD HOUSEKEEPING

Contractors shall maintain the entire dummy calibration laboratory, test fixtures, and instrumentation in a neat, clean, and painted condition with test instruments arranged in an orderly manner consistent with good test laboratory housekeeping practices.

5. TEST SCHEDULING AND MONITORING

The Part 572, Subpart P dummies are being calibrated as test tools to be used in a CRS test to determine compliance with the requirements of FMVSS 213. The schedule for these performance calibration tests must be correlated with that of the CRS tests. All testing shall be coordinated to allow monitoring by the COTR.

6. TEST DATA DISPOSITION

The contractor shall make all dummy calibration data available to the COTR for review and analysis as required. All calibration test data for each particular Part 572, Subpart P dummy will be sent to the COTR with each test report.

All backup data sheets, strip charts, recordings, plots, technicians notes, etc. shall be either sent to the COTR or destroyed at the conclusion of each delivery order, purchase order, etc.

7. GOVERNMENT FURNISHED PROPERTY (GFP)

Part 572, Subpart P test dummies will be furnished to the contract laboratory by the OVSC. The dummies shall be stored in a hanging position using the bracket and positioning shown in the following drawings.

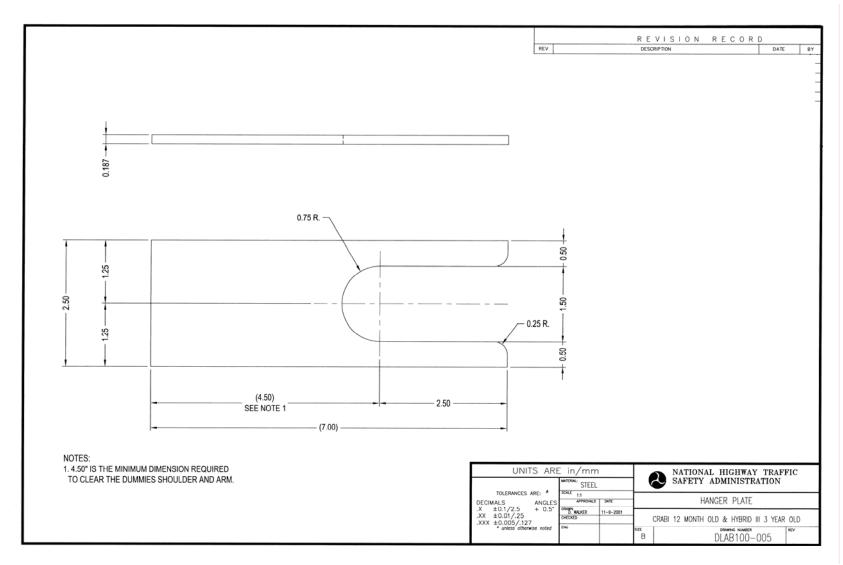


FIGURE 1D

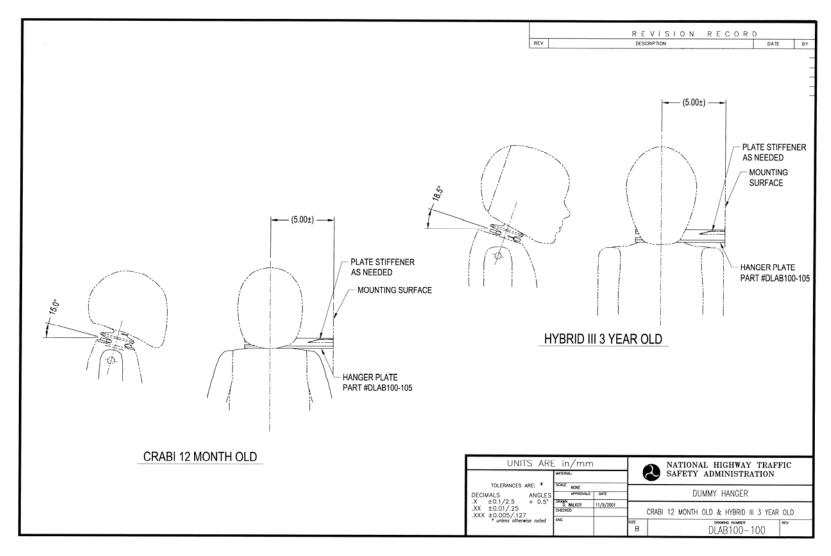


FIGURE 2D

These dummies shall be stored in a secured room that is kept between 55°F and 85°F. The contractor will check dummy components for damage after each low risk deployment test and complete a dummy damage checklist that will be included with the posttest dummy calibration. The COTR will be kept informed of the dummies condition in order that replacement parts can be provided.

8. CALIBRATION AND TEST INSTRUMENTATION

Before the contractor initiates the dummy performance calibration test program, a test instrumentation calibration system must be implemented and maintained in accordance with established calibration practices. The calibration system shall be set up and maintained as follows:

- A. Standards for calibrating the measuring and test equipment shall be stored and used under appropriate environmental conditions to assure their accuracy and stability.
- B. All measuring instruments and standards shall be calibrated by the contractor, or a commercial facility, against a higher order standard at periodic intervals not exceeding 6 months for instruments and 12 months for calibration standards. Records, showing the calibration traceability to the National Institute of Standards and Technology (NIST), shall be maintained for all measuring and test equipment.
- C. All measuring and test equipment and measuring standards shall be labeled with the following information:
 - (1) Date of calibration
 - (2) Date of next scheduled calibration
 - (3) Name of the technician who calibrated the equipment
- D. The contractor shall provide a written calibration procedure that includes, as a minimum, the following information for all measurement and test equipment:
 - (1) Type of equipment, manufacturer, model number, etc.
 - (2) Measurement range
 - (3) Accuracy
 - (4) Calibration interval

- (5) Type of standard used to calibrate the equipment (calibration traceability of the standard must be evident)
- (6) The actual procedures and forms used to perform calibrations.
- E. The contractor shall keep records of calibrations for all test instrumentation in a manner that assures the maintenance of established calibration schedules. All such records shall be readily available for inspection when requested by the COTR. The calibration system will need the written acceptance of the COTR before testing begins.
- F. Test equipment shall receive a calibration check immediately prior to and after each test. This check shall be recorded by the test technician(s) and submitted with the final report.

9. RESERVED

10. **DEFINITIONS**

PADI: Procedures for Assembly, Disassembly, and Inspection

11. PRETEST REQUIREMENTS

11.1 TRANSDUCER REQUIREMENTS

The contractor shall provide and install the following instrumentation to the GFP dummies (excluding the chest deflection transducer).

- A. HEAD The head accelerometers shall have dimensions, response characteristics and sensitive mass locations specified in drawing SA572-S4 and be mounted in the head as shown in drawing 210-0000. (572.146(b))
 - Three accelerometers shall be mounted in the head cavity to measure orthogonal accelerations (Ax, Ay, Az) at the center of gravity (CG) of the head assembly.
- B. NECK The upper neck force transducer shall have the dimensions, response characteristics, and sensitive axis locations specified in drawing SA572-S19 and shall be mounted at the upper neck transducer location as shown in drawing 210-0000. (572.146(c))
- C. CHEST The chest accelerometers shall have the dimensions, response characteristics, and sensitive mass locations specified in drawing SA572-S4 and be mounted in the torso assembly in traxial configuration at the T4 location as shown drawing 210-0000. The chest accelerometers are not

required for dummy calibration testing but are required for FMVSS 208 low risk deployment testing. (572.146(e))

The chest deflection potentiometer shall have the dimensions and response characteristics specified in drawing SA572-S50 and be mounted in the torso assembly as shown in drawing 210-0000. (572.146(f))

D. TEST FIXTURE – The neck pendulum, thorax and knee probe accelerometers shall have the dimensions and characteristics of drawing SA572-S4.

11.2 OTHER TRANSDUCER CONDITIONS

- A. TRANSDUCER MOUNTS The mountings for sensing devices shall have no resonance frequency less than 3 times the frequency range of the applicable channel class. (572.146(n))
- B. TRANSDUCER SIGN CONVENTION The sign convention for outputs of transducers mounted within the dummy that measure head and chest accelerations, chest deflection and neck loads are located in Figure 3D and Table 1D. For other transducers see SAE J1733DEC94. (572.146(m))
- C. TRANSDUCER OUTPUTS and FILTERING The outputs of acceleration and force-sensing devices installed in the dummy and in the test apparatus specified by this part are recorded with individual data channels. Each data channel will be comprised of a sensor, signal conditioner, data acquisition device, and all interconnecting cables, and must conform to the requirements of SAE Recommended Practice J211/1 MAR95, "Instrumentation for Impact Test," with channel classes as follows: (572.146(I))

(1) Head acceleration(2) Neck force(3) Neck pendulum acceleration(4) Neck moment(5) Neck potentiometer(6) Thorax spine acceleration	Class 1000 Class 1000 Class 180 Class 600 Class 60 Class 180	(572.146(I)(1)) (572.146(I)(2)(ii)) (572.146(I)(2)(iii)) (572.146(I)(2)(ii)) (572.146(I)(2)(iv)) (572.146(I)(3)(ii))
(7) Thorax pendulum acceleration	Class 180	(572.146(I)(3)(ii))
(8) Sternum deflection (9) Lumbar torso flexion	Class 600 Class 60	(572.146(I)(3)(iii)) (572.146(I)(4)(iii))

All filter classes should be of the "phaseless" type to be compatible with the "time" dependent test parameters.

11.3 THORAX IMPACTOR PROBE (572.146(a))

- A. The test probe for thoracic impacts shall be of rigid metallic construction, concentric in shape and symmetric about is longitudinal axis.
- B. It shall have a mass of 1.70 ± 0.01 kg (3.75 ± 0.02 lbs). 1/3 of the weight of the suspension cables and their attachments to the impact probe must be included in the calculation of mass, and such components may not exceed 5 percent of the total weight of the test probe.
- C. It shall have a minimum mass moment of inertia of 283 kg-cm² (0.25 lbs-in-sec²) in yaw and pitch about the center of gravity.
- D. The impacting end of the probe is perpendicular to and concentric with the longitudinal axis. It must have a flat, continuous, and non-deformable face with a diameter of 50.8 ± 0.2 mm $(2.00 \pm 0.01$ in) and a maximum edge radius of 12.7 mm (0.5 in).
- E. The impactor is a cylinder with a diameter of 53.3 mm (2.1 in) and it is at least 25.4 mm (1.0 in) long.
- F. The probe's end opposite to the impact face must have provisions for mounting of an accelerometer with its sensitive axis collinear with the longitudinal axis of the probe.
- G. The impact probe shall have a free air resonant frequency of not less than 1000 Hz in the direction of the longitudinal direction of the impactor.

SIGN CONVENTION FOR PART 572 TEST DUMMIES

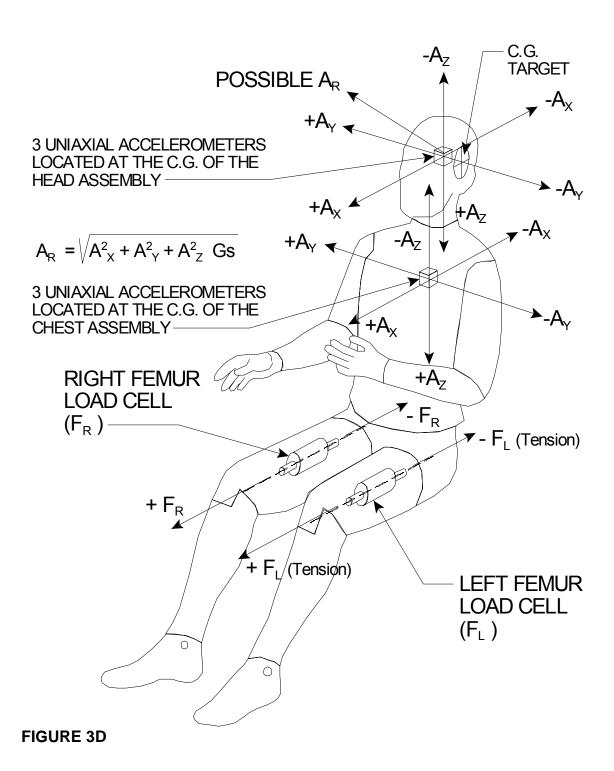


TABLE 1D

SIGN CONVENTION FOR HYBRID III TRANSDUCER OUTPUTS			
BODY SEGMENT — MEASURED FORCE	POSITIVE OUTPUT DIRECTION		
NECK FX SHEAR FY SHEAR FZ AXIAL	HEAD REARWARD OR CHEST FORWARD HEAD LEFTWARD, CHEST RIGHTWARD HEAD UPWARD, CHEST DOWNWARD		
MX MOMENT (ROLL) MY MOMENT (PITCH) MZ MOMENT (YAW)	LEFT EAR TOWARD LEFT SHOULDER CHIN TOWARD STERNUM CHIN TOWARD LEFT SHOULDER		
FEMUR FX SHEAR FY SHEAR FZ AXIAL	KNEE UPWARD, UPPER FEMUR DOWNWARD KNEE RIGHTWARD, UPPER FEMUR LEFTWARD KNEE FORWARD (TENSION), PELVIS REARWARD		
MX MOMENT (ROLL) MY MOMENT (PITCH) MZ MOMENT (YAW)	KNEE LEFTWARD, HOLD UPPER FEMUR IN PLACE KNEE UPWARD, HOLD UPPER FEMUR IN PLACE KNEE ROTATED CCW WHEN FACING FRONT OF DUMMY		
KNEE CLEVIS - FZ AXIAL	TIBIA DOWNWARD (TENSION), FEMUR UPWARD		
UPPER TIBIA MX MOMENT MY MOMENT	ANKLE LEFTWARD, HOLD KNEE IN PLACE ANKLE FORWARD, BOTTOM OF KNEE CLEVIS REARWARD		
LOWER TIBIA FX SHEAR FY SHEAR FZ AXIAL	ANKLE FORWARD, KNEE REARWARD ANKLE RIGHTWARD, KNEE LEFTWARD ANKLE DOWNWARD (TENSION), KNEE UPWARD		
MX MOMENT MY MOMENT	ANKLE LEFTWARD, HOLD KNEE IN PLACE ANKLE FORWARD, BOTTOM OF KNEE CLEVIS REARWARD		
CHEST DISPLACEMENT	CHEST COMPRESSED - NEGATIVE		
KNEE SHEAR DISPLACEMENT	PUSH ON FRONT OF TIBIA - NEGATIVE		

NOTE: DIRECTIONS ARE DEFINED IN RELATION TO A SEATED DUMMY

11.4 GENERAL TEST CONDITIONS

- A. Surfaces of dummy components are not painted unless otherwise specified. (572.146(q))
- B. Dummy performance tests of the same component, segment, assembly, or fully assembled dummy are separated in time by a period of not less than 30 minutes unless otherwise specified. (572.146(p))
- C. Except for neck assembly and thorax assembly testing, the dummy performance tests are conducted at any temperature from 18.9°C (66°F) to 25.6°C (78°F) and at any relative humidity from 10% to 70% after exposure of the dummy to these conditions for a period of not less than 4 hours. For the neck assembly and thorax assembly, the temperature range is 20.6°C (69°F) to 22.2°C (72°F)
- D. Dummy limb joints are set at 1 G, barely restraining the weight of the limb when it is extended horizontally. The force required to move a limb segment does not exceed 2 Gs throughout the range of limb motion. (572.146(o))
- E. Dummies will be clothed for the thorax calibration tests with a form fitting cotton-polyester-based tight-fitting long-sleeved shirt and ankle length pants. The total weight of the shirt and pants shall not exceed 0.25 kg (0.55 lb). (572.144(c)(1))

12. CALIBRATION TEST EXECUTION

Complete the Data Sheets in section 15.

13. POST TEST REQUIREMENTS

The contractor shall verify all instrumentation and check data sheets and photographs. Make sure data is recorded in all data blocks on every performance calibration test data sheet.

14. REPORTS

14.1 APPARENT NONCONFORMANCE

During the posttest calibration verification, any indication of apparent nonconformance to the requirements of Regulation P572 shall be communicated by telephone to the COTR within 24 hours with written notification mailed within 48 hours (Saturdays and Sundays excluded). Written notification shall be submitted with a copy of the particular test data sheet(s) and preliminary data plot(s).

In the event of an apparent nonconformance, a posttest calibration check of some critically sensitive test equipment and instrumentation may be required for verification of accuracy. The necessity for the calibration shall be at the COTR's discretion and shall be performed without additional costs to the OVSC.

14.2 FINAL PERFORMANCE CALIBRATION REPORTS

14.2.1 COPIES

A report containing the pre-test calibration and post test calibration verification data for each Part 572, Subpart P dummy used in the CRS test shall be submitted with FMVSS 213 final test reports.

Contractors are required to PROOF READ all Final Test Reports before submittal to the COTR. The OVSC will not act as a report quality control office for contractors. Reports containing a significant number of errors will be returned to the contractor for correction, and a "hold" will be placed on invoice payment for the particular test.

14.2.2 REQUIREMENTS

Performance calibration report Table of Contents shall include the following:

- A. Section 1 Purpose of Calibration Test
- B. Section 2 Calibration Data Summary
- C. Section 3 Test Data
- D. Section 4 Test Equipment List and Calibration Information
- E. Section 5 Photographs (if applicable)

The test data for each dummy will be presented in separate sections. Each section shall contain a title page, test results summary and the test data. The title page shall include the dummy's serial number and he manufacturer's name. It will also indicate whether the calibration data is pre or posttest. The test results sheets will provide a summary of each test and describe any damage, failures and/or corrective action taken. The test data shall include the pass/fail data sheets, the time histories for each data channel used to determine the pass or fail status, and instrumentation calibration data sheets.

14.2.3 FIRST PAGE

FRONT COVER

A heavy paperback cover (or transparency) shall be provided for the protection of the final report. The information required on the cover is as follows:

A. Final Report Title And Subtitle such as

DUMMY PERFORMANCE CALIBRATION IN SUPPORT OF CHILD RESTRAINT SYSTEM TESTING FMVSS No. 213

B. Contractor's Name and Address such as



ABC TESTING LABORATORIES, INC. 405 Main Street Detroit, Michigan 48070

NOTE: DOT SYMBOL WILL BE PLACED BETWEEN ITEMS B AND C

- C. Date of Final Performance Calibration Report completion
- D. The sponsoring agency's name and address as follows

U. S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Enforcement
Office of Vehicle Safety Compliance
400 Seventh Street, SW
Room 6111 (NVS-222)
Washington, DC 20590

15. Data Sheets

DATA SHEET D1 DUMMY DAMAGE CHECKLIST

Dummy Serial Number	Test Date
Technician	
This check sheet is completed as part of	the posttest calibration verification.
Perform general cleaning.	

Dummy Item	Inspect for	Comments	Damaged	OK
Outer skin	Gashes, rips, cracks			
Head	Ballast secure			
	General appearance			
Neck	Broken or cracked			
	rubber			
	Upper neck bracket			
	firmly attached to			
	the lower neck			
	bracket			
	Looseness at the			
	condyle joint			
	Nodding blocks			
	cracked or out of			
	position			
Spine	Broken or cracks in			
	rubber.			
Ribs	Broken or bent ribs			
	Broken or bent rib			
	supports			
	Damping material			
	separated or			
	cracked			
	Rubber bumpers in			
	place			
Chest	Bent shaft			
Displacement				
Assembly	Oli I			
	Slider arm riding in			
- .	track			
Transducer	Torn cables			
leads				

Dummy Item	Inspect for	Comments	Damaged	OK	
Accelerometer	Head mounting				
Mountings	secure				
	Chest mounting				
	secure				
Knees	Skin condition				
	Insert (do not				
	remove)				
	Casting				
Limbs	Normal movement				
	and adjustment				
Knee Sliders	Wires intact				
	Rubber returned to				
	"at rest" position				
Pelvis	Broken				
Other					
replacemen		n is to be consulted for a decision or by:	терап ог		
Signature		 Date			
Describe th	Describe the repair or replacement of parts:				

Date

Signature


DATA SHEET D2 EXTERNAL MEASUREMENTS (See the PADI, pages 65-68)

Dumn	ny Serial Number Test Date
Techr	nician
	etest calibration st test calibration verification
	st test samplation vermoditon
1.	Seat the dummy on a flat, rigid, smooth, clean, dry, horizontal surface as shown in Figure 5D and 6D. The seating surface is at least 406 mm (16 in) wide and 221 mm (8 11/16 in) in depth with a vertical section at least 406 mm (16 in) wide and 610 mm (24 in) high attached to the rear of the seating fixture. The dummy's midsagittal plane is vertical and centered on the test surface.
2.	Secure the dummy to the test fixture so that the upper torso and buttocks are against the rear surface.
3.	Position the dummy's H-point so it is 39.4 ± 5.1 mm (1.55 \pm 0.2 in) above the horizontal seating surface and 62.0 ± 5.1 mm) (2.44 \pm 0.2 in) forward of the rear vertical surface of the fixture.
4.	Extend the dummy's neck so that the base of the skull is level both fore-and-aft and side-to-side, within 0.5 degrees. The rearmost surface of the head should be 53.3 ± 5.1 mm (2.1 ± 0.2 in) from the vertical surface of the test fixture. A strap or bungee cord may be placed around the forehead of the dummy to stabilize the head in this position.
5.	Position the upper and lower legs parallel to the midsagittal plane so the centerline between the knee pivot and the ankle pivot is parallel to the rear vertical surface of the fixture.
6.	Position the feet parallel to the dummy's midsagittal plane with the bottoms horizontal and parallel to the seating surface.
7.	Position the upper arms downward vertically so the centerline between the shoulders and elbow pivots is parallel to the rear vertical surface of the fixture.
8.	Position the lower arms horizontally so the centerline of the lower arm-hand is
9.	parallel to the seat surface. Record the dimensions listed in following table, except for dimension Q, X, Y and Z (reference figure 4D).
10.	Mark the locations AA, and BB, and record the dimensions Y, Z, as specified in the following table and figure 4D. Measure and record dimensions Q and X.
Signa	ture Date

EXTERNAL DIMENSIONS

HYBRID III, PART 572, SUBPART O EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
А	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	538.5-553.7	
В	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	307.4-322.6	
С	H-POINT HEIGHT	Reference	34.3-44.5	
D	H-POINT LOCATION FROM BACKLINE	Reference	56.9-67.1	
Е	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder pivot bolt to the fixture's rear vertical surface.	60.9-71.1	
F	THIGH CLEARANCE	Fixture's seat surface to hightest point on the upper leg segment	81.0-91.2	
G	BACK OF ELBOW TO WRIST PIVOT	Back of the elbow flesh to the finger tip, in line with the elbow and wrist centerlines	247.4-262.6	
Н	HEAD BACK TO BACKLINE	Rearmost surface of the head to the fixture's rear vertical surface (Reference)	48.2-58.4	
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder to the lowest part of the flesh on the elbow in line with the shoulder and elbow pivot bolts.	185.4-200.6	
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	133.6-148.8	
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the fixture's rear vertical surface, in line with the knee and hip pivots.	284.8-300	
L	POPLITEAL HEIGHT	Seat surface to the horizontal plane of the bottom of the feet.	218.5-233.7	
М	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	241.6-256.8	
N	BUTTOCK POPLITEAL LENGTH	The most forward portion of the crevice between the upper and lower legs behind the knee to the fixture's rear verical surface.	218.0-233.2	

HYBRID III, SUBPART P EXTERNAL DIMENSIONS, continued					
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT	
0	CHEST DEPTH WITH JACKET	Measured 254.0 ± 5.1 mm above seat surface	138.5-153.7		
Р	FOOT LENGTH	Tip of toe to rear of heal	137.6-147.8		
Q	STATURE	Lay the dummy out on a flat surface with the rear surfaces of the head, upper torso, buttocks and heels touching the surface and with the bottom of the feet perpendicular to that surface. Measure the distance from the bottom of the feet to the top of the head.	932.2-957.6	N/A	
R	BUTTOCK TO KNEE PIVOT LENGTH	Knee pivot bolt to the fixture's rear vertical surface.	251.4-261.6		
S	HEAD BREADTH	Distance across the widest of the head at its widest point	128.3-143.5		
Т	HEAD DEPTH	Distance from the forward most surface of the head to the rearmost surface of the head, in line with the midsgittal plane.	167.4-182.6		
U	HIP BREADTH	Distance across the width of the hip at the widest point of the jacket	200.7-215.9		
V	SHOULDER BREADTH	Distance between the outside edges of the shoulder flesh, in line with the shoulder pivot bolts	236.5-251.7		
W	FOOT BREADTH	The widest part of the foot	53.6-63.8		
Х	HEAD CIRCUMFERENCE	At the largest location	500.4-515.6		
Υ	CHEST CIRCUMFERENCE WITH JACKET	Distance around chest at reference location AA, with jacket on.	527.1-552.5		
Z	WAIST CIRCUMFERENCE	Distance around chest at reference location BB, with jacket on.	527.1-552.5		
AA	REFERENCE LOCATION FOR DIMENSION Y	Reference: 254.0 ± 5.1 MM above the seat surface	248.9-259.1		
ВВ	REFERENCE LOCATION FOR DIMENSION Z	Reference: 165.1 ± 5.1 MM above seat surface	160.0-170.2		

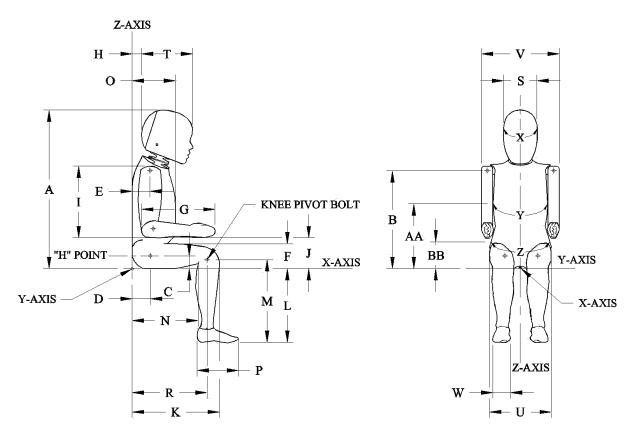

EXTERNAL DIMENSION MEASUREMENT DESIGNATIONS FIGURE 4D

EXTERNAL DIMENSIONS TEST SETUP


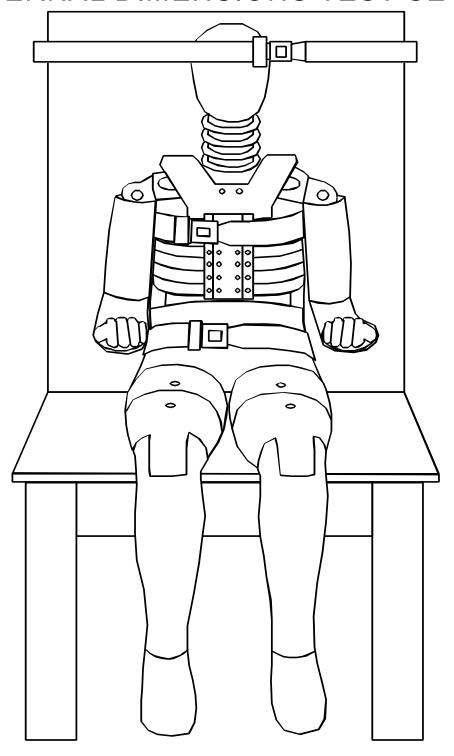


FIGURE 5B

EXTERNAL DIMENSIONS TEST SETUP

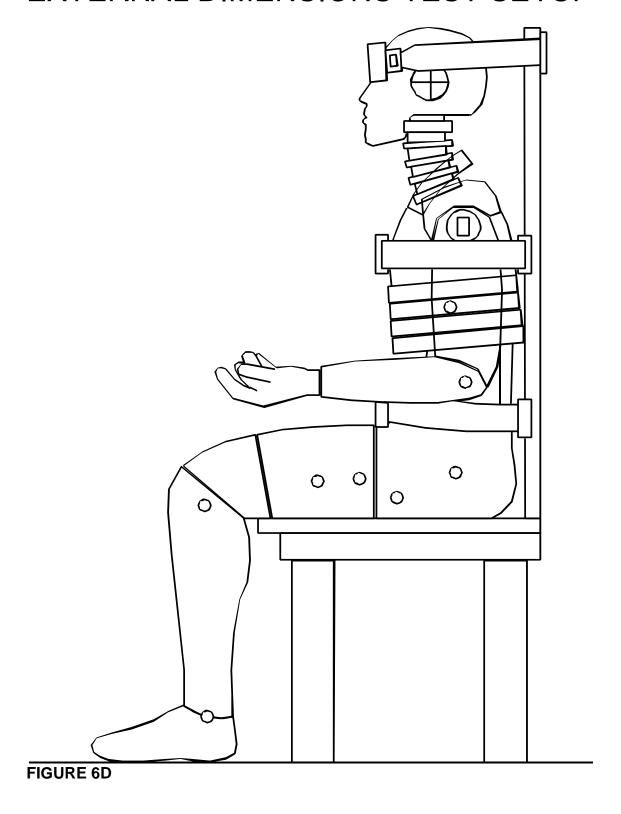


DATA SHEET D3 HEAD DROP TEST (572.142)

Dumn	ny Serial Number Test Date
Techr	nician
	etest calibration st test calibration verification
Test a	attempt no (when successive head drops are necessary)
1.	It has been at least 2 hours since the last head drop. (572.142(c)(5)) N/A, ONLY one head drop performed
2.	
4. 5.	
6.	The data acquisition system, including transducers, conforms to the requirements of SAE Recommended Practice J211/1 MAR95. (572.146(I))
7.	The head assembly soaked at a temperature between 18.9°C (66°F) and 25.6°C (78°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to a test. (572.142(c)(1)) Record the maximum temperature Record the minimum temperature Record the maximum humidity Record the minimum humidity
8.	Visually inspect the head skin for cracks, cuts, abrasions, etc. Repair or replace the head skin if the damaged area is more than superficial. Note: If the damage resulted from the low risk deployment test in which the dummy was an occupant, the damaged area is to be documented with photography and the post test calibration verification testing completed before any replacement or repairs are made. Record findings and actions:
9.	Clean the impact surface of the skin and the impact surface of the fixture with isopropyl alcohol, trichloroethane or equivalent prior to the test. (572.142(c)(2))

10.	on the forehead is 376.0 ± 1.0 mm (14 (572.142(c)(3)) Record the actual distance		
	NOTE: The masses of the suspense cables are to be kept as lightwee the test results.		
_	The 3.3 mm (0.13 inch) diameter holes head are equidistance within 2 mm fro Record the right side distance Record the left side distance The impact surface is clean and dry ar 203.2x10 ⁻⁶ mm (8 micro inches) to 203	m the impact surface. (572.142) nd has a micro finish in the rang	(c)(3)) e of
14.	(572.142(c)(4)) Record actual micro finish The impact surface is a flat horizontal 610 mm (24 inches) square. (572.142(Record thickness Record width	•	hick and
	Record length Drop the head assembly from a height 0.04 inches) by a means that ensures surface. (572.142(b) & (572.142(c)(4)) Complete the following table. (572.142)	a smooth, instant release onto t	
ſ	Developed	Consideration	Decuit
	Parameter Peak resultant acceleration	Specification	Result
		$250 \text{ g} \le x \le 280 \text{ g}$	
	Resultant versus time history curve Oscillations after the main pulse	Unimodal Less than 10% of the peak resultant acceleration	
	Lateral acceleration	y-axis acceleration ≤ 15 g	
17.	Plots of the x, y, z, and resultant accel	-	
Signa	ture	Date	

HEAD DROP TEST SET-UP SPECIFICATIONS

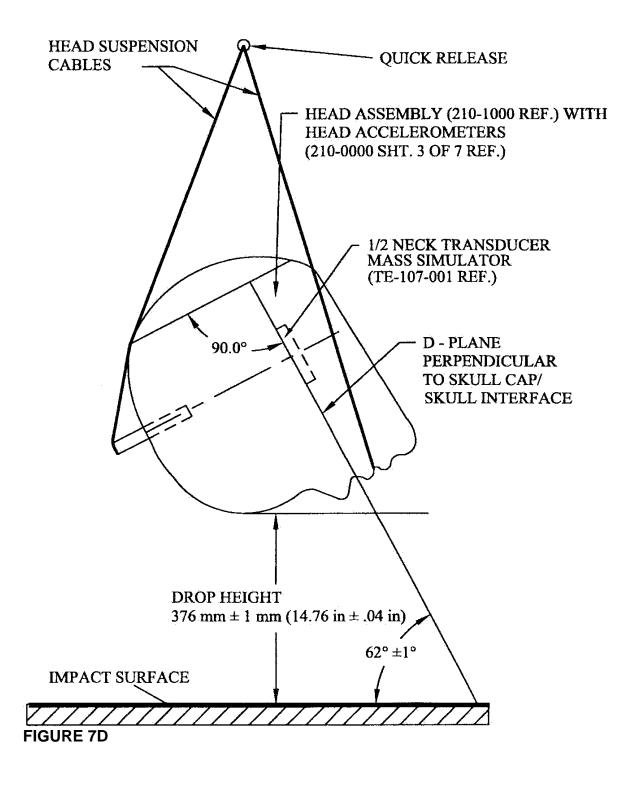

DATA SHEET D4 NECK FLEXION TEST (572.143)

Dumm	ny Serial Number lest Date
Techn	ician
	test calibration st test calibration verification
Test a	ttempt no (when successive flexion tests are necessary)
1. 2.	It has been at least 30 minutes since the last neck test. (572.146(p)) N/A, this is the first neck test performed The components required for the neck tests include the neck molding assembly
	(210-2015), neck cable (210-2040), nylon shoulder bushing (9001373), upper mount plate insert (910420-048), bib simulator (TE-208-050), urethane washer (210-2050), neck mounting plate (TE-250-021), two jam nuts (9001336), load moment transducer (SA572-S19) and headform (TE-208-000). (572.143(a))
3.	The assembly soaked at a temperature between 20.6°C (69°F) and 22.2°C (72°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to a test. (572.143(c)(1)) Record the maximum temperature Record the minimum temperature
4.	Record the maximum humidity Record the minimum humidity Visually inspect neck assembly for cracks, cuts and separation of the rubber from the metal segments. Note: If the damage resulted from the low risk deployment
	test, the damaged area is to be documented with photography and the post test calibration verification testing completed before any replacement or repairs are made. Record findings and actions:
6,	Torque the jam nut (9001336) on the neck cable (210-2040) between 0.2 Nm and 0.3 Nm (573.143(a)(2)
7.	and 0.3 Nm. (572.143(c)(2) The data acquisition system, including transducers, conforms to the requirements of SAE Recommended Practice J211/1 MAR95. (572.146(I))
8. 9.	The test fixture pendulum conforms to the specifications in Figure 8D. The head-neck assembly is mounted on the pendulum so the midsagittal plane of the headform is vertical and coincides with the plane of motion of the pendulum as shown in Figure 9D for the flexion test. (572.143(c)(3))
10.	Install the transducers or other devices for measuring the "D" plane rotation with respect to the pendulum longitudinal centerline. Note: Plane "D" is the top

designed	horizontal surface of the neck load cell. These measurement devices should be designed to minimize their influence upon the performance of the head-neck assembly.			
,		lar ± 1 degree to the centerline of the pendu	lum.	
		n so that the moment and rotation are define		
when the longitudinal centerline of the neck and pendulum are parallel.				
(572.143(1	b)(1)(iii))			
		n and allow it to fall freely from a height to ac		
		/s to 5.6 m/s as measured at the center of the	ie pendulum	
	neter. (572.1	· / · //		
14. Complete	the following	g table:		
	ion Test Res	sults (572.143(b)(1) & (572.143(c)(4)(ii)		
Parameter		Specification	Result	
Pendulum impac		5.4 m/s ≤ speed ≤ 5.6 m/s		
Pendulum	@ 10ms	$2.0 \text{ m/s} \leq \Delta V \leq 2.7 \text{ m/s}$		
ΔV with respect	@ 15 ms	$3.0 \text{ m/s} \leq \Delta V \leq 4.0 \text{ m/s}$		
to impact speed	@ 20ms	$4.0 \text{ m/s} \leq \Delta V \leq 5.1 \text{ m/s}$		
Plane D Rotation		Peak moment*	Nm @	
		42 Nm ≤ moment ≤ 53 Nm during the	degrees	
		following rotation range 70° ≤ angle ≤ 82°		
Positive Moment	Decay**	Time to decay to 10 Nm		
(Flexion)		60 ms ≤ time ≤ 80ms		
**Time ze	ro is defined	ct reading from the load cell as the time of initial contact between the pe comb material. (572.143(c)(4)(iii))	ndulum striker	
15. Plots of pendulum acceleration, pendulum velocity, neck y-axis moment, and neck rotation about the y-axis follow this sheet.				
Signature		 Date		

DATA SHEET D5 NECK EXTENSION TEST (572.133)

Dumm	ny Serial Number lest Date
Techn	ician
	test calibration of test calibration verification
Test a	ttempt no (when successive extension tests are necessary)
— ^{1.} 2.	It has been at least 30 minutes since the last neck test. (572.146(p)) N/A, this is the first neck test performed The components required for the neck tests include the neck molding assembly
_	(210-2015), neck cable (210-2040), nylon shoulder bushing (9001373), upper mount plate insert (910420-048), bib simulator (TE-208-050), urethane washer (210-2050), neck mounting plate (TE-250-021), two jam nuts (9001336), load moment transducer (SA572-S19) and headform (TE-208-000). (572.143(a))
3.	The assembly soaked at a temperature between 20.6°C (69°F) and 22.2°C (72°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to a test. (572.143(c)(1)) Record the maximum temperature Record the minimum temperature
	Record the maximum humidity Record the minimum humidity
4.	Visually inspect neck assembly for cracks, cuts and separation of the rubber from the metal segments. Note: If the damage resulted from the low risk deployment test, the damaged area is to be documented with photography and the post test calibration verification testing completed before any replacement or repairs are made. Record findings and actions:
	Trecord findings and actions.
6,	Torque the jam nut (9001336) on the neck cable (210-2040) between 0.2 Nm and 0.3 Nm. (572.143(c)(2)
7.	The data acquisition system, including transducers, conforms to the requirements of SAE Recommended Practice J211/1 MAR95. (572.146(I))
8. 9.	The test fixture pendulum conforms to the specifications in Figure 8D. The head-neck assembly is mounted on the pendulum so the midsagittal plane of the headform is vertical and coincides with the plane of motion of the pendulum as shown in Figure 10D for the extension test. (573,143(a)(3))
10.	as shown in Figure 10D for the extension test. (572.143(c)(3)) Install the transducers or other devices for measuring the "D" plane rotation with respect to the pendulum longitudinal centerline. Note: Plane "D" is the top

designed	horizontal surface of the neck load cell. These measurement devices should be designed to minimize their influence upon the performance of the head-neck assembly.			
,	Plane D is perpendicular ± 1 degree to the centerline of the pendulum.			
		n so that the moment and rotation are define		
		centerline of the neck and pendulum are par		
(572.143(•	contentino or the near and pendalam are par	GG	
	, , , , , , , , , , , , , , , , , , , ,	n and allow it to fall freely from a height to ac	hieve an	
		m/s to 3.75 m/s as measured at the center o		
	neter. (572.1		,	
14. Complete	the following	g table:		
Neck Exte	ension Test F	Results (572.143(b)(2) & (572.143(c)(4)(ii)		
Parameter		Specification	Result	
Pendulum impac	t speed	3.55 m/s ≤ speed ≤ 3.75 m/s		
Pendulum	@ 6 ms	1.0 m/s ≤ Δ V ≤ 1.4 m/s		
ΔV with respect	@ 10 ms	1.9 m/s ≤ Δ V ≤ 2.5 m/s		
to impact	@ 14 ms	$2.8 \text{ m/s} \le \Delta V \le 3.5 \text{ m/s}$		
speed			_	
Plane D Rotation	1	Peak moment*	Nm @	
		-53.3 Nm ≤ moment ≤ -43.7 Nm during	degrees	
		the following rotation range 83≤ angle ≤		
N. C. N.	93			
Negative Moment Decay**		Time to decay to -10 Nm		
(Extension)		60 ms ≤ time ≤ 80ms		
		ct reading from the load cell		
**Time zero is defined as the time of initial contact between the pendulum striker				
plate and the honeycomb material. (572.143(c)(4)(iii))				
15 Diete of n	ممايايات مما	valaration, nandulum valaaitu, naak u avia ma	amant and	
15. Plots of pendulum acceleration, pendulum velocity, neck y-axis moment, and				
neck rotation about the y-axis follow this sheet.				
Signature		 Date		
Signature		Date		

PENDULUM SPECIFICATIONS


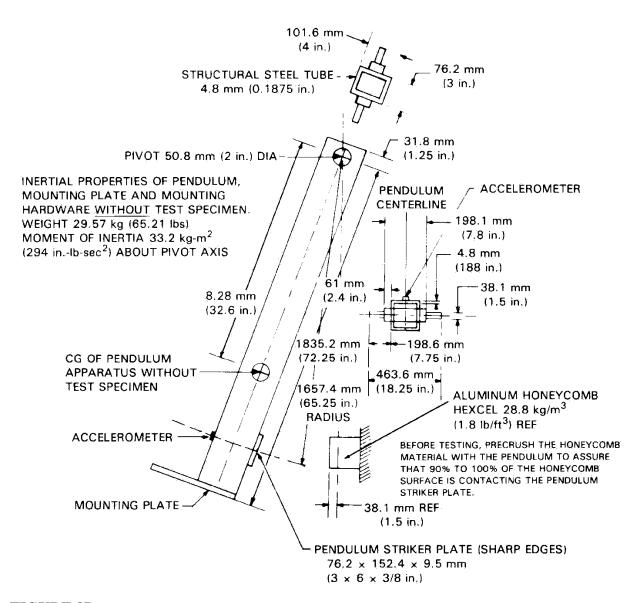


FIGURE 8D


D-29

NECK FLEXION TEST SET-UP SPECIFICATIONS

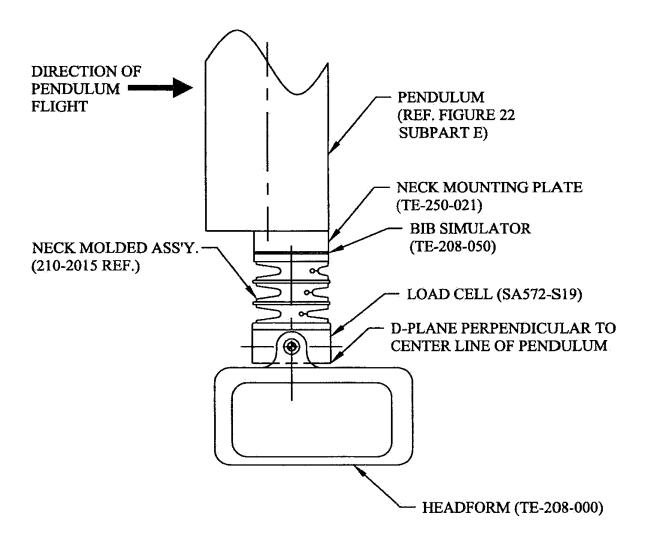

NOTE: MOUNT NECK AT LEADING EDGE OF PENDULUM TO AVOID INTERFERENCE WITH HEADFORM MOTION. PENDULUM SHOWN IN VERTICAL ORIENTATION. FIGURE 9D

NECK EXTENSION TEST SET-UP SPECIFICATIONS

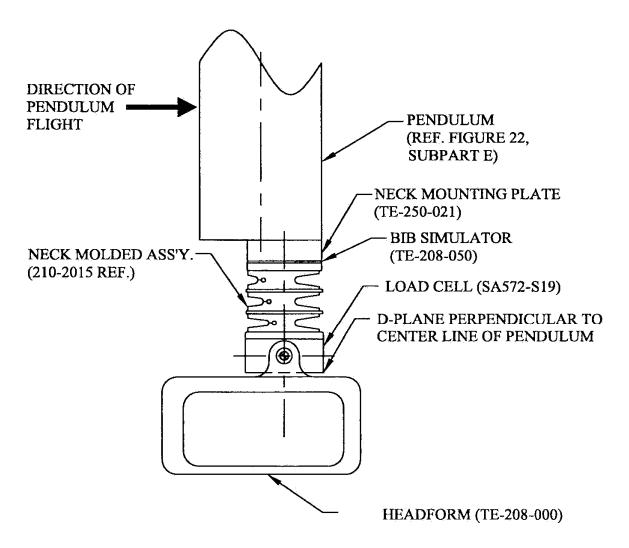

NOTE: MOUNT NECK AT LEADING EDGE OF PENDULUM TO AVOID INTERFERENCE WITH HEADFORM MOTION.
PENDULUM SHOWN IN VERTICAL ORIENTATION.
FIGURE 10D


DATA SHEET D6 THORAX IMPACT TEST (572.144)

Dumn	ny Serial Number Test Date
Techr	nician
	etest calibration st test calibration verification
Test a	attempt no (when successive thorax impact tests are necessary)
1.	N/A, ONLY one thorax impact test performed
2. 3.	The test fixture conforms to the specifications in Figure 11D. The complete assembled dummy (210-0000) is used (572.144(b)) and is dressed in cotton-polyester-based tight-fitting long sleeved shirt and ankle length pants. The weight of the shirt and pants shall not exceed 0.25 kg. (572.144(c)(1))
_4.	The dummy assembly soaked at a temperature between 20.6°C (69°F) and 22.2°C (72°F) and at a relative humidity from 10% to 70% for a period of at least four (4) hours prior to this test. (572.144(c)(2)) Record the maximum temperature Record the minimum temperature Record the maximum humidity Record the minimum humidity
5. 6.	Remove the arms. Unzip the 3 zippers and fold down the chest jacket. Visually inspect the thorax assembly for cracks, cuts, abrasions, etc. Particular attention should be given to the rib damping material, chest displacement transducer assembly and the rear rib supports. Inspect for rib deformation using the chest depth gage. If any damage is noted repair and/or replace the damaged components unless the damage resulted from the vehicle crash test in which the dummy was an occupant in which case the damage must be documented and post test calibration verification testing completed before any repairs or replacements are made. No damage Damage from crash test, no repairs or replacement because this is a post test calibration verification. Record damage The following repairs or replacement was performed. Record
7.	Seat the dummy, without back and arm supports on the test fixture surface as shown in Figure 11D. The surface must be long enough to support the pelvis
8.	and outstretched legs. $(572.144(c)(3))$ Level the middle rib both longitudinally and laterally $\pm 0.5^{\circ}$. $(572.144(c)(3))$

9. The midsagittal plane of the dummy is vertical within \pm 1°. (572.144(c)(3)) 10. The longitudinal centerline of the test probe is centered within ±2.5 mm of the midsagittal plane of the dummy and is centered on the center of the No. 2 rib within ± 2.5 mm within $\pm 0.5^{\circ}$ of a horizontal line in the dummy's midsagittal plane. (572.144(c)(4)) 11. Record locations such as the rear surfaces of the thoracic spine and the lower neck bracket reference with respect to the laboratory coordinate system. These reference measurements are necessary to ensure the dummy is in the same position after the chest skin is rolled up and zipped, and the arms installed. The reference locations must be accessible after the chest skin is rolled up and the arms installed. It will be necessary to leave the chest skin zipper unfastened until the references are checked and then fasten it just prior to the test. __12. Install the chest skin and arms, and reposition the dummy using the reference measurements recorded. 13. Place the upper arms parallel to the torso. Place the lower arms horizontal and forward and parallel to the midsagittal plane. (572.144(c)(3)) 14. The data acquisition system, including transducers, must conform to the requirements of SAE Recommended Practice J211/1 MAR95 (572.146(I)). 15. Impact the anterior surface of the thorax with the test probe so the longitudinal centerline of the probe is within 2° of a horizontal line in the dummy's midsagittal plane at the moment of impact. (572.144(c)(5)) The velocity of the test probe at the time of impact is between 5.9 m/s and 6.1 m/s. (572.144(b)) The probe is guided so there is no significant lateral, vertical or rotational movement during the impact. (572.144(c)(6) Neither the suspension hardware, suspension cables, nor other attachments to the probe, including the velocity vane, make contact with

the dummy during the test. (572.144(c)(7))

16.	Complete the following tab	ole:	
·	Thorax Impact Results (57	(2.144(b) and 572.144(b)(1)&(2)	
	Parameter*	Specification	Result
	Test Probe Speed	5.9 m/s ≤ speed ≤ 6.1 m/s	
	Chest Compression	32 mm ≤ compression ≤ 38 mm	
	Peak force** between 32	680 N ≤ peak force ≤ 810 N	
	and 38 mm chest	·	
	compression		
	Peak force** between	Peak force ≤ 910 N	
	12.5 and 32.0 mm chest		
	compression		
	Internal Hysteresis***	65% ≤ hysteresis ≤ 85%	
	chest skin. **Force = impactor mass x	ne time of initial contact between the test per acceleration (572.144(b)(3)) we minus the area under the unloading curve. (Figure 12D)	
17.	Plots of chest compression versus deflection follow the	n, pendulum acceleration, pendulum force is sheet.	, and force
Signa	ture	 Date	

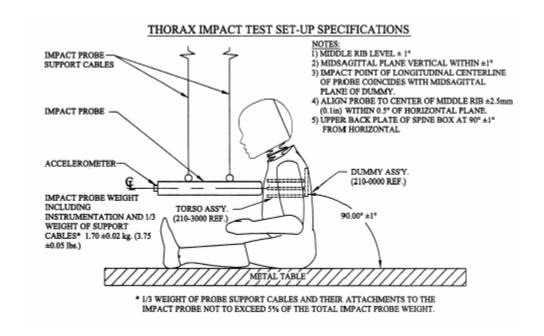

Probe specifications:

- 1. Rigid metallic construction, concentric its longitudinal axis.
- 2. A mass of 1.7 ± 0.02 kg $(3.75 \pm 0.05$ lbs). 1/3 of the weight of the suspension cables and their attachments to the impact probe are included in the calculation of mass, and such components may not exceed 5 percent of the total weight of the test probe.
- 3. Minimum mass moment of inertia of 164 kg-cm² (0.145 lbs-in-sec²) in yaw and pitch about the center of gravity.
- 4. The impacting end of the probe is perpendicular to and concentric with the longitudinal axis. It has a flat, continuous, and non-deformable face with diameter of 50.8 ± 0.2 mm $(2.00 \pm 0.01 \text{ in})$ and a maximum edge radius of 7.6-12.7 mm (0.3-0.5 in).
- 5. The impactor is a cylinder with a diameter of 53.3 mm (2.1 in) and it is at least 25.4 mm (1.0 in) long.
- 6. The probe's end opposite to the impact face must have provisions for mounting of an accelerometer with its sensitive axis collinear with the longitudinal axis of the probe.
- 7. The impact probe shall have a free air resonant frequency of not less than 1000 Hz in the direction of the longitudinal direction of the impactor.

FIGURE 11D

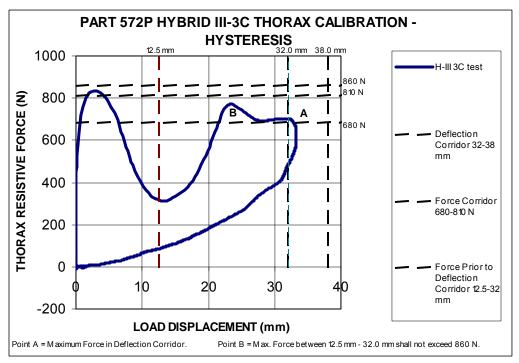


FIGURE 12D

D-36

DATA SHEET D7 TORSO FLEXION TEST (572.145)

Dumm	ny Serial Number Test Date
Techn	ician
	test calibration st test calibration verification
Test a	ttempt no (when successive torso flexion tests are necessary)
1.	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
2	N/A, ONLY one thorax impact test performed
2. 3.	The test fixture conforms to the specifications in Figure 13D. The complete assembled dummy (210-0000) is used with or without the lower
3.	legs. (572.145(c)(2)).
	with legs below the femurs.
	without legs below the femurs.
4.	The dummy assembly soaked at a temperature between 18.9°C (66°F) and
	25.6°C (78°F) and at a relative humidity from 10% to 70% for a period of at least
	four (4) hours prior to this test. (572.145(c)(1))
	Record the maximum temperature
	Record the minimum temperature
	Record the maximum humidity
_	Record the minimum humidity
5.	Unzip the torso jacket and remove the lumbar load transducer or its structural
	replacement from the dummy. Attach the rigid pelvis attachment fixture to the
5	lumbar spine. (572.145(c)(2)(i)&(ii))
5.	Secure the fixture to the table so that the pelvis-lumbar joining surface is horizontal within ±1° and the buttocks and upper legs of the seated dummy are in
	contact with the test surface. (572.145(c)(2)(iii))
6.	Attach the loading adapter bracket to the upper part of the torso as shown in
	Figure 13D and zip up the torso jacket. (572.145(c)(2)(iv))
7.	
	horizontally and forward, parallel to the midsagittal plane. (572.145(c)(2)(v))
8.	Flex the dummy forward and back 3 times such that the angle of the torso
	reference plane moves between 0° and $30^{\circ} \pm 2^{\circ}$. The torso reference plane is
	defined by the transverse plane tangent to the posterior surface of the upper
	backplate of the spine box weldment (210-8020). (572.145(c)(3)(i))
9.	Remove all externally applied flexion forces and support the dummy such that
	the torso reference plane is at or near 0°. Wait at least 30 minutes before
. =	continuing. (572.135(c)(3)(ii))
10.	Remove all external support that was implemented in 9 above and wait 2
	minutes. (572.145(c)(4))

11.	Measure the initial orientation angle of the upper torso reference plane of the seated, unsupported dummy. (572.145(c)(4)) Record reference plane angle (max. allowed 15°)			
12.	Attach the pull cable and the load cell while maintaining the initial torso			
	orientation. (572.145(c)(5))			
13.	Apply a tension force in the midsagittal plane to the pull cable at any upper torso deflection rate between 0.5° and 1.5° per second, until the torso reference plane reaches $45^{\circ} \pm 0.5^{\circ}$ of flexion relative to the vertical transverse plane. (572.145(c)(5))			
14.		lane at 45° ± 0.5° of flexion f	for 10 seconds and record	
		uring this period. (572.145(c		
15.	As quickly as possible release	ase the force applied to the	attachment bracket.	
	(572.145(c)(8))			
16.		ease of the force, measure the	ne angle reference plane.	
47	(572.145(c)(8))			
17.	Complete the following table	le:		
	Torso Flexion Results (572	145(b)(1)&(2), 572.145(c)(4	I). (572.145(c)(5))	
	Parameter	Specification	Result	
=	Initial ref. plane angle	Angle ≤ 15°		
	Torso rotation rate	0.5°/s ≤ rate ≤ 1.5°/s		
	Force at 45° ±0.5°	130 N ≤ force ≤ 180 N		
	Final ref. plane angle #10° Initial ref. plane angle #10°			
18. A plot of the force versus time follows this sheet.				
Signat	Signature Date			

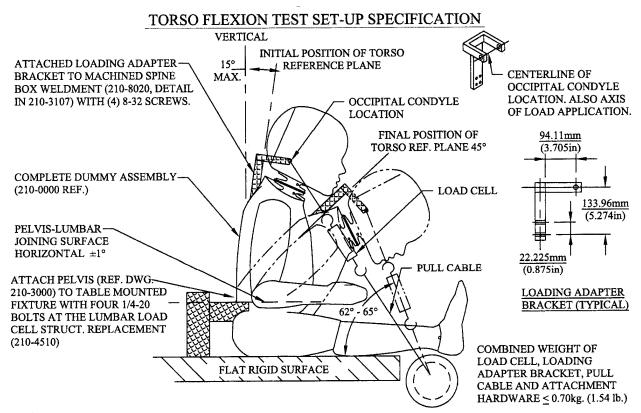


FIGURE 13D

DATA SHEET D8 PART 572 INSTRUMENTATION CALIBRATION INFORMATION

I.D. NO.	MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF LAST CALIBRATION	DATE OF NEXT CALIBRATION
		DUMMY INSTRUM	ENTATION		
		HEAD ACCELERO	OMETERS		
(1) LONGITUDINAL					
(2) LATERAL					
(3) VERTICAL					
NECK TRANSDUCER					
		CHEST ACCELER	OMETERS		
(1) LONGITUDINAL					
(2) LATERAL					
(3) VERTICAL					
CHEST POTENTIOMETER					
		FEMUR LOAD	CELLS		
(1) RIGHT FEMUR					
(2) LEFT FEMUR					
	LABORATORY INSTRUMENTATION				
NECK PENDULUM ACCELEROMETER					
THORAX PENDULUM ACCELEROMETER					
KNEE PENDULUM ACCELEROMETER					
NECK ROTATION TRANSDUCER 1 (OPTIONAL)					
NECK ROTATION TRANSDUCER 2 (OPTIONAL)					

LABORATORY TECHNICIAN:	
LADOINATOINT TEOLINIOIAIN.	