

FedScope Employment Cube

June 2010

Raw Data Set

Prepared for: Data.gov



Table of Contents

1 0\	/ERVIEW	3
1.1	Purpose	
1.2	Scope	3
2 RA	W DATA SET FILE	3
2.1	FACTDATA	3
3 DI	MENSION TRANSLATIONS FILES	3 3 3 3 5
3.1	Agency	5
3.2	Location	6
3.3	Age	6
3.4	Gender	7
3.5	General Schedule & Equivalent Grade	7
3.6	Length of Service	8
3.7	Occupation	8
3.8	Occupation Category	9
3.9	Pay Plan & Grade	9
3.10) Salary Level	10
3.11	Type of Appointment	10
3.12	2 Work Schedule	11
3.13	3 Employment	11
3.14	Average Salary	11
3.15	5 Average Length of Service	11
4 DA	ATA DEFINITIONS	12
4.1	Agency	12
4.2	Location	12
4.3	Age	12
4.4	Gender	12
4.5	General Schedule & Equivalent Grade	12
4.6	Length of Service	12
4.7	Occupation	12
4.8	Occupation Category	12
4.9	Pay Plan & Grade	13
4.10) Salary Level	13
4.11	Type of Appointment	13
4.12	2 Work Schedule	13
4.13	3 Employment	13
4.14	Average Salary	13
4.15	5 Average Length of Service	14
	PPENDIX	14
5.1	FedScope General Public Web Site	14



Listing of Tables

4
5
6
6
7
7
8
8
9
9
10
10
11



1 OVERVIEW

1.1 Purpose

The purpose of this raw data set is to increase public access to high value, machine readable datasets generated by the U.S. Office of Personnel Management. The FedScope Employment Cube data sets are available via <u>Data.gov</u>.

1.2 Scope

The scope of this raw data set includes all data elements used in the creation of the FedScope Employment Cube (<u>http://www.fedscope.opm.gov/</u>). **NOTE**: Starting in FY 2010, the OPM Statistical Data Mart (SDM) is the source for all FedScope data. The SDM is processed data from the Enterprise Human Resources Integration (EHRI) data warehouse. Data is processed on a quarterly basis (i.e. March, June, September and December).

2 RAW DATA SET FILE

2.1 FACTDATA

This "**delimited**" (comma separated value (**CSV**)) raw data set provides employee population data as of June 2010. Each column value is separated by a "**comma**" from the next column's value and each row starts a new record. Each record contains 15 data elements. The record layout for FACTDATA.TXT is depicted in <u>Table 2.1</u> below:

Agency

Age

Location

Gender

Occupation

Salary Level

Work Schedule

Average Salary

Employment

Length of Service

Pay Plan & Grade

Occupation Category

Type of Appointment

Average Length of Service

Data

Column

1

2

3

4

5

6

7

8

9

10


11

12

13

14

15

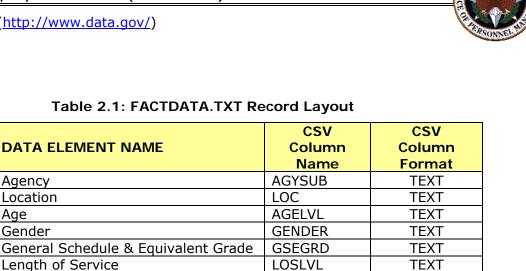

TEXT

TEXT

TEXT

TEXT

TEXT

TEXT

NUMERIC

NUMERIC

NUMERIC

OCC

TOA

LOS

PATCO

PPGRD

SALLVL

SALARY

WORKSCH

EMPLOYMENT

Table 2.1: FACTDATA.TXT Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-12 from "General" to "Text". Columns 13-15 can be imported as "General" data format. In Excel, the "General" data format converts numeric values to numbers. Columns 1-12 are TEXT fields; Columns 13-15 are NUMERIC fields.

Total Records: 2,108,952



3 DIMENSION TRANSLATIONS FILES

3.1 Agency

This "**delimited**" (comma separated value (**CSV**)) data file provides translations for the agency data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "**comma**" from the next column's value and each row starts a new record. Each record contains 6 data elements. The record layout for DTagy.txt is depicted in <u>Table 3.1</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format		
1	Agency Type	AGYTYP	TEXT		
2	Agency Type Translation	AGYTYPT	TEXT		
3	Agency	AGY	TEXT		
4	Agency Translation	AGYT	TEXT		
5	Agency Sub element	AGYSUB	TEXT		
6	Agency Sub element Translation	AGYSUBT	TEXT		
	Total Records: 532				

Table 3.1: DTagy.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-6 from "General" to "Text".



3.2 Location

This "**delimited**" (comma separated value (**CSV**)) data file provides translations for the location data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "**comma**" from the next column's value and each row starts a new record. Each record contains 4 data elements. The record layout for DTloc.txt is depicted in <u>Table 3.2</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format		
1	Location Type	LOCTYP	TEXT		
2	Location Type Translation	LOCTYPT	TEXT		
3	State/Country	LOC	TEXT		
4	State/Country Translation	LOCT	TEXT		
	Total Records: 227				

Table 3.2: DTloc.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-4 from "General" to "Text".

3.3 Age

This "delimited" (comma separated value (CSV)) data file provides translations for the age data element contained in the employee population data file (FACTDATA.TXT). See <u>Table</u> <u>2.1</u>. Each column value is separated by a "comma" from the next column's value and each row starts a new record. Each record contains 2 data elements. The record layout for DTagelvl.txt is depicted in <u>Table 3.3</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format
1	Age	AGELVL	TEXT
2	Age Translation	AGELVLT	TEXT
Total Records: 12			

Table	3.3: D	Tagelvl.txt	Record	Lavout
	0.0. 0	. agon	110001 0	Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-2 from "General" to "Text".



3.4 Gender

This "**delimited**" (comma separated value (**CSV**)) data file provides translations for the gender data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "**comma**" from the next column's value and each row starts a new record. Each record contains 2 data elements. The record layout for DTgender.txt is depicted in <u>Table 3.4</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format
1	Gender	GENDER	TEXT
2	Gender Translation	GENDERT	TEXT
Total Records: 3			

Table 3.4: DTgender.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-2 from "General" to "Text".

3.5 General Schedule & Equivalent Grade

This "delimited" (comma separated value (CSV)) data file provides translations for the general schedule & equivalent grade data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "comma" from the next column's value and each row starts a new record. Each record contains 1 data element. The record layout for DTgsegrd.txt is depicted in <u>Table 3.5</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format			
1	General Schedule & Equivalent Grade	GSEGRD	TEXT			
	Total Records: 17					

Table 3.5: DTgsegrd.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for column 1-from "General" to "Text".



3.6 Length of Service

This "delimited" (comma separated value (CSV)) data file provides translations for the length of service data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "comma" from the next column's value and each row starts a new record. Each record contains 2 data elements. The record layout for DTloslvl.txt is depicted in <u>Table 3.6</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format	
1	Length of Service	LOSLVL	TEXT	
2	Length of Service Translation	LOSLVLT	TEXT	
Total Records: 11				

Table 3.6: DTloslvI.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-2 from "General" to "Text".

3.7 Occupation

This "**delimited**" (comma separated value (**CSV**)) data file provides translations for the occupation data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "**comma**" from the next column's value and each row starts a new record. Each record contains 6 data elements. The record layout for DTocc.txt is depicted in <u>Table 3.7</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format
1	Occupation Type	OCCTYP	TEXT
2	Occupation Type Translation	OCCTYPT	TEXT
3	Occupation Family	OCCFAM	TEXT
4	Occupation Family Translation	OCCFAMT	TEXT
5	Occupation	OCC	TEXT
6	Occupation Translation	OCCT	TEXT
Total Records: 710			

Table 3.7: DTocc.txt Rec	ord Layout
--------------------------	------------

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-6 from "General" to "Text".



3.8 Occupation Category

This "delimited" (comma separated value (**CSV**)) data file provides translations for the occupation category data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "comma" from the next column's value and each row starts a new record. Each record contains 2 data elements. The record layout for DTpatco.txt is depicted in <u>Table 3.8</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format	
1	Occupation Category	PATCO	TEXT	
2	Occupation Category Translation	PATCOT	TEXT	
Total Records: 7				

Table 3.8: DTpatco.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-2 from "General" to "Text".

3.9 Pay Plan & Grade

This "delimited" (comma separated value (CSV)) data file provides translations for the pay plan & grade data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "comma" from the next column's value and each row starts a new record. Each record contains 7 data elements. The record layout for DTppgrd.txt is depicted in <u>Table 3.9</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format
1	Pay Plan Type	PPTYP	TEXT
2	Pay Plan Type Translation	PPTYPT	TEXT
3	Pay Plan Group	PPGROUP	TEXT
4	Pay Plan Group Translation	PPGROUPT	TEXT
5	Pay Plan	PAYPLAN	TEXT
6	Pay Plan Translation	PAYPLANT	TEXT
7	Pay Plan & Grade	PPGRD	TEXT
Total Records: 1,068			

Table 3.9: DTppgrd.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-7 from "General" to "Text".



3.10 Salary Level

This "**delimited**" (comma separated value (**CSV**)) data file provides translations for the salary level data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "**comma**" from the next column's value and each row starts a new record. Each record contains 2 data elements. The record layout for DTpaylvl.txt is depicted in <u>Table 3.10</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format	
1	Salary Level	SALLVL	TEXT	
2	Salary Level Translation	SALLVLT	TEXT	
Total Records: 19				

Table 3.10: DTsallvl.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-2 from "General" to "Text".

3.11 Type of Appointment

This "delimited" (comma separated value (**CSV**)) data file provides translations for the type of appointment data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "comma" from the next column's value and each row starts a new record. Each record contains 4 data elements. The record layout for DTtoa.txt is depicted in <u>Table 3.11</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format
1	Type of Appointment Type	TOATYP	TEXT
2	Type of Appointment Type Translation	TOATYPT	TEXT
3	Type of Appointment	TOA	TEXT
4	Type of Appointment Translation	TOAT	TEXT
Total Records: 19			

Table 3.11: DTtoa.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-4 from "General" to "Text".



3.12 Work Schedule

This "delimited" (comma separated value (**CSV**)) data file provides translations for the work schedule data element contained in the employee population data file (FACTDATA.TXT). See <u>Table 2.1</u>. Each column value is separated by a "comma" from the next column's value and each row starts a new record. Each record contains 4 data elements. The record layout for DTwrksch.txt is depicted in <u>Table 3.12</u> below:

Data Column	DATA ELEMENT NAME	CSV Column Name	CSV Column Format
1	Work Schedule Type	WSTYP	TEXT
2	Work Schedule Type Translation	WSTYPT	TEXT
3	Work Schedule	WORKSCH	TEXT
4	Work Schedule Translation	WORKSCHT	TEXT
Total Records: 12			

Table 3.12: DTwrksch.txt Record Layout

NOTE: If importing this table (data set) into Excel, change the "column data format" for columns 1-4 from "General" to "Text".

3.13 Employment

There is no translation file for this data element. Every record in the employee population data file (FACTDATA.TXT) contains a value of "1" for this field. See Chapter <u>4.13</u> for definition of <u>Employment</u>.

3.14 Average Salary

There is no translation file for this data element. See Chapter 4.14 for definition of <u>Average</u> <u>Salary</u>.

3.15 Average Length of Service

There is no translation file for this data element. See Chapter 4.15 for definition of <u>Average</u> <u>Length of Service</u>.



4 DATA DEFINITIONS

4.1 Agency

The employing organization.

4.2 Location

The official duty station of an employee. Locations in the United States are defined in terms of states. Locations outside the United States are defined in terms of countries and U.S. territories.

4.3 Age

An employee's age. Age is displayed in five-year intervals, except for an initial interval of less than 20 years and a final interval of 65 years or more.

4.4 Gender

An employee's gender (male or female).

4.5 General Schedule & Equivalent Grade

The General Schedule grade for pay plans in the General Schedule and Equivalent pay plan category (See <u>Pay Plan & Grade</u>).

4.6 Length of Service

The number of years of Federal civilian employment, creditable military service, and other service made creditable by specific legislation. Length of service is grouped by five-year intervals, except for:

- a. the initial intervals of less than 1 year, 1-2 years, and 3-4 years and
- b. the final interval of 35 years or more.

4.7 Occupation

An employee's occupation as defined by the Office of Personnel Management (OPM).

4.8 Occupation Category

Occupational categories are defined by the educational requirements of the occupation and the subject matter and level of difficulty or responsibility of the work.



4.9 Pay Plan & Grade

The pay system and, where applicable, the grade used to determine an employee's basic pay rate. Grade denotes a hierarchical position in a pay plan and is sometimes referred to as level, class, rank, or pay band.

4.10 Salary Level

An employee's adjusted basic pay, which is an annualized rate of pay. Adjusted basic pay is the sum of an employee's rate of basic pay plus any locality comparability payment and/or special pay adjustment for law enforcement officers. Salaries are grouped by \$10,000 intervals, except for an initial interval of less than \$20,000 and a final interval of \$180,000 or more.

An employee's actual earnings may be more or less than the annualized rate because of factors such as overtime, shift differentials, less than full time work, or leave without pay.

4.11 Type of Appointment

An employee's appointment in terms of permanence and competitiveness.

4.12 Work Schedule

The time basis on which an employee is scheduled to work.

4.13 Employment

A measure representing the number of employees in pay status at the end of the quarter (or end of the pay period prior to the end of the quarter).

4.14 Average Salary

A measure representing the average adjusted basic pay, an annualized rate of pay. Adjusted basic pay is the sum of an employee's rate of basic pay and any locality comparability payment and/or special pay adjustment for law enforcement officers.

An employee's actual earnings may be more or less than the annualized rate because of factors such as overtime, shift differentials, less than full time work, or leave without pay.

Invalid salary values are excluded from the average. A large number of invalid values could invalidate the average. To obtain counts of invalid values, display the data using the Salary Level dimension (See <u>Salary Level</u>).



4.15 Average Length of Service

A measure representing the average number of years of Federal civilian employment and creditable military service.

Invalid values are excluded from the average. A large number of invalid values could invalidate the average. To obtain counts of invalid values, display the data using the Length of Service dimension (See Length of Service).

5 APPENDIX

5.1 FedScope General Public Web Site

More information regarding this raw data set is available at:

• <u>http://www.fedscope.opm.gov/</u>

Questions/Comments to: <u>mailto:FedScope.opm.gov</u>