BISPHENOL A ALTERNATIVES IN THERMAL PAPER



DRAFT FOR PUBLIC COMMENT

July 2012

** DO NOT CITE OR QUOTE **



Table of Contents

1	Introduction	1-1
	.1 Purpose of the BPA in Thermal Paper Alternatives Assessment	1-2
	.2 Scope of the BPA in Thermal Paper Alternatives Assessment	
	.3 Chemical Alternatives Assessment as a Risk Management Tool	
2	Products and Materials: BPA in Thermal Paper	
	.1 BPA as a Developer in Thermal Paper	2-1
	.2 Thermal Paper Uses	
3	Background on Thermal Printing Technology	
	.1 Components of Thermal Paper	3-1
	3.1.1 Paper	
	3.1.2 Printing Chemistry	3-2
	.2 Thermal Printing Equipment and Process	
	Advantages and Disadvantages of Thermal Printing Technology	3-6
	.4 Alternatives Included in this Assessment	
	.5 Alternatives Not Included in this Assessment	3-11
4	Hazard Evaluation of Bisphenol A (BPA) and Alternatives	4-1
	.1 Toxicological and Environmental Endpoints	4-1
	4.1.1 Definitions of Each Endpoint Evaluated Against Criteria	
	4.1.2 Criteria	4-4
	4.1.3 Endpoints Characterized but Not Evaluated	4-7
	Data Sources and Assessment Methodology	4-8
	4.2.1 Identifying and Reviewing Measured Data	4-8
	4.2.2 Hierarchy of Data Adequacy	4-10
	4.2.3 Assessment of Oligomeric Mixtures	4-11
	.3 Importance of Physical and Chemical Properties, Environmental Transport, an	
	Biodegradation	
	.4 Evaluating Human Health Endpoints	
	4.4.1 Endpoints Characterized and Evaluated Against Criteria Based on Measured	d Data. 4-
	18	
	4.4.2 SAR – Application of SAR and Expert Judgment to Endpoint Criteria	
	.5 Evaluating Environmental Endpoints	
	4.5.1 Ecotoxicity	
	4.5.2 Bioaccumulation	
	4.5.3 Environmental Persistence	
	.6 Endocrine Activity	
	.7 Hazard Summary Table	
	.8 Hazard Profiles	
	Bisphenol A	
	Bisphenol F	
	Bisphenol C	4-116

	MBHA	4-141
	BisOPP-A	4-162
	Bisphenol AP	4-183
	Substituted Phenolic Compound #1	4-205
	Substituted Phenolic Compound #2	4-224
	PHBB	4-246
	Bisphenol S	4-268
	2,4-BPS	4-292
	TGSA	4-305
	BPS-MAE	4-321
	BPS-MPE	4-333
	D-8	4-348
	D-90	4-361
	DD-70	4-374
	Pergafast 201	4-384
	BTUM	4-399
	UU	4-409
5	General Exposure and Lifecycle Information	5_1
_		
	5.1 Potential Exposure Pathways and Routes (General)	
	5.1.1 Inhalation Exposures	
	5.1.2 Dermal Exposures	
	5.1.3 Ingestion Exposures	
	5.1.4 Environmental and General Population Exposures	
	5.1.5 Exposures to Susceptible Populations	
	5.1.6 Physical-Chemical Properties for the Alternatives to BPA included in the	
	Assessment that May Impact Exposure	
	5.2 Potential Sources of Exposure in the Life-cycle of Thermal Paper	
	5.2.1 Manufacture of Developers	
	5.2.2 Manufacture of Thermal Paper	
	5.2.3 Conversion of Thermal Paper	
	5.2.4 Use of Thermal Paper	
	5.2.5 End-of-Life	5-12
	5.2.6 Manufacture of Recycled Paper Products	
	5.3 Available Data on Occupational, Consumer, and Environmental Exposures	
	Thermal Paper Lifecycle	
	5.3.1 BPA in Receipts	
	5.3.2 BPS in Receipts	
	5.3.3 BPA Transfer to Skin and Potential for Dermal Absorption	
	5.3.4 Occupational Exposure	
	5.3.5 Consumer and General Population Exposure	
	5.3.6 Environmental Exposure	5-17
6	Considerations for Selecting Thermal Paper Developers	6-1
	6.1 Human Health and Environmental Considerations	6-1
	6.1.1 Human Health Hazard	
	6.1.2 Ecotoxicity	

6.1.3	Persistence	6-2
6.1.4	Bioaccumulation Potential	6-2
6.1.5	Exposure Considerations	6-3
6.3 I	Performance Considerations	6-4
6.4 I	Economic Considerations	6-5
6.5	Social Considerations	6-6
6.7 I	nnovation and Design Challenges	6-10
6.8 I	Relevant Resources	6-11
6.8.1	Resources for State and Local Authorities	6-11
6.8.2	Federal Agency Resources	6-12
6.8.3	Resources for Global Regulations	6-12
	Related Assessments	

List of Acronyms and Abbreviations

AIM Analog Identification Methodology

ACR Acute to Chronic Ratio

ADME Absorption, Distribution, Metabolism, and Excretion

AIST Advanced Industrial Science and Technology
ASTM American Society for Testing and Materials

BAF Bioaccumulation Factor BCF Bioconcentration Factor

BPA Bisphenol A

CASRN Chemical Abstracts Service Registry Number CDC Centers for Disease Control and Prevention

CHO Chinese Hamster Ovary Cells

ChV Chronic Value

CPSC Consumer Product Safety Commission

CVL Crystal Violet Lactone
DfE Design for the Environment

dpi Dots per inch

EC₅₀ Half Maximal Effective Concentration

ECHA European Chemicals Agency

ECOSAR Ecological Structure Activity Relationships EDSP Endocrine Disruptor Screening Program

EEC European Economic Community

EKG Electrocardiogram

EPA U. S. Environmental Protection Agency

EPCRA Community Right-to-Know Act EPI Estimations Program Interface

ERMA Environmental Risk Management Authority

EU European Union

FDA U.S. Food and Drug Administration

GHS Globally Harmonized System of Classification and Labeling of Chemicals

GLP Good Laboratory Practice

HGPRT Hypoxanthine-Guanine Phosphoribosyl-Transferase

HPLC High Performance Liquid Chromatography

HPV High Production Volume

HSDB Hazardous Substances Data Bank

IARC International Agency for Research on Cancer

IR Infrared

IRIS Integrated Risk Information System

IUCLID International Uniform Chemical Information Database

K_{oc} Organic carbon/water partition coefficient (a.k.a. soil adsorption coefficient)

 K_{ow} Octanol/water partition coefficient LC_{50} Median Lethal Concentration

LCA Life cycle assessment LD₅₀ Median Lethal Dose

LD Lactation Day

LFL Lower limit of flammability

LOAEL Lowest Observed Adverse Effect Level LOEC Lowest Observed Effective Concentration

MF Molecular Formula

MITI Japanese Ministry of International Trade and Industry

MW Molecular Weight

MSDS Material Safety Datasheet

NAICS North American Industry Classification System

NES No Effects at Saturation

NGO Non-Governmental Organization

NHANES National Health and Nutrition Examination Survey

NICNAS National Industrial Chemicals Notification and Assessment Scheme

NIOSH National Institute for Occupational Safety and Health

NIR Near infrared

NOAEL No Observed Adverse Effect Level NOEC No Observed Effect Concentration

NOEL No Observed Effect Level NTP National Toxicology Program

OECD Organisation for Economic Cooperation and Development

OPPT Office of Pollution Prevention and Toxics

P2 Pollution Prevention

PBB Poly-Brominated Biphenyls
PBDE Polybrominated diphenyl Ether

PBT Profiler Persistent, Bioaccumulative, and Toxic (PBT) Chemical Profiler

PMN Premanufacture Notice

PNEC Predicted No Effect Concentration

POS Point-of-sale
ppb parts per billion
ppm parts per million
PVC Polyvinyl Chloride

REACH Registration, Evaluation, Authorisation and Restriction of Chemical substances

RoHS Restriction of Hazardous Substances
SAR Structure Activity Relationship

SF Sustainable Futures

SIDS Screening Information Data Set

SMILES Simplified Molecular-Input Line-Entry System
SPARC Sparc Performs Automated Reasoning in Chemistry

TDI Total Daily Intake

TRI Toxics Release Inventory
TSCA Toxic Substances Control Act

QSAR Quantitative Structure Activity Relationships

UFL Upper Limit of Flammability
USGS U.S. Geological Survey
WHO World Health Organization
WWTP Wastewater Treatment Plant

THIS PAGE INTENTIONALLY LEFT BLANK

Introduction

As part of its effort to enhance the Agency's current chemicals management program, the U.S. Environmental Protection Agency (EPA) has taken steps to identify chemicals that may pose environmental and health concerns; in 2009-2011 EPA developed action plans to investigate potential regulatory and voluntary actions. In March 2010, EPA released a chemical action plan that summarizes hazard, exposure, and use information on bisphenol A (BPA) and identifies actions EPA is considering. Under this Action Plan, EPA's Design for the Environment (DfE) Program initiated this alternatives assessment: BPA Alternatives in Thermal Paper. DfE's Alternatives Assessment Program helps industries choose safer chemicals and provides a basis for informed decision-making by developing an in-depth comparison of potential human health and environmental impacts of chemical alternatives. Representatives from industrial, academic, governmental, and non-governmental organizations (NGOs) engaged with DfE to select and evaluate alternatives to BPA in thermal paper² and develop this report. Although this report is intended to provide information that will enable selection of safer alternatives to BPA in thermal paper, it also contains helpful risk management information for thermal paper companies who are not currently using BPA.

BPA is a high production volume (HPV) chemical with a U.S. volume estimated at 2.4 billion pounds in 2007 and an estimated value of almost \$2 billion (U.S. EPA 2010a). It is a monomer used in manufacturing most polycarbonate plastics, the majority of epoxy resins, and other chemical products such as flame retardants. Recently, there has been heightened public attention around exposures to BPA and its potential effects as an environmental pollutant. Because BPA is a reproductive, developmental, and systemic toxicant in animal studies and interacts with estrogen receptors, there are questions about its potential impact, particularly on children's health and ecosystems. Several government entities have published reports examining potential human health and environmental hazards associated with BPA exposure. Such entities include a number of regulatory agencies in the European Union (EU), Health Canada and Environment Canada, Japan's National Institute of Advanced Industrial Science and Technology (AIST), the U.S. Food and Drug Administration (FDA), and the U.S. National Institute of Environmental Health Sciences National Toxicology Program (NTP). Additional research is underway, particularly concerning whether BPA may cause effects at low concentrations (U.S. EPA 2010a).

Approximately 94% of BPA is used as a monomer to make polycarbonate plastic and epoxy resins (U.S. EPA 2010a). Although most human exposure to BPA is believed to come from food and beverage packaging made from these materials, less than 5% of the BPA produced is used in food contact applications (U.S. EPA 2010a). Apart from food-related uses, BPA-based materials are used in automotive and other transportation equipment, optical media such as DVDs, electrical/electronics equipment, construction, linings inside drinking water pipes, thermal paper coatings, foundry casting, and elsewhere.

¹ The BPA Action Plan is available online at http://www.epa.gov/opptintr/existingchemicals/pubs/actionplans/bpa action plan.pdf

² The term "thermal paper" used in this report refers to paper used in direct thermal transfer machines.

BPA is a commonly used developer in a number of thermal paper applications, such as point of sale receipts, but may also be used in other thermal paper applications, such as airline tickets, event and cinema tickets, and labels. When used in thermal paper, BPA is present as "free" (i.e., discrete, non-polymerized) BPA, which is likely to be more available for exposure than BPA polymerized into a resin or plastic (U.S. EPA 2010a). Upon handling, BPA in thermal paper can be transferred to skin, and there is some concern that residues on hands could be ingested through incidental hand-to-mouth contact (Zalko, Jacques et al. 2011). Furthermore, some studies suggest that dermal absorption may contribute some small fraction to the overall human exposure (Biedermann, Tschudin et al. 2010; Zalko, Jacques et al. 2011). European data indicate that the use of BPA in paper may also contribute to the presence of BPA in the stream of recycled paper and in landfills (JRC-IHCP 2010). Although there are currently no estimates for the amount of BPA used in thermal paper in the United States, in Western Europe, the volume of BPA reported to be used in thermal paper in 2005/2006 was 1,890 tonnes per year, while total production was estimate at 1,150,000 tonnes per year (JRC-IHCP 2010), which accounts for roughly 0.2% of the annual use of BPA.

As described in the Action Plan, EPA's DfE Program initiated this multi-stakeholder partnership alternatives assessment: Alternatives to BPA in Thermal Paper. DfE's Alternatives Assessment Program provides a basis for informed decision-making by developing an in-depth comparison of potential human health and environmental impacts of chemical alternatives. The BPA Alternatives in Thermal Paper Partnership was formed in July 2010 and includes a diverse array of stakeholders, such as thermal paper manufacturers, thermal paper converters, chemical manufacturers, point-of-sale equipment manufacturers, retailers, trade associations, nongovernmental organizations, green chemistry and technical experts, and international governmental organizations. Partners engaged with DfE to identify and evaluate potential alternatives to BPA in thermal paper and develop this report. This report is intended to provide information that will enable selection of safer alternatives to BPA in thermal paper.

This alternatives assessment evaluated the available alternatives that were judged as most likely to be used in thermal printing applications. Selection of a chemical for evaluation in the report does not denote environmental preferability. Rather, the report provides information that will help decision-makers consider environmental and human health profiles for all evaluated chemicals, so that they can choose the safest possible functional alternative. This report also presents general information on exposures to thermal paper, life-cycle considerations, and some considerations for weighing human health and environmental considerations with other factors, such as cost and performance.

1.1 Purpose of the BPA in Thermal Paper Alternatives Assessment

The purpose of the BPA in Thermal Paper Alternatives Assessment is to inform substitution to safer alternatives for BPA by evaluating the hazard associated with functional alternatives to BPA and making that information available to decision-makers and the public. Information generated from this partnership will contribute to more informed decisions concerning the

-

³ For more information on the DfE Program's alternatives assessments, seewww.epa.gov/dfe/alternative assessments.html.

selection and use of developers in thermal paper technologies and the disposal and recycling of thermal paper.

1.2 Scope of the BPA in Thermal Paper Alternatives Assessment

The BPA in Thermal Paper Alternatives Assessment is an evaluation of potential hazards associated with thermal paper developers that are likely to be functional alternatives to BPA. Thermal paper systems include a developer and other components such as dyes and sensitizers. EPA recognizes that a change in the developer may require additional adjustments to the system.

This report summarizes the outcomes of the alternatives assessment, and aims to improve understanding of the potential environmental and human health impacts of BPA and alternative developers in thermal paper throughout their life cycles. It is intended to provide information that will inform industry and other stakeholders on the selection of potentially safer alternative developers for use in thermal paper.

This report is organized as follows:

- *Chapter 1 (Introduction)*: This chapter provides background to the BPA Alternatives in Thermal Paper Partnership, including the purpose and scope of the assessment.
- Chapter 2 (Products and Materials: BPA in Thermal Paper): This chapter provides information on BPA and its use in thermal paper as a developer.
- Chapter 3 (Background on Thermal Printing Technology): This chapter describes the thermal paper printing system and how developers interact with other components in the system to create a printed product.
- Chapter 4 (BPA Alternatives Evaluations): This chapter provides the results of the hazard assessment of BPA and the 19 alternatives that the partnership identified. This chapter also discusses how the alternatives were identified.
- Chapter 5 (General Exposure and Lifecycle Information): This chapter details the human health and environmental exposure pathways of developers from thermal paper.
- Chapter 6 (Considerations for Selecting a Replacement for BPA): This chapter describes considerations involved with selecting an alternative developer to BPA in thermal paper. This chapter also discusses green chemistry options and alternative technologies that could be used in place of thermal paper applications.

1.3 Chemical Alternatives Assessment as a Risk Management Tool

Among other actions, the Agency included an alternatives assessment for BPA in thermal paper as a suitable risk management tool in the Action Plan for BPA. The Agency chose this tool to inform the chemical substitution that may occur as an outcome of other activities described in the Action Plan. Alternatives assessment provides information on the environmental and human health profiles of chemicals that may be used as substitutes so that industry and other stakeholders can use this information, in combination with analysis of cost, performance, and other factors to choose alternatives.

Chemical alternatives assessment, life cycle assessment (LCA) and risk assessment are all tools that can be used to improve the sustainability profiles of chemicals and products. These tools, which can be complementary, should be selected according to the risk management need and other regulatory and policy considerations. DfE Alternatives Assessments establish a foundation that other tools, such as risk assessment and LCA, can build upon.

The focus of this DfE alternatives assessment report is a comparative hazard assessment of the chemical alternatives that may be substituted for BPA in thermal paper. Comparative chemical hazard assessment is a comparison of chemicals within the same functional use group (e.g., solvent, surfactant, flame retardant, ink developer) that evaluates alternatives across a consistent and comprehensive set of hazard endpoints. Information about chemical hazards derived from this type of comparative chemical hazard assessment can be used by decision-makers to help them select safer alternative chemicals.

Risk assessment and alternatives assessment are both based on the premise that risk is a function of hazard and exposure. Risk assessment characterizes the nature and magnitude of hazard and exposure from chemical contaminants and other stressors. The DfE alternatives assessment evaluates and compares the nature of the chemical hazards and reflects a view that when exposure is comparable, risk is reduced through the use of less hazardous chemicals. Alternatives assessment strives to decrease the reliance on exposure controls thus reducing risk even when these controls fail.

Chemical alternatives assessment differs substantially from LCA. An LCA can present a robust picture of many environmental impacts associated with the material and energy inputs and outputs throughout the life cycle of a product, and by doing so can identify opportunities for reducing those impacts. However, unlike chemical alternatives assessment, LCA typically provides a limited (if any) review of inherent toxicity.

DfE's 'functional use' approach to alternatives assessment orients chemical evaluations within a given product type and functionality. Under this approach, factors related to *exposure scenarios*, such as physical form and route of exposure, can be constant within a given functional use analysis and would fall out of the comparison so that a reduction in hazard is a reduction of risk. When less hazardous alternatives have different physical-chemical profiles or require different use levels, it may be appropriate to also conduct an exposure assessment. DfE alternatives assessments consider intrinsic properties of chemical substitutes that affect *exposure potential*, including absorption potential, persistence, and bioaccumulation. Under this approach, the health and environmental profiles in the alternatives assessments become the key variable and source of distinguishing characteristics. The potential impact of exposure attributes, including significant differences in environmental fate and transport based on persistence, bioaccumulation, and physical properties, are discussed in Chapters 4 and 5.

Alternatives assessment is most useful in identifying safer substitutes when available alternatives meet performance requirements and are expected to present lower hazards for human health and the environment. During decision-making, risk assessment or LCA could be applied to the lower-hazard or potentially preferable alternatives to complement the alternatives assessment

findings. Alternatives assessments can also identify the characteristics of a safer alternative and guide innovation and product development, especially when clearly preferable alternatives are not available.

Chemical Alternatives Assessment Furthers the Goals of Green Chemistry

The DfE alternatives assessment approach is aligned with green chemistry principles.⁴ The relationship to two of those principles is especially noteworthy:

- Principle 4: Design of safer chemicals -- "Chemical products should be designed to effect their desired function while minimizing their toxicity," and
- Principle 10: Design for degradability -- "Chemical products should be designed so that at the end of their function they break down into innocuous degradation products and do not persist in the environment."

DfE incorporates these two green chemistry principles in its criteria and applies them in its assessment of chemical hazard and fate in the environment. This approach enables identification of safer substitutes that emphasize greener chemistry and points the way to innovation in safer chemical design where hazard becomes a part of a performance evaluation.

Aspects beyond the Scope of this Assessment and Report

An assessment of process chemicals (i.e., those used in manufacturing of BPA) and other chemicals used in the manufacture of thermal paper is beyond the scope of this assessment. Similarly, assessments of technologies that could replace thermal paper applications altogether, such as alternative printing technologies or electronic receipts, are also outside the scope of this assessment. Selected alternative technologies are briefly discussed in Chapter 6.

⁴ http://www.epa.gov/sciencematters/june2011/principles.htm

References

- Biedermann, S., P. Tschudin, et al. (2010). "Transfer of bisphenol A from thermal printer paper to the skin." <u>Anal Bioanal Chem</u> **398**: 571-576.
- Joint Research Centre-Institute for Health and Consumer Protection (JRC-IHCP) (2010). European Union Risk Assessment Report, 4,4'-Isopropylidenediphenol (Bisphenol-A).
- U.S. Environmental Protection Agency (U.S. EPA) (2010a). Bisphenol A Action Plan.
- Zalko, D., C. Jacques, et al. (2011). "Viable skin efficiently absorbs and metabolizes bisphenol A." <u>Chemosphere</u> **82**(3): 424-430.



2 Products and Materials: BPA in Thermal Paper

Bisphenol A (BPA) is one of the highest production volume chemicals in the world. Global production capacity of BPA was about 5,160 kilotons in 2008 (Chemical Weekly 2009). The U.S. alone had a production capacity of 1,226 kilotons of BPA in 2008. In 2008, Europe's estimated annual production capacity was 1,438 kilotons (Chemical Weekly 2009), up from 1150 kilotons/year in 2005/2006 (JRC-IHCP 2010).

BPA is found in a diverse array of products in addition to thermal paper. For example, one of the main sources of BPA is in polycarbonate plastics and in epoxy resins. Applications of polycarbonates include reusable food and drink containers such as plastic bottles, optical media such as CDs and DVDs, automotive and other transport equipment, sports safety equipment, glazing, and polycarbonate blends in the electronics industry (OECD 2002; Polycarbonate/BPA Global Group 2011). Applications of epoxy resins containing BPA include lacquers in protective coatings in food cans and water pipes, structural composites, electrical laminates such as for printed circuit boards, composites, electrical applications, as well as paints, adhesives and other protective coatings such as dental sealants (OECD 2002; Polycarbonate/BPA Global Group 2011). BPA is used in the production of polyester resins, polysulfone resins, polyacrylate resins, and flame retardants (NTP-CERHR 2008). It is also contained in polyvinyl chloride (PVC) plastics and foundry castings (U.S. EPA 2010a).

BPA is synthesized by the condensation of phenol and acetone in the presence of an acid catalyst (e.g., hydrogen chloride) and a promoter (e.g., methyl mercaptan). This condensation reaction yields two grades of BPA, both of which may be used in the manufacture of thermal paper (ICIS 2011; S. MacNeil, personal communication, November 28, 2011).

This chapter describes BPA's use as a developer, as well as the thermal paper applications in which BPA is often used. Thermal printing technology is described in Chapter 3.

2.1 BPA as a Developer in Thermal Paper

BPA is widely used as a developer in thermal paper because it is efficacious, available, and affordable (Mendum, Stoler et al. 2011). In a sample of ten twelve-inch blank cash register receipts from businesses in suburban Boston, Mendum et al. found that eight receipts had quantifiable concentrations of BPA (level of quantification 26 μ g/g). Detectable BPA varied from 3 to 19 mg per 12-inch receipt (2011). Mendum et al. identified three categories for the amount of BPA in thermal paper: full BPA content (9-19mg/12 inches), low BPA content (1-3 mg/12 inches), and BPA-free paper (below the detection limit) (2011).

In a larger study, 103 thermal receipt papers from 58 locations in the U.S., Japan, Korea, and Vietnam were tested (Liao and Kannan 2011b). BPA was found in 94 percent of the receipts, ranging from below the level of quantification (1 ng/g in this study) to 13.9 mg/g (geometric mean: 0.211 mg/g). Some receipt papers claimed to be "BPA-free," as specifically printed on the receipt paper, but all of these receipt papers contained hundreds of µg/g levels of BPA (geometric mean: 217µg/g). Of the receipt papers collected in the U.S., 100 percent of them

contained BPA. BPA was not detected in any of the six samples from Japan, likely due to the 2001 Japanese phase-out of BPA in thermal paper.

Although there are currently no estimates for the amount of BPA used in thermal paper in the U.S., in Europe, the amount of BPA used in 2005/2006 in thermal paper amounted to 1.89 kilotons (JRC-IHCP 2010). This accounts for roughly 0.2 percent of total European BPA consumption (JRC-IHCP 2010).

2.2 Thermal Paper Uses

Thermal paper has extensive applications with the most common uses including: point-of-sale (POS) receipts, labels, tickets, and print-outs from recording devices Point-of-sale receipts include sales receipts from cash registers, ATMs, and banks. Labels printed on thermal paper include labels on prescriptions, industrial barcodes, packaged items such as supermarket foods (e.g. deli meats, cheese, bulk items), and retail shelf labels. Tickets for transportation (e.g. airlines, trains), entertainment (e.g., cinema, theatre, gaming, sporting events, amusement parks, arenas, and museums), parking tickets, and tickets from kiosks are all common applications of thermal paper (Nashua Corporation 2008). Ultrasound, electrocardiogram, and printouts from other laboratory recorders are also common examples of thermal printing (JPI Healthcare n.d.). Testing of thermal paper used in medical applications, such as electrocardiogram (EKG) printouts, indicates that it is made with bisphenol S (J. Warner, personal communication, March 1, 2011).

According to European estimates, point-of-sale receipts account for only half of thermal paper sold. Nearly one-third of thermal paper is used in self-adhesive labels in applications such as deli trays, shipping labels, luggage tags, etc. Lottery tickets account for ten percent of thermal paper applications and another ten percent for fax paper (JRC-IHCP 2010).

References

- Chemical Weekly (2009). Bisphenol-A: A Techno-Commercial Profile. **September 1, 2009:** 205-211.
- ICIS (2011). Bisphenol A (BPA) Production and Manufacturing Information.
- Joint Research Centre-Institute for Health and Consumer Protection (JRC-IHCP) (2010). European Union Risk Assessment Report, 4,4'-Isopropylidenediphenol (Bisphenol-A).
- JPI Healthcare. (n.d.). "Ultrasound Paper." from http://www.jpihealthcare.com/ultrasound-paper.
- Liao, C. and K. Kannan (2011b). "Widespread Occurence of Bisphenol A in Paper and Paper Products: Implications for Human Exposure." <u>Environ. Sci. Technol.</u> **45**: 9372-9379.
- Mendum, T., E. Stoler, et al. (2011). "Concentration of bisphenol A in thermal paper." <u>Green Chemistry Letters and Reviews</u> **4**(1): 81-86.
- Nashua Corporation. (2008). "Label Products." from http://nashua.com/prodandservices/labelproducts.aspx?selected=labeltrans.
- National Toxicology Program-Center for the Evaluation of Risks to Human Reproduction (NTP-CERHR) (2008). NTP-CERHR Monograph on the Potential Human Reproductive and Developmental Effects of Bisphenol A. U.S. Department of Health and Human Services.
- Organisation for Economic Co-operation and Development (OECD) (2002). "SIDS Initial Assessment Profile." <u>Existing Chemicals Database</u> **SIAM 14**: 26-28.
- Polycarbonate/BPA Global Group. (2011). "Bisphenol A." from http://bisphenol-a.org/.
- U.S. Environmental Protection Agency (U.S. EPA) (2010a). Bisphenol A Action Plan.

3 Background on Thermal Printing Technology

Thermal printing is a rapid and inexpensive printing technology widely used in commercial applications such as point-of-sale receipts, luggage tags, faxes, and labels (Mendum, Stoler et al. 2011). Direct thermal printing produces an image when specific chemicals within the coating of thermal paper are heated.⁵ Thermal printing technology was first developed in the late 1960s, and its popularity grew in the 1980s and 1990s as it became more cost effective and versatile. This chapter describes the components of the thermal paper system, its associated equipment, process, and applications, as well as the alternative chemicals analyzed and considered in the alternatives assessment.

3.1 Components of Thermal Paper

Thermal paper is a highly engineered product that is coated with a thermal sensitive layer that reacts in the presence of heat to create the printed image. The following sections describe the key components of thermal paper development, including chemistry and manufacture. This information was useful in evaluating potential alternatives in this application.

3.1.1 Paper

Thermal paper is a standard paper grade that has been coated with a thermal sensitive layer, also known as a thermal reactive layer (see Figure 3-1). A pre-coat, or base coat, is applied to the base paper and allows for high resolution by preventing the heat transfer through all of the paper's layers, and for smoothness. Applied to the pre-coat is a thermal layer that contains the necessary reactive components (see Section 3.1.2). Additionally, thermal paper may contain a protective top coat and/or back coat. Top coats may be used for some applications to protect thermal paper from mechanical stress or chemical reactions. Similarly, back coats may be used to provide additional protection during lamination, printing, or other mechanical processes (Koehler Thermal Papers n.d.). Thermal paper used for receipts typically lack the top and back coats.

Top Coat
Thermal Reactive Layer
Pre-Coat
Base Paper
Back Coat

Figure 3-1: Cross-Section of Thermal Paper

Thermal paper manufacturers produce the thermal paper in "jumbo rolls," which is considered a semi-finished product. Paper converters print, cut the product to the appropriate size for use, rewind the paper onto a specific core (called "slit rolls"), and package the paper for sale to distributors. There are three major categories of thermal paper depending on basis weight, or density (typically g/m² or pounds per ream): (1) fax and point-of-sale (POS) grades, with an average basis weight of 58 grams, (2) label and ticket grades, with an average basis weight of 80

3-1


⁵ Note: Other types of thermal printing include thermal transfer printing or dye sublimation. Direct thermal printing is the focus of the DfE alternatives assessment and thus, of this report.

grams, and (3) heavy ticket grades, with an average basis weight of 120 grams (USITC 2007). Thermal paper is generally not made from recycled material, as post-consumer content can lack the consistency required for this highly engineered product. Limited quantities of recycled thermal paper are available, often including up to 50 percent post-consumer content. Thermal paper can be printed in both single-sided and double-sided formats.

3.1.2 Printing Chemistry

The thermal layer includes three key compounds (see Figure 3-2): a dye (also referred to as a colorformer), a developer (also referred to as a coreactant), and in some systems, a sensitizer (also referred to as a modifier). A binder, such as polyvinyl alcohol or latex, helps these coatings adhere to the paper. The materials are slurried and applied as an aqueous emulsion to the paper. The combination of these materials and their properties determines the image color, scanning characteristics and durability.

Figure 3-2: Elements of the Thermal Reactive Layer



Dye

The colorant typically used in thermal paper is a leuco dye, which is colorless at room temperature (Biedermann, Tschudin et al. 2010). Leuco dyes used in thermal paper undergo a structural change when protonated in the presence of heat and a proton donor (i.e., developer). The structural change results in the production of color. During printing, the thermal head of the printing unit pulses heat to the paper, which causes the components to melt, triggering the transfer of the proton from the developer to the dye, causing the leuco dye molecule to change structure to form a visible color (Biedermann, Tschudin et al. 2010). When used, the sensitizer has a lower melting point, thus acting as a solvent, promoting the interaction of the developer with the dye.

The dyes are often spirolactone compounds, with Black 305 and ODB2 among the most common. Some dyes extend the wavelength resulting in direct transfer systems that can scan in the near infrared (NIR) and infrared (IR) wavelengths (ETAC and NIR Black 78, respectively). Based on discussions with stakeholders, Design for the Environment (DfE) has compiled a list that illustrates a variety of dyes that can be used in direct thermal printing (see Table 3-1). Each of these dyes shares the property that they are colorless until developed following heat activation.

Table 3-1: Example of Dyes Used in Thermal Paper

Name	Synonyms	CASRN	Color
Spiro[isobenzofuran-1(3H),9'- [9H]xanthen]-3-one, 6'- (dibutylamino)-3'-methyl-2'- (phenylamino)-	2-Anilino-6-dibutylamino-3-methylfluoran; ODB-2, Black 400	89331-94-2	black
Spiro[isobenzofuran-1(3H),9'-[9H]xanthen]-3-one, 6'-(dipentylamino)-3'-methyl-2'-(phenylamino)-	Black 305	129473-78-5	black
, Furo[3,4-b]pyridin-5(7H)-one, 7,7-bis[4-(diethylamino)-2-ethoxyphenyl]-	3,3-Bis (4-diethylamino-2- ethoxyphenyl)-4- azaphthalide GN-2	132467-74-4	green
7-Anilino-3-diethylamino-6-methyl fluoran	N-102 (ODB)	29513-49-0	black
Spiro[isobenzofuran-1(3H),9'-[9H]xanthen]-3-one,6'-[ethyl(4-methylphenyl)amino]-3'-methyl-2'-(phenylamino)-	ODB-250, ETAC	59129-79-2	black
Spiro[isobenzofuran-1(3H),9'-[9H]xanthen]-3-one,6'-(diethylamino)-3'-methyl-2'-[(3-methylphenyl)amino]-	ODB-7	151019-95-3	black
Spiro[12H-benzo[a]xanthene- 12,1'(3'H)-isobenzofuran]-3'- one,9-[ethyl(3- methylbutyl)amino]-	Red 500	115392-27-3	red
Spiro[isobenzofuran-1(3H),9'-[9H]xanthen]-3-one,6'-[ethyl(4-methylphenyl)amino]-2'-methyl-	Red 520	42228-32-0	red
1(3H)-Isobenzofuranone,6- (dimethylamino)-3,3-bis[4- (dimethylamino)phenyl]-	CVL, crystal violet lactone	1552-42-7	blue
Spiro[isobenzofuran-1(3H),9'-[9H]xanthen]-3-one,6'-[ethyl(3-methylbutyl)amino]-3'-methyl-2'-(phenylamino)-	S-205	70516-41-5	black
3,3-Bis[2-[4- (dimethylamino)phenyl]-2-(4- methoxyphenyl)vinyl]-4,5,6,7- tetrachlorophthalide	NIR Black 78	113915-68-7	black
3-(4-Diethylamino-2- methylphenyl)-3-(1-ethyl-2-	Blue 220	114090-18-5	blue

Name	Synonyms	CASRN	Color
methyl-1H-indol-3-yl)-4-			
azaphthalide			
7-[4-(diethylamino)-2-	Blue 203	98660-18-5	blue
hexoxyphenyl]-7-(1-ethyl-2-			
methylindol-3-yl)furo[3,4-			
b]pyridin-5-one			
Spiro[isobenzofuran-1(3H),9'-	ATP	42530-35-8	green
[9H]xanthen]-3-one,6'-[ethyl(4-			
methylphenyl)amino]-2'-			
(methylphenylamino)-			
Spiro[isobenzofuran-1(3H),9'-	Black 500	93071-94-4	black
[9H]xanthen]-3-one,6'-[(3-			
ethoxypropyl)ethylamino]-3'-			
methyl-2'-(phenylamino)-			
(93071-94-4)			

Developer

The purpose of the developer, also referred to as a coreactant, which are weakly acidic, is to transfer protons to the dye, triggering color formation. In selecting a developer, its solubility, pKa, melting point, color, odor, purity, and vapor pressure are key properties. Performance characteristics of effective developers include:

- Acidity such that it produces no background imaging
- Ability to fully react with the colorformer when heated
- Reaction at the temperature of the specific printer
- Stable at end use temperatures
- Appropriate permanence for the application
- Appropriate performance vs. cost balance
- Feasible in large-scale production.

See Section 3.4 for a list of alternative developers considered in this alternatives assessment.

Sensitizer

Sensitizers, also referred to as modifiers, can facilitate the dye coloration process by lowering the melting point of the dye/developer, and/or by acting as a type of solvent in which a dye and developer dissolve below their melting point. Sensitizers typically have a melting point between 45-65°C (Mendum, Stoler et al. 2011). The sensitizer helps to provide the optimal conditions for the developer to transfer protons upon heating, which enables color formation and can increase printing speed, or make a product suitable for low-energy printers. A variety of sensitizers are used in direct thermal printing (see Table 3-2).

Table 3-2: Examples of Sensitizers Used in Thermal Printing


Name	Synonyms	CASRN
Di-(P-Chlorobenzyl)	Ethanedioic acid,1,2-bis[(4-	19829-42-6
oxalate	chlorophenyl)methyl] ester	
Di-(P-Menthylbenzyl)	Ethanedioic acid,1,2-bis[(4-	18241-31-1
oxalate	methylphenyl)methyl] ester	
Dibenzyl oxalate	Ethanedioic acid,1,2-bis(phenylmethyl)	7579-36-4
	ester	
2-Benzyloxynapthalene	Naphthalene,2-(phenylmethoxy)-	613-62-7
1,4-Diphenoxybutanes	1,4-diphenylbutane-1,4-dione	495-71-6
4-Benzylbiphenyl	1-phenyl-4-(phenylmethyl)benzene	613-42-3
Dimethyl terephthalate	1,4-Benzenedicarboxylicacid,	120-61-6
	dimethylester	
1,2-Diphenoxyethane	(2-Phenoxyethoxy)benzene	104-66-5
1,2-Bis(3-	Benzene,1,1'-[1,2-	54914-85-1
methoxyphenoxy) ethane	ethanediylbis(oxy)]bis[3-methyl-	
Diphenyl sulfone	1,1'-Sulfonylbisbenzene	127-63-9
Stearamide (waxy)	Octadecanamide	124-26-5
Kemamide S (waxy)	Oligoethylene butylene glycol adipate,	26570-73-0
	Hexanedioic acid	
Ethylene bis stearamide	Octadecanamide,N,N'-ethylenebis-	110-30-5
	(6CI,7CI,8CI)	
Octadecanamide, N-	N-phenylstearamide	637-54-7
phenyl		
o-Acetoacetotoluidide	N-(2-methylphenyl)-3-oxobutanamide	93-68-5

3.2 Thermal Printing Equipment and Process

Direct thermal printing produces an image by selectively heating specific areas of thermal paper (Mendum, Stoler et al. 2011). At room temperature, the dye is in its neutral, unprotenated state, which is colorless. When the dye/developer/ sensitizer system is heated above the melting point of the sensitizer, the developer (commonly bisphenol A (BPA)) donates a proton. In the case of the CVL dye (Table 3-1), this causes the lactone ring to open and increases the conjugation of the system, resulting in color formation (Mendum, Stoler et al. 2011). The chemicals then solidify to create a relatively stable image.

As Figure 3-3 illustrates, a thermal printing system consists of three basic components: a printer head, thermal paper, and a platen (i.e., backing roll). The printer head contains miniature heating units along the length of the printer head that electronically transfers the required amount of heat to the paper. As the thermal paper is driven by the platen, it is heated by the unit's thermal head causing the dye and the developer in the coating of the paper to melt and react, which subsequently produces an image on the paper (Koehler Thermal Papers n.d.).

Figure 3-3: Overview of Thermal Printing Process (based on Koehler Thermal Paper n.d. and Charters Paper Pty Ltd 2006)



To ensure optimal printing results, it is important to consider the characteristics of the type of thermal paper and printer used. Different grades of thermal paper have certain characteristics that render them more applicable to certain uses. One important characteristic is dynamic sensitivity, which pertains to the length of time the paper is exposed to heat. The faster a printer operates, the less time the paper is exposed to the unit's heating element. Thermal paper with a higher dynamic sensitivity is most appropriate for higher-speed or lower-energy printing. If thermal paper with low dynamic sensitivity is instead used, insufficient heat will be applied to the paper resulting in a reduced long-term stability of the finished product (Koehler Thermal Papers n.d.).

Static sensitivity is another important characteristic of thermal paper. Static sensitivity defines the temperature at which the dye and the developer begin to melt. The static sensitivity value is important for thermally-sensitive applications, such as for parking tickets or environments with high temperatures (e.g., pizza boxes, coffee cup labels) (Koehler Thermal Papers n.d.). Different grades of thermal paper exhibiting varying degrees of thicknesses and sensitivities affect the lifespan of the print job. If the appropriate paper and printer combination is used, and proper storage conditions are met, an image printed on thermal paper typically lasts between five to ten years (Koehler Thermal Papers 2011).

3.3 Advantages and Disadvantages of Thermal Printing Technology

Direct thermal printing offers several advantages in commercial environments, including not requiring any additional inks or chemicals to form the printer image. The only consumable item needed for direct thermal paper printing is the paper. Unlike thermal transfer printing, the direct thermal paper technology obviates the need for ink or ribbon maintenance and replacement. Thermal printing systems also have few moving parts, making them reliable and relatively durable. In addition, direct thermal printing systems are quiet, have appropriate edge definition (up to 400 dpi, or dots per inch), can be manufactured to be small and lightweight, and can print quickly (up to 406 mm per second) (Charters Paper Pty Ltd 2006). Such advantages make direct thermal printing systems a useful tool for market segments like retailers, laboratories with

3-6

⁶ The use of ribbons, which contain a mirror image of anything printed, raise privacy and security concerns; ribbons used in the printing of medical information must be destroyed in accordance with the Health Insurance Portability and Accountability Act of 1996 (HIPAA).

recorders, transportation, and hospitality, which tend to value an economical and fast printing system. Stakeholders noted that direct transfer print systems can be made portable, which is a highly valued attribute.

Thermal paper rolls exposed to heat may turn black, necessitating appropriate storage conditions. Point-of-sale (POS) thermal paper is generally very thin and may be damaged by prolonged exposure to sunlight, water, or chemicals (e.g., solvents, plasticizers) and to friction. In general, POS thermal printing is best suited for short-term printing needs more so than longer term data storage. However, some thermal printing is estimated to last five to twelve years (Koehler Thermal Papers n.d.).

3.4 Alternatives Included in this Assessment

With the assistance of the partnership, EPA identified 19 alternatives to BPA in thermal paper (see Table 3-3 below). These alternatives were selected because have the potential to be functional substitutes to BPA based on their physical and chemical properties and/or because they are already in commercial use. A hazard assessment was conducted on these 19 alternatives and the findings are discussed in Chapter 4.

Table 3-3: The Alternatives Selected for Analysis in the Hazard Assessment

CASRN	Chemical Name	Common Name	Molecular Formula	Structure	Known to Be Used in Thermal Paper
80-05-7	2,2-bis(p- hydroxyphenyl)propane	Bisphenol A, BPA	$C_{15}H_{16}O_2$	ю — ОН	yes
620-92-8	Bis(4- hydroxyphenyl)methane	Bisphenol F, BPF	$C_{13}H_{12}O_2$	Ю	yes
79-97-0	2,2'-Bis(4-hydroxy-3-methylphenyl)propane	Bisphenol C, BPC	$C_{17}H_{20}O_2$	но	unknown
5129-00-0	Methyl bis(4- hydroxyphenyl)acetate	МВНА	C ₁₅ H ₁₄ O ₄	но	unknown
24038-68-4	4,4'-Isopropyllidenebis(2- phenylpheno)	BisOPP-A	$C_{27}H_{24}O_2$	HOOH	unknown
1571-75-1	4,4'-(1- Phenylethylidene)bisphenol	Bisphenol AP, BPAP	$C_{20}H_{18}O_2$	но—Он	yes
PROPRIETARY		Substituted phenolic compound #1	N/A	N/A	unknown

CASRN	Chemical Name	Common Name	Molecular Formula	Structure	Known to Be Used in Thermal Paper
I	PROPRIETARY	Substituted phenolic compound #2	N/A	N/A	proprietary
94-18-8	Benzyl 4-hydroxybenzoate	РНВВ	$C_{14}H_{12}O_3$	P	yes
80-09-1	4-Hydroxyphenyl sulfone	Bisphenol S	$C_{12}H_{10}O_4S$	но — В — О Н	yes
5397-34-2	2,4'- Bis(hydroxyphenyl)sulfone	2,4-BPS	$C_{12}H_{10}O_4S$	O, O OH	yes
41481-66-7	bis-(3-allyl-4- hydroxyphenyl) sulfone	TGSA	C ₁₈ H ₁₈ O ₄ S	Ю — ОН	yes
97042-18-7	Phenol,4-[[4-(2-propen-1-yloxy)phenyl]sulfonyl]-	BPS-MAE	C ₁₅ H ₁₄ O ₄ S	HO————————————————————————————————————	yes
63134-33-8	4-Hydroxy-4'- benzyloxydiphenylsulfone	BPS-MPE	C ₁₉ H ₁₆ O ₄ S	О — О — О Н О Н	yes
95235-30-6	4-hydroxyphenyl 4- isoprooxyphenylsulfone	D-8	$C_{15}H_{16}O_4S$	О — В — О Н	yes

CASRN	Chemical Name	Common Name	Molecular Formula	Structure	Known to Be Used in Thermal Paper
191680-83-8	4-[4'-[(1'-methylethyloxy) phenyl]sulfonyl]phenol	D-90	$C_{28}H_{26}O_{9}S_{2} (n = 1);$ $C_{44}H_{42}O_{14}S_{3} (n = 2)$	HO 0,00	yes
93589-69-6	1,7-bis(4- Hydroxyphenylthio)-3,5- dioxaheptane	DD-70	$C_{17}H_{20}O_4S_2$		unknown
232938-43-1	N-(p-Toluenesulfonyl)-N'- (3-p- toluenesulfonyloxyphenyl)u rea	Pergafast 201	$C_{21}H_{20}N_2O_6S_2$	H ₃ C — CH ₃	yes
151882-81-4	4,4'-bis(<i>N</i> -carbamoyl-4-methylbenzenesulfonamide) diphenylmethane	BTUM	$C_{29}H_{28}N_4O_6S_2$		yes
321860-75-7	Urea Urethane Compound	UU	$C_{42}H_{36}N_6O_8S$	O N N N N N N N N N N N N N N N N N N N	Yes

3.5 Alternatives Not Included in this Assessment

The chemicals listed in this section were identified as possible alternatives to BPA, but were not included in the alternatives assessment. Chemicals were excluded, based on feedback from the partnership, because their physical or chemical properties would likely render them incompatible as a functional replacement developer to BPA. Required physical properties of developers include acidity, water solubility, and melting point. A summary of the chemicals that were discussed but not included in this assessment are listed in Table 3-4.

Table 3-4: Alternatives Considered but Not Included in the Hazard Assessment

CASRN	Chemical or Common Name	Molecular Formula	Structure
98-54-4	p-tert-butylphenol	C ₁₀ H ₁₄ O	——— ОН
92-69-3	p-phenylphenol	C ₁₂ H ₁₀ O	Н О
2664-63-3	4,4'-thiodiphenol	$C_{12}H_{10}O_2S$	в в в в в в в в в в в в в в в в в в в
19715-19-6	3,5-di-tert- butylsalicylic acid	C ₁₅ H ₂₂ O ₃	\ \ \ \ \ \ \
120-47-8	ethyl-p- hydroxybenzoate, ethyl paraben	C ₉ H ₁₀ O ₃	DH OH
22479-95-4	dimethyl-4- hydroxyphthalate, DMP-OH	$C_{10}H_{10}O_5$	НО
1694-06-0	N-(p- toluenesulphonyl)-N'- (3-p- toluenesulphonyloxyp henyl)urea	$C_8H_{10}N_2O_3S$	O. S. NH NH2
4724-47-4	octadecylphosphonic acid	$C_{18}H_{39}O_3P$	Ф ОН

CASRN	Chemical or Common Name	Molecular Formula	Structure
65-85-0	benzoic acid	$C_7H_6O_2$	HO
57-11-4	stearic acid	$C_{18}H_{36}O_2$	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
144-62-7	oxalic acid	$C_2H_2O_4$	ОНООН
11113-50-1	boric acid	H ₃ BO ₃	HO B OH
149-91-7	gallic acid	$\mathrm{C_7H_6O_5}$	но

References

Biedermann, S., P. Tschudin, et al. (2010). "Transfer of bisphenol A from thermal printer paper to the skin." <u>Anal Bioanal Chem</u> **398**: 571-576.

Charters Paper Pty Ltd (2006). Leaders in the field of Thermal Paper Technology.

Koehler Thermal Papers (2011). Koehler Thermal Papers: Product Range.

Koehler Thermal Papers (n.d.). Thermal Papers: Product Information.

Mendum, T., E. Stoler, et al. (2011). "Concentration of bisphenol A in thermal paper." <u>Green</u> Chemistry Letters and Reviews **4**(1): 81-86.

U.S. International Trade Commission (2007). Certain Lightweight Thermal Paper From China, Germany, and Korea.



4 Hazard Evaluation of Bisphenol A (BPA) and Alternatives

This chapter summarizes the toxicological and environmental hazards of bisphenol A (BPA) and each of the 20 alternative chemicals that were identified as potential functional substitutes for BPA. In general, the hazard profiles include the assessment of unchanged starting materials, byproducts, and impurities. Evaluations of chemical formulations may also require the consideration of associated substances (e.g. starting materials, byproducts, and impurities) if their presence is specifically required to allow that alternative to fully function in the assigned role. In general, associated substances were assumed to remain unchanged in this assessment, but may need to be considered in the selection of an alternative. This report is a hazard assessment, not a full risk assessment. Hazard assessment as a risk management tool is discussed in more detail in Section 1.3.

Toxicological and environmental endpoints included in the hazard profiles are discussed in Section 4.1 along with the criteria used to evaluate each hazard endpoint. Data sources and the review methodology are described in Section 4.2. The report then offers a detailed description of the utility of physical/chemical properties in understanding hazard in Section 4.3. Next, the process of evaluating human health and environmental endpoints are described in Sections 4.4 and 4.5, respectively and a discussion of the evaluation of endocrine activity is included in Section 4.6. The characteristics of each chemical included in the alternatives assessment are summarized in the comparative hazard summary table in Section 4.7. Lastly, the collected data and hazard profile of each chemical are presented in Section 4.8.

4.1 Toxicological and Environmental Endpoints

The assessment of endpoints with the intent to create hazard profiles for a Design for the Environment (DfE) alternatives assessment follows the guidance of the "Alternatives Assessment Criteria for Hazard Evaluation" (U.S. EPA 2011c). The definitions for each endpoint evaluated following these criteria are outlined in Section 4.1.1 and the criteria by which these endpoints are evaluated are outlined in Section 4.1.2. Lastly, there are endpoints which DfE characterizes but does not assign criteria to and these are summarized in Section 4.1.3.

4.1.1 Definitions of Each Endpoint Evaluated Against Criteria

Hazard designations for each chemical discussed in this report were made by direct comparison of the experimental or estimated data to the DfE "Alternatives Assessment Criteria for Hazard Evaluation" (U.S EPA 2011c). Table 4-1 provides brief definitions of human health toxicity, environmental toxicity and environmental fate endpoints.

Table 4-1: Definitions of Toxicological and Environmental Endpoints for Hazard Assessment

Endpoint Category	Endpoint	Definition
Human Health Effects	·	Adverse effects occurring following oral or dermal administration of a single dose of a substance, or multiple doses given within 24 hours, or an inhalation exposure of 4 hours.

Endpoint Category	Endpoint	Definition
	Carcinogenicity	Capability of a substance to increase the incidence of malignant neoplasms, reducing their latency, or increasing their severity or multiplicity.
	Mutagenicity/Genotoxicity	Mutagenicity – the ability of an agent to induce permanent, transmissible changes in the amount, chemical properties or structure of the genetic material. These changes may involve a single gene or gene segment, a block of genes, parts of chromosomes, or whole chromosomes. Mutagenicity differs from genotoxicity in that the change in the former case is transmissible to subsequent cell generations.
		Genotoxicity – the ability of an agent or processes to alter the structure, information content, or segregation of DNA, including those which cause DNA damage by interfering with normal replication process, or which in a non- physiological manner (temporarily) alter its replication.
	Reproductive toxicity	The occurrence of biologically adverse effects on the reproductive systems of females or males that may result from exposure to environmental agents. The toxicity may be expressed as alterations to the female or male reproductive organs, the related endocrine system, or pregnancy outcomes. The manifestation of such toxicity may include, but is not limited to, adverse effects on onset of puberty, gamete production and transport, reproductive cycle normality, sexual behavior, fertility, gestation, parturition, lactation, developmental toxicity, premature reproductive senescence, or modifications in other functions that were dependent on the integrity of the reproductive systems.
	Developmental toxicity	Adverse effects in the developing organism that may result from exposure prior to conception (either parent), during prenatal development, or postnatally to the time of sexual maturation. Adverse developmental effects may be detected at any point in the lifespan of the organism. The major manifestations of developmental toxicity include: (1) death of the developing organism, (2) structural abnormality, (3) altered growth, and (4) functional deficiency.
	Neurotoxicity	An adverse change in the structure or function of the central and/or peripheral nervous system following exposure to a chemical, physical, or biological agent.

Endpoint Category	Endpoint	Definition				
	Repeated dose toxicity	Adverse effects (immediate or delayed) that impair normal physiological function (reversible and irreversible) to specific target organs or biological systems following repeated exposure to a chemical substance by any route relevant to humans. Adverse effects include biologically significant changes in body and organ weights, changes that affect the function or morphology of tissues and organs (gross and microscopic), mortality, and changes in biochemistry, urinalysis, and hematology parameters that are relevant for human health; may also include immunological and neurological effects.				
	Respiratory sensitization	Result of a substance that will lead to hypersensitivity of the airways following inhalation of the substance.				
	Skin sensitization	A chemical that elicits a cell-mediated or antibody- mediated allergic response characterized by the presence of inflammation that may result in cell death, following an initial induction exposure to the same chemical substance, i.e., skin allergy.				
	Eye irritation/corrosivity	Irritation or corrosion to the eye following the application of a test substance.				
	Skin irritation/corrosion	Skin irritation – Reversible damage to the skin following the application of a test substance for up to 4 hours. Skin corrosion – Irreversible damage to the skin namely, visible necrosis through the epidermis and into the dermis following the application of a test substance for up to 4 hours.				
Environmental Toxicity						
	Aquatic toxicity (Acute)	The property of a substance to be injurious to an organism in a short-term, aquatic exposure to that substance.				
	Aquatic toxicity (Chronic)	The property of a substance to cause adverse effects to aquatic organisms during aquatic exposures which were determined in relation to the life-cycle of the organism.				
Environmental Fate	Environmental Persistence	The length of time the chemical exists in the environment, expressed as a half-life, before it is destroyed (i.e., transformed) by natural or chemical processes. For alternatives assessments, the amount of time for complete assimilation (ultimate removal) is preferred over the initial step in the transformation (primary removal).				

Endpoint Category	Endpoint	Definition
		The process in which a chemical substance is absorbed in an organism by all routes of exposure as occurs in the natural environment, e.g., dietary and ambient environment sources. Bioaccumulation is the net result of competing processes of chemical uptake into the organism at the respiratory surface and from the diet and chemical elimination from the organism including respiratory exchange, fecal egestion, metabolic biotransformation of the parent compound and growth dilution.

The hazard profile for each chemical contains endpoint-specific summary statements (Section 4.8). For each of the endpoints in Table 4-1, these summary statements give the hazard designation, the type of data (experimental or estimated), and the rationale. The endpoint summaries may also include explanatory comments, a discussion of confounding factors, or an indication of the confidence in the data to help put the results in perspective.

4.1.2 Criteria

Table 4-2 summarizes the criteria that were used by the U.S. Environmental Protection Agency (EPA) DfE Program to interpret the data presented in the hazard evaluations. The DfE Alternatives Assessment Criteria for Hazard Evaluation underwent internal and public comment, and were finalized in 2011 (U.S. EPA 2011c). A hazard designation for each human health endpoint was not given for each route of exposure but rather was based on the exposure route with the highest hazard designation. Data may have been available for some or all relevant routes of exposure.

The details as to how each endpoint was evaluated are described below and in the DfE full criteria document, DfE Alternatives Assessment Criteria for Hazard Evaluation, available at: http://www.epa.gov/dfe/alternatives_assessment_criteria_for_hazard_eval.pdf.

Table 4-2: Criteria Used to Assign Hazard Designations

Endpoint	Very High	High	Moderate	Low	Very Low		
Human Health Effects							
Acute mammalian toxicity	Acute mammalian toxicity						
Oral median lethal dose (LD ₅₀) (mg/kg)	≤50	>50–300	>300–2000	>2000	_		
Dermal LD ₅₀ (mg/kg)	≤200	>200-1000	>1000–2000	>2000	_		
Inhalation median lethal concentration (LC_{50}) - vapor/gas (mg/L)	≤2	>2–10	>10–20	>20	_		
Inhalation LC ₅₀ - dust/mist/ fume (mg/L)	≤0.5	>0.5-1.0	>1–5	>5	_		
Carcinogenicity							

Endpoint	Very High	High	Moderate	Low	Very Low	
	Known or presumed human carcinogen (equivalent to Globally Harmonized System of Classification and Labeling of Chemicals (GHS) Category 1A and 1B) ⁷	Suspected human carcinogen (equivalent to GHS Category 2)	Limited or marginal evidence of carcinogenicity in animals (and inadequate evidence in humans)	Negative studies or robust mechanism- based structure activity relationships (SAR) (as described above)	-	
Mutagenicity/Genotoxicity						
Germ cell mutagenicity	GHS Category 1A or 1B: Substances known to induce heritable mutations or to be regarded as if they induce heritable mutations in the germ cells of humans	GHS Category 2: Substances which cause concern for humans owing to the possibility that they may induce heritable mutations in the germ cells of humans OR Evidence of	Evidence of mutagenicity supported by positive results in <i>in vitro</i> OR <i>in vivo</i> somatic cells of humans	Negative for chromosomal aberrations and gene mutations, or no structural alerts.		
Mutagenicity and genotoxicity in somatic cells		mutagenicity supported by positive results in in vitro AND in vivo somatic cells and/or germ cells of humans or animals	or animals			
Reproductive toxicity						
Oral (mg/kg/day)		<50	50–250	>250-1000	>1000	
Dermal (mg/kg/day) Inhalation - vapor, gas (mg/L/day)	-	<100	100–500 1–2.5	>500-2000 >2.5-20	>2000	
Inhalation - dust/mist/fume (mg/L/day)	_	<0.1	0.1-0.5	>0.5-5	>5	
Developmental toxicity						
Oral (mg/kg/day)	_	<50	50-250	>250-1000	>1000	
Dermal (mg/kg/day)	_	<100	100–500	>500-2000	>2000	

_

⁷ The United Nations' GHS document can be found at http://www.unece.org/fileadmin/DAM/trans/danger/publi/ghs/ghs rev04/English/ST-SG-AC10-30-Rev4e.pdf.

Endpoint	Very High	High	Moderate	Low	Very Low
Inhalation - vapor, gas (mg/L/day)	_	<1	1–2.5	>2.5-20	>20
Inhalation - dust/mist/fume (mg/L/day)	_	<0.1	0.1–0.5	>0.5-5	>5
Neurotoxicity					
Oral (mg/kg/day)	_	<10	10–100	>100	_
Dermal (mg/kg/day)	_	<20	20–200	>200	_
Inhalation - vapor, gas (mg/L/day)	_	<0.2	0.2–1.0	>1.0	_
Inhalation - dust/mist/fume (mg/L/day)	_	< 0.02	0.02-0.2	>0.2	_
		Repeated-dose	toxicity		
Oral (mg/kg/day)	_	<10	10–100	>100	_
Dermal (mg/kg/day)	_	<20	20–200	>200	-
Inhalation - vapor, gas (mg/L/day)	_	<0.2	0.2–1.0	>1.0	_
Inhalation - dust/mist/fume (mg/L/day)	-	< 0.02	0.02-0.2	>0.2	_
Sensitization					
Skin sensitization		of sensitization in humans and/or high potency in animals (GHS Category 1A)	Low to moderate frequency of sensitization in human and/or low to moderate potency in animals (GHS Category 1B)	Adequate data available and not GHS Category 1A or 1B	
Respiratory sensitization		Occurrence in humans or evidence of sensitization in humans based on animal or other tests (equivalent to GHS Category 1A and 1B)	Limited evidence including the presence of structural alerts	Adequate data available indicating lack of respiratory sensitization	_
Irritation/corrosivity					
Eye irritation/corrosivity	Irritation persists for >21 days or corrosive	Clearing in 8– 21 days, severely irritating	Clearing in ≤7 days, moderately irritating	Clearing in <24 hours, mildly irritating	Not irritating
Skin irritation/corrosivity	Corrosive	Severe irritation at 72 hours	Moderate irritation at 72 hours	Mild or slight irritation at 72 hours	Not irritating
Endocrine activity			1		
-				racterizations will ata will be prepare	

Endpoint	Very High	High	Moderate	Low	Very Low	
Environmental Toxicity and Fate						
Aquatic toxicity						
Acute aquatic toxicity - LC ₅₀ or Half Maximal Effective Concentration (EC ₅₀) (mg/L)	<1.0	1–10	>10–100	>100 or No Effects at Saturation (NES)	-	
Chronic aquatic toxicity - lowest-observed-effect concentration (LOEC) or ChV (mg/L)	<0.1	0.1–1	>1-10	>10 or NES	_	
	E	nvironmental pe	rsistence			
Persistence in water, soil, or sediment	Half-life >180 days or recalcitrant	Half-life of 60– 180 days	Half-life <60 but ≥16 days	Half-life <16 days OR passes Ready Biodegradability test not including the 10-day window. No degradation products of concern.	Passes Ready Biodegradability test with 10-day window. No degradation products of concern.	
Persistence in air (half-life days) For this endpoint, High/Moderate/Low etc. characterizations will not apply. A qualitative assessment of available data will be prepared. Bioaccumulation						
Bioconcentration Factor (BCF)/Bioaccumulation Factor (BAF)	>5000	5000–1000	<1000–100	<100	-	
Log BCF/BAF	>3.7	3.7–3	<3-2	<2	-	

Very High or Very Low designations (if an option for a given endpoint in Table 4-2) were assigned only when there were experimental data available for the chemical under evaluation. In addition, the experimental data must have been collected from a well conducted study specifically designed to evaluate the endpoint under review. If the endpoint was estimated using experimental data from a close structural analog, professional judgment, or a computerized model, then the next-level designation was assigned (i.e., High or Low).

4.1.3 Endpoints Characterized but Not Evaluated

Several additional endpoints were characterized, but not evaluated against hazard criteria. This is because the endpoints lacked a clear consensus concerning the evaluation criteria (endocrine activity), data and expert judgment were limited for industrial chemicals (persistence in air, terrestrial ecotoxicology), or the information was valuable for interpretation of other toxicity and fate endpoints (including toxicokinetics and transport in the environment).

Table 4-3: Definitions of Endpoints and Information Characterized but Not Evaluated

Against Hazard Criteria

Toxicological Endpoint	Definition
Toxicokinetics	The determination and quantification of the time course of absorption, distribution, metabolism, and excretion (ADME) of chemicals (sometimes referred to as pharmacokinetics).
Biomonitoring Information	The measured concentration of a chemical in biological tissues where the analysis samples were obtained from a natural or non-experimental setting.
Environmental Transport	The potential movement of a chemical, after it is released to the environment, within and between each of the environmental compartments, air, water, soil, and sediment. Presented as a qualitative summary in the alternatives assessment based on physical/chemical properties, environmental fate parameters, and simple volatilization models. Also includes distribution in the environment as estimated from a fugacity model. ⁸
Persistence in Air	The half-life for destructive removal of a chemical substance in the atmosphere. The primary chemical reactions considered for atmospheric persistence include hydrolysis, direct photolysis, and the gas phase reaction with hydroxyl radicals, ozone, or nitrate radicals. Results are used as input into the environmental transport models.
Immunotoxicology	Adverse effects on the normal structure or function of the immune system caused by chemical substances (e.g., gross and microscopic changes to immune system organs, suppression of immunological response, autoimmunity, hypersensitivity, inflammation, and disruption of immunological mechanistic pathways).
Terrestrial Ecotoxicology	Reported experimental values effects from guideline and non-guideline studies on adverse effects on the terrestrial environment. Studies on soil, plants, birds, mammals, invertebrates were also included.
Endocrine Activity	A change in endocrine homeostasis caused by a chemical and/or other stressor.

4.2 Data Sources and Assessment Methodology

This section explains how data were collected (Section 4.2.1), prioritized and reviewed (Section 4.2.2) for use in the development of hazard profiles. High-quality experimental studies lead to a thorough understanding of behavior and effects of the chemical in environment and in living organisms. Analog approaches and SAR-based estimation methods are also useful tools and are discussed throughout this Section. Information on how polymers differ from discrete chemicals in terms of how they are evaluated is presented in Section 4.2.3.

4.2.1 Identifying and Reviewing Measured Data

For each chemical assessed, data were collected in a manner consistent with the High Production Volume (HPV) Chemical Challenge Program guidance on searching for existing chemical information (U.S. EPA 1999b). This process resulted in a comprehensive search of the literature for available experimental data. For well characterized chemicals this usually resulted in the collection of recent high-quality reviews or peer-reviewed risk assessments. These were

_

⁸ A fugacity model predicts partitioning of chemicals among air, soil, sediment, and water under steady state conditions for a default model "environment" (U.S. EPA, 2011e).

supplemented by primary searches of scientific literature published after these secondary sources were released, this explained in greater detail below. For chemicals that are not as well characterized, that is, where these secondary sources were not available or lacked relevant or adequate data, a comprehensive search of the primary scientific literature was done. Subsequently, these searches led to the collection and review of articles from the scientific literature, industrial submissions, encyclopedic sources, and government reports. In addition, data presented in U.S. EPA public and confidential databases (e.g., integrated risk information system (IRIS)) were obtained for this project. Generally, foreign language (non-English) reports were not used unless they provided information that was not available from other sources.

Chemical assessments were performed by first searching for experimental data for all endpoints in Table 4-1. For most chemicals assessed, high quality secondary sources were not available to assess all endpoints, and a comprehensive search of the primary literature was performed to identify experimental data. In some cases, confidential studies submitted to EPA by chemical manufacturers were also available to support hazard designations. For those chemicals that were expected to form stable metabolites, searches were performed to identify relevant fate and toxicity information for the metabolite or degradate.

Well-Studied Chemicals – Literature Search Strategy

As mentioned above, for chemicals that have been well studied, limited to BPA in this Alternatives Assessment, the literature review focused primarily on the use of secondary sources, such as in the case of BPA, the 2008 National Toxicology Program (NTP) expert panel review (National Toxicology Program-Center for the Evaluation of Risks to Human Reproduction (NTP-CERHR) 2008) and the 2011 Food and Agricultural Organization of the United Nations/World Health Organization expert panel review (FAO/WHO 2011). Using high-quality secondary sources maximized available resources and eliminated potential duplication of effort. However, more than one secondary source was typically used to verify reported values, which also reduced the potential for presenting a value that was transcribed incorrectly from the scientific literature. Although other sources might also contain the same experimental value for an endpoint, effort was not focused on building a comprehensive list of these references, as it would not have enhanced the ability to reach a conclusion in the assessment. When data for a selected endpoint could not be located in a secondary source for an otherwise well-studied chemical, the primary literature was searched by endpoint and experimental studies were assessed for relevant information.

Making Predictions in the Absence of Measured Data

In the absence of primary or secondary data, hazard designations were based on (1) Quantitative Structure Activity Relationships (QSAR)-based estimations from the EPA New Chemical Program's predictive methods; (2) analog data (3) category-based assignments from the EPA Chemical Categories document; and (4) expert judgment by EPA subject matter experts.

For chemicals that lacked experimental information, QSAR assessments were made using either EPA's Estimation Programs Interface (EPISuiteTM) for physical-chemical property and environmental fate endpoints or EPA's Ecological Structure Activity Relationships

(ECOSARTM) QSARs for ecotoxicity. For the cancer endpoint, estimates were also obtained from EPA's OncoLogic expert system. These estimation methods have been automated, and are available for free (http://www.epa.gov/oppt/sf/tools/methods.htm). Often analog data were used to support predictions from models. These approaches were described in the EPA Pollution Prevention (P2) Framework (U.S. EPA 2005b) and Sustainable Futures (SF) program (U.S. EPA 2011f).

For some physical-chemical properties that could not be estimated using EPISuiteTM, such as acid/base dissociation constants, other available methods (e.g., the Sparc Performs Automated Reasoning in Chemistry (SPARC) website for dissociation constants) were used. All estimation methods employed were limited to those freely available in the public domain.

The methodology and procedures used to assess polymers are described in Section 4.2.3. In addition, the endpoints for impurities or oligomers with a molecular weight (MW) >1,000 were estimated using professional judgment and the results assessed for inclusion in the overall hazard designation. This process is described, as appropriate, under the corresponding endpoints appearing in Section 4.3.

When QSAR models were not available, professional judgment was used to identify hazards for similar chemicals using the guidance from EPA's New Chemicals Categories (U.S. EPA 2010c). This document groups substances that have similar chemical structure and toxicological properties into categories based on EPA's experience evaluating thousands of chemicals under the Toxic Substances Control Act (TSCA) New Chemicals Program. The categories identify substances that share chemical and toxicological properties and possess potential health or environmental concerns. In the absence of an identified category, analogs for which experimental data are available were identified using EPA's Analog Identification Methodology (AIM) or by substructure searches of confidential EPA databases (U.S. EPA 2012a). If a hazard designation was still not available, the expert judgment of scientists from EPA's New Chemical Program would provide an assessment of the physical-chemical properties, environmental fate, aquatic toxicity, and human health endpoints to fill remaining data gaps.

4.2.2 Hierarchy of Data Adequacy

Once the studies were obtained they were then evaluated to establish whether the hazard data were of sufficient quality to meet the needs of the assessment process. The adequacy and quality of the studies identified in the literature review are described in the Data Quality field of the chemical assessments presented in Section 4.8. The tiered approach described below represents a general preferred data hierarchy, but the evaluation of toxicological data also requires flexibility based on expert judgment.

- 1. One or more studies conducted in a manner consistent with established testing guidelines
- 2. Experimentally valid but non-guideline studies (i.e., do not follow established testing guidelines)
- 3. Reported data do not have supporting experimental details
- 4. Estimated data using SAR methods or professional judgment based on an analog approach

5. Expert judgment based on mechanistic and structural considerations

In general, data were considered adequate to characterize an endpoint if they were obtained using the techniques identified in the HPV data adequacy guidelines (U.S. EPA 1999b). Studies performed according to Harmonized EPA or Organisation for Economic Cooperation and Development guidelines were reviewed to confirm that the studies followed all required steps.

Experimental studies published in the open literature were reviewed for their scientific rigor and were also compared and contrasted to guideline studies to identify potential problems arising from differences in the experimental design. Data from adequate, well-performed, experimental studies were used to assign hazard designations in preference to those lacking in sufficient experimental detail. When multiple adequate studies were available for a given endpoint, any conflicts that were identified were addressed using a weight-of-evidence approach to characterize the endpoint whenever possible.

When available, experimental data from guideline or well-performed experimental studies were preferred (items 1 and 2 in the hierarchy list). Information from secondary sources such as Material Safety Data Sheets (MSDS), or online databases (such as the National Library of Medicine's Hazardous Substances Data Bank (HSDB)) (item 3 in the hierarchy list) was considered appropriate for some endpoints when it included numerical values for effect levels that could be compared to the evaluation criteria.

4.2.3 Assessment of Oligomeric Mixtures

In the BPA Alternatives Assessment, there are two chemicals that are mixtures of low MW oligomers comprised of 2 or 3 repeating units. For these materials, all of the oligomers anticipated to be present in the mixture have MW of less than 1,000 daltons. The hazard assessment evaluated all oligomers present. From all the oligomers, the higher concern material was used to assign the hazard designation. This process is essentially identical to the evaluation of the hazards associated with impurities or byproducts present in discrete chemical products. As a result, the alternatives assessment process determined the amount of oligomers and unchanged monomers (starting materials) present and considered their potential hazards in the alternatives designation.

4.3 Importance of Physical and Chemical Properties, Environmental Transport, and Biodegradation

Physical-chemical properties provide basic information on the characteristics of a chemical substance and were used throughout the alternatives assessment process to inform expert judgment and as inputs into predictive models. These endpoints provide information required to assess potential environmental release, exposure, and partitioning as well as insight into the potential for adverse toxicological effects. The physical-chemical properties are given in the individual chemical hazard profiles presented in Section 4.8. For information on how key physical-chemical properties of alternatives can be used to address the potential for human and environmental exposure, please refer to Section 5.1.6. Descriptions of relevant physical-chemical properties and how they contribute to the hazard assessments are presented below.

Molecular Weight (MW)

MW informs how a chemical behaves in a physical or biological system including bioavailability and environmental fate. In general, but not strictly, larger compounds tend to be less mobile in biological and environmental systems. Their large size restricts their transport through biological membranes and lowers their vapor pressure. Oligomers evaluated in this alternatives assessment are mixtures that contain a distribution of components and they may not have a unique MW (see also Section 4.2.3). To account for variation in these mixtures, the MW of a representative structure for each oligomer or mixture component was evaluated for this alternatives assessment. Selection of this representative structure is based on expert judgment on how the oligomer is produced.

Melting Point and Boiling Point

These two properties provide an indication of the physical state of the material at ambient temperature. Chemicals with a melting point more than 25 °C were assessed as a solid. Those with a melting point less than 25 °C and a boiling point more than 25 °C were assessed as a liquid and those with a boiling point less than 25 °C were assessed as a gas. The physical state was used throughout the assessment, such as in the determination of potential routes of human and environmental exposure, as described in Section 5.1. The melting and boiling points were also useful in determining the potential environmental fate, ecotoxicity, and human health hazards of a chemical. For example, organic compounds with high melting points generally have low water solubility and low rates of dissolution. These properties influence a material's bioavailability and were therefore taken into account in both the assessment process and the evaluation of experimental studies. Similarly, chemicals with a low melting point also have a higher potential to be absorbed through the skin, gastrointestinal tract, and lungs.

In the absence of experimental data, the melting point value was not reported and no estimations were performed. If a chemical decomposes before it melts, this information was included in the assessment. For boiling point, the maximum value reported in the assessment was 300 °C for high boiling materials (U.S. EPA 1999b). Melting points for polymers and/or oligomers were not reported as these materials typically reach a softening point and do not undergo the phase change associated with melting (i.e., solid to liquid).

Vapor Pressure

Vapor pressure is useful in determining the potential for a chemical substance to volatilize to the atmosphere from dry surfaces, from storage containers, or during mixing, transfer, or loading/unloading operations (see Section 5.2). In the assessment process, chemicals with a vapor pressure less than 1 x 10⁻⁶ mm Hg have a low potential for inhalation exposure resulting from gases or vapors. Vapor pressure is also useful for determining the potential environmental fate of a substance. Substances with a vapor pressure more than 1 x 10⁻⁴ mm Hg generally exist in the gas phase in the atmosphere. Substances with a vapor pressure between 1 x 10⁻⁴ and 1 x 10⁻⁸ mm Hg exist as a gas/particulate mixture. Substances with a vapor pressure less than 1 x 10⁻⁸ mm Hg exist as a particulate. The potential atmospheric degradation processes described below in the reactivity section generally occur when a chemical exists in the gas phase. Gases in

the atmosphere also have the potential to travel long distances from their original point of release. Materials in the liquid or solid (particulate) phases in the atmosphere generally undergo deposition onto the Earth's surface.

A maximum vapor pressure of 1×10^{-8} mm Hg was assigned for chemicals without experimental data or for those substances that were anticipated by professional judgment to be non-volatile (U.S EPA 2011f).

Water Solubility

The water solubility of a chemical provides an indication of its distribution between environmental media, potential for environmental exposure through release to aquatic compartments, and potential for human exposure through ingestion of drinking water; water solubility was also used extensively to determine potential human health and ecotoxicity hazards. In general, chemicals with water solubility less than 1 x 10⁻⁵ g/L indicate a lower concern for both the expression of adverse effects, and potential aquatic and general population exposure due to their low bioavailability. However, chemicals with a low bioavailability also tend to be more environmentally persistent. Low bioavailability is different than no bioavailability, and the two should not be used interchangeably.

Within the context of this alternatives assessment, the following descriptors were used according to ranges of water solubility values: more than 10,000 mg/L was considered very soluble; 1,000–10,000 mg/L represents soluble; 100–1,000 mg/L represents moderately soluble, 1–100 mg/L represents slightly soluble, and less than 1 mg/L represents insoluble, noting that these guidelines were not followed consistently within the scientific literature (U.S. EPA 2011f). Chemicals with higher water solubility were more likely to be transported into groundwater with runoff during storm events, be absorbed through the gastrointestinal tract or lungs, partition to aquatic compartments, undergo atmospheric removal by rain washout, and possess a greater potential for human exposure through the ingestion of contaminated drinking water. Chemicals with lower water solubility are generally more persistent and have a greater potential to bioconcentrate.

The water solubility of a substance was also used to evaluate the quality of experimental aquatic toxicity and oral exposure human health studies as well as the reliability of aquatic toxicity estimates. If the water solubility of a substance was lower than the reported exposure level in these experiments, then the study was likely to be regarded as inadequate due to potentially confounding factors arising from the presence of undissolved material. For aquatic toxicity estimates obtained using SARs, when the estimated toxicity was higher than a chemical's water solubility (i.e., the estimated concentration in water at which adverse effects appear cannot be reached because it was above the material's water solubility), the chemical was described as having NES. When NES occured, a low ecotoxicity hazard designation was assigned.

While assessing the water solubility of a chemical substance, its potential to form a dispersion in an aqueous solution was also considered. Ideally, a chemical's potential to disperse would be obtained from the scientific literature. In the absence of experimental data, dispersibility can be determined from chemical structure and/or comparison to closely related analogs. There are two general structural characteristics that lead to the formation of dispersions in water: (1) chemicals

that have both a hydrophilic (polar) head and a hydrophobic (non-polar) tail (e.g., surfactants), and (2) molecules that have a large number of repeating polar functional groups (e.g., polyethylene oxide).

The potential for a chemical to form a dispersion influences potential exposure, environmental fate, and toxicity. Dispersible chemicals have greater potential for human and environmental exposure, leachability, and aquatic toxicity than what might be anticipated based on the material's water solubility alone.

Chemicals without experimental data or chemicals that were anticipated by professional judgment to be sufficiently insoluble and thus were not bioavailable were assigned a water solubility maximum value of 1 x 10^{-6} g/L (U.S. EPA 2011f). A water solubility of 1 x 10^{-3} mg/L is the default value used for discrete organics as well as non-ionic polymers with a MW > 1,000 daltons according to the SF Polymer Assessment guidance assignment is consistent with an analysis of the chemicals used in the development of the water solubility estimation program in EPA's EPISuiteTM software (U.S. EPA 2010b). The training set for this model included 1,450 chemicals with a MW range 27-628 daltons and experimental water solubilities ranging from miscible to 4 x 10^{-7} mg/L (Meylan, Howard et al. 1996; U.S. EPA 2011h). Given that water solubility decreases with MW, a default value of 1 x 10^{-3} mg/L is consistent with the limited bioavailability expected for materials with a MW >1,000 daltons. Although no BPA alternatives had a MW >1,000, there are two compounds that may contain small amounts of higher MW oligomeric materials or impurities that were evaluated using a water solubility suggestive of limited bioavailability.

Octanol/Water Partition Coefficient (K_{ow})

The octanol/water partition coefficient, commonly expressed as its log value (i.e., $\log K_{ow}$) is one of the most useful properties for performing a hazard assessment. The $\log K_{ow}$ provides the partitioning between octanol and water, where octanol is used to mimic fat and other hydrophobic components of biological systems. Chemicals with a $\log K_{ow}$ less than 1 are highly soluble in water (hydropholic), while those with a $\log K_{ow}$ more than 4 are not very soluble in water (hydrophobic). A $\log K_{ow}$ more than 8 indicates that the chemical is not readily bioavailable and is essentially insoluble in water. In addition, $\log K_{ow}$ greater than approximately 8 may be difficult to obtain experimentally.

The log K_{ow} can be used as a surrogate for the water solubility in a hazard assessment and is frequently used to estimate the water solubility if an experimental value is not available. It can also be used to estimate other properties important to the assessment, including bioconcentration and soil adsorption, and is a required input for SAR models used to estimate ecotoxicity values.

For chemicals, that are not within the domain of EPISuiteTM or that were expected to be insoluble in water (WS <-1 x 10^{-6} g/L), a minimum value of 10 was assigned for the log K_{ow} (U.S. EPA 2011f). Insoluble chemicals that could be run through EPISuiteTM software used a log $K_{ow} > 10$ if the result appeared to be valid based on expert review. This assignment is consistent with an analysis of the chemicals used in the development of the octanol/water partition coefficient estimation program in the EPISuiteTM software. The training set (chemicals

used for calibration) for this model included 10,946 chemicals with a MW range 18-720 daltons and experimental log K_{ow} ranging from -3.89 to 8.70 (Meylan and Howard 1995; U.S. EPA 2011i). Given that log K_{ow} increases with MW, a default value of 10 is consistent with the limited bioavailability expected for materials with a MW >1,000 daltons. Although no BPA alternatives had a MW >1,000, there are two compounds that may contain small amounts of higher MW oligomeric materials or other impurities that were evaluated using a log K_{ow} suggestive of limited bioavailability. A maximum log K_{ow} of -2 was used for water soluble materials. For most polymers and other materials that are anticipated to be insoluble in both water and octanol, the log K_{ow} cannot be measured and was therefore not listed.

Flammability (Flash Point)

The flash point of a substance is defined as the minimum temperature at which the substance emits sufficient vapor to form an ignitable mixture with air. Flash point can be used to identify hazards associated with the handling of volatile chemicals. Substances with a flash point above 37.8 °C (100 °F) were commonly referred to as non-flammable, as this is the flammability definition used in the shipping industry. There are exceptions to this definition such as chemicals that may form explosive mixtures in the presence of air.

Explosivity

Explosivity refers to the potential for a chemical to form explosive mixtures in air and can be defined using the limits of flammability. The lower limit of flammability (LFL) is defined as the minimum concentration of a combustible substance that is capable of propagating a flame through a homogenous mixture in the presence of an ignition source. The upper limit of flammability (UFL) is similarly defined as the highest concentration that can propagate a flame. LFLs and UFLs are commonly reported as the volume percent or volume fraction of the flammable component in air at 25°C. If the ambient air concentration of the gas (or vapor) is between the upper and lower explosion limit, then the material has the potential to explode if it comes in contact with an ignition source. Knowledge regarding the explosivity of a given material in air is also useful in identifying potential hazards associated with the manufacture and use of that material.

pН

The pH scale measures how acidic or basic a substance is on a range from 0 to 14. A pH of 7 is neutral. A pH less than 7 is acidic, and a pH greater than 7 is basic. This scale is used primarily to identify potential hazards associated with skin or eye contact with a chemical or its aqueous solutions. The corrosive nature of chemicals that form either strongly basic (high pH) or strongly acidic (low pH) solutions are generally likely to result in harm to skin and other biological membranes. For corrosive chemicals, some experimental studies, such as biodegradation tests, require additional analysis to determine if the tests were performed at concentrations that cause harm to microbes in the test (and, therefore, may result in incorrectly identifying a chemical as persistent in the environment). For chemicals that form moderately basic or acidic solutions in water, the pH of the resulting solution can be used in lieu of a measured dissociation constant.

Dissociation Constant in Water (pKa)

The dissociation constant determines if a chemical will ionize under environmental conditions. The dissociation constant in water provides the amount of the dissociated and undissociated forms of an acid, base, or organic salt in water. Knowledge of the dissociation constant is required to assess the importance of the other physical/-chemical properties used in the hazard assessment. As the percentage of ionization increases, the water solubility increases while the vapor pressure, Henry's Law constant, and octanol/water partition coefficient decrease. For acids and bases, the dissociation constant was expressed as the pK_A and pK_B, respectively.

Henry's Law Constant

Henry's Law constant is the ratio of a chemical's concentration in the gas phase to that in the liquid phase (at equilibrium). In environmental assessments, the Henry's Law constant is typically measured in water at 25 °C. The Henry's Law constant provides an indication of a chemical's volatility from water, which can be used to derive partitioning within environmental compartments and the amount of material removed by stripping in a sewage treatment plant. Henry's Law constants less than 1 x 10⁻⁷ atm-m³/mole indicate slow volatilization from water to air (the Henry's Law constant for the volatilization of water from water is 1 x 10⁻⁷ atm-m³/mole) and values more than 1 x 10⁻³ atm-m³/mole indicate rapid volatilization from water to air. To aid in determining the importance of volatilization, the assessment uses two models based on the Henry's Law constant. These models determine the half-life for volatilization from a model river and a model lake. A maximum value of 1 x 10⁻⁸ atm-m³/mole for the Henry's Law Constant was assigned for chemicals without experimental data or for those that were anticipated by professional judgment to be non-volatile.

Sediment/Soil Adsorption/Desorption Coefficient (Koc)

The soil adsorption coefficient provides a measure of a chemical's ability to adsorb to the organic portion of soil and sediment. This provides an indication of the potential for the chemical to leach through soil and be introduced into groundwater, which may lead to environmental exposures to wildlife or humans through the ingestion of drinking water drawn from underground sources. Chemicals with high soil adsorption coefficients are expected to be strongly adsorbed to soil and are unlikely to leach into ground water. The soil adsorption coefficient also describes the potential for a chemical to partition from environmental waters to suspended solids and sediment. The higher the $K_{\rm oc}$ the more strongly a chemical is adsorbed to soil. Strong adsorption may impact other fate processes, such as the rate of biodegradation, by making the chemical less bioavailable.

The soil adsorption coefficient, K_{oc} , is normalized with respect to the organic carbon content of the soil to account for geographic differences. The assignments for the degree that a chemical is adsorbed to soil within the context of the assessment were described qualitatively as very strong (above 30,000), strong (above 3,000), moderate (above 300), low (above 30), and negligible (above 3) when determining the potential for a chemical to adsorb to soil and suspended organic matter, the potential for a chemical to form chemical bonds with humic acids and attach to soil

also needs to be considered, although this process is generally limited to a small number of chemical classes.

A maximum value of 30,000 for the K_{oc} was assigned for chemicals without experimental data or for those that were anticipated by professional judgment to be strongly absorbed to soil (U.S. EPA 2011f).

Reactivity

The potential for a substance to undergo irreversible chemical reactions in the environment can be used in the assessment of persistence. The primary chemical reactions considered in an environmental fate assessment are hydrolysis, photolysis, and the gas phase reaction with hydroxyl radicals, ozone, or nitrate radicals. The most important reaction considered in the hazard assessment of organic compounds is hydrolysis, or the reaction of a chemical substance with water. Because the rate of hydrolysis reactions can change substantially as a function of pH, studies performed in the pH range typically found in the environment (pH 5–9) were considered. The second reaction considered in the assessment is photolysis, the reaction of a chemical with sunlight. Both hydrolysis and photolysis occur in air, water, and soil, while only hydrolysis was considered in sediment. The half-lives for reactive processes, if faster than removal via biodegradation, were used to assign the hazard designation by direct comparison to the DfE persistence criteria.

For the atmospheric compartment, persistence also includes the evaluation of oxidative gasphase processes. These processes include the reaction with ozone, hydroxyl radicals, and nitrate radicals. Since the average concentration of these oxidative species in the atmosphere has been measured, the experimental or estimated rate constants were converted to, and reported as, a half-life in the assessment using standard pseudo first-order kinetics (U.S. EPA 2011g; U.S. EPA 2011e).

For inorganic compounds, an additional chemical process was considered, the potential to be reduced or oxidized (undergo a redox reaction) under environmental conditions. Redox reactions change the oxidation state of the species through the transfer of electrons to form another compound (such as the reduction of Cr(VI) to Cr(III). A change in the oxidation state of a metal or inorganic species can result in significant change in the material's hazard designation, in this example going from Cr(VI) to Cr(III) makes the compound less toxic.

Transport

The persistence of a chemical substance is based on determining the importance of removal processes that may occur once a chemical enters the environment. As noted in Section 4.1.2, chemicals with a half-life of less than 60 days are expected to be at most a moderate hazard designation for persistence. Persistence does not directly address the pathways in which a chemical substance might enter the environment (e.g., volatilization or disposal in a landfill) and focuses instead on the removal processes that are expected to occur once it is released into air, water, soil, or sediment. Similarly, the persistence assessment does not address what might happen to a chemical substance throughout its life cycle, such as disposal during incineration of

consumer or commercial products. Understanding the environmental transport of a chemical substance can help identify processes relevant to environmental assessment. For example, if a chemical is toxic to benthic organisms and partitions primarily to sediment, its potential release to water should be carefully considered in the selection of alternatives.

Biodegradation

In the absence of rapid hydrolysis or other chemical reactions, biodegradation is typically the primary environmental degradation process for organic compounds. Determining the importance of biodegradation is, therefore, an important component of the assessment. Biodegradation processes are divided into two types. The first is primary biodegradation, in which a chemical substance is converted to another substance. The second is ultimate biodegradation, in which a chemical is completely mineralized to small building-block components (e.g., CO₂ and water). DfE persistence criteria use data that are reported as a percent removal in the guideline Ready Biodegradability test or as a half-life in other experimental studies; both of these measurements can be compared directly to the DfE criteria in 4.1.2. When considering primary degradation, the assessment process includes an evaluation of the potential for the formation of metabolites that were more persistent than the parent materials. Chemical substances that undergo rapid primary degradation but only slow ultimate biodegradation were considered to have stable metabolites. In the absence of measured data on the substance of interest, DfE evaluated the potential for biodegradation for chemicals with a MW <1,000 daltons using the EPA EPISuiteTM models. EPISuite TM estimates the probability for ready biodegradation as well as the potential for primary and ultimate removal, as described in Section 4.5.

4.4 Evaluating Human Health Endpoints

After data collection and analysis of the physical-chemical properties for the chemicals being assessed the comparison of the data against the hazard criteria can begin. Section 4.4.1 discusses how measured data are used to make hazard designations for human health endpoints and Section 4.4.2 presents the approach for filling in data gaps to make these hazard designations.

4.4.1 Endpoints Characterized and Evaluated Against Criteria Based on Measured Data

This section provides a short description of how measured data were used to designate the level of hazard for each endpoint. As a reminder, the criteria for the hazard designations are in Section 4.1.2.

For acute mammalian toxicity the median lethal doses or concentrations were used to assign the hazard designation. Four levels of hazard designation have been defined ranging from Low to Very High.

For cancer the hazard designation was contingent on the level of evidence for increased incidence of cancer, and not potency. The definitions applied in DfE criteria are based on International Agency for Research Cancer (IARC) levels of evidence (International Agency for Research on Cancer 2006). For example, a designation of Very High concern requires that the substance be characterized as a "known or presumed human carcinogen", whereas a designation

of Low concern requires either negative studies or robust SAR conclusions. A designation of Moderate was applied as a default value when there was an absence of data suggesting High carcinogenicity, and an absence of data supporting Low carcinogenicity (i.e., a lack of negative studies or weak SAR conclusion).

Similarly, the hazard designation for mutagenicity/genotoxicity was also based on the level of evidence rather than potency. Complete data requirements for this endpoint were both gene mutation and chromosomal aberration assays. For instances of incomplete or inadequate mutagenicity/genotoxicity data, a Low hazard designation cannot be given.

For chronic endpoints, such as reproductive, developmental, neurological and repeated dose toxicity, the hazard designation was based on potency. The evaluation considers both lowest observed adverse effect levels (LOAELs) and identification of no observed adverse effect levels (NOAELs) when available. The LOAEL and the NOAEL are experimental dose levels, and their reliability is dictated by the study design. In studies for which the lowest dose tested resulted in an adverse effect (and therefore a NOAEL was not established), and in studies for which the highest dose tested was a NOAEL, a conservative approach using professional judgment was used to address uncertainty regarding the lowest dose or exposure level that might be expected to cause a particular adverse effect. For example, in the absence of an established a NOAEL, an identified LOAEL might fall within the range of a Moderate hazard; however, it is uncertain if a lower dose, such as one that falls within the range of high hazard exists because no lower doses were tested. In such cases, professional judgment was applied to assign a hazard designation when possible. Some degree of uncertainty was evident in results from studies in which a NOAEL may fall within one hazard range (e.g., moderate hazard) and the identified LOAEL falls within a different hazard range (e.g., low hazard) because the true LOAEL may fall in either category, but there were not enough experimental data points to determine the true LOAEL. Professional judgment was also applied to these cases to assign a hazard descriptor when possible and the rationale used was described in the assessment.

Developmental neurotoxicity, for which data were only available for BPA, was considered and was evaluated using the developmental toxicity criteria, which are more stringent than the criteria for neurotoxicity, and thus more protective (U.S. EPA 2011c).

The criteria for skin and respiratory sensitization, which are immune-based responses, consider the frequency and potency of the reactions. For skin sensitization, categories were based on the weight of evidence from traditional animal bioassays, but *in vitro* alternative studies were also considered. At this time, there are no standard test methods for respiratory sensitization; as a result there was often no designation for this endpoint.

The evaluation of skin and eye irritation and corrosivity were based on the time to recovery.

4.4.2 SAR – Application of SAR and Expert Judgment to Endpoint Criteria

If measured data pertaining to human health criteria were not available, potential adverse effects were estimated with SAR analysis. To make these estimates, DfE relied on the expertise of scientists in EPA's New Chemicals Program who have reviewed thousands of chemicals and associated data using these methods. SAR uses the molecular structure of a chemical to infer a

physicochemical property that can be related to specific effects on human health. These correlations may be qualitative (simple SAR) or quantitative (QSAR). Information on EPA's use of SAR analysis has been published by U.S. EPA (1994). Public access to free validated quantitative SAR models for human health endpoints is far more limited than physical/-chemical properties, environmental fate parameters, or ecotoxicology.

Carcinogenicity

Carcinogenicity was assessed using the OncoLogic expert system that provides a qualitative result directly applicable to the DfE criteria. For other endpoints that required SAR approaches, an analog approach using expert judgment was used as discussed in Section 4.2.

The potential for a chemical to cause cancer in humans was estimated using OncoLogic expert system. This program uses a decision tree based on the known carcinogenicity of chemicals with similar chemical structures, information on mechanisms of action, short-term predictive tests, epidemiological studies, and expert judgment. All estimates obtained in this project were reviewed by EPA scientists having appropriate expertise. Estimates for the other human health endpoints were based on expert judgment using an analog approach and not through the use of computerized SAR methodologies.

Oligomeric Mixtures

Oligomers with MW<1,000 were assessed using a representative structure for all the MW species anticipated to be present in the mixture. The procedures were essentially identical to those employed for the evaluation of impurities or byproducts in discrete chemicals although in this case the oligomer with the highest concern was used to drive the hazard designation. Unreacted monomers, if present, were also assessed and considered in the hazard evaluation. In this alternatives assessment, two chemicals are mixtures of low MW oligomers comprised of 2 or 3 repeating units.

4.5 Evaluating Environmental Endpoints

As with endpoints previously mentioned, the preferred method for the evaluation of environmental endpoints is the use of experimental data. In their absence, the alternatives assessment uses computerized QSAR models developed by EPA for the evaluation of environmental endpoints that can be directly compared to the DfE criteria. When measured data were unavailable, the hazard designation for aquatic toxicity was estimated using EPA's ECOSARTM software and the persistence designation was estimated using models in EPA's EPISuiteTM software. As a direct result of the design of these models and their direct application to DfE criteria, the evaluation of environmental endpoints using experimental or estimated data was discussed together in the following subsections.

4.5.1 Ecotoxicity

For ecological toxicity, the alternatives assessment focused on the hazard designations for acute and chronic studies on freshwater species of algae, invertebrates, and fish, often referred to as the 'three surrogate species'). Aquatic toxicity values were reported in the assessment as follows:

- Acute (estimated or experimental) LC₅₀ in mg/L
- Chronic (experimental) No observed effect concentration (NOEC) in mg/L; and
- Chronic (estimated) ChV, or the geometric mean between the NOEC and the LOEC, in mg/L

Experimental data reported in the alternatives assessment also included information on the species tested. Test data on other organisms (e.g., worms) were included in the assessment if data were readily available. These data would be evaluated using professional judgment to support hazard designations assigned using the three surrogate species; however they were not used by themselves to assign a hazard designation as DfE criteria are not available.

If an experimental or estimated effect level exceeded the known water solubility of a chemical substance, or if the log K_{ow} exceeded the estimated ECOSAR Cut-off values for acute and chronic endpoints (which are class specific), NES were predicted for the aquatic toxicity endpoints. NES indicates that at the highest concentration achievable, the limit of a chemical's water solubility, no adverse effects were observed (or would be expected). In these cases, a Low hazard designation was assigned. In the cases where both an estimated water solubility and ECOSAR estimate were used, then an additional factor of ten was applied to the water solubility before a NES designation was assigned to account for the combined uncertainty in the model estimates.

In the case where an experimental aquatic toxicity value was significantly higher than the chemical's water solubility, it was likely the result of a poorly conducted study. In this circumstance, which is generally more frequent for formulated products or mixtures, additional details were provided in the data quality section to describe why the reported values could not be used to assign a hazard designation.

EPA's ECOSARTM estimation program uses chemical structure to estimate toxicity of a chemical substance using class-specific QSARs. ECOSARTM automatically determines all of the classes that a chemical substance may belong to and, therefore, may provide a number of different ecotoxicity estimates for some or all of the species and durations estimated. Modeled results are dependent on the functional groups present on the molecule as well as the diversity of chemicals with experimental data that were used to build the models. The hazard profiles report every estimated value returned from ECOSARTM. However, the hazard designation was based on the most conservative ECOSARTM estimate, unless expert judgment suggested that an individual substance was better represented by a specific class based on analysis of the operative mechanism of action. Experimental log K_{ow} values were used preferentially as input into ECOSARTM. In their absence, estimated log K_{ow} values from EPISuiteTM were used.

The QSARs for ECOSARTM were built using experimental data for several chemical classes. For a chemical class to be defined within ECOSARTM, sufficient acute experimental data were required to build a QSAR for all three species included in the model. There were instances, however, where sufficient experimental data are not available to build a chronic QSAR for some of the three surrogate species. When ECOSARTM did not provide chronic estimates, the acute value (experimental or estimated) was divided by an acute to chronic ratio (ACR) to arrive at the

chronic value. ACRs of 10 were used for fish and daphnid and an ACR of 4 was used for algae (Mayo-Bean, Nabholz et al. 2011).

An estimate of NES is the default value used for organics, oligomers, or non-ionic polymers with a MW >1,000 daltons in the assignment of aquatic toxicity hazard. In EPA's New Chemcial program, aquatic toxicity is not predicted for chemicals with a MW >1,000 daltons as uptake has been found to decrease exponentially with MWs >600 daltons (Nabholz, Clements et al. 1993) due to a decrease in passive absorption through respiratory membranes (Mayo-Bean, Nabholz et al. 2011). Although no BPA alternatives had a MW <1,000, there are two oligomeric materials that may contain small amounts of higher MW components. The aquatic toxicity hazard potential for these materials was would be assigned a low designation as discussed above and, as a direct result, their presence did not influence the hazard designation for this endpoint.

4.5.2 Bioaccumulation

Bioaccumulation is a process in which a chemical substance is absorbed in an organism by all routes of exposure as occurs in the natural environment, e.g., from dietary and ambient environment sources. Bioaccumulation is the net result of the competing processes; this includes uptake, metabolism and elimination of a chemical in an organism. Bioaccumulation can be evaluated using the BAF, the steady state ratio of a chemical in an organism relative to its concentration in the ambient environment, where the organism is exposed through ingestion and direct contact. Experimental BAFs have not been widely available in the scientific literature and, as a result, experimental BCFs are more commonly used to evaluate the bioaccumulation hazard. BCFs are defined as the ratio of the concentration of a chemical in an organism to the concentration of the chemical in theorganism's surroundings; BCFs are typically measured for fish (in water) using guideline studies.

Experimental BAF or BCF values can be compared directly to the DfE criteria for this endpoint to assign a hazard designation. The BCF/BAF designations range from <100 for a Low designation to >5,000 for a Very High Designation (see Table 4-2). If experimental values were available for both of these endpoints, and the BCF and BAF were >100 (i.e., above the Low designation), the largest factor was used to assign hazard designation. If experimental BCFs <100 were available, the estimated upper trophic BAF from EPISuite TM was used preferentially if its use resulted in a more conservative hazard designation and the potential for metabolism was accurately accounted for within the model estimates.

In the absence of experimental data, evaluation of bioaccumulation potential can be done using the log K_{ow} and the log octanol/air partition coefficient K_{oa} as estimated by EPISuite TM . However, analysis using K_{oa} requires the use of metabolism data for higher trophic, air breathing organisms, which can be difficult to obtain from the scientific literature and cannot be readily estimated. BAFs and BCFs from EPISuite TM were, therefore, typically used for the bioaccumulation hazard designation when experimental data were lacking. These values can be compared directly to DfE criteria and the most conservative result was used for the hazard designation. For chemicals that had estimated bioaccumulation data, available experimental monitoring data were used to provide insight into the reliability of the model results. For example, an estimated Low bioaccumulation potential may be increased to a Moderate

designation if a chemical was routinely identified in samples from higher trophic levels, or a High designation if the chemical was routinely measured in animals at the top of the food chain.

An estimate of Low is the default value used for organics with a MW >1,000 daltons in the assignment of bioaccumulation hazard. This assignment is consistent with an analysis of the chemicals used in the development the bioconcentration and bioaccumulation estimation programs in the EPISuiteTM software (U.S. EPA 2011h). The training sets for these models included 527 and 421 chemicals, respectively, with a MW range 68-992 (959 for BAF) daltons. Given that BCF and BAF reach a maximum and then decrease with increasing log K_{ow}, a default value of Low is in general consistent with the limited bioavailability expected for materials with a MW >1,000 daltons. DfE will use all available well-conducted studies when evaluating bioaccumulation potential for materials with a MW >1,000, including environmental biomonitoring data on higher trophic levels. Although no BPA alternatives had a MW <1,000, there are two compounds that may contain small amounts of higher MW oligomeric impurities; the bioaccumulation hazard potential for these materials was would be assigned a low designation as discussed above and, as a direct result, their presence did not influence the hazard designation for this endpoint.

4.5.3 Environmental Persistence

A chemical's persistence in the environment is evaluated by determining the type and rate of potential removal processes. These removal processes were generally divided into two categories: chemical and biological. Of the chemical degradation processes, an evaluation of environmental persistence includes the reaction of a chemical with water, also known as hydrolysis, because water is ubiquitous in the environment. Hydrolysis rate constants can be obtained from the literature or estimated, and the resulting half-lives can be compared directly to DfE criteria. For commercial chemicals, hydrolysis tends to be a slower environmental removal process than biodegradation. Direct and indirect photolysis also represent other potential chemical degradation processes that are considered in the alternatives assessment, and they are discussed later in this section.

Biodegradation, the most prevalent biological removal processes, were divided into two types. The first is primary biodegradation, in which a chemical substance is converted to another substance through a single transformation. The second is ultimate biodegradation, in which a chemical is completely mineralized to small building-block components (e.g., CO₂ and water). DfE criteria utilize ultimate biodegradation preferentially for the persistence hazard designation, although primary removal rates were informative in assigning hazard designations particularly for materials that were transformed slowly, and to a lesser extent for those that are transformed rapidly.

If ultimate biodegradation data were not available, primary removal data were used in some cases. For primary removal processes, the potential for the formation of degradation products that are more persistent than the parent compounds must be considered in the hazard designation. When present, the persistent degradation products should be evaluated for fate and toxicity. Half-life data on the persistent degradation products, if available, were used to determine the assignment for the persistence designation. In the absence of persistent degradation products,

primary biodegradation half-life data were compared directly to the DfE criteria to assign a hazard designation.

Biodegradation processes can be classified as either aerobic or anaerobic. Aerobic biodegradation is an oxidative process that occurs in the presence of oxygen. Anaerobic biodegradation is a reductive process that occurs only in the absence of oxygen. Aerobic biodegradation is typically assessed for soil and water, while anaerobic biodegradation is generally assessed in sediment. For determining the persistence hazard, the importance of both aerobic and anaerobic biodegradation as well as partitioning and transport in the environment were considered to determine what removal processes were most likely to occur.

One aspect of the assessment is to determine the potential for biodegradation of a chemical substance within a sewage treatment plant and other environments. In this assessment, the term "ready biodegradability" refers to a chemical's potential to undergo removal in guideline laboratory studies. A positive result in a test for ready biodegradability can be considered as indicative of rapid and ultimate degradation in most environments including biological sewage treatment plants. Ready tests typically include a 10-window, beginning when the biodegradation parameter (e.g., dissolved organic carbon, theoretical oxygen demand) reaches 10%. The window must occur within the 28-day length of the test. If the pass level of the test (typically 60%) is met in the 10-day window, the chemical received a Very Low hazard designation. Those that did not pass the 10-day window criterion but met the pass level in 28 days received a Low hazard designation. -If ready biodegradability test data were available but the chemical did not meet the pass level, the chemical was evaluated based on measured data using the DfE half-life criteria (Table 4-1). These half-life criteria were also used to assign a hazard designation for nonguideline ultimate biodegradation studies reported in the scientific literature.

In the absence of a reported half-life, experimental data were also used to approximate half-life as appropriate. For example, a chemical that undergoes <5% removal in 30 days would be expected to have a half-life >60 days and would be assigned a High persistence concern.

When experimental data on the biodegradation of a chemical substance were not available, the potential of that substance to undergo this removal process was assessed from the results of the EPISuiteTM models. These models fall into one of four classes: Rapid biodegradation models based on linear and non-linear regressions that estimate the probability that a chemical substance will degrade fast; Expert survey models that determine the rate of ultimate and primary biodegradation using semi-quantitative methods; Probability of ready biodegradability; and Probability of rapid biodegradation under anaerobic conditions. Each of these is discussed in the following paragraphs.

The first models (Biowin 5 and 6) used in the assessment estimated ready biodegradability (also known as Japanese Ministry of International Trade and Industry (MITI) models), and provided the probability that a material passes this standardized test. Those chemicals that were estimated to pass the ready biodegradability test received a Low persistence designation. If a chemical was not estimated to pass the MITI test, the results of the other EPISuite The biodegradation models were used.

The rapid biodegradation potential models within EPISuiteTM (Biowin 1 and 2) were useful for determining if a chemical substance was expected to biodegrade quickly in the environment. If a chemical was likely to biodegrade quickly, it was generally assigned a Low hazard designation for persistence. The results of the estimates from these models may be used in concert with the semi-quantitative output from a second set of models, which include an ultimate and primary survey models (Biowin 3 and 4) for evaluating persistence. These models provided a numeric result, ranging from 1 to 5, as an indication of the amount of time required for complete mineralization (ultimate degradation) and removal of the parent substance (primary degradation) of the test compound. The numeric result was converted to an estimated half-life for removal that can be compared directly to DfE criteria. If results from different models (other than the MITI models) led to a different hazard designation, then the ultimate biodegradation model results were used preferentially. If the transport properties indicate the potential for the material to partition to sediment, an anoxic compartment, then the results of the anaerobic probability model (Biowin 7) will also be evaluated.

Half-lives for hydrolysis from experimental studies or EPISuiteTM estimates, were used in preference to biodegradation data when they suggested that hydrolysis is a more rapid removal process. Hydrolysis half-lives were compared directly to DfE criteria to assign the persistence designation. Similar to primary biodegradation, breakdown products resulting from hydrolysis were evaluated for fate and toxicity when they were expected to be more persistent than the parent compound.

Photolysis may also be an important environmental removal process. In general, environmental removal rates from photolysis do not compete with biodegradation or hydrolysis although there are exceptions such as iodides. Photolysis may be an important removal process for chemicals that were not bioavailable because of their limited water solubility. Estimation methods for photolysis rates were not available using computerized SAR tools. If experimental or suitable analog data were available, the rate of photolysis was evaluated relative to other removal processes.

When evaluating the environmental persistence designation, it should be noted that chemicals with a High or Very High designation can degrade over time, although this process may occur at a very slow rate. As a result, a Very High designation may have been assigned if persistent degradates were expected to be produced, even at a very slow rate, in the absence of experimental biodegradation data for the parent substance.

4.6 Endocrine Activity

Chemicals included in this DfE alternatives assessment were screened for potential endocrine activity, consistent with the DfE Alternatives Assessment Criteria (U.S. EPA 2011c). Endocrine activity refers to a change in endocrine homeostasis caused by a chemical or other stressor. An endocrine disruptor is an external agent that interferes in some way with the role of natural hormones in the body, in a manner causing adverse effects. Relevant data are summarized in the hazard assessments for each chemical, located in Section 4.8. Data on endocrine activity were available for BPA and 10 of the 20 alternatives included in this report. For chemicals without available data on endocrine activity, this was acknowledged with a "no data available" statement. When endocrine activity data were available, the data were summarized as a narrative. A unique

hazard designation of Low, Moderate or High is not provided for this endpoint in Table 4-3, for reasons discussed below.

The document Special Report on Environmental Endocrine Disruption: An Effects Assessment and Analysis describes EPA's activities regarding the evaluation of endocrine disruption (U.S. EPA 1997). This report was requested by the Science Policy Council and prepared by EPA's Risk Assessment Forum. This report states that "Based on the current state of the science, the Agency does not consider endocrine disruption to be an adverse endpoint per se, but rather to be a mode or mechanism of action potentially leading to other outcomes, for example, carcinogenic, reproductive or developmental effects, routinely considered in reaching regulatory decisions" (U.S. EPA 1997). The report also states that "Evidence of endocrine disruption alone can influence priority setting for further testing and the assessment of results of this testing could lead to regulatory action if adverse effects are shown to occur" (U.S. EPA 1997).

The 1996 Food Quality Protection Act directed EPA to develop a scientifically-validated screening program to determine whether certain substances may cause hormonal effects in humans. In response, EPA established the Endocrine Disruptor Screening Program (EDSP) (U.S. EPA 2012b). The EDSP is developing requirements for the screening and testing of thousands of chemicals for their potential to affect the endocrine system. When complete, EPA will use these screening and testing approaches to set priorities and conduct further testing when warranted. The science related to measuring and demonstrating endocrine disruption is relatively new, and validated testing methods at EPA are still being developed.

The EDSP proposes a two-tiered approach that includes initial screening followed by more indepth testing when warranted (U.S. EPA 2011b). The Tier 1 screening battery is intended to identify chemicals with the potential to interact with the estrogen, androgen, or thyroid hormone systems through any of several recognized modes of action. Positive findings for Tier 1 tests identify the potential for an interaction with endocrine systems, but do not fully characterize the nature of possible effects in whole animals. Tier 2 testing is intended to confirm, characterize, and quantify the effects for chemicals that interact with estrogen, androgen, and thyroid hormone systems. These test methods must undergo a four-stage validation process (protocol development, optimization/prevalidation, validation, and peer-review) prior to regulatory acceptance and implementation. Validation is ongoing for Tier 1 and Tier 2 methods. Once validated test methods have been established for screening and testing of potential endocrine disruptors, guidance must be developed for interpretation of these test results using an overall weight-of-evidence characterization.

To assess the data on endocrine activity, DfE applies the weight of evidence approach developed by the EDSP (U.S. EPA 2011d). Generally, weight of evidence is defined as the process for characterizing the extent to which the available data support a hypothesis that an agent causes a particular effect (U.S. EPA 1999a; U.S. EPA 2002; U.S. EPA 2005a). This process integrates and evaluates data, and always relies on professional judgment (U.S. EPA 2011d). To evaluate endocrine activity with this weight of evidence approach, DfE examined multiple lines of evidence (when available) and considered the nature of the effects within and across studies,

⁹ Information on the status of assay development and validation efforts for each assay in EPA's EDSP can be found at: http://www.epa.gov/oscpmont/oscpendo/pubs/assayvalidation/status.htm

including number, type, and severity/magnitude of effects, conditions under which effects occurred (e.g., dose, route, duration), consistency, pattern, range, and interrelationships of effects observed within and among studies, species, strains, and sexes, strengths and limitations of the in vitro and in vivo information, and biological plausibility of the potential for an interaction with the endocrine, androgen, or thyroid hormonal pathways.

Most test data for chemicals in this report consist of *in vitro* assays, but results of *in vitro* assays alone were not generally expected to provide a sufficient basis to support a hazard designation for endocrine disruption. EPA expects that *in vivo* evidence would typically be given greater overall influence in the weight of evidence evaluation than *in vitro* findings because of the inherent limitations of such assays. Although *in vitro* assays can provide insight into the mode of action, they have limited ability to account for normal metabolic activation and clearance of the compound, as well as normal intact physiological conditions (e.g., the ability of an animal to compensate for endocrine alterations).

As described in the DfE Alternatives Assessment Criteria, endocrine activity was summarized in a narrative, rather than by High, Moderate or Low hazard designation. The endocrine activity summaries can be found in the hazard profiles. This is an appropriate approach because there is no consensus on what constitutes high, moderate or low concern for this endpoint. The summary of endocrine activity largely relies on representative studies and expert review summaries.

4.7 Hazard Summary Table

Table 4-4 Screening Level Hazard Summary

This table only contains information regarding the inherent hazards of the chemicals evaluated. Evaluation of risk considers both the hazard and exposure.

The caveats listed in the legend and footnote sections must be taken into account when interpreting the hazard information in the table below.

VL = Very Low hazard L = Low hazard M = Moderate hazard H = High hazard VH = Very High hazard — Endpoints in colored text (VL, L, M, H, and VH) were assigned based on empirical data. Endpoints in black italics (VL, L, M, H, and VH) were assigned using values from estimation software and professional judgment. $^{\circ}$ The highest hazard designation of a representative component of the oligomeric mixture with MWs <1,000.

‡ The highest hazard designation of any of the oligomers with MW <1,000§ Based on analogy to experimental data for a structurally similar compound.

					·		Human I	Health Effect	ts					Aquatic T	oxicity	Enviror Fa	nmental ate
	Chemical	CASRN	Acute Toxicity	Carcinogenicity	Mutagenicity/Genotoxicity	Reproductive	Developmental	Neurological	Repeated Dose	Skin Sensitizer	Respiratory Sensitization	Eye Irritation	Dermal Irritation	Acute	Chronic	Persistence	Bioaccumulation
но-Он	Bisphenol A 2,2-bis(p-hydroxyphenyl)propane	80-05-7	L	M	L	Н	Н	М	М	M		M	M	Н	Н	VL	L
но	Bisphenol F Bis(4-hydroxyphenyl)methane	620-92-8	L	М	L	H [§]	H§	М	Н	L		VH	M [§]	M	Н	L	L
но	Bisphenol C 2,2'-Bis(4-hydroxy-3-methylphenyl)propane	79-97-0	L^{\S}	М	M	H§	H^{\S}	М	<i>M</i> [§]	M [§]		H [§]	M [§]	Н	Н	M	М
но	MBHA Methyl bis(4-hydroxyphenyl)acetate	5129-00-0	L§	М	L [§]	H§	H [§]	М	M [®]	L		M [§]	M [§]	Н	Н	М	L
HO	BisOPP-A 4,4'-Isopropyllidenebis(2-phenylphenol)	24038-68-4	L§	М	L§	H [§]	H [§]	М	<i>M</i> [§]	M [§]		M ⁸	M [§]	L	Н	Н	М

но-Он	Bisphenol AP 4,4'-(1-Phenylethylidene)bisphenol	1571-75-1	L^{\S}	М	L^{\S}	H^{\S}	H^{\S}	М	M [§]	M [§]	M [§]	M [§]	Н	Н	Н	M
	Substituted phenolic compound, PROPRIETARY #1		L^{\S}	М	L	H [§]	H^{\S}	M	M ⁸	M [§]	M ⁸	<i>M</i> §	Н	М	М	L
	Substituted phenolic compound, PROPRIETARY #2		L^{\S}	М	L^{\S}	H^{\S}	H§	М	M [§]	M [§]	M [§]	M [§]	Н	Н	Н	Н
но	PHBB Benzyl 4-hydroxybenzoate	94-18-8	L	М	М	L	М	М	L	M [§]	VL	V L	Н	Н	L§	L




							Huma	n Health Eff	ects ects					Aquatic '	Toxicity	Environ Fa	
	Chemical	CASRN	Acute Toxicity	Carcinogenicity	Mutagenicity/Genotoxicity	Reproductive	Developmental	Neurological	Repeated Dose	Skin Sensitizer	Respiratory Sensitization	Eye Irritation	Dermal Irritation	Acute	Chronic	Persistence	Bioaccumulation
но — Б	Bisphenol S 4-Hydroxyphenyl sulfone	80-09-1	L	М	М	M	M	М	Н	L		L	L	M	M	M	L
0,0 OH	2,4-BPS 2,4'-Bis(hydroxyphenyl)sulfone	5397-34-2	L§	М	M	M [§]	M [§]	М	H§	L [§]		L^\S	L^{\S}	М	Н	М	L
HO S HO OH	TGSA bis-(3-allyl-4-hydroxyphenyl) sulfone	41481-66-7	L	М	L	M [§]	M [§]	М	M	Н	М	L	VL	Н	Н	Н	L
но-О-	BPS-MAE Phenol,4-[[4-(2-propen-1-yloxy)phenyl]sulfonyl]-	97042-18-7	L	M [§]	M	M [§]	M [§]	М	L	L	М	L	VL	Н	н	Н	L
○-(- -(-)-o+	BPS-MPE 4-Hydroxy-4'-benzyloxydiphenylsulfone	63134-33-8	L	М	M [§]	M [§]	M [§]	М	H^\S	L		L	L	VH	Н	Н	М
О ОН ОН	D-8 4-hydroxyphenyl 4-isoprooxyphenylsulfone	95235-30-6	L§	М	М	M [§]	M [§]	М	H [§]	L^{\S}		L^{\S}	L§	Н	Н	M [§]	L

				Human Health Effects							Aquatic 7	Foxicity	Enviror Fa	nmental ate			
	Chemical	CASRN	Acute Toxicity	Carcinogenicity	Mutagenicity/Genotoxicity	Reproductive	Developmental	Neurological	Repeated Dose	Skin Sensitizer	Respiratory Sensitization	Eye Irritation	Dermal Irritation	Acute	Chronic	Persistence	Bioaccumulation
-oio-(voio+	D-90 Phenol, 4,4'-sulfonylbis-, polymer with 1,1'-oxybis[2-chloroethane]	191680-83-8	L	М	L	L	L	М	L	F		M	VL	L^{\ddagger}	L^{\ddagger}	VH [‡]	H^{\ddagger}
NO STATE OF THE PROPERTY OF TH	DD-70 1,7-bis(4-Hydroxyphenylthio)-3,5-dioxaheptane	93589-69-6	L	М	L	М	M [§]	M	<i>M</i> [§]	M [§]		H^\S	M [§]	Н	Н	Н	L
n,c-Q-2 n	Pergafast 201 N-(p-Toluenesulfonyl)-N'-(3-p-toluenesulfonyloxyphenyl)urea	232938-43-1	L	М	L	M	M	L	M	L		L	VL	VH	Н	VH	L
oxioaixa	BTUM 4,4-bis(N-carbamoyl-4- methylbenzenesulfomide)diphenylmethane	151882-81-4	L	М	L	L	L	L	M	L		L	L	Н	Н	Н	L
مىتمىدە تەمىمتىدە	UU Urea Urethane Compound	321860-75-7	L	М	L	L	L	L	L	L		L	L	L	L [¢]	VH	L

4.8 Hazard Profiles

Bisphenol A



SMILES: Oc1ccc(cc1)C(c1ccc(O)cc1)(C)C

Synonyms: Phenol,4,4'-(1-methylethylidene)bis- (TSCA Inventory); BPA; 2,2-(4,4'-dihydroxydiphenyl)propane; 2,2-bis(4'-hydroxyphenyl)propane; 2,2-bis(4-hydroxyphenyl)propane; 2,2-bis(p-hydroxyphenyl)propane; 2,2-bis-4'-hydroxyfenylpropan; 2,2-di(4-hydroxyphenyl)propane; 2,2-di(4-phenylol)propane; 4,4'-(1-Methylethylidene)bisphenol; 4,4'-Dihydroxy-2,2'-diphenylpropane; 4,4'-Dihydroxydiphenyl-2,2'-propane; 4,4'-bisphenol A; 4,4'-dihydroxydiphenyl-2,2-propane; 4,4'-dihydroxydiphenylpropane; 4,4'-dihydroxyphenyl-2,2-propane; 4,4'-isopropylidenediphenol; 4,4-isopropylidenediphenol; beta, beta'-bis(p-hydroxylphenyl)propane; beta-di-p-hydroxyphenylpropane; bis(4-hydroxyphenyl)propane; bis[phenol],4,4'-(1-methylethylidene)-; Bisferol A; bisphenol; Bisphenol,4,4'-(1-methylethylidene)-; Bisphenol-a; Dian; Diano; dimethylbis(p-hydroxyphenyl)methane; dimethylmethylene-p,p'-di-phenol; dimethylmethylene-p,p'-diphenol; p,p'-bisphenolA; p,p'-dihydroxydiphenyldimethylmethane; p,p'-dihydroxydiphenylpropane; p,p'-isopropylidene-bisphenol; p,p'-isopropylidene-di-phenol; p,p'-bisphenolA; p,p'-dihydroxydiphenylmethane; p,p'-dihydroxydiphenylpropane; p,p'-isopropylidene-bisphenol; p,p'-isopropylidene-di-phenol; Parabis; ParabisA; Phenol,(1-methylethylidene)bis-; Phenol,4,4'-Isopropylidene-di; Phenol,4,4'-dimethylmethylenedi-; Phenol,4,4'-isopropylidenedi-; Pluracol 245; propane,2,2-bis(p-hydroxyphenyl)-; Rikabanol; β-Di-p-Hydroxyphenylpropane; Ucarbisphenol A; Ucarbisphenol HP

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: BPA glucuronide, BPA sulfate conjugate, BPA diglucuronide, 5-hydroxy BPA and the corresponding sulfate conjugate, isopropyl-hydroxyphenol, BPA glutathione conjugate, glutathionyl-phenol, glutathionyl 4-isopropylphenol, BPA dimmers, monohydroxybisphenol A, beta-glucoside, BPA mono-O-\$\mathbb{G}\$-D-gentiobioside and the trisaccharide BPA, \$\mathbb{G}\$-D-glucopyranoside, mono- and di- O-\$\mathbb{G}\$-D-glucopyranosides, phenol, 4-isopropylphenol, 4-isopropylphenol, hexestrol, 5,5'-bis-[1-(4-hydroxy-phenyl)-1-methylethyl]-bisphenyl-2,2'-diol, 4-hydroxyacetephenone, 4-hydroxybenzoic acid, 2,2-bis(4-hydrozyphenyl)-1-propanol, 2, 3- bis(4-hydroxyphenyl)-1, 2-propanediol (Kang, Katayama et al., 2006)

Analog: None Analog Structure: Not applicable

Endpoint(s) using analog values: Not applicable

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: 37 - Irritating to respiratory system; 41 - Risk of serious damage to eyes; 43 - May cause sensitization by skin contact; 52 - Harmful to aquatic organisms; 62 - Possible risk of impaired fertility (ESIS, 2011).

Risk Assessments: Risk assessment completed for Bisphenol A by Canada in 2008, the European Union in 2010 and Japan in 2007 (Canada, 2008; EINECS, 2010; Nakanishi and Miyamoto, 2007).

	Bisphenol A CASRN 8	0-05-7	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	PHYSICAL/CHEMICAL PR	ROPERTIES	
Melting Point (°C)	155 (Measured)	EINECS, 2010	Adequate; consistent values reported in
	150-157 (Measured)	EINECS, 2010; Canada, 2008	secondary sources.
	150-155 (Measured)	O'Neil, 2006	
Boiling Point (°C)	360.5 at 760 mmHg (Measured)	EINECS, 2010; IUCLID, 2000	Adequate.
	250-252 at 13 mmHg (decomposes) (Measured)	EINECS, 2010	Reduced boiling point consistent with values reported in secondary sources.
	220-398 (Measured)	Canada, 2008	Range of values not entirely consistent with other located sources.
	220 at 4 mm Hg (Measured); decomposes when heated above 220°C	O'Neil, 2006	Data indicate that BPA will decompose at elevated temperatures.
Vapor Pressure (mm Hg)	3.99x10 ⁻⁸ (Measured)	EINECS, 2010; Canada, 2008	Adequate; consistent with values reported in other secondary sources.
	3.08x10 ⁻⁹ - 3.99x10 ⁻⁸ (Measured)	EINECS, 2010	
Water Solubility (mg/L)	300 (Measured)	EINECS, 2010	Adequate; selected value for assessment.
	120-301 (Measured)	Canada, 2008	Adequate; consistent values which span a narrow range have been reported in secondary sources.
	120 (Measured)	Dorn, Chou et al., 1987	Adequate; well conducted nonguideline study.
Log K _{ow}	3.32 (Measured)	Hansch, Leo et al., 1995; Canada, 2008	Adequate; consistent values that span a relatively narrow range have been reported in secondary sources; selected value for assessment.
	2.2 (Measured)	EINECS, 2010	Adequate; reported in a secondary source.
Flammability (Flash Point)	79.4-227°C (Measured)	EINECS, 2010	Lower temperatures in this range are inconsistent with values reported in other secondary sources.

	Bisphenol A CASRN 8	0-05-7	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	213°C (Measured) Reported as 415°F	CHRIS, 1985	Adequate; reported in a secondary source.
	Auto flammability = approximately 532 °C (Measured)	EINECS, 2010	Substantial degradation is anticipated to occur before this temperature is reached.
Explosivity	Minimum explosive concentration (in air) 0.012 g/L with oxygen >5% (Measured)	EINECS, 2010	Adequate; reported in a secondary source.
	Dust is flammable if ignited (Measured)	IUCLID, 2000	Adequate; reported in a secondary source.
рН	,		No data located.
pK_a	9.59–11.30 (Measured)	Canada, 2008	Adequate; initial value in range is for first ionization; higher values likely for second ionization step.
	HUMAN HEALTH EFI	FECTS	
Toxicokinetics	In rats, BPA was rapidly absorbed following via first-pass metabolism. BPA and its moral exposure occurred mainly in the feces administered dose, mainly as the glucuror and excretion may also occur via the moth of BPA was rapidly absorbed, readily met 100% of the administered dose). Informativo inhalation or dermal exposure.	etabolites did not appear to accurate to accurate to the second of the administered double conjugate). Maternal transfer's milk. In humans, essential tabolized, and excreted in the urtion was not located regarding to	imulate. In rats, excretion following ose) and urine (13-42% of the fer to the rat fetus was demonstrated by 100% of a relatively small oral dose ine as BPA-glucuronide (essentially the toxicokinetics of BPA following in
Dermal Absorption in vitro	Human skin, 10% of applied millimolar dose was absorbed	EINECS, 2010	Adequate.
	Pig skin, 10 μg/mL radiolabeled BPA. 2, 5, and 10 hours of exposure; the total BPA skin content was 3%, 6.9%, and 11.4% of the applied dose, respectively. BPA remained in the skin surface and accumulated primarily in the dermis.	NIOSH, 2010	Adequate.

		Bisphenol A CASRN 80)-05-7	
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
PROPERT Absorption, Distribution, Metabolism & Excretion	Y/ENDPOINT Oral, Dermal or Inhaled	Data located for rats, mice, monkeys, and humans indicate that ingested BPA is rapidly and extensively absorbed from the gastrointestinal tract (up to 85-86% in rats and monkeys and essentially 100% of a relatively small dose in humans). Orally-absorbed BPA undergoes extensive first-pass metabolism. In all species studied, the major metabolic pathway involved the conjugation of BPA to BPA-glucuronide. There does not appear to be a selective affinity of yolk sac/placenta or embryo/fetus for BPA or BPA metabolites. Enterohepatic recirculation of BPA-glucuronide readily occurs in rats, resulting in availability of some free BPA to tissues. Enterohepatic recirculation does not appear to occur in humans. Approximately 13-42% of an administered BPA dose was recovered in the urine of rats as the glucuronide metabolite; 50-83% was eliminated in the feces, mostly as free BPA. Limited excretion in the milk was observed. In monkeys, 82-85% of an orally-administered BPA dose was recovered in the urine; only 2-3% was detected in the feces. In volunteers given relatively low doses of BPA, the dose was completely recovered as BPA-glucuronide in the urine. No animal data were located regarding the	EINECS, 2010	Summary of multiple studies reported in secondary source.
		toxicokinetics of BPA following <i>in vivo</i> exposure via inhalation or dermal routes.		
Acute Mammalian T	Coxicity	LOW: The acute oral and dermal toxicity	hazard of BPA is low based on	experimental data in animals. Data

		Bisphenol A CASRN 8	0-05-7	
PROPER	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		for exposure via inhalation were inconclu provided.	sive, as only a single concentrati	on was tested and an LC ₅₀ was not
Acute Lethality	Oral	Rat $LD_{50} = 3,200 \text{ to } > 5,000 \text{ mg/kg bw}$	EINECS, 2010; European Commission, 2000; NTP, 1982	Adequate; multiple studies, some guideline studies.
		Mouse $LD_{50} = 4,000-5,200 \text{ mg/kg bw}$	EINECS, 2010; European Commission, 2000; NTP, 1982	Adequate; multiple studies, some guideline studies.
		Mouse $LD_{50} = 1,600 \text{ mg/kg bw}$	EINECS, 2010; European Commission, 2000	Inadequate; insufficient study details, relatively old study, results not supported by other studies.
		Rabbit $LD_{50} = 2,230 \text{ mg/kg bw}$	EINECS, 2010; European Commission, 2000	Inadequate; insufficient study details, old study.
	Dermal	Rabbit $LD_{50} = 3,000-6,400 \text{ mg/kg bw}$	EINECS, 2010; European Commission, 2000	Adequate; limited study details for multiple studies reported in secondary sources.
	Inhalation	No deaths among male and female F344 rats (10/sex) exposed to BPA dust at 0.17 mg/L (highest attainable concentration) for 6 hours; transient slight nasal tract epithelial damage was evident	EINECS, 2010; European Commission, 2000	Adequate, although test guidelines were not reported in secondary sources.

		Bisphenol A CASRN 80)-05-7				
PROPERTY/E	NDPOINT	DATA	REFERENCE	DATA QUALITY			
Carcinogenicity		MODERATE: Two standard 2-year guideline carcinogenicity studies found no increased incide associated with adult exposures. There is concern for carcinogenicity associated with endocrine mechanisms due to its estrogenic properties. Several nonguideline studies indicate proliferation ductal epithelium and squamous metaplasia of prostatic epithelium in offspring, conditions thou predispose to neoplasia (FAO/WHO 2011). In response to the uncertainty, NTP and FDA are concern GLP study that is designed to include a wide oral dosing range, to include pre-and perinatal expenses (FAO/WHO 2011). Since data from guideline studies suggest low concern for cancer, but there a nonguideline studies that demonstrate evidence of proliferative lesions, carcinogenicity cannot be this time, DfE criteria calls for an assignment of MODERATE hazard concern. Oncologic SAR analysis					
One	coLogic Results	Moderate (Estimate) OncoLogic class: phenols and phenolic compounds: However, several types of phenolic compounds are of concern based on structural similarities to estrogenic and androgenic compounds known to be potential carcinogens or tumor promoters via endocrine-related mechanisms.	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.			
Car	rcinogenicity	Based on existing carcinogenicity study data, It is confident that exposure to BPA: Exhibits endocrine activity and has estrogenic properties Estradiol-17β is classified as carcinogenic (IARC); It is likely that exposure to BPA: may be associated with increased cancers of the hematopoietic system and increased interstitial-cell tumors in the testes Alters function of microbules Induces aneuploidy in cells and tissues	Keri, Ho et al., 2007	2007 consensus statement for NIEHS-funded cancer researchers evaluating evidence of carcinogenicity in human and animal models following exposure to BPA.			

	Bisphenol A CASRN 80)-05-7	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	 Exposure early in life may cause a predisposition for pre-neoplastic lesions in adult mammary gland and prostate gland tissues Prenatal exposure alters mammary gland development in mice and increases effects relevant to markers of breast cancer risk in humans; 		
	It is possible that exposure to BPA:		
	 Induces in vitro cellular transformation Promote tumor progression and reduces time to recurrence in advanced prostate cancers with androgen receptor mutations. 		

	Bisphenol A CASRN 80)-05-7	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Combined Chronic Toxicity/	2-Year dietary study in male and female F344 rats (50/sex/group)	NTP, 1982	Adequate.
Carcinogenicity	Dietary concentrations: 0, 1,000, and 2,000 ppm (estimated doses 0, 84, and 167 mg/kg-day for males and females combined). Chronic toxicity: Lower mean body weight of low- and high-dose females and high-dose males likely the result of decreased food consumption. Carcinogenicity: Marginally significant increase in leukemia in male rats, nonsignificant increase in female rats, significant increase in interstitial-cell tumors of testes (known to occur at high incidence in aging F344 rats) not considered by NTP to be convincing evidence of a carcinogenic effect for BPA.		
	2-Year dietary study in male and female B6C3F1 mice (50/sex/group) Dietary concentrations: 0, 1,000, and 5,000 ppm (males); 0, 5,000, and 10,000 ppm (females) (estimated doses 0, 172, and 858 mg/kg-day for males and 0, 864, and 1,728 mg/kg-day for females). Chronic toxicity: Increased incidence of multinucleated giant hepatocytes in males (incidences of 41/49 and 41/50 versus 1/49 in controls) Carcinogenicity: Non-significantly increased incidences of leukemia or lymphomas in low- and high-dose male mice (9/50, 5/50 versus 2/50 in controls) not	NTP, 1982	Adequate.

Bisphenol A CASRN 80-05-7					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	considered by NTP to be convincing evidence of carcinogenic effect for BPA.				
	evidence of carcinogenic effect for BPA. Studies that included perinatal (gestational and/or lactational) exposures to BPA (oral doses to the dam from ~10 to 250 μ g/kg bw per day) have reported, among other lesions, proliferation of mammary ductal epithelium and squamous metaplasia of prostatic epithelium in offspring, conditions thought by many to predispose to neoplasia (Timms et al., 2005; Moral et al., 2008). Additional treatments with initiating or promoting agents have led to earlier onset of mammary tumors (Jenkins et al., 2009) or prostatic intraepithelial neoplasia (Prins et al., 2011). However, the studies that included exposures to BPA during the appropriate periods all suffered from one or more deficiencies in design or execution	FAO/WHO, 2011	Summary of data, data quality, and conclusions from the expert panel.		
	that prevent a definitive evaluation of its potential as a carcinogen. These include 1) lack of consideration of litter effects, 2) small numbers of animals, 3) insufficient study duration to determine whether developmental conditions thought to enhance cancer susceptibility actually did so and 4) additional treatment with a strong initiating or additional promoting agent(s). In the absence of additional studies addressing these deficiencies, there is currently insufficient evidence on which to judge the carcinogenic potential of BPA.				

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Genotoxicity	LOW: Based on determination by FAO/V (2) BPA does not induce cell transformation inconsistent and inconclusive, although so in dividing cells. The conclusion of FAO/V humans.	on, (3) <i>in vivo</i> evidence for BPA- me <i>in vitro</i> studies have shown l	induced clastogenic effects is BPA to affect chromosomal structure	
	vitro test systems, including studies with Salmonella typhimurium, Chinese hamster V79 cells, Syrian hamster embryo cells, and mouse lymphoma cells. However, DNA damage was induced in MCF-7 and MDA-MB-231 cells, DNA adduct formation in Syrian hamster ovary cells, and a number of positive findings have been reported for the potential for BPA to inhibit purified microtubule polymerization, affect the spindle apparatus and produce aneuploidy in in vitro studies with Chinese hamster V79 cells or oocytes from Balb/c or MF1 mice. FAO/WHO Expert Panel concludes: BPA is not a mutagen in in vitro test systems, nor does it induce cell transformation. BPA has been shown to affect chromosomal structure in dividing cells in in vitro studies, but evidence for this effect in in vivo studies is inconsistent and inconclusive. BPA is not likely to pose a genotoxic hazard to humans.		Summary of data, data quality, and conclusions from the expert panel.	
Reproductive Effects	HIGH: Based on NOAELs of 4.75 mg/kg l female rats, respectively. Conclusions of l subchronic or chronic oral exposures to b	NTP-CERHR (2008) include suf	ficient evidence in rats and mice that	

Bisphenol A CASRN 80-05-7					
PROPERTY/ENDPOINT	DATA REFERENCE		DATA QUALITY		
	bw-day (highest NOAEL = 47.5 mg/kg-day) and male reproductive toxicity at doses ≥47.5mg/kg bw-day (highest NOAEL = 4.75 mg/kg bw-day). There is considerable uncertainty regarding the results of recent studies that reported reproductive and/or developmental effects in laboratory animals administered BPA at oral doses <5 mg/kg bw-day.				
Reproduction/ Developmental Toxicity Screen			No data located.		
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.		

	Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reproduction and Fertility Effects	Multigenerational dietary study on fertility and reproductive performance in Sprague-Dawley rats (30/sex/group) BPA concentrations: 0, 0.015, 0.3, 4.5, 75, 750, and 7,500 ppm (estimated doses 0, 0.0095, 0.019, 0.285, 4.75, 47.5, and 475 mg/kg bw-day) Exposure period: 10 weeks premating, 2 weeks mating, gestation (parental males and females), lactation (parental females); similar exposure regimen for F ₁ and F ₂ parental males and females; F ₃ weanlings exposed for 10 weeks Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males Reproductive toxicity: Females: NOAEL = 47.5 mg/kg bw-day LOAEL = 475 mg/kg bw-day for decreases in number of implantation sites, delayed vaginal opening in F ₁ , F ₂ , F ₃ offspring Males: NOAEL = 4.75 mg/kg bw-day, LOAEL = 47.5 mg/kg-day for delayed	NTP-CERHR, 2008	Adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having as High Utility.	
	preputial separation in F_1 males Two-generation dietary study of fertility and reproductive performance in CD-1 mice (28/sex/group) Dietary concentrations: 0, 0.018, 0.18, 1.8, 30, 300, and 3,500 ppm (approximate doses of 0.003, 0.03, 0.3, 5, 50, and 600 mg/kg bw-day based on target doses of 0, 0.003,	NTP-CERHR, 2008	Adequate; guideline study as reported in the secondary source. Classified by NTP-CERHR as having as High Utility.	

	Bisphenol A CASRN 80-05-7			
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		0.03, 0.3, 5, 50, and 600 mg/kg bw-day) Exposure period: 8 weeks premating, 2 weeks mating, gestation, and lactation for F ₀ and F ₁ parental mice Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females Reproductive toxicity: NOAEL = 50 mg/kg bw-day LOAEL = 600 mg/kg bw-day LOAEL = 600 mg/kg bw-day for increased gestation length, decreased epididymal sperm concentration in F ₁ males, increased incidence of gross ovarian cysts in F ₁ and F ₂ females		
	Summary of Reproductive Effects	A large experimental animal literature was reviewed by the NTP-CERHR Expert Panel, assessed for its utility, and weighted based on the criteria established by this expert panel, including an evaluation of experimental design and statistical procedures. These animal data are assumed relevant for the assessment of human hazard. The NTP-CERHR Expert Panel concluded the following: Female effects: There is sufficient evidence in rats and mice that bisphenol A causes female reproductive toxicity with subchronic or chronic oral exposures with a NOAEL of 47.7 mg/kg bw-day and a LOAEL of 475 mg/kg bw-day.	Chapin et al. 2008; NTP-CERHR, 2008	Classified by NTP-CERHR as having High Utility.

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Male effects: There is sufficient evidence in rats and mice that bisphenol A causes male reproductive toxicity with subchronic or chronic oral exposures with a NOAEL of 4.75 mg/kg bw-day and a LOAEL of 47.5 mg/kg bw/day.			
	The joint FAO/WHO Expert Panel reviewed located reproductive and developmental toxicity data for BPA as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on BPA have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bw-day. Regarding the potential for low oral doses (<1 mg/kg bw-day) of BPA to alter reproduction and development in rodents, the FAO/WHO noted that: (1) There is sufficient evidence that BPA does not: * induce gross morphological reproductive abnormalities in F1 offspring; * reduce F1 pup survival or body weight; * alter F1 growth or survival during lactation; * alter F1 anogenital distance in males or females; or * cause undermasculinization of male morphology or masculinization of female morphology. (2) There is evidence (with some	FAO/WHO, 2011	Summary of data, data quality, and conclusions from the expert panel.	

	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	uncertainty) that BPA <i>does not:</i> * reduce P0 implantation, infertility, or fecundity. (3) There is conflicting evidence (with higher uncertainty) that BPA: * alters F1 pubertal landmarks; * alters P0 male or female reproductive tract organ weights or histopathology; and * alters F1 male reproductive tract organ weights or histopathology and semen parameters. Furthermore, changes in brain biochemical signaling, morphometric, and cellular endpoints within sexually dimorphic anatomical structures and neuroendocrine endpoints were reported at dietary exposures below 5 mg/kg bw-day. Methodological limitations introduce uncertainty in interpretation of the findings.				
Developmental Effects	HIGH: The NTP-CERHR (2008) Expert neural and behavioral alterations related 0.2 mg/kg bw-day). The FAO/WHO Expe NOAEL of 50 mg/kg bw-day for developm These conclusions support a hazard design	to disruptions in normal sex differt Panel concluded that while the nental toxicity, low-level (<1 mg/	Gerences in rats and mice (0.01- nere was broad agreement in a (kg bw-day) effects were uncertain.		
Reproduction/ Developmenta Toxicity Scree	ı		No data located.		
Combined Rep Dose with Reproduction/ Developmenta Toxicity Scree	peated l		No data located.		

	Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
PROPERTY/ENDPOINT Summary of Developmental Effects	The NTP-CERHR Expert Panel concluded that bisphenol A: * does not cause malformations or birth defects in rats or mice at levels up to the highest doses evaluated: 640 mg/kg/day (rats) and 1,250 mg/kg bw-day (mice). * does not alter male or female fertility after gestational exposure up to doses of 450 mg/kg bw/day in the rat and 600 mg/kg bw-day in the mouse (highest dose levels evaluated). * does not permanently affect prostate weight at doses up to 475 mg/kg bw-day in adult rats or 600 mg/kg bw-day in mice. * does not cause prostate cancer in rats or mice after adult exposure at up to 148 or 600 mg/kg bw-day, respectively. * does change the age of puberty in male or female rats at high doses (ca. 475 mg/kg bw-day). And that rodent studies <i>suggest</i> that bisphenol A:	REFERENCE Chapin et al., 2008; NTP– CERHR, 2008	Summary of data, data quality, and conclusions from the expert panel.	
	* causes neural and behavioral alterations related to disruptions in normal sex differences in rats and mice (0.01-0.2 mg/kg bw-day).			
	The joint FAO/WHO Expert Panel reviewed located reproductive and developmental toxicity data for BPA as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on BPA have indicated an oral	FAO/WHO, 2011	Summary of data, data quality, and conclusions from the expert panel.	

	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	reproductive and developmental NOAEL of 50 mg/kg bw-day.				
	Regarding the potential for low oral doses (<1 mg/kg bw-day) of BPA to alter reproduction and development in rodents, the FAO/WHO noted that:				
	(1) There is sufficient evidence that BPA <i>does not:</i> *induce gross morphological reproductive abnormalities in F1 offspring;				
	*reduce F1 pup survival or body weight; *alter F1 growth or survival during lactation;				
	*alter F1 anogenital distance in males or females; or *cause undermasculinization of male morphology or masculinization of female				
	morphology. (2) There is evidence (with some uncertainty) that BPA <i>does not:</i> *reduce P0 implantation, infertility or				
	fecundity. (3) There is conflicting evidence (with higher uncertainty) that BPA:				
	*alters F1 pubertal landmarks; *alters P0 male or female reproductive tract organ weights or histopathology; and *alters F1 male reproductive tract organ				
	weights or histopathology and semen parameters. Furthermore, changes in brain biochemical				
	signaling, morphometric and cellular end- points within sexually dimorphic				

	Bisphenol A CASRN 80-05-7			
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		anatomical structures and neuroendocrine end-points were reported at dietary exposures below 5 mg/kg bw-day. Methodological limitations introduce uncertainty in interpretation of the findings.		
Neurotoxicity	MODERATE: Estimated to have potential for neurotoxicity based on the presence of the phenol structural alert.			presence of the phenol structural
	Neurotoxicity Screening Battery (Adult)		U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.
Repeated Dose Effec	ts	MODERATE: BPA produced histopatho from oral dosing at 50 mg/kg bw-day (NO potential for BPA doses between the NOA adverse systemic effects. Furthermore, les inhalation exposure to BPA dust at 0.05 m and inhalation exposure routes.	AEL = 5 mg/kg bw-day) and the EL of 5 mg/kg bw-day and the lasions in the nasal cavity of rats w	ere is uncertainty regarding the LOAEL of 50 mg/kg-day to cause were reported following repeated
		The FAO/WHO Expert Panel reviewed the located information regarding repeated-dose oral toxicity of BPA and concluded that results demonstrated effects on the liver, kidney, and body weight at doses of 50 mg/kg bw-day and higher and that the lowest NOAEL was 5 mg/kg-day, as identified in several studies.		Summary of data, data quality, and conclusions from the expert panel.

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Multigenerational dietary study on fertility and reproductive performance in Sprague-Dawley rats (30/sex/group)	NTP-CERHR, 2008	Adequate; guideline study as reported in the secondary source.	
	BPA concentrations: 0, 0.015, 0.3, 4.5, 75, 750, and 7,500 ppm (estimated doses 0, 0.0095, 0.019, 0.285, 4.75, 47.5, and		Classified by NTP-CERHR as having High Utility.	
	475 mg/kg bw-day) Exposure period: 10 weeks premating,			
	2 weeks mating, gestation (parental males and females), lactation (parental females); similar exposure regimen for F_1 and F_2			
	parental males and females; F ₃ weanlings exposed for 10 weeks Parental systemic toxicity:			
	NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12%			
	decreased terminal body weight in F ₁ parental males			

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Two-generation dietary study of fertility and reproductive performance in CD-1 mice (28/sex/group)	NTP-CERHR, 2008	Adequate; guideline study as reported in the secondary source.	
	Dietary concentrations: 0, 0.018, 0.18, 1.8, 30, 300, and 3,500 ppm (approximate doses of 0.003, 0.03, 0.3, 5, 50, and 600 mg/kg		Classified by NTP-CERHR as having High Utility.	
	bw-day based on target doses of 0, 0.003, 0.03, 0.3, 5, 50, and 600 mg/kg bw-day) Exposure period: 8 weeks premating,			
	2 weeks mating, gestation, lactation for F_0 and F_1 parental mice			
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased			
	incidences of centrilobular hepatocellular hypertrophy in males and females			
	Inhalation study (whole body, dust) in Fischer 344 rats Exposure concentrations: 0, 10, 50, 150	EINECS, 2010; European Commission, 2000	Adequate.	
	mg/m³ (0, 0.01, 0.05, 0.15 mg/L) Exposure period: 6 hours/day, 5 days/week			
	for 13 weeks NOAEL = 0.01 mg/L LOAEL = 0.05 mg/L based on microscopic			
	changes in the anterior portion of the nasal cavity			
	Nasal epithelium changes were reversible (not apparent after 4-week recovery period)			

Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Inhalation study in rats (species not defined) Exposure concentrations: 0, 15-86 mg/m³; mean = 47 mg/m³ (0.047 mg/L) Exposure period: 4 hours/day for 4 months. NOAEL = None established LOAEL = 0.047 mg/L for decreased body weight gain, increased liver and kidney weight, unspecified "morphological changes" in liver, kidney, and lungs	European Commission, 2000; EINECS, 2010	Inadequate; single exposure level, insufficient study details in secondary sources.
	Inhalation study in male Alderley Park rats Exposure concentrations: Saturated atmosphere Exposure period: 6 hours/day for five exposures Results: No signs of toxicity, no gross macroscopic changes	EINECS, 2010	Inadequate; single exposure level, insufficient study duration, lack of study details in secondary sources.
Skin Sensitization	MODERATE: Recent data from three Bl sensitization; however, results of some hur although cross-sensitization was not ruled although assays may not have been maxim and moderate redness and swelling follow evidence of skin sensitization in humans a	man studies suggest the possibili out. Most animal studies were nized. There is evidence of ear s ing repeated dermal exposure in	ity of a dermal sensitization response, negative for dermal sensitization, welling in a photoallergy test in mice a rabbits. Based on suggestive
Skin Sensitization	Negative in a modified local lymph node assay of mice administered BPA epicutaneously on the ears at concentrations up to 30% on 3 consecutive days.	EINECS, 2010	Adequate, although the assay did not include concentrations >30%.
	Negative in a local lymph node assay modified to test for photoreactivity in mice administered BPA epicutaneously on the ears at concentrations up to 30% on 3 consecutive days and irradiated with UV light immediately following application.	EINECS, 2010	Adequate, although the assay did not include concentrations >30%.

	Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Negative in several sensitization tests using guinea pigs.	European Commission, 2000; EINECS, 2010	Inadequate; study details lacking and induction and challenge concentrations may not have been maximized.	
	Negative, mouse; BPA applied as 1% solution in acetone and corn oil for 2 days; induced UV-photosensitization on flank and ears.	European Commission, 2000	Inadequate; insufficient experimental details.	
	Positive in 2/16 guinea pigs receiving BPA (50% in dimethyl phthalate) for 4 hours (occluded) once per week for 3 weeks and single challenge (4 hours occluded) 2 weeks later.	European Commission, 2000; EINECS, 2010	Inadequate; insufficient experimental details.	
	Positive, mouse ear swelling photoallergy test.	European Commission, 2000	Inadequate; no data on concentrations, methods or GLP.	
	Negative in comprehensive medical surveillance data obtained from three BPA manufacturing plants for 875 employees examined for several years where workers were potentially exposed to other chemicals (phenol, acetone) that are not considered to be skin sensitizers.	EINECS, 2010	Adequate.	
	Positive, rabbits; repeated dermal application (30 times over 37 days) of BPA (pure powder) produced moderate swelling and redness; skin turned yellow followed by dark pigmentation after day 15.	NIOSH, 2010	Adequate.	
	Limited human data provide suggestive evidence that BPA may potentially act as a dermal sensitizer, although concomitant exposure to other potential dermal sensitizers may reflect a cross-sensitization	EINECS, 2010	Inadequate; possible cross-sensitization responses.	

	Bisphenol A CASRN 80-05-7			
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		response.		
		The Joint FAO/WHO Expert Meeting to review toxicological aspects of BPA concurs with previous reviews that BPA is capable of producing a skin sensitization response in humans.	FAO/WHO, 2011	Summary of data, data quality, and conclusions from the expert panel.
Respiratory Sensitiz	ation	No data located.		
	Respiratory Sensitization			No data located.
Eye Irritation		MODERATE: BPA was slightly to highly	irritating to rabbit eyes.	
	Eye Irritation	Rabbit, slightly to highly irritating	EINECS, 2010; European Commission, 2000	Adequate; study details provided for multiple studies indicate potential for BPA to cause eye irritation.
Dermal Irritation		MODERATE: BPA was slightly irritating a skin irritant.	g to moderately irritating to rab	bit skin. NIOSH has assigned BPA as
	Dermal Irritation	Rabbit, nonirritating to slightly irritating when applied as undiluted or 10% aqueous suspension to intact or abraded skin.	European Commission, 2000; EINECS, 2010; NIOSH, 2010	Adequate; study details provided for multiple studies indicate potential for BPA to cause dermal irritation.
		Rabbit, moderately irritating when applied as 40% solution in dimethyl sulfoxide under non-occlusive conditions.	European Commission, 2000	Adequate.
		Guinea pig, not irritating when applied as 5% solution in acetone for 24-hours under occlusive conditions.	European Commission, 2000	Adequate.
		Although a limited number of studies were identified that contained data on the direct hazard of skin exposures to BPA, located evidence indicates that mild skin irritation following prolonged dermal exposure may occur. Therefore, on the basis of the data for this assessment, BPA is assigned the SK:	NIOSH, 2010	Adequate; summary of conclusions provided by NIOSH.

Bisphenol A CASRN 80-05-7					
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		DIR (IRR) notation.			
Endocrine Activity		Bisphenol A displays endocrine activity in assays demonstrate that bisphenol A can be induce progesterone receptors, and induce that the <i>in vitro</i> endocrine activity of bisphenol 17β-estradiol, although the results are infledicit an androgenic but there is some evid suggest that the estrogenicity of bisphenol bisphenol F and somewhat more potent the biological interactions involving rapid sign picture; oral bisphenol A does not consiste summary data to suggest that bisphenol A systems.	pind to estrogen receptors, elicited cell proliferation in MCF7 candle cell proliferation in MCF7 can be cell proliferation in MCF7 can be cell proliferation in MCF7 calling networks. Data from in viently produce robust estrogenic in MCF7 calling networks.	estrogen-induced gene transcription, cer cells. The data located indicate lers of magnitude less than that of mys suggest that, bisphenol A did not. Limited comparative <i>in vitro</i> data at of bisphenol AP, bisphenol C, and to data there is also evidence of two studies exhibit a more complex responses. EINECS provides	



	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Reviews				
	The estrogenicity of bisphenol A has since been evaluated using several different kinds of <i>in vitro</i> assays, including binding assays, recombinant reporter systems, MCF-7 cells, rat pituitary cells, rat uterine adenocarcinoma cells, human adenocarcinoma cells, fish hepatocytes (vitellogenin production) and frog hepatocytes (vitellogenin production). According to the NTP-CERHR Expert Panel, there is considerable variability in the results of these studies with the estrogenic potency of bisphenol A ranging	NTP-CERHR, 2008	Summary of data, data quality, and conclusions from NTP-CERHR.		
	over about 8 orders of magnitude. A number of <i>in vivo</i> tests have been conducted with most of the focus on effects on uterine weight in immature or ovariectomized animals. These studies indicate that the potency of bisphenol A in increasing uterine weight varies over ~4 orders of magnitude. According to the NTP-CERHR Expert Panel, oral bisphenol A does not consistently produce robust estrogenic responses and, when seen, estrogenic effects after oral treatment occur at high-dose levels.	NTP-CERHR, 2008	Summary of data, data quality, and conclusions from NTP-CERHR.		
	A limited number of studies have evaluated androgen activity of bisphenol A. These studies provide little evidence of androgenic effects, but there is limited evidence of antiandrogenicity.		Summary of data, data quality, and conclusions from NTP-CERHR.		

	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Positive estrous response; subcutaneous injections of BPA to ovariectomised rats (strain not specified) (positive response measured by cornification in vaginal smears)	European Commission, 2000	Adequate.		
	Numerous studies were locatedregarding the behavior of bisphenol A as an estrogen or xenoestrogen in ecological organisms. Important results include findings that bisphenol A increases plasma vitellogenin concentration in freshwater and saltwater fish at a potency in the range of 10^{-4} that of 17β -estradiol and that bisphenol A can bind to the estrogen receptor of fish, albeit at a lower affinity than that of 17β -estradiol.	EINECS, 2010	Adequate.		
	BPA can interact with non-classic estrogen receptor systems at similar or lower concentrations than interactions with ER α and ER β . BPA has a high binding affinity to estrogen-related receptor- γ (ERR γ), an orphan receptor that shares a sequence homology with ER α and ER β but is not activated by estradiol.	NTP, 2010	Adequate.		
	BPA also impacts cellular physiology through rapid signaling mechanisms, independent of nuclear hormone receptor activity, to modify the activities of various intracellular signaling networks. Maximal rapid signaling effects for BPA and 17β-estradiol are often observed at similar concentrations.	NTP, 2010	Adequate.		


Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Representative <i>in vitro</i> studies Receptor Binding Assays		
	In a human ER binding assay, the relative binding affinity (RBA) of bisphenol A was 0.195% compared to 126% for 17β-estradiol. RBAs for other bisphenol compounds included 0.129% for bisphenol C, 0.0803% for bisphenol AP, 0.0719% for bisphenol F, and 0.0055% for bisphenol S. An RBA of 0.00473% was reported for PHBB.	METI, 2002	Adequate.
	In a competitive ER binding assay using human ER α , the RBA for bisphenol A was 0.32% that of 17 β -estradiol. RBAs for other bisphenol compounds included 1.68% for bisphenol C, 1.66% for bisphenol AP, and 0.09% for bisphenol F.	Coleman, Toscano et al., 2003	Adequate.
	In a rat uterine cytosol assay that evaluated ER binding affinity, ER binding affinities for bisphenol A and bisphenol F were approximately 3 orders of magnitude less than that for 17β-estradiol	Perez, Pulgar et al., 1998	Adequate.
	In a rat uterine cytosolic ER-competitive binding assay, results for bisphenol A, bisphenol S, and PHBB indicated a weak affinity for ER.	Laws, Yavanhxay et al., 2006	Adequate.
	Bisphenol A exhibited weak ER binding activity in preparations from uteri of ovariectomized Sprague-Dawley rats as evidenced by a relative binding affinity (RBA) that was 0.008% of the binding affinity of 17β-estradiol. RBAs for other	Blair, Branham et al., 2000	Adequate.

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	tested chemicals included 0.003% for PHBB, 0.0009% for bisphenol F, and 0.0007% for the proprietary substituted phenolic compound (126-00-1).			



Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Representative <i>in vitro</i> studies Gene Transcription Assays		
	Bisphenol A exhibited evidence of estrogenic activity in a yeast (Saccharomyces cerevisiae) two-hybrid assay using ER α and the coactivator TIF2. Based on estrogenic activity that was 5 orders of magnitude lower than that of 17 β -estradiol, bisphenol A was considered weakly estrogenic. Assessment of other bisphenols resulted in a ranking of relative potency as follows: bisphenol C \geq bisphenol A $>$ bisphenol F $>$ bisphenol S.		Adequate.
	Bisphenol A exhibited estrogenic activity approximately 10,000-fold less than that of 17β -estradiol) in an <i>in vitro</i> recombinant yeast estrogen assay; the estrogenic activities of bisphenol F and PHBB were 9,000-fold and 4,000-fold less than that of 17β -estradiol	Miller, Wheals et al., 2001	Adequate.
	Bisphenol A exhibited evidence of estrogenic activity in a yeast (Saccharomyces cerevisiae) two-hybrid assay using ERα and the coactivator TIF2.	Nishihara, Nishikawa et al., 2000	Adequate.
	In a yeast two-hybrid system (reporter gene assay) using β -galactosidase activity as a measure of estrogenic activity, an estrogenic response was elicited by bisphenol A and bisphenol F but not by bisphenol S.	Hashimoto and Nakamura, 2000	Adequate.
	In a yeast two-hybrid assay (reporter gene assay) using β-galactosidase activity as a	Ogawa, Kawamura et al. 2006	Adequate.

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	measure of estrogenic activity, an estrogenic response was elicited by bisphenol A and bisphenol F.			

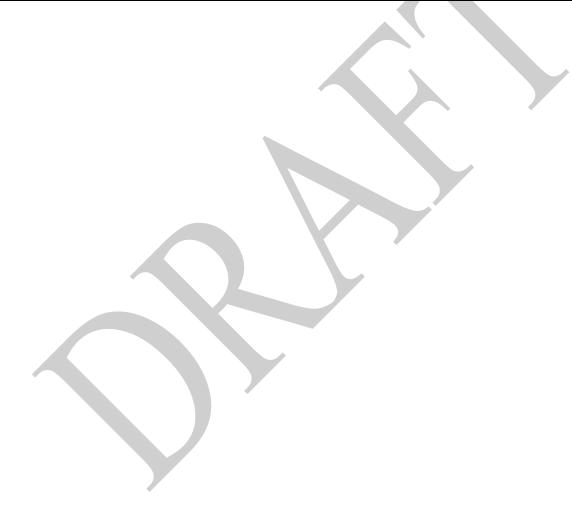

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In a reporter gene assay of estrogen-induced transcriptional activity, relative activity (RA) for bisphenol A was 0.00278% compared to 81.7% for 17β-estradiol. RAs for other bisphenol compounds included 0.00189% for bisphenol C, 0.000639% for bisphenol F, 0.000254% for bisphenol S, and 0.000184% for bisphenol AP. An RA of 0.000592% was reported for PHBB.	METI, 2002	Adequate.	
	In an ER-mediated reporter gene expression assay, bisphenol A induced reporter gene expression at a relative activity (RA) of 2.75×10^{-3} that of 17β -estradiol. RAs for other bisphenol compounds included 5.3×10^{-4} for bisphenol F, 4.9×10^{-4} for bisphenol C, and 9.0×10^{-5} for bisphenol AP.	Coleman, Toscano et al., 2003	Adequate.	
	In an ERE-luciferase reporter assay using MCF-7 cells, an EC ₅₀ was 0.63 μ M for bisphenol A compared to an EC ₅₀ of 8.6 x 10^{-6} for 17β -estradiol (i.e., bisphenol A was approximately 5 orders of magnitude less potent than 17β -estradiol at inducing estrogenic activity). EC ₅₀ values for other bisphenol compounds included 0.42 μ M for bisphenol C, 1.0 μ M for bisphenol F, and 1.1 μ M for bisphenol S.	Kitamura, Suzuki et al., 2005	Adequate.	
	In an ERE-luciferase reporter assay using MCF-7 cells in the presence of 17β-estradiol, neither bisphenol A, bisphenol C, bisphenol F, bisphenol S, nor bisphenol M appeared to exert an anti-estrogenic effect	Kitamura, Suzuki et al., 2005	Adequate.	

Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Representative <i>in vitro</i> studies Progesterone Receptor Induction		
	Bisphenol A induced progesterone receptors in cultured human mammary cancer cells (MCF-7) cells, but the magnitude of the induction was not specified	EINECS, 2010; European Commission, 2000	Adequate.
	In an assay designed to evaluate estrogenic effects on the number of progesterone receptors (PgR) in MCF7 cells, 17β-estradiol, bisphenol A, and bisphenol F each increased the concentration of PgR by approximately 10- to 15-fold	Perez, Pulgar et al., 1998	Adequate.
	Representative in vitro studies Cell Proliferation Assays		
	In an E-SCREEN test of MCF7 cell proliferation (an indicator of estrogenic activity), the proliferative potency of bisphenol A was approximately 10 ⁻⁵ that of 17β-estradiol, suggestive of a weakly estrogenic effect for bisphenol A. The potency of bisphenol F was somewhat less than that of bisphenol A.	Perez, Pulgar et al., 1998	Adequate.
	In a proliferation assay of MCF-7 human breast cancer cells that contain $ER\alpha$ and $ER\beta$ and are known to proliferate in response to estrogens, bisphenol A induced a proliferative response that was 2.0×10^{-3} that of 17β -estradiol. Proliferative values for other bisphenol compounds included 1.6 x 10^{-3} for bisphenol C, 1.0×10^{-3} for bisphenol F, and 6.0×10^{-4} for bisphenol AP.	Coleman, Toscano et al., 2003	Adequate.

	Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In an E-screen test for estrogenicity, bisphenol A and bisphenol F increased proliferation of MCF-7 cells with EC ₅₀ values of 410 nM and 84.8 nM, respectively, compared to an EC ₅₀ of 0.0045 nM for 17 β -estradiol. The results indicate a weak estrogenic effect with bisphenol F exerting a more potent effect than bisphenol A.	Stroheker, Picard et al., 2004	Adequate.	
	In an E-screen test for estrogenicity, bisphenol A bisphenol F, and bisphenol S increased proliferation of MCF-7 cells at concentrations in the range of 10 ⁻⁴ to 10 ⁻⁷ M. Bisphenol A appeared to be more effective than bisphenol S or bisphenol F.	Hashimoto, Moriguchi et al., 2001	Adequate.	
	Bisphenol A increased the rate of proliferation of MCF-7 cells at 3-5 orders of magnitude less than that of 17β-estradiol	EINECS, 2010; European Commission, 2000	Adequate.	
	In an assay that measured induction and secretion of pS2 in cultured MCF7 cells (ELSA-pS2 immunoradiometric assay), induction of pS2 by bisphenol A and bisphenol F was approximately 1,000-fold less than that of 17β-estradiol	Perez, Pulgar et al., 1998	Adequate.	
	Representative in vivo studies			
	Exposure of immature female rats to bisphenol A (gavage dosing once daily for 4 days) resulted in no apparent effects on uterine weight. Bisphenol F-treated rats exhibited significantly increased uterine weight. There were no effects on uterine	Stroheker, Picard et al., 2003	Adequate.	

Bisphenol A CASRN 80-05-7			
PROPERTY/ENDPOINT DATA REFERENCE DATA QUALITY			
	weight of bisphenol F- or bisphenol A-treated ovariectromized rats.		



	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	In uterotrophic assays using ovariectomized mice, bisphenol A treatment at doses in the range of 20 to 500 mg/kg/day for 3 days resulted in dose-related increased relative uterus weights of 147-185% that of controls compared to nearly 500% increased uterus weight in mice administered 17 β -estradiol at 50 μ g/kg/day. This result is indicative of an estrogenic effect <i>in vivo</i> .	Kitamura, Suzuki et al., 2005	Adequate.		
	In a uterotrophic assay in which immature female rats were injected with bisphenol F, bisphenol S, or bisphenol M subcutaneously for three consecutive days, observed changes in uterine weight indicated that bisphenol F, bis phenol S, and bisphenol M exerted both estrogenic and anti-estrogenic responses.	Akahori, Makai et al., 2008	Adequate.		
	Representative Androgen Assays	¥			
	In an ARE-luciferase reporter assay using a mouse fibroblast cell line (NIH3T3 cells), neither bisphenol A, bisphenol C, bisphenol F, nor bisphenol S exerted an androgenic effect	Kitamura, Suzuki et al., 2005	Adequate.		
	In an ARE-luciferase reporter assay using a mouse fibroblast cell line (NIH3T3 cells), bisphenol A inhibited the androgenic activity of dihydrotestosterone. Antiandrogenic responses were elicited by bisphenol C, bisphenol F, and bisphenol S as well.	Kitamura, Suzuki et al., 2005	Adequate.		

Bisphenol A CASRN 80-05-7				
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Bisphenol A and bisphenol F induced androgenic effects in MDA-MB453 cells transfected with an AR responsive luciferase reporter gene; anti-androgenic effects were elicited in the presence of dihydrotestosterone. Relative potency of the androgenic and anti-androgenic effects elicited by bisphenol A was similar to that of bisphenol F.	Stroheker, Picard et al., 2004	Adequate.
		Representative Thyroid Assays		
		In an assay of thyroid hormonal activity whereby induction of growth hormone production is assessed in GH3 cells, neither bisphenol A nor bisphenol C inhibited growth hormone production	Kitamura, Suzuki et al., 2005	Adequate.
		Bisphenol A did not exhibit thyroid hormone receptor binding in a yeast two-hybrid assay system with TRα and coactivator TIF-2.	Kitagawa, Takatori et al., 2003	Adequate.
Immunotoxicity		No data located.		
	Immune System Effects (Included under Repeated Dose)	Rodent studies (direct or in utero exposure) suggest that BPA may modulate immune homeostasis, but due to study variations and deficiencies, there is no clear evidence that BPA interferes with immune function.	Willhite, Ball et al., 2008; FAO/WHO, 2011	Inadequate; few of the studies followed regulatory protocols (U.S. EPA, 1999) or GLP requirements.
		ECOTOXICITY		
ECOSAR Class		Phenols		
Acute Toxicity		HIGH: Based on experimental data indic	0 0	, , , ,
Fish LC ₅₀ Freshwater		Oryzias latipes (Medaka fish) 96-hour LC ₅₀ = 13 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Adequate; guideline study (OECD 204).

	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Oryzias latipes (Medaka fish, early life stage) 96-hour LC ₅₀ = 13.9 mg/L (Experimental)	Wright-Walters, Volz et al., 2010	Adequate; secondary source considered the study valid. Test concentrations were not analytically measured.		
	Oryzias latipes (Medaka fish) 72-hour $LC_{50} = 5.1 \text{ mg/L (embryo)}$ 72-hour $LC_{50} = 6.8 \text{ mg/L (adult male)}$ 72-hour $LC_{50} = 8.3 \text{ mg/L (adult female)}$ (Nominal, daily renewal)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Adequate; secondary sources considered the study valid. Measured test concentrations.		
	Pimephales promelas (fathead minnow) 96-hour $LC_{50} = 4.7 \text{ mg/L (static)}$ 96-hour $LC_{50} = 4.6 \text{ mg/L (flow-through)}$ (Experimental) No toxicity at levels $\leq 2.29 \text{ mg/L}$	Alexander, Dill et al., 1988; EINECS, 2010; European Commission, 2000	Adequate; ASTM guideline study. Similar LC ₅₀ values for static and flow-through measurements indicated stability of BPA in water during the 96-hour test period.		
	Multiple additional studies of freshwater fish species reported 48-96-hour LC ₅₀ values in the range of 3-15 mg/L	European Commission, 2000; Wright-Walters, Volz et al., 2010	Although individual studies were inadequate based on lack of provided study details or insufficient exposure duration, the LC ₅₀ range supports the results of studies considered adequate.		
Fish LC ₅₀ Saltwater	Menidia menidia (silverside fish) 96-hour LC ₅₀ = 9.4 mg/L (flow-through) (Experimental) No discernible effect concentration >4.8 mg/L	EINECS, 2010; Wright-Walters, Volz et al., 2010; European Commission, 2000	Adequate; U.S. EPA guideline study.		
	Cyprinodon variegates (sheepshead minnow) 96-hour LC ₅₀ = 7.5 mg/L (Experimental)	EINECS, 2010	Adequate; EINECS considered the study "apparently valid", but noted missing data such as pH, temperature, dissolved oxygen.		

	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Daphnid LC ₅₀	Daphnia magna (water flea) 48-hour $EC_{50} = 10.2 \text{ mg/L}$ (Experimental)	EINECS, 2010; European Commission, 2000; Alexander, Dill et al., 1988	Adequate; ASTM guideline study.		
	Daphnia magna (water flea) 48-hour $EC_{50} = 3.9 \text{ mg/L}$ (Nominal)	EINECS, 2010; European Commission, 2000	Adequate; European Commission, 2000 indicates that analytical monitoring was used.		
Saltwater Invertebrate LC ₅₀	Mysidopsis bahia (mysid shrimp) 96-hour LC ₅₀ (flow-through) = 1.1 mg/L (Experimental)	EINECS, 2010; European Commission, 2000; Alexander, Dill et al., 1988	Adequate; OPPT 830.1035 guideline study.		
	Acartia tonsa (copepod) 48-hour LC ₅₀ (static) = 3.4-5.0 mg/L (Nominal)	EINECS, 2010	Inadequate; nominal concentrations only, organisms 10-12 days old at start of test.		
Green Algae EC ₅₀ Freshwater	Pseudokirchneriella subcapitata 96-hour $EC_{50} = 2.7 \text{ mg/L (biomass)}$ 96-hour $EC_{50} = 3.1 \text{ mg/L (cell volume)}$ (Experimental)	EINECS, 2010; European Commission, 2000; Alexander, Dill et al., 1988	Adequate; ASTM guideline study.		
	Pseudokirchneriella subcapitata 96-hour EC ₅₀ (biomass) = 2.5 mg/L (Experimental)	European Commission, 2000	Inadequate; test conditions not specified in secondary source.		
Green Algae EC ₅₀ Saltwater	Skeletonema costatum 96-hour $EC_{50} = 1.0 \text{ mg/L (biomass)}$ 96-hour $EC_{50} = 1.8 \text{ mg/L (chlorophyll a content)}$ (Experimental)	European Commission, 2000; Wright-Walters, Volz et al., 2010; Alexander, Dill et al., 1988	Adequate; ASTM guideline study. Cell count and chlorophyll a content are both measures of biomass.		
Chronic Aquatic Toxicity	HIGH: Based on experimental data from multiple studies indicating a High hazard concern for fish.				
Fish ChV	Branchydanio rerio (Zebrafish) 14-day survival NOEC = 3.2 mg/L LOEC = 10.15 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Adequate; guideline study (OECD 204).		

	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Branchydanio rerio (Zebrafish) growth and reproduction: NOEC = 0.75 mg/L LOEC = 1.5 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Inadequate; lack of experimental design details.		
	Oryzias latipes (Medaka fish) 60-day survival: NOEC = 1.82 mg/L Growth: NOEC = 0.355 mg/L LOEC = 1.82 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Adequate; modified OECD 210 early life stage study.		
	Oryzias latipes (Medaka fish) 14-day hatchability NOEC = 6.25 mg/L LOEC = 12.5 mg/L (Nominal)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Adequate; early life stage toxicity study, although test concentrations apparently not measured analytically.		
	Oryzias latipes (Medaka fish) 21-day reproductive capacity test NOEC = 3.1 mg/L (Experimental)	EINECS, 2010	Adequate; reproductive toxicity study of adult fish. Test methods subsequently recommended by OECD for elucidation of effects on survival, growth, and reproduction of potential endocrine disrupting compounds.		
	Oryzias latipes (Medaka fish) 14-day hatchability: NOEC = 0.68 mg/L LOEC = 2.3 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Inadequate; early life stage toxicity study, insufficient study details in secondary sources. Test concentrations not measured analytically.		
	Pimephales promelas (Fathead minnow) multigenerational toxicity study Survival, growth: NOEC = 0.16 mg/L	EINECS, 2010; Wright-Walters, Volz et al., 2010	Adequate, although secondary sources did not mention guidelines followed. Test concentrations were analytically measured.		

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	LOEC: = 0.64 mg/L Hatchability: NOEC = 0.016 mg LOEC = 0.16 mg/L (Experimental)			
		Wright-Walters, Volz et al., 2010	Adequate; considered valid GLP study by secondary source. Chemical exposures measured analytically.	
	Pimephales promelas (Fathead minnow) 29-30 day survival, growth, and development study Survival, growth: NOEC = 1.0 mg/L Development: NOEC = 0.1 mg/L (Experimental)		Adequate; considered valid GLP study by secondary source. Chemical exposures measured analytically.	
	Oncorhynchus mykiss (Rainbow trout) 28-day growth NOEC = 3.64 mg/L LOEC = 11 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Adequate; guideline study (OECD 215) of juvenile growth rate.	
	Cyrinus carpio (carp) 28- and 49-day growth 28-day NOEC = 0.6 mg/L 49-day NOEC = 0.1 mg/L (Experimental)	EINECS, 2010	Adequate; guideline study (not specified).	
	Cyrinus carpio (carp) 28-day survival/ growth NOEC: 0.74 mg/L (Experimental)	Wright-Walters, Volz et al., 2010	Inadequate; non-GLP and abstract only.	

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Poecilia reticulata (guppy) 21-day sperm count LOEC = 0.274 mg/L (Experimental)	Wright-Walters, Volz et al., 2010	Inadequate; insufficient study details in secondary source.	
	Poecilia reticulata (guppy) 30-day survival NOEC = 0.5 mg/L LOEC = 5.0 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Inadequate; insufficient study details in secondary source.	
Daphnid ChV	Daphnia magna 21- day survival, molting success, growth, reproduction NOEC = 3.16 mg/L (Experimental)	Caspers, 1998; EINECS, 2010; European Commission, 2000	Adequate; guideline study (OECD 202).	
Green Algae ChV	Green algae ChV = 0.278 mg/L (ECOSAR: poly phenols)	ECOSAR; EPI		
Teratogenicity in Frog Embryos	Rana temporaria (common frog) 20-day embryo survival NOEC = 0.1 mg/L LOEC = 1 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Inadequate; embryos used, no chemical analysis of exposure concentrations.	
	Xenopus laevis (African clawed frog) 90-day survival, growth, development NOEC = 0.5 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Adequate GLP study, although study guidelines were not mentioned in the secondary source. Test concentrations were analytically measured.	
	Xenopus laevis (African clawed frog) 12-week survival, growth NOEC = 0.23 mg/L (Experimental)	EINECS, 2010; Wright-Walters, Volz et al., 2010	Inadequate; study report lacks information regarding test conditions (e.g., temperature, water quality). Test concentrations were not analytically measured. Non-GLP study.	
ENVIRONMENTAL FATE				
Transport	Based on the Level III fugacity models incorporating the located experimental property data, bisphenol A is expected to partition primarily to soil. Bisphenol A is expected to be moderately mobile in soil based on			

Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	experimental K_{oc} studies. Leaching of bisphenol A through soil to groundwater is not expected to be an important transport mechanism. Estimated volatilization half-lives indicate that it will be nonvolatile from surface water. Volatilization from dry surfaces is also not expected based on its measured vapor pressure. In the atmosphere, bisphenol A is expected to exist in the particulate phase, based on its measured vapor pressure. Particulates will be removed from air by wet or dry deposition.			
Henry's Law Constant(atm- m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for nonvolatile compounds, based on professional judgment.	
	890 ± 30 L/kg OECD Test Guideline 106 (Measured)	Höllrigl-Rosta, Vinken et al., 2003; EINECS, 2010	Adequate, data from guideline study as reported in secondary source.	
$\textbf{Coefficient} - \textbf{K}_{oc}$	795.9 OECD Test Guideline 106. (Measured)		Adequate, data from guideline study as reported in secondary source.	
	251-1507, mean value of 962 (Measured)	Ying and Kookana, 2005; EINECS, 2010	Adequate, data from guideline study as reported in secondary source.	
	335-703, mean value of 375 (Measured)	Loffredo and Senesi, 2006; EINECS, 2010	Adequate, data from guideline study as reported in secondary source.	
	778 (Measured)	Ying and Kookana, 2003; EINECS, 2010	Adequate, valid nonguideline study as reported in secondary source.	
	115 (Measured)	Zeng, Zhang et al., 2006; EINECS, 2010	Adequate, valid nonguideline study as reported in secondary source.	
	335-703; reported as Log K_{oc} = 2.53-2.85 at pH 4.5-5.9 (Measured)		Adequate, data from guideline study as reported in secondary source.	
	The levels of bisphenol A measured in water and bed sediments were used to calculate $K_{\rm oc}$ values. The range of results was 11,220-17,000 (log $K_{\rm oc}$ 4.04-4.23). (Measured)		Adequate, data are from a valid nonguideline study; K_{oc} values are likely for the unionized species.	
Level III Fugacity Model	Air = <1% (Estimated) Water = 8.4% Soil = 74% Sediment = 18%	EPI	Experimental water solubility (0.12 g/L) and vapor pressure (3.99x10 ⁻⁸ mmHg) used in model calculations.	

	Bisphenol A CASRN 80-05-7				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY	
Persistence		VERY LOW: Bisphenol A has passed Ready Biodegradability tests, OECD 301 F and OECD 301C within the 10 day window. Experimental data using a wide variety of innocula have demonstrated that rapid primary and ultimate biodegradation of BPA occurs under aerobic condition in water and soil. The biodegradation of BPA does not result in the formation of stable metabolites. Aerobic biodegradation processes are anticipated to be the predominant environmental removal process. Experimental data indicate that BPA does not biodegrade under anaerobic conditions. Although models suggest that BPA may display limited partitioning to sediment, it has been detected in sediment samples. BPA may also undergo removal by both direct and indirect photolysis in environmental waters, although this process is anticipated to be far slower than aerobic biodegradation processes.			
Water	Aerobic Biodegradation	OECD 301B: No biodegradation of bisphenol A was observed with modified Sturm test (Measured)	EINECS, 2010	Adequate, data from a guideline study as reported in secondary source.	
		OECD 301C: Reported biodegradation half-lives of <3.5 days in river surface water samples (Measured)	MITI, 1992; Canada, 2008	Adequate, data from a guideline study as reported in secondary source.	
		OECD 301D: No biodegradation of bisphenol A was observed with OECD 301D closed bottle test (Measured)	EINECS, 2010	Adequate, data from a guideline study as reported in secondary source.	
		OECD 301F: Average percent removal by BOD was 89%; 10-day window met and no bisphenol A detected by HPLC after 28 days (Measured)	CERI, 2004; EINECS, 2010	Adequate, data from a guideline study.	
		OECD 301F: Rapid biodegradation by standard aerobic 28-day ready biodegradability test (Measured)	West, 1997; Canada, 2008; EINECS, 2010	Adequate, data from a guideline study.	
		Bisphenol A met the criteria for inherently biodegradable substances; using a modified SCAS procedure (Measured)	Turner and Watkinson, 1986; EINECS, 2010	Adequate, data from a valid nonguideline study.	
		Degradation was noted in 40 of 44 river water systems; 6 river water systems were able to mineralize the substance completely, and 34 showed TOC removal of 40-90%	Ike, Chen et al., 2000; EINECS, 2010	Adequate, data from a valid nonguideline study.	

	Bisphenol A CASRN 80-05-7				
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		(Measured) Bisphenol A biodegradation half-life of <4 days was measured in natural waters following a 1- to 4-day adaptation period – acclimation (Measured)	Dorn, Chou et al., 1987; Canada, 2008	Adequate, data from a valid nonguideline study.	
		Biodegradation half-lives of 0.5-3.5 days in river surface water samples after a lag phase of 2-8 days (Measured)		Adequate, data from a valid nonguideline study.	
			Kang and Kondo, 2002; Canada, 2008; EINECS, 2010	Adequate, data from a valid nonguideline study.	
		River water degradation of Bisphenol A half-life of 3-4 days; some seawater degradation of bisphenol A after lag period of 30-40 days (Measured)	Kang and Kondo, 2005; EINECS, 2010	Adequate, data from a valid nonguideline study.	
		>90% degradation after 56 days in seawater; or bisphenol A degradation half- life of 14.4 after lag period of 35 days.(Measured)	Ying and Kookana, 2003; EINECS, 2010	Adequate, data from a valid nonguideline study.	
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI		
Soil	Aerobic Biodegradation	Biodegradation half-life of 7 days (Measured)	EINECS, 2010; Canada, 2008; Ying and Kookana, 2005	Adequate, data from a valid nonguideline study.	
		Biodegradation half-life of 3 days ¹⁴ C-BPA was transiently converted to up to five metabolites. The parent ¹⁴ C-BPA and ¹⁴ C-BPA metabolites were not detected after 3 days (Measured)	Fent, Hein et al., 2003; Canada, 2008	Adequate, data from a valid nonguideline study.	

	Bisphenol A CASRN 80-05-7				
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Anaerobic Biodegradation	No biodegradation after 70 days (Measured)	Ying and Kookana, 2005; EINECS, 2010	Adequate, data from a valid nonguideline study.	
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation	No biodegradation after 70 days; anaerobic conditions with Aquifer water and sediment (Measured)	Ying and Kookana, 2003; Canada, 2008; EINECS, 2010	Adequate, data from a valid nonguideline study.	
		50% dissipation times in days Aerobic conditions: river water-sediment test system: 0.57 groundwater-aquifer test system: 1.212 Anaerobic conditions: river water-sediment test system: 1.38 groundwater-aquifer test system: 2.75 (Measured)	Canada, 2008	Invalid; losses of up to 40% of the initial amount applied occurred in the sterile (control) treatments.	
		Bisphenol A was not biodegraded under anaerobic conditions using estuarine sediments (Measured)	Voordeckers, Fennell et al., 2002	Adequate, data from a valid nonguideline study.	
Air	Atmospheric Half-life	1.6 hours (Estimated)	EPI		
Reactivity	Photolysis	Direct and indirect photochemical transformation of bisphenol A in aquatic media has been described (Measured)	Chin, Miller et al., 2004; Canada, 2008; EINECS, 2010	Adequate; the located secondary sources do not quantify the importance of this process, although it is not anticipated to compete with biodegradation in natural waters.	
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Half	-life	75 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI	

	Bisphenol A CASRN 80-05-7				
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
				and the PBT Profiler methodology.	
Bioconcentration		LOW: The measured fish BCF values rep	orted for a number of experime	ental studies are <100.	
	Fish BCF	3.5–68 (Measured)	Canada, 2008	As reported in secondary source.	
		67 (Measured)	EINECS, 2010	As reported in secondary source.	
		38 ± 21 L/kg in halibut (<i>Varaspar variegates</i>) (Measured)	EINECS, 2010; Lee, Soyano et al., 2004	As reported in secondary source.	
		73.4 Killifish (<i>Oryzias latipes</i>) (Measured)	Takino, Tsuda et al., 1999; EINECS, 2010	Adequate.	
		5.1-13.8 (Measured) <20-67.7 (Measured)	Canada, 2008; MITI, 1992	Adequate.	
		3.5-5.5 (Measured)	Lindholst, Pedersen et al., 2001; Canada, 2008;	Adequate.	
	Green Algae BCF	From the Tama River, Japan Periphytons: 18-650 Benthos: 8-170 (Measured)		Adequate.	
	Earthworms BCF	7.9 kg/kg (Estimated)	EINECS, 2010	Adequate.	
	Metabolism in fish	Metabolites identified 7 days after exposure in fish (<i>Danio rerio</i>) (Measured)	Kang, Katayama et al., 2006; Canada, 2008,	Adequate.	
		Fish plasma half- life of Bisphenol A was calculated to be 3.75 hours following injection of the compound (Measured)	Lindholst, Pedersen et al., 2001; Canada, 2008	Adequate.	
		ENVIRONMENTAL MONITORING AT	ND BIOMONITORING		
Environmental Monitoring		Bisphenol A was detected in environmental samples, including those from groundwater, wastewater treatment plume water, landfill lagoon water, drinking water, streams and rivers, and sediments.			
Ecological Biomonitoring		Bisphenol A was found in ecological samples; detectable levels were found in snails, mussels, fish, clams, and zooplankton.			
Human Biomonitoring		Bisphenol A was detected in a variety of human biological samples including serum, breast milk, urine, fetal blood, and umbilical cord blood. This chemical was included in the NHANES biomonitoring report (CDC, 2011).			

Akahori, Y.; Makai, M.; Yamasaki, K.; et al. Relationship between the results of *in vitro* receptor binding assay to human estrogen receptor α and *in vivo* uterotrophic assay: Comparative study with 65 selected chemicals. *Toxicol. In vitro* **2008**, 22:225-231.

Alexander, H., Dill, D., Smith, L., et al. Bisphenol-A: Acute aquatic toxicity. Environ. Toxicol. Chem., 1988. 7:19-26.

Blair, R., Branham, W., Hass, B., et al. The estrogen receptor relative binding affinities of 188 natural and xenochemicals: Structural diversity of ligands. Toxicol. Sci., **2000.** 54:138-153.

Boethling, R., Mackay, D. Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences. Boca Raton: Lewis Publishers. **2000.**

Canada. Environment Canada, Health Canada. Screening Assessment for the Challenge Phenol, 4,4' (1-methylethylidene)bis-(Bisphenol A) CAS 80-05-7. October **2008**.

CDC (Centers for Disease Control and Prevention). Fourth national report on human exposure to environmental chemicals, updated tables. Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

Chapin, R.E., Adams, J., Boekelheide, K., et al. NTP-CERHR Expert Panet report on the reproductive and developmental toxicity of bisphenol A. Birth Defects Research. Part B. Developmental and Reproductive Toxicology. **2008**. 83:157-395.

Chemicals Evaluation and Research Institute (CERI, Japan), **2004**. Biodegradation study of BPA by microorganisms. Study number 14293, Final Report.

Chen, M.-Y., Michihiko, I., Fujita, M. Acute toxicity, mutagenicity, and estrogenicity of bisphenol-A and other bisphenols. Environ. Toxicol., **2002.** 17:80-86.

Chin, Y-P.; Miller, P.; Zeng, L.; Cawley, k.; Weavers, L. Photosensitized Degradation of Bisphenol A by Dissolved Organic Matter. Environ. Sci. Technol. **2004**, 38, 5888-5894.

Coleman, K.P., Toscano, W.A., Wiese, T.E. QSAR Models of the *in vitro* estrogen activity of bisphenol A analogs. QSAR & Combinatorial Science **2003.** 22:78-88.

Dorn, P.; Chou, C.; Gentempo, J. Degradation of bisphenol-A in natural waters. Chemosphere, **1987**, 16(7), 1501-1507.

ECOSAR/EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 3.20. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

EINECS. 4,4'-Isopropylidenediphenol (bisphenol A). European Union Risk Assessment Report. 2010.

EPI (EPIWIN/EPISUITE) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

European Commission. IUCLID Dataset for 4,4-isopropylidenediphenol (CAS No. 80-05-7). European Chemicals Bureau, February 19, 2000. **2000**.

FAO/WHO. Toxicological and health aspects of bisphenol A. Report of Joint FAO/WHO expert meeting 2-5 November 2010 and report of stakeholder meeting on bisphenol A 1 November 2010. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. **2011**.

Fent, G.; Hein, W.; Moendel, M.; Kubiak, R. Fate of ¹⁴C-bisphenol A in soils. Chemosphere, **2003**, 51; 735-746.

Hansch, C., Leo, A., D. Hoekman. Exploring QSAR - Hydrophobic, Electronic, and Steric Constants. Washington, DC: American Chemical Society., **1995**., p. 131

Hashimoto, Y.; Nakamura, M. Estrogenic activity of dental materials and bisphenol-A related chemicals *in vitro*. *Dent. Mater. J.* **2000,** 19(3):245-262.

Hashimoto, Y.; Moriguchi, Y.; Oshima, H.; et al. Measurement of estrogenic activity of chemicals for the development of new dental polymers. *Toxicol. In vitro* **2001**, 15:421-425.

Höllrigl-Rosta, A.; Vinken, R.; Lenz, M.; Schäffer, A. Sorption and dialysis experiments to assess the binding of phenolic xenobiotics to dissolved organic matter in soil. Environ. Toxicol. Chem., **2003**, 22(4), 746-752.

Ike, M.; Chen, M.Y.; Danzl, E.; et al. Biodegradation of a variety of bisphenols under aerobic and anaerobic conditions. Water Sci. Technol. **2006**, 53:153-159.

Kang, J-H.; Kondo, F. Bisphenol A degradation by bacteria isolated from river water. Arch. Environ. Contam. Toxicol., **2002**, 43, 265-269.

Kang, J-H.; Kondo, F. Bisphenol A degradation in seawater is different from that in river water. Chemosphere, 2005, 60, 1288-1292.

Kang, J-H.; Katayama, Y.; Kondo, F. Biodegradation or metabolism of bisphenol A: from microorganisms to mammals. Toxicology, **2006**, 217, 81-90.

Kitagawa, Y., Takatori, S., Oda, H., et al. Detection of thyroid hormone receptor-binding activities of chemicals using a yeast two-hybrid assay. *J. Health Sci.* **2003**, 49(2):99-104.

Keri R.A., Ho S-M, Hunt, P., et al. An evaluation of evidence for the carcinogenic activity of bisphenol A. Reprod Toxicol. **2007**. 24(2):240-252.

Kitamura, S, Suzuki, T., Sanoh, S., et al. Comparative study of the endocrine-disrupting activity of bisphenol A and 19 related compounds. Toxicol. Sci., **2005.** 84:249-259.

Klečka, G.; Gonsior, S.; West, R.; Goodwin, P.; Markham, D.; Biodegradation of bisphenol A in aquatic environments: river dieaway. Environ. Toxicol., Chem. **2001**, 20(12): 2725-2735.

Laws, S., Yavanhxay, S, Cooper, R., et al. Nature of the binding interaction for 50 structurally diverse chemicals with rat estrogen receptors. *Toxicol. Sci.* **2006**, 94(1):46-56.

Lee, H.; Soyano, K.; Ishimatsu, A.; Nagae, M.; Kohra, S.; Ishibashi, Y.; Arizono, K.; Takao, Y. Bisphenol A and nonylphenol bioconcentration in spotted halibut Varaspar variegates. Fisheries Science, **2004**, 70, 192-194.

Lindholst, C.; Pedersen, S.; Bjerregaard, P. Uptake, metabolism and excretion of bisphenol A in the rainbow trout (Oncorhynchus mykiss). Aquat. Toxicol., **2001**, 55:75-84.

Loffredo, E.; Senesi, N. Fate of anthropogenic organic pollutants in soils with emphasis on adsorption/desorption processes of endocrine disruptor compounds. Pure Appl. Chem., **2006**, 78(5), 947-961.

METI. Current status of testing methods development for endocrine disruptors. Ministry of Economy, Trade and Industry, Japan. 6th meeting of the task force on Endocrine Disruptors Testing and Assessments (EDTA). 24-25 June, 2002. Tokyo. **2002.**

Miller, D.; Wheals, B.B.; Beresford, N.; et al. Estrogenic activity of phenolic additives determined by an *in vitro* yeast bioassay. *Environ. Health Perspect.* **2001**, 109(2):133-138.

MITI. Biodegradation and bioaccumulation data of existing chemicals based on the CSCL Japan. 1998, Compiled under the supervision of Chemical Products Safety Division, Basic Industries Bureau, Ministry of International Trade & Industry, Japan; Chemicals Inspection & Testing Institute, Japan. Ed.; Japan Chemical Industry Ecology-Toxicology & Information Center: 1998.

Nakanishi, J.; Miyamoto, K.; AIST Risk Assessment Document Series No. 4 – Bisphenol A. **2007** Available at: http://unit.aist.go.jp/crm/index_e.html as of February 09, 2010.

NIOSH. Skin Notation (SK) Profile, Bisphenol A (BPA) [CAS No. 80-05-7]. Department of Health and Human Services; Centers for Disease Control and Prevention; National Institute for Occupational Safety and Health. **2010.**

Nishihara, T.; Nishikawa, J.; Kanayama, T.; et al. Estrogenic activities of 517 chemicals by yeast two-hybrid assay. *J. Health Sci.* **2000**, 46(4) 282-298.

NTP-CERHR. Monograph on the potential human reproductive and developmental effects of biphenol A. National Toxicology Program; U.S. Department of Health and Human Service. Center for the Evaluation of Risks to Human Reproduction. NIH Publication No. 08-5994. September 2008.

NTP. Carcinogenesis bioassay of bisphenol-A (CAS No. 80-05-7) in F344 rats and B6C3F1 mice (feed study). National Toxicology Program. Technical Report No. 215, Order No. PB82-184060. **1982.**

NTP. Bisphenol A. National Toxicology Program, Department of Health and Human Services. http://ntp-apps.niehs.nih.gov/ntp_tox/index.cfm?searchterm=80-05-7&fuseaction=ntpsearch.searchresults. **2010.**

Ogawa, Y.; Kawamura, Y.; Wakui, C.; et al. Estrogenic activities of chemicals related to food contact plastics and rubbers tested by the yeast two-hybrid assay. *Food Addit. Contam.* **2006**, 23(4):422-430.

O'Neil, M., et al. eds. e-Merck Index. 14th ed. Basic Search. Whitehouse Station, NJ: Merck & Co., Inc. 2010. https://themerckindex.cambridgesoft.com/TheMerckIndex/index.asp as of December 10, 2010.

Patrolecco, L.; Capri, S.; De Angelis, S.; Pagnotta, R.; Polesello, S.; Valsecchi, S. Partition of nonylphenol and related compounds among different aquatic compartments in Tiber River (central Italy). Water, Air and Soil Pollution, **2006**, 172, 151-166.

PBT Profiler Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT) Profiler, U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

Perez, P., Pulgar, R., Olea-Serrano, F., et al. 1998. The estrogenicity of bisphenol A-related diphenylalkanes with various substituents at the central carbon and the hydroxyl groups. Environ. Health Perspect., **1998.** 106(3):167-174.

Stroheker, T., Picard, K., Lhuguenot, J., et al. Steroid activities comparison of natural and food wrap compounds in human breast cancer cell lines. *Food Chem. Toxicol.* **2004**, 42:887-897.

Takino, A.; Tsuda, T.; Kojima, M.; Harada, H.; Muraki, K.; Wada, M. Bioconcentration factor of bisphenol A for killifish (Oryzias latipes) Rep Shiga Prefecture. Public Health & Environ Sci, **1999**, 34, 65-67.

Turner, S.; Watkinson, R. Diphenylol Propane: An Assessment of Inherent Biodegradability. Shell Company Report. 1986

U.S. EPA Sustainable Futures. Using Non Cancer Screening within the SF Initiative. Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic as of February 09, 2011.

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

Voordeckers, J.; Fennell, D.; Jones, K.; Häggblom, M. Anaerobic biotransformation of tetrabromobisphenol A, tetrachlorobisphenol A and bisphenol A in estuarine sediments. Environ. Sci. Technol. **2002.** 36, 696-701.

Willhite C.C.; Ball G.L.; McLellan C.J. Derivation of a bisphenol a oral Reference Dose (RfD) and drinking-water equivalent concentration. J Toxicol Environ Health, Part B., **2008**, 11: 69-146.

West, R.; Goodwin, P. Evaluation of Ready Biodegradability of Bisphenol-A Using the OECD 301F: Manometric Respirometry Test. Dow Company Report. Study ID 971108A, **1997**.

Wright-Walters, M.; Volz, C.; Talbott, E.; et al. An updated weight of evidence approach to the aquatic hazard assessment of Bisphenol A and the derivation a new predicted no effect concentration (Pnec) using a non-parametric methodology. Sci. Total Environ., **2011** 409(4):676-685.

Ying, G.; Kookana, R. Degradation of five selected endocrine-disrupting chemicals in seawater and marine sediment. Environ Sci. Technol., **2003**, 37, 1256-1260.

Ying, G.; Kookana, R. Sorption and degradation of estrogen-like endocrine disrupting chemicals in soil. Environ. Toxicol. Chem., **2005**, 24(10), 2640-2645.

Zeng, G.; Zhang, C.; Huang, G.; Yu, J.; Wang, Q.; Li, J.; Xi, B.; Liu, H. Adsorption behaviour of bisphenol A on sediments in Xiangjiang River, south-central China. Chemosphere, **2006**, 65, 1490-1499.

Bisphenol F

HOOH

CASRN: 620-92-8

MW: 200.24

MF: $C_{13}H_{12}O_2$

Physical Forms: Neat: Solid

Use: Developer for thermal paper

SMILES: OC(CCC(C1)CC(CCC(O)C2)C2)C1

Synonyms: Phenol, 4,4'-methylenebis- (TSCA Inventory); Bis(4-hydroxyphenyl)methane; 4,4'-Methylenebis(phenol); 4,4'-Dihydroxydiphenylmethane; 4,4'-Methylene diphenol; Bis(4-hydroxyphenyl)methane; Bis(p-hydroxyphenyl)methane; Phenol, 4,4'-methylenedi-; p,p'-Bis(hydroxyphenyl)methane; p-(p-Hydroxybenzyl)phenol

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: 4,4'-dihydroxybenzophenone, bis(4-hydroxyphenyl)methanol, 4-hydroxyphenyl-4-hydroxybenzoate,

4-hydroxybenzoate and 1,4-hydroquinine, sulfate conjugate of bisphenol F

Analog: Bisphenol A (80-05-7)

Endpoint(s) using analog values: Reproductive and developmental

toxicity, dermal irritation

Analog Structure:

но-{_}-Он

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	PHYSICAL/CHEMICAL PR	OPERTIES		
Melting Point (°C)	162.5 (Measured)	Lide, 2008	Adequate.	
Boiling Point (°C)	Sublimes	Lide, 2008	Adequate.	
Vapor Pressure (mm Hg)	3.7x10 ⁻⁷ (Estimated)	EPI		
Water Solubility (mg/L)	190 (Estimated)	EPI		
Log K _{ow}	2.91 (Measured)	Hansch, 1995	Adequate.	
Flammability (Flash Point)			No data located.	
Explosivity			No data located.	
pH			No data located.	
pK _a	7.55 (Measured)	Serjeant and Dempsey, 1979	Adequate.	

Bisphenol F CASRN 620-92-8						
PROPE	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	HUMAN HEALTH EFFECTS					
Toxicokinetics		Bisphenol F is readily absorbed following metabolites, and excreted primarily in the state of th				
Dermal Absorptio	n in vitro			No data located.		
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Single gavage doses of 7 or 100 mg/kg [³H]bisphenol F to pregnant or nonpregnant Sprague-Dawley rats. Approximately 15-20% of the administered radioactivity was recovered in the urine during the first 24 hours postdosing, indicating that bisphenol F was readily absorbed. By 96 hours postdosing, nearly 50% of the dose had been recovered in the urine; fecal excretion accounted for <20% of the dose. Parent compound accounted for <25% of the radioactivity in the urine and at least six urinary metabolites were detected; the major urinary metabolite (>50%) appeared to be a sulfate conjugate of bisphenol F. At 96 hours postdosing, <1% of the administered radioactivity was detected in selected organs and tissues; the highest levels were found in the liver (0.5% of dose). Radioactivity was detected in placenta, amniotic fluid, and fetuses of pregnant rats. In bile-cannulated rats, nearly 50% of an administered dose of [³H]bisphenol F was collected in the bile between 2 and 8 hours postdosing, indicating the involvement of enterohepatic cycling of bisphenol F and/or its metabolites.	Cabaton, Chagnon et al., 2006	Adequate.		

	Bisphenol F CASRN 620-92-8				
PROPE	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Acute Mammalian	n Toxicity	LOW: Based on an experimental rat L or dermal toxicity.	D_{50} of 4,950 mg/kg. No data were	e located to assess acute inhalation	
Acute Lethality	Oral	Rat oral $LD_{50} = 4,950 \text{ mg/kg}$	Smyth, Carpenter et al., 1962	Adequate.	
	Dermal			No data located.	
	Inhalation			No data located.	
Carcinogenicity		MODERATE: Estimated using OncoLogic expert system which describes a concern for this compound as a potential carcinogen or tumorigenesis promoter arising from its structural similarity to estrogenic/androgenic compounds, using the phenols and phenolic compounds structural alert.			
	OncoLogic Results	Moderate (Estimate) OncoLogic class: Phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.	
	Carcinogenicity (Rat and Mouse)			No data located.	
	Combined Chronic Toxicity/Carcinogenicity			No data located.	
Genotoxicity		LOW: Bisphenol F did not cause gene multiple test strains and cell types. Bispassessment guidance indicates a low conaberrations assays.	phenol F did cause DNA damage	in a Comet assay; however,	
	Gene Mutation in vitro	Negative; Ames assay in <i>Salmonella Typhimurium</i> strains TA98, TA100, TA1535, TA1537, and <i>Escherichia coli</i> W2 <i>uvrA</i> pKM101 with and without metabolic activation	Cabaton, Dumont et al., 2009	Adequate.	
		Negative, umu test in <i>S. typhimurium</i> strain TA1335 with and without metabolic activation	Chen, Michihiko et al., 2002	Adequate.	
		Negative, gene mutation tests at the Na+/K+ ATPase locus and hprt locus of Syrian hamster embryo (SHE) cells	Tsutsui, Tamura et al., 2000	Adequate.	

	Bisphenol F CASRN 620-92-8				
PROPER	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Gene Mutation in vivo			No data located.	
	Chromosomal Aberrations in vitro	Negative, chromosomal aberrations in SHE cells	Tsutsui, Tamura et al., 2000	Adequate.	
		Negative, micronucleus test in HepG2 cells	Cabaton, Dumont et al., 2009	Adequate.	
	Chromosomal Aberrations in vivo			No data located.	
	DNA Damage and Repair	Positive; DNA damage (single and double strand breaks); Comet assay HepG2 cells	Cabaton, Dumont et al., 2009	Adequate.	
	Other			No data located.	
Reproductive Effect	ts	HIGH: Estimated based on male and forespectively, for reproductive toxicity for CERHR (2008) included sufficient evid bisphenol A causes female reproductive bw-day) and male reproductive toxicity day). There is considerable uncertainty and/or developmental effects in laborate <5 mg/kg bw-day. Adequate data were bisphenol F. Changes in uterine weigh gavage study reported no effects on reproductive to 500 mg/kg-day. These studies were madequate to evaluate the potential repr	collowing exposure to the analog bistence in rats and mice that subchrows toxicity at doses ≥475 mg/kg bw-day (high y regarding the results of recent strong animals administered the analog not located to assess reproductive twere reported following <i>in vivo</i> exproductive organ weights, estrous cot guideline reproductive toxicity strong the subchround the subchrou	sphenol A. Conclusions of NTP- onic or chronic oral exposures to day (highest NOAEL = 47.5 mg/kg hest NOAEL = 4.75 mg/kg bw- udies that reported reproductive og bisphenol A at oral doses toxicity following exposure to exposure in rats. However, a 28-day cycles, or spermatocytes at doses up	
	Reproduction/ Developmental Toxicity Screen	Bisphenol F increased absolute and relative uterine weight in a rat uterotrophic assay.	Yamasaki, Noda et al., 2004	Adequate.	

	Bisphenol F CASRN 620-92-8				
PROPERTY/END	POINT	DATA	REFERENCE	DATA QUALITY	
		28-Day study with Crj:CD Sprague- Dawley rats (10/sex/dose), gavaged with 0, 20, 100, or 500 mg/kg-day: NOAEL = 500 mg/kg-day (endocrine/reproductive parameters). No changes in spermatological findings, estrous cycles, reproductive organ weight, or thyroid weight.	Higashihara, Shiraishi et al., 2007	Adequate.	
		Exposure to bisphenol F in immature rats resulted in a dose-dependent increase in relative wet and dry uterine weight and increased vaginal cornification in immature female Wistar rats. LOAEL = 100 mg/kg-day (based on increased relative wet uterine weight NOAEL = 50 mg/kg-day	Stroheker, Chagnon et al., 2003	Adequate.	
with Rep	ed Repeated Dose production/ mental Toxicity			No data located.	

	Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Reproduction and Fertility Effects	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males Reproductive toxicity: Females: NOAEL = 47.5 mg/kg bw-day LOAEL = 475 mg/kg bw-day for decreases in number of implantation sites, delayed vaginal opening in F ₁ , F ₂ , F ₃ offspring Males: NOAEL = 4.75 mg/kg bw-day, LOAEL = 47.5 mg/kg-day for delayed preputial separation in F ₁ males (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females Reproductive toxicity: NOAEL = 50 mg/kg bw-day LOAEL = 600 mg/kg bw-day for increased gestation length, decreased epididymal sperm concentration in F ₁ males, increased incidence of gross ovarian cysts in F ₁ and F ₂ females (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		

Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Female effects: There is sufficient evidence in rats and mice that bisphenol A causes female reproductive toxicity with subchronic or chronic oral exposures NOAEL of 47.5mg/kg bw-day LOAEL of 475 mg/kg bw-day.	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; Classified by NTP-CERHR as having High Utility.	
	Male effects: There is sufficient evidence in rats and mice that bisphenol A causes male reproductive toxicity with subchronic or chronic oral exposures NOAEL of 4.75mg/kg bw-day LOAEL of 47.5mg/kg bw/day.			
	(Estimated by analogy)			
	The joint FAO/WHO Expert Panel reviewed located reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bw-day. (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; Classified by NTP-CERHR as having High Utility.	
Developmental Effects	HIGH: Estimated based on analogy to bisphenol A. The NTP-CERHR (2008) Expert Panel concluded that there is suggestive evidence that bisphenol A causes neural and behavioral alterations related to disruptions in normal sex differences in rats and mice (0.01-0.2 mg/kg bw-day). The FAO/WHO (2011) Expert Panel concluded that while there was broad agreement in a NOAEL of 50 mg/kg bw-day for developmental toxicity, low-level (<1 mg/kg bw-day) effects were uncertain. These conclusions support a High hazard designation, with lower confidence.			

Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reproduction/ Developmental Toxicity Screen			No data located.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	



	Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Summary of Developmental effects	The NTP-CERHR Expert Panel concluded that bisphenol A: *does not cause malformations or birth defects in rats or mice at levels up to the highest doses evaluated: 640 mg/kg/day (rats) and 1,250 mg/kg bw-day (mice). *does not alter male or female fertility after gestational exposure up to doses of 450 mg/kg bw-day in the rat and 600 mg/kg bw-day in the mouse (highest dose levels evaluated). *does not permanently affect prostate weight at doses up to 475 mg/kg bw-day in adult rats or 600 mg/kg bw-day in mice. *does not cause prostate cancer in rats or mice after adult exposure at up to 148 or 600 mg/kg bw-day, respectively. *does change the age of puberty in male or female rats at high doses (ca. 475 mg/kg/day). And that rodent studies <i>suggest</i> that bisphenol A: *causes neural and behavioral alterations related to disruptions in normal sex differences in rats and mice (0.01–0.2 mg/kg/day).	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A.		
	(Estimated by analogy)				

	Bisphenol F CASRN 620-92-8				
PROPERT	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		The joint FAO/WHO Expert Panel reviewed located reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bw-day.	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.	
Neurotoxicity		MODERATE: Estimated to have poten alert.	itial for neurotoxicity based on the	presence of the phenol structural	
		There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.	
Repeated Dose Effect		HIGH: Based on adverse effects (12%) and albumin in the serum) in female rate (the lowest dose tested). Because the state evaluated using modified criteria at 3 times.	ts administered bisphenol F by gav andard criteria thresholds are for 9	rage for 28 days at 20 mg/kg-day	
		28-day oral study of Crj:CD Sprague-Dawley rats (10/sex/dose), gavaged with 0, 20, 100, or 500 mg/kg-day. LOAEL = 20 mg/kg-day (based on significant decreases in final mean body weight [12% less than controls], serum total cholesterol, glucose, and albumin in female rats).	Higashihara, Shiraishi et al., 2007	Adequate 28-day repeated dose toxicity study; this study will be evaluated using modified criteria at 3 times the thresholds because the standard thresholds are based on 90-day studies.	
Skin Sensitization		LOW: One study in guinea pigs sugges	ted bisphenol F is not a skin sensiti	izer.	
S	Skin Sensitization	Negative for skin sensitizing capacity in guinea pig maximization test	Bruze, 1986	Adequate.	
Respiratory Sensitiza	ation	No data located.			

	Bisphenol F CASRN 620-92-8				
PROPEI	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Respiratory Sensitization			No data located.	
Eye Irritation		VERY HIGH: One study of rabbits ind	icated that bisphenol F caused seve	ere eye injury.	
	Eye Irritation	Severe corneal injury in rabbits	Smyth, Carpenter et al., 1962	Adequate.	
Dermal Irritation		MODERATE: Based on analogy to bisphenol A; bisphenol F is estimated to be slightly irritating to moderately irritating to rabbit skin based on test data for the analog bisphenol A. NIOSH has assigned the analog bisphenol A as a skin irritant.			
	Dermal Irritation	when applied as undiluted or 10%	EINECS, 2010; European Commission, 2000; NIOSH, 2010; Professional judgment European Commission, 2000; Professional judgment	Based on the analog bisphenol A; the details provided for multiple studies indicate potential for bisphenol A to cause dermal irritation. Based on the analog bisphenol A; adequate.	
		Guinea pig, not irritating when applied as 5% solution in acetone for 24 hours under occlusive conditions. (Estimated by analogy)		Based on the analog bisphenol A; adequate.	
Endocrine Activity		Based on <i>in vitro</i> and <i>in vivo</i> data. Bisphenol F exhibited estrogenic and anti-estrogenic activity in some <i>in vivo</i> studies of female rats. <i>In vitro</i> assays indicate that bisphenol A can bind to estrogen receptors (ERs), elicit estrogen-induced gene transcription, induce progesterone receptors (PgR), and induce cell proliferation in MCF7 cancer cells. Bisphenol F has been shown to exhibit androgenic and anti-androgenic properties <i>in vitro</i> . Bisphenol F appears to exhibit estrogenic potency similar to or somewhat less than the potency of bisphenol A.			
		Receptor Binding Assays			

	Bisphenol F CASRN 620	0-92-8	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Bisphenol F exhibited weak ER binding activity in preparations from uteri of ovariectomized Sprague-Dawley rats as evidenced by a relative binding affinity (RBA) that was 0.0009% of the binding affinity of 17β-estradiol. RBAs for other tested chemicals included 0.008% for bisphenol A, 0.003% for PHBB, and 0.0007% for the proprietary substituted phenolic compound with CASRN of 126-00-1.	Blair, Branham et al., 2000	Adequate.
	In a human ER binding assay, the RBA of bisphenol F was 0.0719% compared to 126% for 17β-estradiol. RBAs for other bisphenol compounds included 0.195% for bisphenol A, 0.129% for bisphenol C, 0.0803% for bisphenol AP, and 0.0055% for bisphenol S. An RBA of 0.00473% was reported for PHBB.	METI, 2002	Adequate.
	In a competitive ER binding assay using human ERα, the RBA for bisphenol A was 0.32% that of 17β-estradiol. RBAs for other bisphenol compounds included 1.68% for bisphenol C, 1.66% for bisphenol AP, and 0.09% for bisphenol F.	Coleman, Toscano et al., 2003	Adequate.
	In a human ER binding assay, the RBA of bisphenol F was 0.0719% relative to 17β-estradiol (set at 100%). RBAs for other bisphenol compounds included 0.175% for bisphenol M and 0.0055% for bisphenol A.		Adequate.

	Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	In a rat uterine cytosol assay that evaluated ER binding affinity, ER binding affinities for bisphenol A and bisphenol F were approximately 3 orders of magnitude less than that for 17β -estradiol	Perez, Pulgar et al., 1998	Adequate.		
	Gene Transcription and Reporter Gene Assays				
	Bisphenol F exhibited evidence of estrogenic activity in a yeast (Saccharomyces cerevisiae) two-hybrid assay using ER α and the coactivator TIF2. Based on estrogenic activity that was 5 orders of magnitude lower than that of 17β -estradiol, bisphenol A was considered weakly estrogenic. Assessment of other bisphenols resulted in a ranking of relative potency as follows: bisphenol C \geq bisphenol A $>$ bisphenol F $>$ bisphenol S.	Chen, Michihiko et al., 2002	Adequate.		
	Bisphenol F exhibited estrogenic activity approximately 9,000-fold less than that of 17β -estradiol) in an <i>in vitro</i> recombinant yeast estrogen assay; the estrogenic activities of bisphenol A and PHBB were $10,000$ -fold and $4,000$ -fold less than that of 17β -estradiol		Adequate.		
	In a yeast two-hybrid system (reporter gene assay) using β -galactosidase activity as a measure of estrogenic activity, an estrogenic response was elicited by bisphenol F and bisphenol A but not by bisphenol S.	Hashimoto and Nakamura, 2000	Adequate.		

	Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	In yeast two-hybrid systems (reporter gene assay) using β -galactosidase activity as a measure of estrogenic activity, an estrogenic response was elicited by bisphenol F and bisphenol A both in the absence and presence of exogenous metabolic activation; bisphenol S elicited a similar response only in the presence of exogenous metabolic activation	Hashimoto and Nakamura, 2000; Hashimoto et al. 2001	Adequate.		
	In a yeast two-hybrid assay (reporter gene assay) using β -galactosidase activity as a measure of estrogenic activity, an estrogenic response was elicited by bisphenol F and bisphenol A	Ogawa, Kawamura et al. 2006	Adequate.		
	In a reporter gene assay of estrogen-induced transcriptional activity, relative activity (RA) for bisphenol F was 0.000639% compared to 81.7% for 17β-estradiol. RAs for other bisphenol compounds included 0.00278% for bisphenol A, 0.00189% for bisphenol C, 0.000254% for bisphenol S, and 0.000184% for bisphenol AP. An RA of 0.000592% was reported for PHBB.	METI, 2002	Adequate.		
	In an ER-mediated reporter gene expression assay, bisphenol F induced reporter gene expression at a RA of 5.3 x 10 ⁻⁴ that of 17β-estradiol. RAs for other bisphenol compounds included 2.75 x 10 ⁻³ for bisphenol A, 4.9 x 10 ⁻⁴ for bisphenol C, and 9.0 x 10 ⁻⁵ for bisphenol AP.	Coleman, Toscano et al., 2003	Adequate.		

Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In an ERE-luciferase reporter assay using MCF-7 cells, an EC $_{50}$ was 1.0 μ M for bisphenol F compared to an EC $_{50}$ of 8.6 x 10^{-6} for 17 β -estradiol (i.e., bisphenol A was approximately 5 orders of magnitude less potent than 17 β -estradiol at inducing estrogenic activity). EC $_{50}$ values for other bisphenol compounds included 0.63% for bisphenol A, 0.42 μ M for bisphenol C, and 1.1 μ M for bisphenol S.		Adequate.	
	In an ERE-luciferase reporter assay using MCF-7 cells in the presence of 17β-estradiol, neither bisphenol F, bisphenol A, bisphenol C, nor bisphenol S appeared to exert an anti-estrogenic effect		Adequate.	
	Weakly estrogenic in a transcriptional activation assay using human ER and HepG2 cells	Cabaton, Dumont et al., 2009	Adequate.	
	Progesterone Receptor Induction			
	In an ERE-luciferase reporter assay using MCF-7 cells, an EC ₅₀ was 1.0 μ M for bisphenol F compared to an EC ₅₀ of 8.6 x 10^{-6} for 17β -estradiol (i.e., bisphenol A was approximately 5 orders of magnitude less potent than 17β -estradiol at inducing estrogenic activity). EC ₅₀ values for other bisphenol compounds included 0.63% for bisphenol A, 0.42 μ M for bisphenol C, and 1.1 μ M for bisphenol S.	Kitamura, Suzuki et al., 2005	Adequate.	

Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In an assay designed to evaluate estrogenic effects on the number of progesterone receptors (PgR) in MCF7 cells, 17β-estradiol, bisphenol F, and bisphenol A each increased the concentration of PgR by approximately 10- to 15-fold	Perez, Pulgar et al., 1998	Adequate.	
	Cell Proliferation Assays			
	Weakly estrogenic in a transcriptional activation assay using human ER and HepG2 cells	Cabaton, Dumont et al., 2009	Adequate.	
	In an E-screen test for estrogenicity, bisphenol F, bisphenol A, and bisphenol S increased proliferation of MCF-7 cells at concentrations in the range of 10 ⁻⁴ to 10 ⁻⁷ M. Bisphenol A appeared to be more effective than bisphenol S or bisphenol F.	Hashimoto et al., 2001	Adequate.	
	In an E-SCREEN test of MCF7 cell proliferation (an indicator of estrogenic activity), the proliferative potency of bisphenol A was approximately 10 ⁻⁵ that of 17β-estradiol, suggestive of a weakly estrogenic effect for bisphenol A. The potency of bisphenol F was somewhat less than that of bisphenol A.	Perez, Pulgar et al., 1998	Adequate.	

	Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	In an E-screen test for estrogenicity, bisphenol F and bisphenol A increased proliferation of MCF-7 cells with EC ₅₀ values of 84.8 nM and 410 nM, respectively, compared to an EC ₅₀ of 0.0045 nM for 17 β -estradiol. The results indicate a weak estrogenic effect with bisphenol F exerting a more potent effect than bisphenol A.		Adequate.		
	In a proliferation assay of MCF-7 human breast cancer cells that contain ER α and ER β and are known to proliferate in response to estrogens, bisphenol A induced a proliferative response that was 1.0×10^{-3} that of 17β -estradiol. Proliferative values for other bisphenol compounds included 2.0×10^{-3} for bisphenol A, 1.6×10^{-3} for bisphenol C, and 6.0×10^{-4} for bisphenol AP.	Coleman, Toscano et al., 2003	Adequate.		
	In an assay that measured induction and secretion of pS2 in cultured MCF7 cells (ELSA-pS2 immunoradiometric assay), induction of pS2 by bisphenol F and bisphenol A was approximately 1,000-fold less than that of 17β-estradiol	Perez, Pulgar et al., 1998	Adequate.		
	Androgen Assays				

Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Bisphenol F and bisphenol A induced androgenic effects in MDA-MB453 cells transfected with an AR responsive luciferase reporter gene; anti-androgenic effects were elicited in the presence of dihydrotestosterone. Relative potency of the androgenic and anti-androgenic effects elicited by bisphenol F was similar to that of bisphenol A.	Stroheker, Picard et al., 2004	Adequate.	
	In an ARE-luciferase reporter assay using a mouse fibroblast cell line (NIH3T3 cells), neither bisphenol F, bisphenol A, bisphenol C, nor bisphenol S exerted an androgenic effect	Kitamura, Suzuki et al., 2005	Adequate.	
	In an ARE-luciferase reporter assay using a mouse fibroblast cell line (NIH3T3 cells), bisphenol F inhibited the androgenic activity of dihydrotestosterone. Anti-androgenic responses were elicited by bisphenol A, bisphenol C, and bisphenol S as well.	Kitamura, Suzuki et al., 2005	Adequate.	
	Bisphenol F induced an anti-androgenic response in a transcriptional activation assay at a concentration of 10 ⁻⁵ M	Cabaton, Dumont et al., 2009	Adequate.	
	In Vivo Studies			

Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	28-Day study with Crj:CD Sprague-Dawley rats (10/sex/dose), gavaged with 0, 20, 100, or 500 mg/kg-day: NOAEL = 500 mg/kg-day (endocrine/reproductive parameters). No changes in spermatological findings, estrous cycles, reproductive organ weight, or thyroid weight.	Higashihara, Shiraishi et al., 2007	Adequate.	
	Exposure of immature female rats to bisphenol F (gavage dosing once daily for 4 days) resulted in a dose-dependent increase in uterine weight in immature female rats. LOAEL = 100 mg/kg-day (based on increased relative wet uterine weight NOAEL = 50 mg/kg-day There were no significant effects on uterine weight in bisphenol A-treated immature female rats and no effects on uterine weight in bisphenol F- or bisphenol A-treated ovariectromized rats.		Adequate.	
	In a uterotrophic assay of rats subcutaneously injected with bisphenol F once daily for 3 days, an apparent estrogenic effect was evidenced by increased absolute and relative uterine weight. Similar effects were elicited by bisphenol S and bisphenol M.	Yamasaki, Noda et al., 2004	Adequate.	

Bisphenol F CASRN 620-92-8			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	In a uterotrophic assay in which immature female rats were injected with bisphenol F, bisphenol S, or bisphenol M subcutaneously for three consecutive days, observed changes in uterine weight indicated that bisphenol F, bisphenol S, and bisphenol M exerted both estrogenic and anti-estrogenic responses.	Akahori, Makai et al., 2008	Adequate.
Immunotoxicity	No data located.		
Immune System Effects			No data located.
	ECOTOXICITY		
ECOSAR Class	Polyphenols		
Acute Toxicity	MODERATE: Based on an experiment		phnia magna.
Fish LC ₅₀	Fish 96-hour $LC_{50} = 4.55 \text{ mg/L}$ (Estimated) ECOSAR: polyphenols Fish 96-hour $LC_{50} = 19.74 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI EPI	
Daphnid LC ₅₀	Daphnia magna 48-hour $EC_{50} = 56 \text{ mg/L}$ 24-hour $EC_{50} = 80 \text{ mg/L}$ (Experimental) Daphnid 48-hour $LC_{50} = 12.94 \text{ mg/L}$	Chen, Michihiko et al., 2002 EPI	Adequate.
	(Estimated) ECOSAR: neutral organics		
	Daphnid 48-hour LC ₅₀ = 13.0 mg/L (Estimated) ECOSAR: polyphenols	EPI	
Green Algae EC ₅₀	Green algae 96-hour EC ₅₀ = 1.37 mg/L (Estimated) ECOSAR: polyphenols	EPI	

Bisphenol F CASRN 620-92-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Green algae 96-hour $EC_{50} = 8.6 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI		
Chronic Aquatic Toxicity	HIGH: Based on an estimated ChV of	0.29 mg/L for green algae that is wi	ithin the range of 0.1-1.0 mg/L.	
Fish ChV	Fish 30-day ChV = 1.18 mg/L (Estimated) ECOSAR: polyphenols	EPI		
	Fish 30-day ChV = 1.83 mg/L (Estimated) ECOSAR: neutral organics	EPI		
Daphnid ChV	Daphnid ChV = 1.44 mg/L (Estimated) ECOSAR: neutral organics	EPI		
	Daphnid ChV = 4.56 mg/L (Estimated) ECOSAR: polyphenols	ЕРІ		
Green Algae ChV	Green algae ChV = 0.29 mg/L (Estimated) ECOSAR: polyphenols	EPI		
	Green algae ChV = 3.78 mg/L (Estimated) ECOSAR: neutral organics	EPI		

Bisphenol F CASRN 620-92-8						
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY			
	ENVIRONMENTAL FATE					
Transport	Based on the Level III fugacity models incorporating the located experimental property data, bisphenol F is expected to partition primarily to soil. Bisphenol F is expected to exist in both neutral and anionic forms at environmentally-relevant pH, based on its measured pK_a . The neutral form of bisphenol F is expected to have low mobility in soil based on its estimated K_{oc} . The anionic form may be more mobile, as anions do not bind as strongly to organic carbon and clay due to their enhanced water solubility. However, leaching of bisphenol F through soil to groundwater is not expected to be an important transport mechanism. Estimated volatilization half-lives indicate that it will be nonvolatile from surface water. Volatilization from dry surfaces is also not expected based on its estimated vapor pressure. In the atmosphere, bisphenol F is expected to exist in both vapor and particulate phases, based on its estimated vapor pressure. Particulates will be removed from air by wet or dry deposition. Vapor-phase bisphenol F will be susceptible to atmospheric degradation processes.					
Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for nonvolatile compounds according to professional judgment.			
$\begin{tabular}{ll} Sediment/Soil \\ Adsorption/Desorption \\ Coefficient-K_{oc} \\ \end{tabular}$	1.5x10 ⁴ (Estimated)	EPI				
Level III Fugacity Model	Air = <1% (Estimated) Water = 15% Soil = 79% Sediment = 6.5%	ЕРІ				

	Bisphenol F CASRN 620-92-8				
PROPERT	TY/ENDPOINT	DATA REFERENCE DATA QUALITY			
Persistence		LOW: Bisphenol F degraded 100% after 2 weeks in a modified river die-away test (TOC-Handai Method). Complete mineralization was reported. Based on these data, the aerobic biodegradation half-life is expected to be <16 days. An anaerobic biodegradation test assessing primary degradation in concentrated pond sediment reported >80% after ca. 80 days with no lag period. A pure culture study evaluating the ability of a <i>Sphingobium yanoikuyae</i> strain to degrade bisphenol F suggested that the mechanism for biodegradation started at the bridging carbon between the two phenols via hydroxylation and subsequent oxidation to 4,4'-dihydroxybenzophenone. This degradation mechanism can occur for this BPA alternative because of the presence of labile benzylic hydrogens. Bisphenol F did not pass a ready biodegradability test (Japanese MITI), which reported only 1% degradation after 4 weeks, indicating that it may be resistant to biodegradation under more stringent conditions. Bisphenol F is not expected to undergo hydrolysis since it does not contain hydrolysable functional groups. Absorption of light at environmentally relevant wavelengths indicates that it may be susceptible to direct photolysis by sunlight. The atmospheric half-life for the hydroxyl radical reaction of vapor phase bisphenol F is estimated to be 1.6 hours, although it is expected to exist in both the vapor and particulate phases in air. Based on these findings, biodegradation of bisphenol F is expected to be the main fate process in aquatic and terrestrial environments.			
Water	Aerobic Biodegradation	100% after 2 weeks (Measured; TOC-Handai Method). Method similar to aerobic river die-away test. Used concentrated (10 times) river water microcosms diluted in "artificial water". Reported complete mineralization at TOC concentration of 10 mg/L.	Ike, Chen et al., 2006	Valid, nonguideline study demonstrating river water microcosms have the potential to biodegrade bisphenol F.	

	Bisphenol F CASRN 620-92-8				
PROP	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		Biodegradation efficiencies varied from 8 to 58% after 30 days, depending on the sampling site. A modified TOC-Handai Method was used, which is similar to aerobic river die-away test. Used concentrated seawater microcosms diluted in "artificial water". Resistance to seasonal variation was noted. Efficiencies varied from 75 to 100% after 30 days, depending on the sampling site using a sea-die away method. Purified seawater inoculums were used.		Valid, nonguideline study demonstrating seawater microcosms have the potential to biodegrade bisphenol F.	
		Sphingobium yanoikuyae strain FM-2 (isolated from river water) biodegraded bisphenol F. Reported mechanism suggested hydroxylation and subsequent oxidation at the bridging carbon to form the following metabolites: bis(4-hydroxyphenyl)methanol to 4,4'-dihydroxybenzophenone to 4-hydroxyphenyl-4-hydroxybenzoate to 4-hydroxybenzoate and 1,4-hydroquinone, all of which are mineralized.	Inoue, Hara et al., 2008	Valid, pure culture study demonstrating biodegradation potential and mechanism.	
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI		
Soil	Aerobic Biodegradation	1% after 4 weeks (Measured in activated sludge). Japanese MITI test (OECD 301C) measuring BOD with test concentration of 100 mg/L and concentration of activated sludge inoculum = 30 mg/L	MITI, 1998	Adequate, guideline study.	

Bisphenol F CASRN 620-92-8						
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY		
	Anaerobic Biodegradation	>80% after ca. 80 days (Measured; no lag period). Anaerobic pond sediment condensed to twice its original concentration. TOC = 10 mg/L. Measured primary degradation only. No discussion of metabolites.	Ike, Chen et al., 2006	Valid nonguideline study, demonstrating anaerobic seawater sediments have potential to biodegrade bisphenol F.		
	Soil Biodegradation w/ Product Identification			No data located.		
	Sediment/Water Biodegradation			No data located.		
Air	Atmospheric Half-life	1.6 hours (Estimated for hydroxyl radical reaction assuming a 12-hour day and a hydroxyl radical concentration of 1.5x10 ⁶ OH/cm ³)	EPI			
Reactivity	Photolysis	Susceptible to direct photolysis, with a reported UV absorption at 279 nm. Partial absorption at environmental wavelengths expected.	Lide and Milne, 1994; Professional judgment	Qualitative assessment based on functional groups.		
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.		
	Pyrolysis			No data located.		
Environmental Half-life		30 days	EPI, PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.		
Bioaccumulation		LOW: The measured fish BCFs are <100.				
	Fish BCF	6.6 (25 μg/L) (Measured); 11 (2.5 μg/L) (Measured)	MITI, 1998	Adequate, guideline study.		
	BAF	28 (Estimated)	EPI			

Bisphenol F CASRN 620-92-8							
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY			
	Metabolism in Fish			No data located.			
ENVIRONMENTAL MONITORING AND BIOMONITORING							
Environmental Monitoring		Detected in landfill leachates (Öman and Hynning, 1993).					
Ecological Biomonitoring		No data located.					
Human Biomonitoring		This chemical was not included in the NHANES biomonitoring report (CDC, 2011).					



Akahori, Y.; Makai, M.; Yamasaki, K.; et al. Relationship between the results of *in vitro* receptor binding assay to human estrogen receptor α and *in vivo* uterotrophic assay: Comparative study with 65 selected chemicals. *Toxicol. In vitro* **2008**, 22:225-231.

Blair, R.; Branham, W.; Hass, B.; et al. The estrogen receptor relative binding affinities of 188 natural and xenochemicals: Structural diversity of ligands. *Toxicol. Sci.* **2000**, 54:138-153.

Boethling, R.; Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*, Boca Raton: Lewis Publishers. **2000.**

Bruze, M. Sensitizing capacity of dihydroxydiphenyl methane (bisphenol F) in the guinea pig. *Contact Dermatitis* **1986**, 14:228-232.

Cabaton, N.; Chagnon, M-C.; Lhuguenot, J-C.; et al. Disposition and metabolic profiling of bisphenol F in pregnant and nonpregnant rats. *J. Agric. Food Chem.* **2006**, 54:10307-10314.

Cabaton, N.; Dumont, C.; Severin, I.; et al. Genotoxic and endocrine activities of bis(hydroxyphenyl)methane (bisphenol F) and its derivatives in the HepG2 cell line. *Toxicology* **2009**, 255:15-24.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

Chen, M-Y.; Michihiko, I.; Fujita, M. Acute toxicity, mutagenicity, and estrogenicity of bisphenol-A and other bisphenols. *Environ. Toxicol.* **2002**, 17:80-86.

Coleman, K.P., Toscano, W.A., Wiese, T.E. QSAR Models of the *in vitro* estrogen activity of bisphenol A analogs. QSAR & Combinatorial Science **2003**, 22:78-88.

Danzl, E.; Sei, K.; Soda, S., et al. Biodegradation of Bisphenol A, Bisphenol F and Bisphenol S in Seawater. *Int. J. Environ. Res. Public Health* **2009**, 6:1472-1484.

EINECS. 4,4'-Isopropylidenediphenol (bisphenol A). European Union Risk Assessment Report. 2010.

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.0. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

European Commission. IUCLID Dataset for 4,4-isopropylidenediphenol (CAS No. 80-05-7). European Chemicals Bureau, February 19, 2000. **2000**.

FAO/WHO. Toxicological and health aspects of bisphenol A. Report of Joint FAO/WHO expert meeting 2-5 November 2010 and report of stakeholder meeting on bisphenol A 1 November 2010. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. **2011**.

Hansch, C.; Leo, A.; Hoekman, D. *Exploring QSAR: Hydrophobic, electronic, and steric constants*. Washington, D.C.: American Chemical Society. **1995.**

Hashimoto, Y.; Nakamura, M. Estrogenic activity of dental materials and bisphenol-A related chemicals *in vitro*. *Dent. Mater. J.* **2000,** 19(3):245-262.

Hashimoto, Y.; Moriguchi, Y.; Oshima, H.; et al. Measurement of estrogenic activity of chemicals for the development of new dental polymers. *Toxicol. In vitro* **2001**, 15:421-425.

Higashihara, N.; Shiraishi, K.; Miyata, K.; et al. Subacute oral toxicity study of bisphenol F based on the draft protocol for the "Enhanced OECD Test Guideline No. 407". *Arch. Toxicol.* **2007**, 81:825-832.

Ike, M.; Chen, M.Y.; Danzl, E.; et al. Biodegradation of a variety of bisphenols under aerobic and anaerobic conditions. *Water Sci. Technol.* **2006,** 53:153-159.

Inoue, D.; Hara, S.; Kashihara, M.; et al. Degradation of Bis(4-Hydroxyphenyl)Methane (Bisphenol F) by *Sphingobium yanoikuyae* Strain FM-2 isolated from river water. *Appl. Environ. Microbiol.* **2008**, 74(2):352-358.

Kitamura, S.; Suzuki, T.; Sanoh, S.; et al. Comparative study of the endocrine-disrupting activity of bisphenol A and 19 related compounds. *Toxicol. Sci.* **2005**, 84:249-259.

Lide, D.R.; Milne, G.W.A. Handbook of data on organic compounds. Boca Raton: CRC Press. 1994.

Lide, D. R., ed. CRC Handbook of Chemistry and Physics, 88th edition, CRC Press: Boca Raton. 2008.

METI. Current status of testing methods development for endocrine disruptors. Ministry of Economy, Trade and Industry, Japan. 6th meeting of the task force on Endocrine Disruptors Testing and Assessments (EDTA). 24-25 June, 2002. Tokyo. **2002.**

Miller, D.; Wheals, B. B.; Beresford, N.; et al. Estrogenic activity of phenolic additives determined by an *in vitro* yeast bioassay. *Environ. Health Perspect.* **2001,** 109(2):133-138.

MITI. *Biodegradation and bioaccumulation data of existing chemicals based on the CSCL Japan*. Compiled under the supervision of Chemical Products Safety Division, Basic Industries Bureau, Ministry of International Trade & Industry, Japan; Chemicals Inspection & Testing Institute, Japan. Ed.; Japan Chemical Industry Ecology-Toxicology & Information Center: 1998. **1998.**

NIOSH (National Institute for Occupational Safety and Health). Skin Notation (SK) Profile, bisphenol A (BPA) [CAS No. 80-05-7]. Department of Health and Human Services; Centers for Disease Control and Prevention, **2010**.

NTP-CERHR. *Monograph on the potential human reproductive and developmental effects of biphenol A*. National Toxicology Program; U.S. Department of Health and Human Service. Center for the Evaluation of Risks to Human Reproduction. NIH Publication No. 08-5994. **2008**.

Ogawa, Y.; Kawamura, Y.; Wakui, C.; et al. Estrogenic activities of chemicals related to food contact plastics and rubbers tested by the yeast two-hybrid assay. *Food Addit. Contam.* **2006**, 23(4):422-430.

Öman, C. and Hynning, P-Å.; Identification of organic compounds in municipal landfill leachates. Environ Pollut. 1993, 80: 265-271.

OncoLogic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P)*, *Bioaccumulative (B)*, and *Toxic (T) Chemical (PBT)Profiler*. U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

Perez, P.; Pulgar, R.; Olea-Serrano, F.; et al. The estrogenicity of bisphenol A-related diphenylalkanes with various substituents at the central carbon and the hydroxyl groups. *Environ. Health Perspect.* **1998,** 106(3):167-174.

Serjeant, E.; Dempsey, B. Ionisation constants of organic acids in aqueous solution. 1979, New York: Pergamon Press.

Smyth, H.F. Jr.; Carpenter, C.P.; Weil, C.S. Range-finding toxicity data: List VI. Am. Ind. Hyg. Assoc. J. 1962, 23:95-107.

Stroheker, T., Chagnon, M-C., Pinnert, M-F., et al. Estrogenic effects of food wrap packaging xenoestrogens and flavonoids in female Wistar rats: a comparative study. *Reprod. Toxicol.* **2003**, 17:421-432.

Stroheker, T., Picard, K., Lhuguenot, J., et al. Steroid activities comparison of natural and food wrap compounds in human breast cancer cell lines. *Food Chem. Toxicol.* **2004**, 42:887-897.

Tsutsui, T.; Tamura, Y.; Suzuki, A.; et al. Mammalian cell transformation and aneuploidy induced by five bisphenols. *Int. J. Cancer* **2000**, 86:151-154.

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

Yamasaki, K.; Noda, S.; Imatanaka, N.; et al. Comparative study of the uterotrophic potency of 14 chemicals in a uterotrophic assay and their receptor-binding affinity. *Toxicol. Lett.* **2004,** 146:111-120.

Bisphenol C

но — Он

CASRN: 79-97-0

MW: 256.35

MF: $C_{17}H_{20}O_2$

Physical Forms: Neat: Solid

Use: Developer for thermal paper

SMILES: Cc1cc(ccc1O)C(C)(C)c2ccc(c(c2)C)O

Synonyms: Phenol, 4,4'-(1-methylethylidene) bis[2-methyl- (TSCA Inventory); Bisphenol C; 2,2-Bis(3-methyl-4-hydroxyphenyl)propane; 2,2-Bis(3-methyl-4-hydroxyphenyl)propane; 2,2-Bis(4-hydroxy-3-methylphenyl)propane; 2,2-Bis(4-hydroxy-3-methylphenyl)propane; 3,3'-Dimethylbisphenol A; 3,3'-Dimethyldian; 4,4'-(1-Methylethylidene)bis(2-methylphenol); 4,4'-Isopropylidenebis(2-methylphenol); 4,4'-isopropylidenedi-o-cresol

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: 4-hydroxy-3-methyl acetophenone, 4-hydroxy-3-methyl benzoic acid, and 2,2-bis[4-hydroxy-3-methylphenyl]-1-propanol

Analog: Bisphenol A (80-05-7)

Endpoint(s) using analog values: Acute toxicity, reproductive, developmental, repeated dose, skin sensitization, dermal irritation

Analog: Confidential analog (structure not available) **Endpoint(s) using analog values:** eye irritation

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

Analog Structure:

но-

	Bisphenol C CASRN 79)-97-0	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	PHYSICAL/CHEMICAL PR	OPERTIES	
Melting Point (°C)	138-140 (Measured)	Aldrich, 2009	Adequate; reported values that span a relatively narrow range and are consistent with those provided in other sources.
	140 (Measured)	Lide, 2008	Adequate.
Boiling Point (°C)	368 (Extrapolated from the reduced boiling point reported by Aldrich, 2009)	Professional judgment	The boiling point at 760 mm Hg was extrapolated from the measured boiling point at reduced pressure using a computerized nomograph.
	238-240 at 12 mm Hg (Measured)	Aldrich, 2009	Inadequate; value obtained at a reduced pressure.
Vapor Pressure (mm Hg)	2.3x10 ⁻⁶ (Estimated from the reduced boiling point reported by Aldrich, 2009)	Professional judgment	The vapor pressure was extrapolated from the measured boiling point at reduced pressure using a computerized nomograph.
Water Solubility (mg/L)	4.7 (Estimated)	EPI	
Log K _{ow}	4.7 (Estimated)	EPI	
Flammability (Flash Point)			No data located.
Explosivity			No data located.
рН			No data located.
pK _a	10.5 (Estimated)	SPARC	
	HUMAN HEALTH EFF	ECTS	
Toxicokinetics	Bisphenol C as a neat material is estimabsorption when in solution. Bisphenotract.		
Dermal Absorption in vitro			No data located.

Bisphenol C CASRN 79-97-0				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Not absorbed through the skin as neat material and has poor absorption in solution; can be absorbed through the lung and gastrointestinal tract (Estimated by analogy)		Based on closely related analog with similar structure, functional groups, and physical/chemical properties.
Acute Mammalian	Toxicity	LOW: Based on analogy to bisphenol a estimated to be low based on experiment bisphenol A via inhalation were inconceprovided.	ntal data in animals for the analo	g. Data for exposure to the analog
Acute Lethality	Oral	Rat $LD_{50} = 3,200$ ->5,000 mg/kg bw (Estimated by analogy)	Commission, 2000; EINECS,	Based on the analog bisphenol A; multiple studies, some guideline studies.
		Mouse $LD_{50} = 4,000-5,200 \text{ mg/kg bw}$ (Estimated by analogy)	Commission, 2000; EINECS,	Based on the analog bisphenol A; multiple studies, some guideline studies.
	Dermal	Rabbit $LD_{50} = 3,000-6,400 \text{ mg/kg bw}$ (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; limited study details provided for multiple studies reported in secondary sources.
	Inhalation	No deaths among male and female F344 rats (10/sex) exposed to bisphenol A dust at 0.17 mg/L (highest attainable concentration) for 6 hours; transient slight nasal tract epithelial damage was evident (Estimated by analogy)	EINECS, 2010; Professional	Based on the analog bisphenol A; test guidelines were not reported in secondary sources.

		Bisphenol C CASRN 79)-97-0	
PROPI	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Carcinogenicity		MODERATE: Estimated using OncoL potential carcinogen or tumorigenesis estrogenic/androgenic compounds, using	promoter arising from its structu	ıral similarity to
	OncoLogic Results	Moderate (Estimate) OncoLogic class: Phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/Carcinogenicity			No data located.
Genotoxicity		MODERATE: Bisphenol C induced m fibroblasts, but was not mutagenic in o without exogenous metabolic activity a cells.	ne assay of Salmonella typhimuri	<i>ium</i> strain TA1335 either with or
	Gene Mutation in vitro	Negative, umu test in <i>S. typhimurium</i> TA1335 with and without metabolic activation	Chen et al., 2002	Adequate.
		Negative, gene mutation tests at the Na+/K+ ATPase locus and hprt locus of Syrian hamster embryo (SHE) cells	Tsutsui et al., 2000	Adequate.
	Gene Mutation in vivo			No data located.
	Chromosomal Aberrations in vitro	Negative, chromosomal aberrations in SHE cells	Tsutsui et al., 2000	Adequate.
		Positive; induction of micronuclei in Chinese hamster V79 cells	Pfeiffer et al., 1997	Adequate.
	Positive; induction of micronuclei in human AG1522C fibroblasts	Lehmann and Metzler, 2004	Adequate.	
	Chromosomal Aberrations in vivo			No data located.
	DNA Damage and Repair			No data located.
	Other			No data located.

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT DATA REFERENCE DAT			DATA QUALITY	
Reproductive Effects			pectively following oral exposure to the fficient evidence in rats and mice that ses female reproductive toxicity at doses eproductive toxicity at doses ≥47.5mg/kg ole uncertainty regarding the results of	
Reproduction/ Developmental Toxicity Screen			No data located.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
Reproduction and Fertility Effects	Potential for toxic effects to testes and ovaries (Estimated by analogy)	Professional judgment	Estimated based on located test data for a confidential analog.	
	Potential for reproductive toxicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol A.	
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males Reproductive toxicity: Females: NOAEL = 47.5 mg/kg bw-day LOAEL = 475 mg/kg bw-day for	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.	
	decreases in number of implantation sites, delayed vaginal opening in F_1 , F_2 , F_3 offspring			

Bisphenol C CASRN 79-97-0			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Males: NOAEL = $4.75 \text{ mg/kg bw-day}$, LOAEL = 47.5 mg/kg-day for delayed preputial separation in F_1 males (Estimated by analogy)		
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.
	Reproductive toxicity: NOAEL = 50 mg/kg bw-day LOAEL = 600 mg/kg bw-day for increased gestation length, decreased epididymal sperm concentration in F_1 males, increased incidence of gross ovarian cysts in F_1 and F_2 females (Estimated by analogy)		
Summary of Reproductive effects	Female effects: There is sufficient evidence in rats and mice that bisphenol A causes female reproductive toxicity with subchronic or chronic oral exposures NOAEL of 47.5mg/kg bw-day LOAEL of 475 mg/kg bw-day. Male effects: There is sufficient evidence in rats and mice that bisphenol A causes male reproductive toxicity with subchronic or chronic oral exposures	judgment	Based on the analog bisphenol A; Classified by NTP-CERHR as having High Utility.

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	NOAEL of 4.75mg/kg bw-day			
	LOAEL of 47.5mg/kg bw-day.			
	(Estimated by analogy)			
	The joint FAO/WHO Expert Panel	NTP-CERHR 2008: Professional	Based on the analog bisphenol A;	
	(2010) reviewed located reproductive	judgment	Classified by NTP-CERHR as having	
	and developmental toxicity data for	J	High Utility.	
	bisphenol A as of November, 2010 and			
	noted that most regulatory bodies			
	reviewing the numerous studies on			
	bisphenol A have indicated an oral			
	reproductive and developmental NOAEL of 50 mg/kg bw-day.			
	or 50 mg/kg ow day.			
	(Estimated by analogy)			
Developmental Effects	HIGH: Estimated based on analogy to there is suggestive evidence that the an disruptions in normal sex differences i Expert Panel concluded that while the developmental toxicity, low-level (<1 m hazard designation of High concern of	alog bisphenol A causes neural a n rats and mice (0.01-0.2 mg/kg b re was broad agreement in a NO ng/kg bw-day) effects were uncer	nd behavioral alterations related to ow-day). The FAO/WHO (2011) AEL of 50 mg/kg bw-day for tain. These conclusions support a	
Reproduction/			No data located.	
Developmental Toxicity				
Screen			N. 1. 1	
Combined Repeated Dose with Reproduction/			No data located.	
Developmental Toxicity				
Screen				
Summary of Development	al Potential for developmental	Professional judgment	Estimated based on located test data	
Effects	neurotoxicity due to effects of thyroid		for a confidential analog.	
	toxicity			
	(Estimated by analogy)	D 6 : 1: 1		
	Potential for developmental toxicity	Professional judgment	Estimated based on reported	

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	(Estimated by analogy)		experimental data for the analog bisphenol A.	
	The NTP-CERHR (2008) Expert Panel concluded that bisphenol A: *Does not cause malformations or birth defects in rats or mice at levels up to the highest doses evaluated: 640 mg/kg-day (rats) and 1,250 mg/kg bw-day (mice). *Does not alter male or female fertility after gestational exposure up to doses of 450 mg/kg bw-day in the rat and 600mg/kg bw-day in the mouse (highest dose levels evaluated). *Does not permanently affect prostate weight at doses up to 475 mg/kg-day in adult rats or 600 mg/kg-day in mice. *Does not cause prostate cancer in rats or mice after adult exposure at up to 148 or 600 mg/kg-day, respectively. *Does change the age of puberty in male or female rats at high doses (ca. 475 mg/kg-day). And that rodent studies <i>suggest</i> that bisphenol A: *Causes neural and behavioral alterations related to disruptions in normal sex differences in rats and mice. (0.01-0.2 mg/kg/day). (Estimated by analogy)	judgment	Based on the analog bisphenol A.	

	Bisphenol C CASRN 79-97-0			
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		The joint FAO/WHO Expert Panel reviewed located reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bwday.	judgment	Based on the analog bisphenol A.
Neurotoxicity		MODERATE: Estimated to have poter alert.	ntial for neurotoxicity based on t	he presence of the phenol structural
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.
Repeated Dose Effe	cts	MODERATE: Estimated based on analiver (centrilobular hepatocyte hypertriday) and there is uncertainty regarding bw-day and the LOAEL of 50 mg/kg by nasal cavity of rats were reported follow. These findings indicate a Moderate haz	ophy) from oral dosing at 50 mg/g the potential for bisphenol A dow-day to cause adverse systemic wing repeated inhalation exposurand potential for the oral and in	kg bw-day (NOAEL = 5 mg/kg bw- ses between the NOAEL of 5 mg/kg effects. Furthermore, lesions in the re to bisphenol A dust at 0.05 mg/L. halation exposure routes.
		Potential for liver toxicity (Estimated by analogy)	Ç Ç	Estimated based on reported experimental data for the analog bisphenol A.

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	The FAO/WHO Expert Panel reviewed the located information regarding repeated-dose oral toxicity of bisphenol A and concluded that results demonstrated effects on the liver, kidney, and body weight at doses of 50 mg/kg bw-day and higher and that the lowest NOAEL was 5 mg/kg-day, as identified in several studies. (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.	
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.	
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.	
	NOAEL = 0.01 mg/L LOAEL = 0.05 mg/L based on microscopic changes in the anterior portion of the nasal cavity (Estimated by analogy) NOAEL = None established	European Commission, 2000; EINECS, 2010; Professional judgment European Commission, 2000;	Based on the analog bisphenol A. Based on the analog bisphenol A;	

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	LOAEL = 0.047 mg/L for decreased body weight gain, increased liver and kidney weight, unspecified "morphological changes" in liver, kidney, and lungs (Estimated by analogy)	EINECS, 2010; Professional judgment	single exposure level, insufficient study details in secondary sources.	
Skin Sensitization	MODERATE: Based on analogy to bis data from three bisphenol A manufactu however, results of some human studies cross-sensitization was not ruled out. Marmal sensitization, although assays me photoallergy test in mice and moderate Based on suggestive evidence of skin se designation is warranted.	uring facilities indicate that it does suggest the possibility of a dern Most animal studies conducted or nay not have been maximized. The redness and swelling following reconstructions.	es not elicit skin sensitization; nal sensitization response, although n the analog were negative for here is evidence of ear swelling in a repeated dermal exposure in rabbits.	
Skin Sensitization	Potential for dermal sensitization (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol A.	
	Negative in a modified local lymph node assay of mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on three consecutive days. (Estimated by analogy)		Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%.	
	Negative in a local lymph node assay modified to test for photoreactivity in mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on three consecutive days and irradiated with UV light immediately following application. (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%.	

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Negative in comprehensive medical surveillance data obtained from three bisphenol A manufacturing plants for 875 employees examined for several years where workers were potentially exposed to other chemicals (phenol, acetone) that are not considered to be skin sensitizers. (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate.	
	Positive, rabbits; repeated dermal application (30 times over 37 days) of bisphenol A (pure powder) produced moderate swelling and redness. Skin turned yellow followed by dark pigmentation after day 15. (Estimated by analogy)	NIOSH, 2010; Professional judgment	Based on the analog bisphenol A; adequate.	
	The Joint FAO/WHO Expert Meeting to review toxicological aspects of bisphenol A concurs with previous reviews that bisphenol A is capable of producing a skin sensitization response in humans. (Estimated by analogy)		Based on the analog bisphenol A; adequate.	
Respiratory Sensitization	No data located.			
Respiratory Sensitization			No data located.	
Eye Irritation	HIGH: Based on analogy to a confidential analog, bisphenol C is estimated to potentially cause severe irritation and corrosion to eyes.			
Eye Irritation	Potential for severe irritation and corrosion to eyes (Estimated by analogy)	Professional judgment	Estimated based on located test data for a confidential analog.	
Dermal Irritation	MODERATE: Based on analogy to bisphenol A; bisphenol C is estimated to be slightly irritating to moderately irritating to rabbit skin based on test data for the analog bisphenol A. NIOSH has assigned the analog, bisphenol A, as a skin irritant.			
Dermal Irritation	Rabbit, nonirritating to slightly irritating	European Commission, 2000;	Based on the analog bisphenol A;	

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	when applied as undiluted or 10% aqueous suspension to intact or abraded skin (Estimated by analogy)	EINECS, 2010; NIOSH, 2010; Professional judgment	Adequate, study details provided for multiple studies indicate potential for bisphenol A to cause dermal irritation.	
	Rabbit, moderately irritating when applied as 40% solution in dimethyl sulfoxide under non-occlusive conditions. (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.	
	Guinea pig, not irritating when applied as 5% solution in acetone for 24 hours under occlusive conditions. (Estimated by analogy)	s European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.	
Endocrine Activity	Based on limited in vitro data it appears that Bisphenol C exhibits endocrine activity. <i>In vitro</i> assays demonstrate that bisphenol C can bind to estrogen receptors, elicit estrogen-induced gene transcription, and induce cell proliferation in MCF7 cancer cells. In an ARE-luciferase reporter assay using a mouse fibroblast cell line, bisphenol C did not elicit an androgenic response, but did inhibit the androgenic activity of dihydrotestosterone. Data located indicate that the <i>in vitro</i> endocrine activity of bisphenol C is approximately 3-5 orders of magnitude less than that of 17β-estradiol, suggesting that bisphenol C acts as a weak estrogen. Limited comparative <i>in vitro</i> data suggest that the endocrine activity of bisphenol C is similar in magnitude to that of bisphenol A, bisphenol AP, and bisphenol F and somewhat more potent than bisphenol S. Bisphenol C elicited estrogenic and anti-estrogenic responses in a CARP-HEP/vitellogenin assay.			
	Binding Assays			
	In a human ER binding assay, the relative binding affinity (RBA) of bisphenol C, was 0.129% compared to 126% for 17β-estradiol. RBAs for other bisphenol compounds included 0.195% for bisphenol A, 0.0803% for bisphenol AP, 0.0719% for bisphenol F, and 0.0055% for bisphenol S. An RBA of 0.00473% was reported for PHBB.	METI, 2002	Adequate.	

	Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	In a competitive ER binding assay using human ERα, the RBA for bisphenol C was 1.68% that of 17β-estradiol. RBAs for other bisphenol compounds included 0.32% for bisphenol A, 1.66% for bisphenol AP, and 0.09% for bisphenol	Coleman et al., 2003	Adequate.		
	Gene Transcription and Reporter Gene Assays				
	Bisphenol C exhibited evidence of estrogenic activity in a yeast (<i>Saccharomyces cerevisiae</i>) two-hybrid assay using ERα and the coactivator TIF2. Based on estrogenic activity that was 5 orders of magnitude lower than that of 17β-estradiol, bisphenol C was considered weakly estrogenic. Assessment of other bisphenols resulted	Chen et al., 2002	Adequate.		
	in a ranking of relative potency as follows: bisphenol $C \ge$ bisphenol $A >$ bisphenol S .				
	Bisphenol C did not exhibit evidence of estrogenic activity in a yeast (<i>Saccharomyces cerevisiae</i>) two-hybrid assay using ERα and the coactivator TIF2.	Nishihara et al., 2000	Adequate.		

	Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	In a reporter gene assay of estrogen-induced transcriptional activity, relative activity (RA) for bisphenol C was 0.00189% compared to 81.7% for 17β-estradiol. RAs for other bisphenol compounds included 0.00278% for bisphenol A, 0.000639% for bisphenol F, 0.000254% for bisphenol S, and	METI, 2002	Adequate.		
	0.000184% for bisphenol AP. An RA of 0.000592% was reported for PHBB.				
	In an ERE-luciferase reporter assay using MCF-7 cells, an EC ₅₀ was 0.42 μM for bisphenol C compared to an EC ₅₀ of 8.6 x 10 ⁻⁶ for 17β-estradiol (i.e., bisphenol A was approximately 5 orders of magnitude less potent than 17β-estradiol at inducing estrogenic activity). EC ₅₀ values for other bisphenol compounds included 0.63 μM for bisphenol A, 1.0 μM for bisphenol F, and 1.1 μM for bisphenol S		Adequate.		
	In an ER-mediated reporter gene expression assay, bisphenol C induced reporter gene expression at a relative activity (RA) of 4.9 x 10 ⁻⁴ that of 17β-estradiol. RAs for other bisphenol compounds included 5.3 x 10 ⁻⁴ for bisphenol F, 9.0 x 10 ⁻⁵ for bisphenol AP, and 2.75 x 10 ⁻³ for bisphenol A.	Coleman et al., 2003	Adequate.		

Bisphenol C CASRN 79-97-0			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	In an ERE-luciferase reporter assay	Kitamura et al., 2005	Adequate.
	using MCF-7 cells in the presence of 17β-estradiol, neither bisphenol C,		
	bisphenol A, bisphenol F, nor bisphenol		
	S appeared to exert an anti-estrogenic		
	effect		
	In a proliferation assay of MCF-7 human	Coleman et al., 2003	Adequate.
	breast cancer cells that contain ERα and		
	ERβ and are known to proliferate in		
	response to estrogens, bisphenol C		
	induced a proliferative response that was		
	1.6x10 ⁻³ that of 17β-estradiol.		
	Respective proliferative responses for		
	other bisphenol compounds were 2.0x10 ⁻³ for bisphenol A, 1.0x10 ⁻³ for		
	bisphenol F, and $6.0x10^{-4}$ for bisphenol		
	AP.		
	In an ERE-luciferase reporter assay	Kitamura et al., 2005	Adequate.
	using MCF-7 cells in the presence of		
•	17β-estradiol, neither bisphenol C,		
	bisphenol A, bisphenol F, nor bisphenol		
	S appeared to exert an anti-estrogenic		
	effect		

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Cell Proliferation Assays			
	In a proliferation assay of MCF-7 human	Coleman et al., 2003	Adequate.	
	breast cancer cells that contain ER α and			
	ERβ and are known to proliferate in			
	response to estrogens, bisphenol C			
	induced a proliferative response that was 1.6×10^{-3} that of 17β -estradiol.			
	Respective proliferative responses for			
	other bisphenol compounds were 2.0			
	$x10^{-3}$ for bisphenol A, 1.0 x 10^{-3} for			
	bisphenol F, and 6.0 x 10 ⁻⁴ for bisphenol			
	AP.			
	Androgen Assays			
	In an ARE-luciferase reporter assay	Kitamura et al., 2005	Adequate.	
	using a mouse fibroblast cell line			
	(NIH3T3 cells), neither bisphenol C,			
	bisphenol A, bisphenol F, nor bisphenol			
	S exerted an androgenic effect	***		
	In an ARE-luciferase reporter assay	Kitamura et al., 2005	Adequate.	
	using a mouse fibroblast cell line (NIH3T3 cells), bisphenol C inhibited			
	the androgenic activity of			
	dihydrotestosterone. Anti-androgenic			
	responses were elicited by bisphenol A,			
	bisphenol F, and bisphenol S as well.			
	Thyroid Assays			
	In an assay of thyroid hormonal activity	Kitamura et al., 2005	Adequate.	
	whereby induction of growth hormone		-	
	production is assessed in GH3 cells,			
	neither bisphenol C nor bisphenol A			
	inhibited growth hormone production			
	Vitellogenin Assays			
	1		1	

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In a CARP-HEP/vitellogenin assay, bisphenol C and bisphenol A induced vitellogenin production by up to 5 and 3%, respectively, of the vitellogenin production elicited by 17β-estradiol, indicating an estrogenic effect. In 17β-estradiol-induced preparations, bisphenol C inhibited vitellogenin production with a potency approximately one-hundredth that of the known estrogen antagonist tamoxifen, indicating an anti-estrogenic effect for bisphenol C.	Letcher et al., 2005	Adequate.	
Immunotoxicity	No data located.			
Immune System Effects			No data located.	
	ECOTOXICITY			
ECOSAR Class	Polyphenols			
Acute Toxicity	HIGH: Based on an experimental LC ₅	o value for Daphnid (1.6 mg/L) as	nd estimated acute toxicity values.	
Fish LC ₅₀	Fish 96-hour $LC_{50} = 0.60 \text{ mg/L}$ (Estimated) ECOSAR: polyphenols Fish 96-hour $LC_{50} = 0.95 \text{ mg/L}$	EPI EPI		
	(Estimated) ECOSAR: neutral organics			

Bisphenol C CASRN 79-97-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Daphnid LC ₅₀	Daphnia magna 48-hour $EC_{50} =$ 1.6 mg/L; 24-hour $EC_{50} = 4$ mg/L (Experimental)	Chen et al., 2002	Adequate.	
	Daphnid 48-hour $LC_{50} = 0.77 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI		
	Daphnid 48-hour $LC_{50} = 0.85 \text{ mg/L}$ (Estimated) ECOSAR: polyphenols	EPI		
Green Algae EC ₅₀	Green algae 96-hour $EC_{50} = 1.02 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI		
	Green algae 96-hour EC ₅₀ = 1.25 mg/L (Estimated) ECOSAR: polyphenols	EPI		
Chronic Aquatic Toxicity	HIGH: Estimated LC ₅₀ values for fish			
	values for neutral organics and polyph	-	0.	
Fish ChV	Fish ChV = 0.09 mg/L (Estimated) ECOSAR: neutral organics	EPI		
	Fish ChV = 0.12 mg/L (Estimated) ECOSAR: polyphenols	EPI		
Daphnid ChV	Daphnid ChV = 0.12 mg/L (Estimated) ECOSAR: neutral organics	EPI		
	Daphnid ChV = 0.27 mg/L (Estimated) ECOSAR: polyphenols	EPI		
Green Algae ChV	Green algae ChV = 0.13 mg/L (Estimated) ECOSAR: polyphenols	EPI		

Bisphenol C CASRN 79-97-0				
PRO	PERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Green algae ChV = 0.61 mg/L (Estimated) ECOSAR: neutral organics	EPI	
		ENVIRONMENTAL F	ATE	
Transport		If released to air, a vapor pressure of 2 the vapor and particulate phases in the the atmosphere by wet or dry deposition based upon an estimated $K_{\rm oc}$ of 100,000 important fate process based upon this model results, which utilized estimated partition primarily to soil and sediment	e atmosphere. Particulate-phase on. If released to soil, bisphenol (0. Volatilization from water surf s compound's estimated Henry's l l values as the input parameters,	bisphenol C will be removed from C is expected to have low mobility aces is not expected to be an Law constant. Level III fugacity
	Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for nonvolatile compounds based on professional judgment.
	Sediment/Soil Adsorption/Desorption Coefficient – K _{oc}	>30,000 (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonmobile compounds according to SF assessment guidance.
	Level III Fugacity Model	Air = <1% (Estimated) Water = 6% Soil = 63% Sediment = 31%	EPI	
Persistence		MODERATE: Experimental studies in aerobic biodegradation. Bisphenol C h 2 weeks in a TOC Handai river die awarexperimental studies demonstrating 17 bisphenol C degradation intermediates indicate that they do not persist in the hydrolysis and so hydrolysis is not an ebiodegradation have not been reported	as a measured primary biodegrada ay method. Ultimate biodegrada 7% mineralization after 2 weeks (is have been identified (Sakai, 200 environment. Bisphenol C lacks expected removal process. In add	dation half-life in water of less than tion will take longer based on (Ike, 2006). Although three (7), the ultimate biodegradation data functional groups susceptible to

	Bisphenol C CASRN 79-97-0				
PF	ROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Water	6	17% in 2 weeks (complete degradation) (Measured)	Ike, 2006	Adequate; valid nonguideline study demonstrating river water microcosms have the potential to biodegrade bisphenol C.	
		58% in 2 weeks; % removal in a microcosm study (partial degradation) (Measured)	Ike, 2006	Supporting information presented; nonguideline study.	
		94% in four days by <i>Sphingomonas</i> sp. Strain BP-7 (degradation intermediates detected) (Measured)	Sakai, 2007	Adequate; valid nonguideline study using a pure culture innoculum supporting the potential for aerobic biodegradation.	
		Degradation products 4-hydroxy- 3-methyl acetophenone, 4-hydroxy- 3-methyl benzoic acid, and 2,2-bis[4-hydroxy-3-methylphenyl]- 1-propanol identified; no biodegradation rate information included (Measured)	Lobos, 1992	Adequate, nonguideline study that provides supporting information on environmental persistence.	
	Volatilization Half-life for Model River	>1 year (Estimated)	ЕРІ		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	ЕРІ		
Soil	Aerobic Biodegradation			No data located.	
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	ЕРІ		
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation			No data located.	
Air	Atmospheric Half-life	1.3 hours (Estimated)	EPI		

	Bisphenol C CASRN 79-97-0				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to absorb light at environmentally significant wavelengths.	
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Half-life		75 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		MODERATE: The estimated fish BC	F is <1,000.		
	Fish BCF	620 (Estimated)	EPI		
	BAF	110 (Estimated)	EPI		
	Metabolism in Fish			No data located.	
	ENVIRONMENTAL MONITORING AND BIOMONITORING				
Environmental Monitoring No data located.		No data located.			
Ecological Biomonia	Ecological Biomonitoring No data located.				
Human Biomonitor	ing	This chemical was not included in the NHANES biomonitoring report (CDC, 2011).			

Aldrich. Handbook of Fine Chemicals and Laboratory Equipment. 2009-2010. Milwaukee, WI: Aldrich Chem Co. 2009, p.344.

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

Chen, M-Y.; Michihiko, I.; Fujita, M. Acute toxicity, mutagenicity, and estrogenicity of bisphenol-A and other bisphenols. *Environ. Toxicol.* **2002**, 17:80-86.

Coleman, K.P., Toscano, W.A., Wiese, T.E. QSAR Models of the *in vitro* estrogen activity of bisphenol A analogs. QSAR & Combinatorial Science **2003.** 22:78-88.

CDC (Centers for Disease Control and Prevention). Fourth national report on human exposure to environmental chemicals, updated tables. Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

EINECS. 4,4'-Isopropylidenediphenol (bisphenol A). European Union Risk Assessment Report. 2010.

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

European Commission. IUCLID Dataset for 4,4-isopropylidenediphenol (CAS No. 80-05-7). European Chemicals Bureau, February 19, 2000. **2000**.

FAO/WHO. Toxicological and health aspects of bisphenol A. Report of Joint FAO/WHO expert meeting 2-5 November 2010 and report of stakeholder meeting on bisphenol A 1 November 2010. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. **2011**.

Ike, M.; Chen, M.Y.; Danzl, E.; et al. Biodegradation of a variety of bisphenols under aerobic and anaerobic conditions. *Water Sci. Technol.* **2006**, 53:153-159.

Kitamura, S.; Suzuki, T.; Sanoh, S.; et al. Comparative study of the endocrine-disrupting activity of bisphenol A and 19 related compounds. *Toxicol. Sci.* **2005**, 84:249-259.

Lehmann L., Metzler M. Bisphenol A and its methylated congeners inhibit growth and interfere with microtubules in human fibroblasts *in vitro*. *Chem. Biol. Interact.* **2004**, 147:273-285.

Letcher, R. J., Sanderson, J.T., Bokkers, A., et al. Effects of bisphenol A-related diphenylalkanes on vitellogenin production in male carp (Cyprinus carpio) hepatocytes and aromatase (CYP19) activity in human H295R adrenocortical carcinoma cells. *Toxicol. Appl. Pharmacol.* **2005**, 209:95-104.

Lide, D. R, ed. CRC Handbook of Chemistry and Physics, 88th edition; CRC Press Taylor Francis: Boca Raton, FL. 2008.

Lobos, J., Leib, T., Su, T. Biodegradation of Bisphenol A and Other Bisphenols by a Gram-Negative Aerobic Bacterium. *Appl. Environ. Microbiol.* **1992**, 58(6):1823-1831.

METI. Current status of testing methods development for endocrine disruptors. **2002**, Ministry of Economy, Trade and Industry, Japan. 6th meeting of the task force on Endocrine Disruptors Testing and Assessments (EDTA). 24-25 June, 2002. Tokyo.

NIOSH (National Institute for Occupational Safety and Health). Skin notation (SK) profile, bisphenol A (BPA) [CAS No. 80-05-7]. Department of Health and Human Services; Centers for Disease Control and Prevention, **2010**.

Nishihara, T.; Nishikawa, J.; Kanayama, T.; et al. Estrogenic activities of 517 chemicals by yeast two-hybrid assay. *J. Health Sci.* **2000**, 46(4) 282-298.

NTP (National Toxicology Program). Carcinogenesis bioassay of bisphenol-A (CAS No. 80-05-7) in F344 rats and B6C3F1 mice (feed study). Technical Report No. 215, PB82-184060. **1982.**

NTP-CERHR. Monograph on the potential human reproductive and developmental effects of biphenol A. National Toxicology Program; U.S. Department of Health and Human Service. Center for the Evaluation of Risks to Human Reproduction. NIH Publication No. 08-5994. September 2008.

Oncologic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT)Profiler*, U.S. Environmental Protection Agency: Washington D.C. <u>www.pbtprofiler.net</u>.

Perez, P., Pulgar, R., Olea-Serrano, F., et al. The estrogenicity of bisphenol A-related diphenylalkanes with various substituents at the central carbon and the hydroxyl groups. *Environ. Health Perspect.* **1998**, 106(3):167-174.

Pfeiffer, E., Rosenberg, B., Deuschel, S., et al. Interference with microtubules and induction of micronuclei *in vitro* by various bisphenols. *Mutat. Res.* **1997**, 390:21-31.

Sakai, K., Yamanaka, H., Moriyoshi, K, et al. Biodegradation of bisphenol A and related compounds by *Sphingomonas* sp. strain BP-7 isolated from seawater. *Biosci. Biotechnol. Biochem.* **2007**, 71(1):51-57.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

Tsutsui, T., Tamura, Y., Suzuki, A., et al. Mammalian cell transformation and aneuploidy induced by five bisphenols. *Int. J. Canc.* **2000**, 86:151-154.

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

MBHA

MW: 258.28

MF: $C_{15}H_{14}O_4$

CASRN 5129-00-0

Physical Forms:

Neat: Solid

Use: Developer for thermal paper

SMILES: O=C(OC)C(c(ccc(O)c1)c1)c(ccc(O)c2)c2

Synonyms: Benzeneacetic acid, 4-hydroxy-.alpha.-(4-hydroxyphenyl)-, methyl ester (TSCA Inventory); Methyl bis(4-hydroxyphenyl)acetate

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None identified

Analog: Bisphenol A (80-05-7)

Endpoint(s) using analog values: Acute toxicity, reproductive, developmental, repeated dose, skin and eye irritation, genotoxicity

Analog Structure:

HO-\begin{align*} \rightarrow \rightarrow

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

MBHA CASRN 5129-00-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	PHYSICAL/CHEMICAL PR	OPERTIES		
Melting Point (°C)			No data located.	
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling point compounds according to HPV assessment guidance.	
Vapor Pressure (mm Hg)	3.3x10 ⁻⁸ (Estimated)	EPI		
Water Solubility (mg/L)	360 (Estimated)	EPI		
Log K _{ow}	2.8 (Estimated)	EPI		
Flammability (Flash Point)			No data located.	
Explosivity			No data located.	
pH			No data located.	
pK_a	9.7-9.9 (Estimated)	SPARC		

	MBHA CASRN 5129-00-0			
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		HUMAN HEALTH EFF		
Toxicokinetics	Toxicokinetics MBHA as a neat material is estimated to not be absorbed through the skin and will have poor sk absorption when in solution. MBHA is expected to be absorbed via the lungs and gastrointestina expected that MBHA will undergo ester hydrolysis by esterases in the body.			ings and gastrointestinal tract. It is
Dermal Absorptio	n in vitro			No data located.
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Not absorbed through the skin as neat material and has poor absorption in solution; can be absorbed through the lung and gastrointestinal tract (Estimated by analogy)	Professional judgment	Based on closely related analog with similar structure, functional groups, and physical/chemical properties.
Acute Mammaliar	to be low based on experimental data in animals for a closely related substance. Data for e analog bisphenol A via inhalation were inconclusive, as only a single concentration was test was not provided.		stance. Data for exposure to the	
Acute Lethality	Oral	Rat $LD_{50} = 3,200 -> 5,000 \text{ mg/kg bw}$ (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies.
		Mouse $LD_{50} = 4,000-5,200 \text{ mg/kg bw}$ (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies.
	Dermal	Rabbit LD ₅₀ = 3,000-6,400 mg/kg bw (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate by weight of evidence, multiple studies, although study details were not reported in secondary sources.
	Inhalation	No deaths among male and female F344 rats (10/sex) exposed to bisphenol A dust at 0.17 mg/L (highest attainable concentration) for 6 hours; transient slight nasal tract epithelial damage was evident (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; test guidelines were not reported in secondary sources.

	MBHA CASRN 5129-00-0			
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Carcinogenicity		MODERATE: Estimated using OncoLogic expert system which describes a concern for this compound as a potential carcinogen or tumorigenesis promoter arising from its structural similarity to estrogenic/androgenic compounds, using the 'phenols and phenolic compounds' structural alert.		
	OncoLogic Results	Moderate (Estimate) OncoLogic class: phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/Carcinogenicity			No data located.
Genotoxicity		LOW: Based on analogy to bisphenol A not a mutagen in <i>in vitro</i> test systems, (2) <i>in vivo</i> evidence for clastogenic effects in although some <i>in vitro</i> studies have show conclusion of FAO/WHO (2011) is that thumans.	the analog bisphenol A does not duced by the analog bisphenol A n bisphenol A to affect chromoso	induce cell transformation, and (3) is inconsistent and inconclusive, mal structure in dividing cells. The
		Potential for mutagenicity (Estimated by analogy)		Estimated based on reported experimental data for the analog bisphenol A.

MBHA CASRN 5129-00-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		FAO/WHO, 2011	Based on the analog bisphenol A.	
	(Estimated by analogy)			

MBHA CASRN 5129-00-0			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Reproductive Effects	HIGH: Based on analogy to bisphenol A. Based on NOAELs of 4.75 mg/kg bw-day and 47.5 mg/kg bw-day for reproductive toxicity in male and female rats, respectively, following oral exposure to the analog bisphenol A. Conclusions of NTP-CERHR (2008) include sufficient evidence in rats and mice that subchronic or chronic oral exposures to the analog bisphenol A causes female reproductive toxicity at doses ≥475 mg/kg bw-day (highest NOAEL = 47.5 mg/kg-day) and male reproductive toxicity at doses ≥47.5mg/kg bw-day (highest NOAEL = 4.75 mg/kg bw-day). There is considerable uncertainty regarding the results of recent studies that reported reproductive and/or developmental effects in laboratory animals administered the analog BPA at oral doses <5 mg/kg bw-day.		
Reproduction/ Developmental Toxicity Screen			No data located.
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.

MBHA CASRN 5129-00-0			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Reproduction and Fertility Effects	Potential for reproductive toxicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol A.
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males Reproductive toxicity: Females: NOAEL = 47.5 mg/kg bw-day LOAEL = 475 mg/kg bw-day for decreases in number of implantation sites, delayed vaginal opening in F ₁ , F ₂ , and F ₃ offspring Males: NOAEL = 4.75 mg/kg bw-day, LOAEL = 47.5 mg/kg bw-day for delayed preputial separation in F ₁ males	judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.
	(Estimated by analogy)		

	MBHA CASRN 5129-00-0				
PROPER	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females Reproductive toxicity: NOAEL = 50 mg/kg bw-day LOAEL = 600 mg/kg bw-day for increased gestation length, decreased epididymal sperm concentration in F ₁ males, increased incidence of gross ovarian cysts in F ₁ and F ₂ females	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.	
	Summary of Reproductive Effects	(Estimated by analogy) Female effects: There is sufficient evidence in rats and mice that bisphenol A causes female reproductive toxicity with subchronic or chronic oral exposures NOAEL of 47.5 mg/kg bw-day LOAEL of 475 mg/kg bw-day Male effects: There is sufficient evidence in rats and mice that bisphenol A causes male reproductive toxicity with subchronic or chronic oral exposures NOAEL of 4.75mg/kg bw-day LOAEL of 47.5mg/kg bw/day (Estimated by analogy)		Based on the analog bisphenol A. Classified by NTP-CERHR as having High Utility.	

MBHA CASRN 5129-00-0			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	The joint FAO/WHO Expert Panel (2011) reviewed available reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bw-day. (Estimated by analogy)	FAO/WHO, 2011; NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A. Classified by NTP-CERHR as having High Utility.
Developmental Effects	HIGH: Based on analogy to bisphenol A. The NTP-CERHR (2008) Expert Panel concluded that there is suggestive evidence that the analog bisphenol A causes neural and behavioral alterations related to disruptions in normal sex differences in rats and mice (0.01-0.2 mg/kg bw-day). The FAO/WHO (2011) Expert Panel concluded that while there was broad agreement in a NOAEL of 50 mg/kg bw-day for developmental toxicity, low level (<1 mg/kg bw-day) effects were uncertain. These conclusions support a call of High concern of the analog, with lower confidence.		
Reproduction/ Developmental Toxicity Screen			No data located.
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
Summary of Developmental Effects	Potential for developmental toxicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol A.

MBHA CASRN 5129-00-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
T c ** d h h d ** a 4 66 d ** m 66 * fi b * red d 0	The NTP-CERHR (2008) Expert Panel	NTP-CERHR, 2008; Professional judgment	•	

MBHA CASRN 5129-00-0			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	, , ,	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.
The state of the s	MODERATE: Estimated to have potential for neurotoxicity based on the presence of the phenol structural alert.		
• ` ` ` `	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.

MBHA CASRN 5129-00-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Repeated Dose Effects	MODERATE: Estimated based on analogy to bisphenol A, which produced histopathologic changes in the liver (centrilobular hepatocyte hypertrophy) from oral dosing at 50 mg/kg bw-day (NOAEL = 5 mg/kg bw-day) and there is uncertainty regarding the potential for bisphenol A doses between the NOAEL of 5 mg/kg bw-day and the LOAEL of 50 mg/kg bw-day to cause adverse systemic effects. Furthermore, lesions in the nasal cavity of rats were reported following repeated inhalation exposure to bisphenol A dust at 0.05 mg/L. These findings indicate a Moderate hazard concern for the oral and inhalation exposure routes.			
	Potential for liver toxicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol A.	
	The FAO/WHO (2011) Expert Panel reviewed the available information regarding repeated-dose oral toxicity of bisphenol A and concluded that results demonstrated effects on the liver, kidney, and body weight at doses of 50 mg/kg bwday and higher and that the lowest NOAEL was 5 mg/kg-day, as identified in several studies. (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.	
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.	
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.	

	MBHA CASRN 5129-00-0			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	NOAEL = 0.01 mg/L LOAEL = 0.05 mg/L based on microscopic changes in the anterior portion of the nasal cavity	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A.	
	(Estimated by analogy) NOAEL = None established LOAEL = 0.047 mg/L for decreased body weight gain, increased liver and kidney weight, unspecified "morphological changes" in liver, kidney, and lungs (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; single exposure level, insufficient study details in secondary sources.	
Skin Sensitization	LOW: Based on experimental data, MBHA is not a skin sensitizer in guinea pigs.			
Skin Sensitization	Not a skin sensitizer in maximization assay in guinea pigs	Kawaguchi Chemical Co., 2011	Conducted according to OECD guideline 406.	
Respiratory Sensitization	No data located.			
Respiratory Sensitization			No data located.	
Eye Irritation	MODERATE: Based on analogy to bisp rabbit eyes.	henol A. The analog bisphenol A	A was slightly to highly irritating to	
Eye Irritation	Rabbit, slightly to highly irritating (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A. Adequate; multiple studies, weight of evidence indicates potential for bisphenol A to cause eye irritation.	
Dermal Irritation MODERATE: Based on analogy to bisphenol A. The analog bisphenol A was slightly irritating to moderately irritating to rabbit skin. NIOSH has assigned the analog, bisphenol A as a skin irritant				

	MBHA CASRN 5129-00-0				
PROPEI	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Dermal Irritation	Rabbit, nonirritating to slightly irritating when applied as undiluted or 10% aqueous suspension to intact or abraded skin (Estimated by analogy)	European Commission, 2000; EINECS, 2010; NIOSH 2010; Professional judgment	Based on the analog bisphenol A. Adequate; multiple studies, weight of evidence indicates potential for bisphenol A to cause dermal irritation.	
		Rabbit, moderately irritating when applied as 40% solution in dimethyl sulfoxide under non-occlusive conditions (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.	
		Guinea pig, not irritating when applied as 5% solution in acetone for 24 hours under occlusive conditions (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.	
Endocrine Activity	<i>I</i>	No data located.			
				No data located.	
Immunotoxicity		No data located.			
	Immune System Effects			No data located.	
		ECOTOXICITY			
ECOSAR Class		Polyphenols, esters			
Acute Toxicity		HIGH: Estimated 96-hour LC ₅₀ for fish	and 96-hour EC_{50} for algae are in	n the range of 1-10 mg/L.	
Fish LC ₅₀		Fish 96-hour $LC_{50} = 8.80 \text{ mg/L}$ (Estimated) ECOSAR: polyphenols	EPI		
		Fish 96-hour LC ₅₀ = 13.0 mg/L (Estimated) ECOSAR: esters	EPI		
		Fish 96-hour $LC_{50} = 45.72 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI		

	MBHA CASRN 5129-00-0				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Daphnid LC ₅₀	Daphnid 48-hour LC ₅₀ = 24.24 mg/L (Estimated) ECOSAR: esters	EPI			
	Daphnid 48-hour $LC_{50} = 28.52 \text{ mg/L}$ (Estimated) ECOSAR: polyphenols	EPI			
	Daphnid 48-hour $LC_{50} = 28.9 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI			
Saltwater Invertebrate LC ₅₀	Mysid shrimp 96-hour $LC_{50} = 12.60 \text{ mg/L}$ (Estimated) ECOSAR: esters	EPI			
Green Algae EC ₅₀	Green algae 96-hour EC ₅₀ = 1.88 mg/L (Estimated) ECOSAR: polyphenols	EPI			
	Green algae 96-hour $EC_{50} = 9.53 \text{ mg/L}$ (Estimated) ECOSAR: esters	EPI			
	Green algae 96-hour EC ₅₀ = 16.98 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Chronic Aquatic Toxicity	HIGH: Estimated ChV for fish and ChV	I for algae are in the range of 0.1-	-1.0 mg/L.		
Fish ChV	Fish 32/33-day ChV = 0.97 mg/L (Estimated) ECOSAR: esters	EPI			
	Fish 30-day ChV = 2.41 mg/L (Estimated) ECOSAR: polyphenols	EPI			

MBHA CASRN 5129-00-0				
DATA	REFERENCE	DATA QUALITY		
Fish ChV = 4.27 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Daphnid ChV = 3.050 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Daphnid 21-day ChV = 12.60 mg/L (Estimated) ECOSAR: esters	EPI			
Daphnid 21-day ChV = 10.19 mg/L (Estimated) ECOSAR: polyphenols	EPI			
Mysid shrimp ChV = 194.76 mg/L (Estimated) ECOSAR: esters	EPI			
Green algae ChV = 0.450 mg/L (Estimated) ECOSAR: polyphenols	EPI			
Green algae ChV = 3.07 mg/L (Estimated) ECOSAR: esters	EPI			
Green algae ChV = 7.05 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Earthworm 14-day LC ₅₀ = 1,922.81 mg/L (Estimated) ECOSAR: esters (MBHA may not be soluble enough to measure this predicted effect)	EPI			
	Fish ChV = 4.27 mg/L (Estimated) ECOSAR: neutral organics Daphnid ChV = 3.050 mg/L (Estimated) ECOSAR: neutral organics Daphnid 21-day ChV = 12.60 mg/L (Estimated) ECOSAR: esters Daphnid 21-day ChV = 10.19 mg/L (Estimated) ECOSAR: polyphenols Mysid shrimp ChV = 194.76 mg/L (Estimated) ECOSAR: esters Green algae ChV = 0.450 mg/L (Estimated) ECOSAR: polyphenols Green algae ChV = 3.07 mg/L (Estimated) ECOSAR: polyphenols Green algae ChV = 7.05 mg/L (Estimated) ECOSAR: neutral organics Earthworm 14-day LC ₅₀ = 1,922.81 mg/L (Estimated) ECOSAR: esters (MBHA may not be soluble enough to	Fish ChV = 4.27 mg/L (Estimated) ECOSAR: neutral organics Daphnid ChV = 3.050 mg/L (Estimated) ECOSAR: neutral organics Daphnid 21-day ChV = 12.60 mg/L (Estimated) ECOSAR: esters Daphnid 21-day ChV = 10.19 mg/L (Estimated) ECOSAR: polyphenols Mysid shrimp ChV = 194.76 mg/L (Estimated) ECOSAR: esters Green algae ChV = 0.450 mg/L (Estimated) ECOSAR: polyphenols Green algae ChV = 3.07 mg/L (Estimated) ECOSAR: esters Green algae ChV = 7.05 mg/L (Estimated) ECOSAR: neutral organics Earthworm 14-day LC ₅₀ = 1,922.81 mg/L (Estimated) ECOSAR: esters (MBHA may not be soluble enough to		

4-156

		MBHA CASRN 5129-	00-0	
PROPERT	ΓΥ/ENDPOINT	DATA REFERENCE DATA QUALITY		
Transport		MBHA is expected to partition primarily to soil based on results from a level III fugacity model incorporating estimated property data. Based on its estimated pK_a , it is expected to exist primarily in the neutral form at environmentally-relevant pH, but anionic forms may be present at the upper-range of environmental pH. The neutral form of MBHA is expected to be moderately mobile in soil based on its estimated K_{oc} . The anionic form may have higher mobility, as anions do not bind as strongly to organic carbon and clay. However, leaching of MBHA through soil to groundwater is not expected to be an important transport mechanism. In the atmosphere, MBHA is expected to exist in the particulate phase, based on its estimated vapor pressure. Particulates will be removed from air by wet or dry deposition. If released to soil, MBHA is expected to bind strongly to soils with minimal migration to subsurface depths. It is not expected to migrate from water or soil surfaces to air. Release of particulates to the atmosphere will result in deposition to soil and water surfaces.		
	Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for non-volatile compounds based on professional judgment.
	Sediment/Soil Adsorption/Desorption Coefficient – K _{oc}	7,300 (Estimated)	EPI	
	Level III Fugacity Model	Air = <1% Water = 15 % Soil = 81% Sediment = 3% (Estimated)	EPI	
Persistence		MODERATE: The persistence of MHBA is based on an estimated half-life of 30 days in soil. MBHA is expected to partition primarily to soil. Experimental biodegradation data for MBHA were not available. Results from biodegradation models estimate ultimate biodegradation in weeks and primary degradation in days-weeks. Biodegradation under anaerobic methanogenic conditions is not probable based on results from estimation models. MBHA does not contain chromophores that absorb light at environmentally-relevant wavelengths. Therefore, it is not expected to be susceptible to direct photolysis. Hydrolysis is expected to be negligible based on hydrolysis rate estimations. The atmospheric half-life of MBHA is estimated at 1.8 hour although it is expected to exist primarily as a particulate in air. Biodegradation is expected to be the predominant fate pathway for MBHA in the environment.		a for MBHA were not available. weeks and primary degradation in s not probable based on results from ght at environmentally-relevant colysis. Hydrolysis is expected to be e of MBHA is estimated at 1.8 hours,

	MBHA CASRN 5129-00-0				
PROPEI	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Water	Aerobic Biodegradation	Days-weeks (primary survey model) Weeks (ultimate survey model)	ЕРІ		
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI		
Soil	Aerobic Biodegradation			No data located.	
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI		
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation			No data located.	
Air	Atmospheric Half-life	1.6 hours (Estimated)	EPI		
	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.	
	Hydrolysis	Half-life at pH 8 = 200 days (Estimated) Half-life at pH 7 >1 year (Estimated)	EPI		
	Pyrolysis			No data located.	
Environmental Ha	lf-life	30 days	EPI, PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		LOW: The estimated BCF is <100.			
	Fish BCF	31 (Estimated)	ЕРІ		
	BAF	6 (Estimated)	ЕРІ		
	Metabolism in Fish			No data located.	

MBHA CASRN 5129-00-0				
PROPERTY/ENDPOINT DATA REFERENCE DATA QUALITY				
ENVIRONMENTAL MONITORING AND BIOMONITORING				
Environmental Monitoring No data located.				
Ecological Biomonitoring No data located.				
Human Biomonitoring	This chemical was not included in the NHA	ANES biomonitoring report (CDC, 2	2011).	



Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

EINECS (European Inventory of Existing Commercial Chemical Substances). 4,4'-Isopropylidenediphenol (bisphenol A). European Union Risk Assessment Report. **2010.**

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

European Commission. IUCLID Dataset for 4,4-isopropylidenediphenol (CAS No. 80-05-7). European Chemicals Bureau, February 19, 2000. **2000**.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

FAO/WHO. Toxicological and health aspects of bisphenol A. Report of Joint FAO/WHO expert meeting 2-5 November 2010 and report of stakeholder meeting on bisphenol A 1 November 2010. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. **2011**.

Kawaguchi Chemical Co. Skin sensitization test of MBHA in guinea pigs (maximization test). Study No. STG045. Sumika Technoservice corporation, Osaka, Japan. **2011**.

NIOSH (National Institute for Occupational Safety and Health). Skin Notation (SK) Profile, Bisphenol A (BPA) [CAS No. 80-05-7]. Department of Health and Human Services; Centers for Disease Control and Prevention. **2010.**

NTP-CERHR. Monograph on the potential human reproductive and developmental effects of biphenol A. National Toxicology Program; U.S. Department of Health and Human Service. Center for the Evaluation of Risks to Human Reproduction. NIH Publication No. 08-5994. September 2008.

NTP (National Toxicology Program). Carcinogenesis bioassay of bisphenol-A (CAS No. 80-05-7) in F344 rats and B6C3F1 mice (feed study). Technical Report No. 215, PB82-184060. **1982.**

Oncologic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P)*, *Bioaccumulative (B)*, and *Toxic (T) Chemical (PBT)Profiler*. U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. **1999**. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

BisOPP-A

HO OH

CASRN: 24038-68-4

MW: 380.49

MF: $C_{27}H_{24}O_2$

Physical Forms: Neat: Solid

Use: Developer for thermal paper

SMILES: CC(C1=CC(C2=CC=CC=C2)=C(O)C=C1)(C)C3=CC(C4=CC=CC=C4)=C(O)C=C3

Synonyms: 5,5'-Propane-2,2-diyldibiphenyl-2-ol; 4,4'-Isopropyllidenebis(2-phenylphenol)

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None

Analog: Bisphenol A (80-05-7)

Endpoint(s) using analog values: Acute toxicity, eye and dermal irritation, skin sensitization, reproductive and developmental toxicity,

genotoxicity, repeated dose effects

Analog Structure:

но-

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)


Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

	BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	PHYSICAL/CHEMICAL PH	ROPERTIES			
Melting Point (°C)	118 (Measured)	ChemSpider, 2010	Secondary source; study details and test conditions were not provided.		
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling point compounds according to HPV assessment guidance.		
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.		
Water Solubility (mg/L)	0.011 (Estimated)	EPI			
Log K _{ow}	7.2 (Estimated)	EPI			
Flammability (Flash Point)			No data located.		
Explosivity			No data located.		
pH			No data located.		
pK_a	10.8-10.9 (Estimated)	SPARC			

BisOPP-A CASRN 24038-68-4					
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		HUMAN HEALTH EF	FECTS		
Toxicokinetics		BisOPP-A is estimated not to be absorbe gastrointestinal tract based on data for s		sorbed via the lungs and	
Dermal Absorption	on in vitro			No data located.	
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Not absorbed through the and has poor through the lung and gastrointestinal tract (Estimated by analogy)	Professional judgment	Based on closely related analog with similar structure, functional groups, and physical/chemical properties.	
Acute Toxicity		LOW: Based on analogy to bisphenol A. Potential for acute oral and dermal toxicity of bisOPP-A is estimated to be low based on experimental data in animals for the analog bisphenol A. Data for exposure to the analog bisphenol A via inhalation were inconclusive, as only a single concentration was tested and an LC ₅₀ was not provided.			
Acute Lethality	Oral	Rat $LD_{50} = 3,200 > 5,000 \text{ mg/kg bw}$ (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies.	
		Mouse $LD_{50} = 4,000-5,200 \text{ mg/kg bw}$ (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies.	
	Dermal	Rabbit $LD_{50} = 3,000-6,400 \text{ mg/kg bw}$ (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A. Adequate; limited study details for multiple studies reported in secondary sources.	
	Inhalation	No deaths among male and female F344 rats (10/sex) exposed to bisphenol A dust at 0.17 mg/L (highest attainable concentration) for 6 hours; transient slight nasal tract epithelial damage was evident (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; test guidelines were not reported in secondary sources.	
Carcinogenicity	rcinogenicity MODERATE: Estimated using OncoLogic expert system, which describes a potential for this compound a potential carcinogen or tumorigenesis promoter arising from its structural similarity to estrogenic/androgenesis. The 'Phenols and phenolic compounds' structural alert was used.			l similarity to estrogenic/androgenic	

	BisOPP-A CASRN 24038-68-4			
PROP	PERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	OncoLogic Results	Moderate (Estimate) OncoLogic class: Phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/Carcinogenicity			No data located.
Genotoxicity		LOW: Based on analogy to bisphenol A. not a mutagen in <i>in vitro</i> test systems, (2) clastogenic effects induced by the analog studies have shown bisphenol A to affect concluded that the analog bisphenol A is	does not induce cell transformati bisphenol A is inconsistent and in chromosomal structure in dividin	ion, and (3) <i>in vivo</i> evidence for acconclusive, although some <i>in vitro</i> ag cells. FAO/WHO (2011)
		Potential for mutagenicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol A.



BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
PROPERTY/ENDPOINT		FAO/WHO, 2011	Based on the analog bisphenol A.	

BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reproductive Effects	HIGH: Estimated based on analogy to bisphenol A. Based on NOAELs of 4.75 mg/kg bw-day and 47.5 mg/kg bw-day for reproductive toxicity in male and female rats, respectively, following oral exposure to the analog bisphenol A. Conclusions of NTP-CERHR (2008) included sufficient evidence in rats and mice that subchronic or chronic oral exposures to the analog bisphenol A caused female reproductive toxicity at doses ≥475 mg/kg bw-day (highest NOAEL = 47.5 mg/kg bw-day) and male reproductive toxicity at doses ≥47.5mg/kg bw-day (highest NOAEL = 4.75 mg/kg bw-day). There is considerable uncertainty regarding the results of recent studies that reported reproductive and/or developmental effects in laboratory animals administered the analog bisphenol A at oral doses <5 mg/kg bw-day.			
Reproduction/ Developmental Toxicity Screen			No data located.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
Reproduction and Fertility Effects	Potential for reproductive toxicity (Estimated by analogy)	3 &	Estimated based on test data located for a confidential analog.	

	BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males Reproductive toxicity: Females: NOAEL = 47.5 mg/kg bw-day LOAEL = 475 mg/kg bw-day for decreases in number of implantation sites, delayed vaginal opening in F ₁ , F ₂ , and F ₃ offspring Males: NOAEL = 4.75 mg/kg bw-day, LOAEL = 47.5 mg/kg bw-day for delayed preputial separation in F ₁ males	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		
	(Estimated by analogy) Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females Reproductive toxicity: NOAEL = 50 mg/kg bw-day LOAEL = 600 mg/kg bw-day for increased gestation length, decreased epididymal sperm concentration in F ₁ males, increased incidence of gross ovarian cysts in F ₁ and F ₂ females (Estimated by analogy)		Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		

	BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Summary of Reproductive Effects	Female effects: There is sufficient evidence in rats and mice that bisphenol A causes female reproductive toxicity with subchronic or chronic oral exposures NOAEL of 47.5 mg/kg bw-day LOAEL of 475 mg/kg bw-day Male effects: There is sufficient evidence in rats and mice that bisphenol A causes male reproductive toxicity with subchronic or chronic oral exposures NOAEL of 4.75 mg/kg bw-day LOAEL of 47.5 mg/kg bw/day	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; Classified by NTP-CERHR as having High Utility		
	(Estimated by analogy) The FAO/WHO Expert Panel reviewed located reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bw-day. (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.		

BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Developmental Effects	HIGH: Estimated based on analogy to bisphenol A. The NTP-CERHR (2008) Expert Panel concluded that there is suggestive evidence that the analog bisphenol A causes neural and behavioral alterations related to disruptions in normal sex differences in rats and mice (0.01-0.2 mg/kg bw-day). The FAO/WHO (2011) Expert Panel concluded that while there was broad agreement in a NOAEL of 50 mg/kg bw-day for developmental toxicity, low-level (<1 mg/kg bw-day) effects were uncertain. These conclusions support a car of High hazard potential for the analog, with lower confidence.			
Reproduction/ Developmental Toxicity Screen		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	No data located.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
Summary of Developmental Effects	Potential for developmental toxicity (Estimated by analogy)	Professional judgment	Estimated based on test data located for a confidential analog.	

BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	The NTP-CERHR Expert Panel concluded that bisphenol A: *does not cause malformations or birth defects in rats or mice at levels up to the highest doses evaluated: 640 mg/kg bw-day (rats) and 1,250 mg/kg bw-day (mice). *does not alter male or female fertility after gestational exposure up to doses of 450 mg/kg bw-day in the rat and 600mg/kg bw-day in the mouse (highest dose levels evaluated). *does not permanently affect prostate weight at doses up to 475 mg/kg bw-day in adult rats or 600 mg/kg bw-day in mice. *does not cause prostate cancer in rats or mice after adult exposure at up to 148 or 600 mg/kg bw-day, respectively. *does change the age of puberty in male or female rats at high doses (ca. 475 mg/kg bw-day). And that rodent studies <i>suggest</i> that bisphenol A: *causes neural and behavioral alterations related to disruptions in normal sex differences in rats and mice. (0.01–0.2 mg/kg bw-day). (Estimated by analogy)	judgment	g .	

BisOPP-A CASRN 24038-68-4			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	The FAO/WHO Expert Panel reviewed located reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bw-day.	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.
Neurotoxicity	MODERATE: Estimated to have potent alert.	ial for neurotoxicity based on the	presence of the phenol structural
Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.
Repeated Dose Effects	MODERATE: Estimated based on anal- liver (centrilobular hepatocyte hypertrop day) and there is uncertainty regarding to bw-day and the LOAEL of 50 mg/kg bw- nasal cavity of rats were reported follow. These findings indicate a moderate haza	phy) from oral dosing at 50 mg/kg the potential for bisphenol A dose day to cause adverse systemic eff ing repeated inhalation exposure	g bw-day (NOAEL = 5 mg/kg bw- s between the NOAEL of 5 mg/kg ects. Furthermore, lesions in the to bisphenol A dust at 0.05 mg/L.
	The FAO/WHO Expert Panel reviewed located information regarding repeated-dose oral toxicity of bisphenol A and concluded that results demonstrated effects on the liver, kidney, and body weight at doses of 50 mg/kg bw-day and higher and that the lowest NOAEL was 5 mg/kg bw-day, as identified in several studies. (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.

	BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having		
	(Estimated by analogy)		High Utility.		
	Parental systemic toxicity:	NTP-CERHR, 2008; Professional judgment European Commission, 2000;	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility. Based on the analog bisphenol A.		
	LOAEL = 0.05 mg/L based on microscopic changes in the anterior portion of the nasal cavity (Estimated by analogy)	EINECS, 2010; Professional	Duscu on the unalog disphenol 11.		
	NOAEL = None established LOAEL = 0.047 mg/L for decreased body weight gain, increased liver and kidney weight, unspecified "morphological changes" in liver, kidney, and lungs (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; single exposure level, insufficient study details in secondary sources.		

BisOPP-A CASRN 24038-68-4			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Skin Sensitization	MODERATE: Based on analogy to bisphenol A, bisOPP-A is estimated to be a skin sensitizer. Recent data from three bisphenol A manufacturing facilities indicated that the chemical does not elicit skin sensitization; however, results of some human studies suggested the possibility of a dermal sensitization response, although cross-sensitization was not ruled out. Most animal studies conducted on the analog were negative for dermal sensitization, although assays may not have been maximized. There is evidence of ear swelling in a photoallergy test in mice and moderate redness and swelling following repeated dermal exposure in rabbits. The MODERATE hazard designation is based on suggestive evidence of skin sensitization in humans and mice for the analog.		
Skin Sensitization	Negative in a modified local lymph node assay of mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on 3 consecutive days (Estimated by analogy) Negative in a local lymph node assay modified to test for photoreactivity in mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on 3 consecutive days and irradiated with UV light immediately following application (Estimated by analogy)	EINECS, 2010; Professional	Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%. Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%.
	Negative in comprehensive medical surveillance data obtained from three bisphenol A manufacturing plants for 875 employees examined for several years where workers were potentially exposed to other chemicals (phenol, acetone) that are not considered to be skin sensitizers (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate.

	BisOPP-A CASRN 24038-68-4			
PROPERTY/EN	DPOINT	DATA	REFERENCE	DATA QUALITY
		Positive, rabbits; repeated dermal application (30 times over 37 days) of bisphenol A (pure powder) produced moderate swelling and redness. Skin turned yellow followed by dark pigmentation after day 15 (Estimated by analogy)	NIOSH, 2010; Professional judgment	Based on the analog bisphenol A; adequate.
		The Joint FAO/WHO Expert Meeting to review toxicological aspects of bisphenol A concurs with previous reviews that bisphenol A is capable of producing a skin sensitization response in humans (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.
Respiratory Sensitization		No data located.		
Respirat	ory Sensitization			No data located.
Eye Irritation		MODERATE: Based on analogy to bispl		o be slightly to highly irritating to
		rabbit eyes based on test data for the ana		
Eye Irrit	ation	Rabbit, slightly to highly irritating	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A. Adequate; study details provided for multiple studies indicate potential for bisphenol A to cause eye irritation.
Dermal Irritation		MODERATE: Based on analogy to bispl	henol A. BisOPP-A is estimated t	
		to rabbit and guinea pig skin based on te irritant.		
Dermal I	Irritation	when applied as undiluted or 10% aqueous suspension to intact or abraded skin (Estimated by analogy)	European Commission, 2000; EINECS, 2010; NIOSH, 2010; Professional judgment European Commission, 2000;	Based on the analog bisphenol A. Adequate, study details provided for multiple studies indicate potential for bisphenol A to cause dermal irritation. Based on the analog bisphenol A;
			Professional judgment	adequate.

BisOPP-A CASRN 24038-68-4			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Guinea pig, not irritating when applied as 5% solution in acetone for 24 hours under occlusive conditions (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.
Endocrine Activity	No data located.		
			No data located.
Immunotoxicity	No data located.		
Immune System Effects			No data located.
	ECOTOXICITY	7	
ECOSAR Class	Polyphenols		
Acute Toxicity	LOW: The log K_{ow} of 7.17 for this compeffects at saturation are predicted for the		s to predict acute aquatic toxicity. No
Fish LC ₅₀	Fish 96-hour $LC_{50} = 0.012 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics Fish 96-hour $LC_{50} = 0.034 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly	EPI	NES: The chemical may not be soluble enough to measure this predicted effect; the log K_{ow} of 7.17 for this chemical exceeds the SAR limitation for log K_{ow} of 7.0; NES are predicted for these endpoints. NES: The chemical may not be soluble enough to measure this predicted effect; the log K_{ow} of 7.17 for this chemical exceeds the SAR limitation for log K_{ow} of 7.0; NES are predicted for these endpoints.
Daphnid LC ₅₀	Daphnid 48-hour LC ₅₀ = 0.013 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES: The chemical may not be soluble enough to measure this predicted effect; the log K_{ow} of 7.17 for this chemical exceeds the SAR limitation for log K_{ow} of 5.5; NES are predicted for these endpoints.

	BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Daphnid 48-hour $LC_{50} = 0.017 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly	EPI	NES: The chemical may not be soluble enough to measure this predicted effect; the log K_{ow} of 7.17 for this chemical exceeds the SAR limitation for log K_{ow} of 5.5; NES are predicted for these endpoints.		
Green Algae EC ₅₀	Green algae 96-hour LC ₅₀ = 0.048 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES: The chemical may not be soluble enough to measure this predicted effect; the log K_{ow} of 7.17 for this chemical exceeds the SAR limitation for log K_{ow} of 6.4; NES are predicted for these endpoints.		
	Green algae 96-hour LC ₅₀ = 1.13 mg/L (Estimated) ECOSAR: phenols, poly	EPI	NES: The chemical may not be soluble enough to measure this predicted effect; the log K_{ow} of 7.17 for this chemical exceeds the SAR limitation for log K_{ow} of 6.4; NES are predicted for these endpoints.		
Chronic Aquatic Toxicity	HIGH: Based on estimated ChV values	<0.1 mg/L for fish, Daphnid, and	green algae.		
Fish ChV	Fish ChV = 0.0010 mg/L (Estimated) ECOSAR: neutral organics	EPI			
	Fish 30-day ChV = 0.004 mg/L (Estimated) ECOSAR: phenols, poly	EPI			
Daphnid ChV	Daphnid ChV = 0.003 mg/L (Estimated) ECOSAR: neutral organics	EPI			
	Daphnid 21-day ChV = 0.005 mg/L (Estimated) ECOSAR: phenols, poly	EPI			

BisOPP-A CASRN 24038-68-4				
PROPERTY/E	ENDPOINT	DATA	REFERENCE	DATA QUALITY
Green Algae ChV	reen Algae ChV Green algae ChV = 0.041 mg/L (Estimated) ECOSAR: phenols, poly		EPI	
		Green algae ChV = 0.045 mg/L (Estimated) ECOSAR: neutral organics	EPI	
		ENVIRONMENTAL 1	FATE	
Transport		Evaluation of BisOPP-A transport is based entirely on QSAR estimations for fugacity (level III), disassociation constant (pK_a), K_{oc} , volatilization, and vapor pressure. It is expected to exist in neutral form at environmentally-relevant pH. BisOPP-A is expected to partition primarily to soil; therefore, leaching through soil to groundwater is not expected to be an important transport mechanism. In the atmosphere, BisOPP-A is expected to exist in the particulate phase, which will be deposited back to the soil and water surfaces through wet or dry deposition.		
He (at	enry's Law Constant tm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for nonvolatile compounds, based on professional judgment.
Ad De	ediment/Soil dsorption/ esorption pefficient – K _{oc}	>30,000 (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonmobile compounds according to SF assessment guidance.
	evel III Fugacity odel	Air = <1% Water = 2% Soil = 36% Sediment = 62% (Estimated)	EPI	

BisOPP-A CASRN 24038-68-4				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY
Persistence		HIGH: The persistence of bisOPP-A is based on an estimated half-life of 340 days in soil. BisOPP-A is expected to partition primarily to soil. Experimental biodegradation data for bisOPP-A were not located. The biodegradation assessment for bisOPP-A is based entirely on QSARs of aerobic and anaerobic biodegradation. Results from these models estimate primary biodegradation in weeks and ultimate degradation in weeks-months. Biodegradation under anaerobic methanogenic conditions is estimated to be not probable. BisOPP-A does not contain functional groups that absorb light at environmentally-relevant wavelengths. Therefore, it is not expected to be susceptible to direct photolysis. It is not expected to undergo hydrolysis as it does not contain hydrolysable functional groups. The atmospheric half-life of bisOPP-A is estimated to be 1.8 hours, although it is expected to exist primarily as a particulate in air. Based on the estimated data and qualitative assessments based on functional groups, biodegradation of bisOPP-A is expected to be the major removal process in the environment.		
Water	Aerobic Biodegradation	Weeks (primary survey model) Weeks-months (ultimate survey model)	EPI	
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI	
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI	
Soil	Aerobic Biodegradation			No data located.
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI	
	Soil Biodegradation w/ Product Identification			No data located.
	Sediment/Water Biodegradation			No data located.
Air	Atmospheric Half-life	2 hours (Estimated assuming 12-hour day and hydroxyl radical concentration of 1.5x10 ⁶ molecules/cm ³)	EPI	

BisOPP-A CASRN 24038-68-4					
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.	
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Half-life		340 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		MODERATE: The estimated fish BAF is <1,000. Although the BCF suggests a High potential hazard, the BAF model is anticipated to better account for metabolism of this substance.			
	Fish BCF	11,000 (Estimated)	EPI		
	BAF	590 (Estimated)	EPI		
	Metabolism in Fish			No data located.	
ENVIRONMENTAL MONITORING AND BIOMONITORING					
Environmental Monitoring		No data located.			
Ecological Biomonitoring		No data located.			
Human Biomonitoring		This chemical was not included in the NHANES biomonitoring report (CDC, 2011).			

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). Fourth national report on human exposure to environmental chemicals, updated tables. Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

Chemspider. *ChemSpider; Structure-based Chemistry Information*. Royal Society of Chemistry:London. **2010**. http://www.chemspider.com (accessed on December 11, 2010).

EINECS. 4,4'-Isopropylidenediphenol (bisphenol A). European Union Risk Assessment Report. 2010.

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.0. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

European Commission. IUCLID Dataset for 4,4-isopropylidenediphenol (CAS No. 80-05-7). European Chemicals Bureau, February 19, 2000. **2000**.

FAO/WHO. Toxicological and health aspects of bisphenol A. Report of Joint FAO/WHO expert meeting 2-5 November 2010 and report of stakeholder meeting on bisphenol A 1 November 2010. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. **2011**.

NIOSH (National Institute for Occupational Safety and Health). Skin Notation (SK) profile, bisphenol A (BPA) [CAS No. 80-05-7]. Department of Health and Human Services; Centers for Disease Control and Prevention. **2010.**

NTP (National Toxicology Program). Carcinogenesis bioassay of bisphenol-A (CAS No. 80-05-7) in F344 rats and B6C3F1 mice (feed study). Technical Report No. 215, PB82-184060. **1982.**

NTP-CERHR. Monograph on the potential human reproductive and developmental effects of biphenol A. National Toxicology Program; U.S. Department of Health and Human Service. Center for the Evaluation of Risks to Human Reproduction. NIH Publication No. 08-5994. September **2008**.

OncoLogic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P)*, *Bioaccumulative (B)*, and *Toxic (T) Chemical (PBT)Profiler*. U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. 2011. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

Bisphenol AP

НО-ОН

CASRN: 1571-75-1

MW: 290.36

MF: C₂₀H₁₈O₂
Physical Forms:
Neat: Solid

Use: Developer for thermal paper

SMILES: OC1=CC=C(C(C)(C2=CC=CC=C2)C3=CC=C(O)C=C3)C=C1

Synonyms: 4,4'-(α-methylbenzylidene)diphenol; 4,4'-(1-Phenylethylidene)bisphenol; phenol, 4,4'-(1-phenylethylidene)bis-

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None

Analog: Bisphenol A (80-05-7)

Endpoint(s) using analog values: Acute toxicity, dermal irritation, skin

sensitization, reproductive and developmental toxicity, genotoxicity,

repeated dose effects

Analog: Confidential analog (structure not available)

Endpoint(s) using analog values: Eye irritation, immunotoxicity

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: 50/53 - Very toxic to aquatic organisms may cause long-term adverse effects in the aquatic environment (ESIS, 2011).

Risk Assessments: None identified

Analog Structure:

но-

Bisphenol AP CASRN 1571-75-1					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
PHYSICAL/CHEMICAL PROPERTIES					
Melting Point (°C)	189	ChemSpider, 2010	Secondary source, consistent with other reported values.		
	188-191 (Measured)	Aldrich, 2009	Adequate; measured by chemical supplier. Consistent with other reported values.		
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling compounds according to HPV assessment guidance.		
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.		
Water Solubility (mg/L)	1.1 (Estimated)	EPI			
$\operatorname{Log} \mathbf{K}_{\operatorname{ow}}$	4.9 (Estimated)	EPI			
Flammability (Flash Point)			No data located.		
Explosivity			No data located.		
pH			No data located.		
pK_a	9.9-10.1 (Estimated)	SPARC			

Bisphenol AP CASRN 1571-75-1					
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY	
		HUMAN HEALTH EFFI	ECTS		
Toxicokinetics		Bisphenol AP, as a neat material, is estimated to not be absorbed through the skin and have poor skin absorption when in solution. Bisphenol AP is expected to have poor absorption via the lungs and gastrointestinal tract.			
Dermal Absorption in vitro				No data located.	
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Not absorbed through the skin and has poor absorption to skin when in a solution; poor absorption through the lung and gastrointestinal tract (Estimated by analogy)	Professional judgment	Based on closely related confidential analog with similar structure, functional groups, and physical/chemical properties.	
Acute Mammalian Toxicity LOW: The acute oral and dermal toxicity hazard of bisphenol AP is estimated to be low based on to bisphenol A. Data for exposure to the analog bisphenol A via inhalation were inconclusive, as o single concentration was tested and an LC ₅₀ was not provided.					
Acute Lethality	Oral	Rat $LD_{50} = 3,200$ ->5,000 mg/kg bw (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies.	
		Mouse $LD_{50} = 4,000-5,200 \text{ mg/kg bw}$ (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies.	
	Dermal	Rabbit $LD_{50} = 3,000-6,400 \text{ mg/kg bw}$ (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; limited study details for multiple studies reported in secondary sources.	
	Inhalation	No deaths among male and female F344 rats (10/sex) exposed to bisphenol A dust at 0.17 mg/L (highest attainable concentration) for 6 hours; transient slight nasal tract epithelial damage was evident (Estimated by analogy)	EINECS, 2010; European Commission, 2000; Professional judgment	Based on the analog bisphenol A; test guidelines were not reported in secondary sources.	
		MODERATE: Estimated using OncoLogic expert system, which describes potential for this compound as a potential carcinogen or tumorigenesis promoter arising from its structural similarity to estrogenic/androgenic compounds, using the 'phenols and phenolic compounds' structural alert.			

Bisphenol AP CASRN 1571-75-1				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY
	U	Moderate (Estimate) OncoLogic class: phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/ Carcinogenicity			No data located.
not a mutagen in <i>in vitro</i> test systems, (2) does not clastogenic effects induced by the analog bisphostudies have shown bisphenol A to affect chromatical effects.			FAO/WHO (2011) determined that: (1) the analog bisphenol A is does not induce cell transformation, and (3) <i>in vivo</i> evidence for bisphenol A is inconsistent and inconclusive although some in vitro chromosomal structure in dividing cells. The conclusion of henol A is not likely to pose a genotoxic hazard to humans.	
	Gene Mutation in vitro	Potential for mutagenicity (Estimated by analogy)	Professional judgment	Estimated based on located test data for a confidential analog with additional substituents.
	Gene Mutation in vivo			No data located.
	in vitro	Potential for mutagenicity; Positive for chromosomal aberrations in Chinese hamster ovary (CHO) cells with metabolic activation (Estimated by analogy)	Professional judgment	Estimated based on located test data for a confidential analog with additional substituents.
	Chromosomal Aberrations in vivo			No data located.
	DNA Damage and Repair			No data located.

Bisphenol AP CASRN 1571-75-1					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Other		Need reference	Based on the analog bisphenol A.		

Bisphenol AP CASRN 1571-75-1			
PROPERTY/ENDPOINT	DATA REFERENCE DATA QUALITY		
Reproductive Effects	HIGH: Estimated based on analogy to bisphenol A. Based on NOAELs of 4.75 mg/kg bw-day and 47.5 mg/kg bw-day for reproductive toxicity in male and female rats, respectively, following oral exposure to analog bisphenol A. Conclusions of NTP-CERHR (2008) include sufficient evidence in rats and mice that subchronic or chronic oral exposures to the analog bisphenol A causes female reproductive toxicity at doses 247.5 mg/kg bw-day (highest NOAEL = 47.5 mg/kg bw-day) and male reproductive toxicity at doses 247.5 mg/kg bw-day (highest NOAEL = 4.75 mg/kg bw-day). There is considerable uncertainty regarding the results of recent studies that reported reproductive and/or developmental effects in laboratory animal administered the analog BAP at oral doses <5 mg/kg bw-day. Data based on a confidential analog also indicates that there is potential for reproductive effects due to effects to the prostate, testes, and ovaries. NOAEL for reproductive effects is identified as 5 mg/kg bw-day, while a LOAEL for these effects was not identified. There is uncertainty for at what dose these effects occur, so the data based on the analog bisphenol A was used to make this hazard designation.		
Reproduction/ Developmental Toxicity Screen			No data located.
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
Reproduction and Fertility Effects	Potential for toxic effects to prostate, testes and ovaries. Rat, 28-day oral study NOAEL = 5 mg/kg-day (Estimated by analogy)	Professional judgment	Estimated based on located test data for a confidential analog with additional substituents; a LOAEL for these effects was not identified.

	Bisphenol AP CASRN 1571-75-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Parental systemic toxicity:	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		
	(Estimated by analogy) Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females Reproductive toxicity: NOAEL = 50 mg/kg bw-day LOAEL = 600 mg/kg bw-day for increased gestation length, decreased epididymal sperm concentration in F ₁ males, increased incidence of gross ovarian cysts in F ₁ and F ₂ females (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		

Bisphenol AP CASRN 1571-75-1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Summary of Reproductive Effects	Female effects: There is sufficient evidence in rats and mice that bisphenol A causes female reproductive toxicity with subchronic or chronic oral exposures NOAEL of 47.5mg/kg bw-day LOAEL of 475 mg/kg bw-day. Male effects: There is sufficient evidence in rats and mice that bisphenol A causes male reproductive toxicity with subchronic or chronic oral exposures NOAEL of 4.75mg/kg bw-day LOAEL of 47.5mg/kg bw/day.	NTP-CERHR, 2008; Professional	Based on the analog bisphenol A; Classified by NTP-CERHR as having High Utility.
		NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; Classified by NTP-CERHR as having High Utility.
Developmental Effects	HIGH: Estimated based on analogy to bisphenol A. The NTP-CERHR (2008) Expert Panel concluded that there is suggestive evidence that the analog bisphenol A causes neural and behavioral alterations related to disruptions in normal sex differences in rats and mice (0.01-0.2 mg/kg bw-day). The FAO/WHO (2011) Expert Panel concluded that while there was broad agreement in a NOAEL of 50 mg/kg bw/day for developmental toxicity, low-level (<1 mg/kg bw-day) effects were uncertain. These conclusions support a High hazard designation for the analog, with lower confidence.		

Bisphenol AP CASRN 1571-75-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reproduction/ Developmental Toxicity Screen			No data located.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	



	Bisphenol AP CASRN 1571-75-1					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY			
Summary of Developmental	The NTP-CERHR Expert Panel concluded	NTP-CERHR, 2008; Professional	Based on the analog bisphenol A.			
Effects	that bisphenol A:	judgment				
	*does not cause malformations or birth					
	defects in rats or mice at levels up to the					
	highest doses evaluated: 640 mg/kg bw-					
	day (rats) and 1,250 mg/kg bw-day (mice).					
	*does not alter male or female fertility					
	after gestational exposure up to doses of					
	450 mg/kg bw-day in the rat and					
	600mg/kg bw-day in the mouse (highest					
	dose levels evaluated).					
	*does not permanently affect prostate					
	weight at doses up to 475 mg/kg bw-day					
	in adult rats or 600 mg/kg bw-day in mice.					
	*does not cause prostate cancer in rats or					
	mice after adult exposure at up to 148 or					
	600 mg/kg bw-day, respectively.					
	*does change the age of puberty in male					
	or female rats at high doses (ca.					
	475 mg/kg bw-day).					
	And that rodent studies <i>suggest</i> that					
	bisphenol A: *causes neural and behavioral alterations					
	related to disruptions in normal sex differences in rats and mice.					
	(0.01-0.2 mg/kg bw-day).					
	(Estimated by analogy)					
	(Estimated by analogy)					

	Bisphenol AP CASRN 1571-75-1				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		3	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.	
Neurotoxicity		MODERATE: Estimated to have potential for neurotoxicity based on the presence of the phenol structural alert.			
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010, Professional judgment	Estimated based on structural alert.	
Repeated Dose Effe	ects	MODERATE: Estimated based on analogy to bisphenol A, which produced histopathologic changes in the liver (centrilobular hepatocyte hypertrophy) from oral dosing at 50 mg/kg bw-day (NOAEL = 5 mg/kg bw-day) and there is uncertainty regarding the potential for bisphenol A doses between the NOAEL of 5 mg/kg bw-day and the LOAEL of 50 mg/kg-day to cause adverse systemic effects. Furthermore, lesions in the nasal cavity of rats were reported following repeated inhalation exposure to bisphenol A dust at 0.05 mg/L. These findings indicate a Moderate hazard potential for the oral and inhalation exposure routes. In addition, while no LOAEL was identified, data located for a confidential analog indicates the potential that bisphenol AP may cause toxic effects to the blood, liver, and kidney.			
		Potential for toxic effects to blood, liver and kidney Rat, 28-day oral study NOAEL = 5 mg/kg-day (Estimated by analogy)	Professional judgment	Estimated based on located test data for a confidential analog with additional substituents; a LOAEL for these effects was not identified.	

	Bisphenol AP CASRN 1571-75-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	The FAO/WHO Expert Panel reviewed the located information regarding repeated-dose oral toxicity of bisphenol A and concluded that results demonstrated effects on the liver, kidney, and body weight at doses of 50 mg/kg bw-day and higher and that the lowest NOAEL was 5 mg/kg bw-day, as identified in several studies. (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.		
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		
	NOAEL = 0.01 mg/L LOAEL = 0.05 mg/L based on microscopic changes in the anterior portion of the nasal cavity (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A.		

Bisphenol AP CASRN 1571-75-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	NOAEL = None established LOAEL = 0.047 mg/L for decreased body weight gain, increased liver and kidney weight, unspecified "morphological changes" in liver, kidney, and lungs (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; single exposure level, insufficient study details in secondary sources.	
Skin Sensitization	MODERATE: Based on analogy to bisp data from three bisphenol A manufactur however, results of some human studies cross-sensitization was not ruled out. M negative for dermal sensitization, althou swelling in a photoallergy test in mice an exposure in rabbits. Based on suggestive MODERATE hazard call is warranted.	ring facilities indicate that it does suggest the possibility of a derma ost animal studies conducted on gh assays may not have been ma nd moderate redness and swelling	s not elicit skin sensitization; al sensitization response, although the analog, bisphenol A, were eximized. There is evidence of ear g following repeated dermal	
Skin Sensitization		EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%.	
	Negative in a local lymph node assay modified to test for photoreactivity in mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on 3 consecutive days and irradiated with UV light immediately following application (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%.	

	Bisphenol AP CASRN 1571-75-1				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		Negative in comprehensive medical surveillance data obtained from three bisphenol A manufacturing plants for 875 employees examined for several years where workers were potentially exposed to other chemicals (phenol, acetone) that are not considered to be skin sensitizers (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate.	
		Positive, rabbits; repeated dermal	NIOSH, 2010; Professional judgment	Based on the analog bisphenol A; adequate.	
		_	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.	
Respiratory Sensiti	zation	No data located.			
	Respiratory Sensitization			No data located.	
Eye Irritation		MODERATE: Based on confidential analog, bisphenol AP was moderately irritating to rabbit eyes. Bisphenol AP may potentially be irritating to eyes.			
	Eye Irritation	Potential for irritation to eyes; caused moderate eye irritation in rabbits (Estimated by analogy)	Professional judgment	Estimated based on located test data for a confidential analog.	
Dermal Irritation		MODERATE: Based on analogy to bisp irritating to rabbit skin based on test dairritant.			

	Bisphenol AP CASRN 1571-75-1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Dermal Irritation	when applied as undiluted or 10% aqueous	European Commission, 2000; EINECS, 2010; NIOSH, 2010; Professional judgment	Based on the analog bisphenol A; the details provided for multiple studies indicate potential for bisphenol A to cause dermal irritation.	
	Rabbit, moderately irritating when applied as 40% solution in dimethyl sulfoxide under non-occlusive conditions (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.	
	Guinea pig, not irritating when applied as 5% solution in acetone for 24 hours under occlusive conditions (Estimated by analogy)		Based on the analog bisphenol A; adequate.	
Endocrine Activity	Based on <i>in vitro</i> data, Bisphenol AP exh can bind to estrogen receptors, elicit estr MCF7 cancer cells. Bisphenol AP appea estrogenic responses <i>in vitro</i> .	ogen-induced gene transcription	, and induce cell proliferation in	
	In a human ER binding assay, the relative binding affinity (RBA) of bisphenol AP was 0.0803% compared to 126% for 17β-estradiol. RBAs for other bisphenol compounds included 0.195% for bisphenol A, 0.129% for bisphenol C, 0.0719% for bisphenol F, and 0.0055% for bisphenol S. An RBA of 0.00473% was reported for PHBB.		Adequate.	

Bisphenol AP CASRN 1571-75-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In a reporter gene assay of estrogen-induced transcriptional activity, relative activity (RA) for bisphenol AP was 0.000184% compared to 81.7% for 17β-estradiol. RAs for other bisphenol compounds included 0.00278% for bisphenol A, 0.00189% for bisphenol C, 0.000639% for bisphenol F, and 0.000254% for bisphenol S. An RA of 0.000592% was reported for PHBB.	METI, 2002	Adequate.	
	In a competitive ER binding assay using human ERα, the RBA for bisphenol AP was 1.66% that of 17β-estradiol. RBAs for other bisphenol compounds included 1.68% for bisphenol C, 0.32% for bisphenol A, and 0.09% for bisphenol F.	Coleman, Toscano et al., 2003	Adequate.	
	In an ER-mediated reporter gene expression assay, bisphenol AP induced reporter gene expression at a relative activity (RA) of 9.0 x 10 ⁻⁵ that of 17β-estradiol. RAs for other bisphenol compounds included 2.75 x 10 ⁻³ for bisphenol A, 5.3 x 10 ⁻⁴ for bisphenol F, and 4.9 x 10 ⁻⁴ for bisphenol C.	Coleman, Toscano et al., 2003	Adequate.	
	In a proliferation assay of MCF-7 human breast cancer cells that contain $ER\alpha$ and $ER\beta$ and are known to proliferate in response to estrogens, bisphenol AP induced a proliferative response that was 6.0×10^{-4} that of 17β -estradiol. Proliferative values for other bisphenol compounds included 2.0×10^{-3} for bisphenol A, 1.6×10^{-3} for bisphenol C, and 1.0×10^{-3} for bisphenol F.	Coleman, Toscano et al., 2003	Adequate.	

	Bisphenol AP CASRN 1571-75-1				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Immunotoxicity		Estimated based on analogy to confident on effects to the spleen.		otential for immunotoxicity based	
	Immune System Effects	Uncertain potential for toxic effects to adrenal glands and spleen Rat, 28-day oral study NOAEL = 5 mg/kg-day (Estimated by analogy)	Professional judgment	Estimated based on located test data for a confidential analog with additional substituents; a LOAEL for these effects was not identified.	
		ECOTOXICITY			
ECOSAR Class		Phenols, poly			
Acute Toxicity		HIGH: Based on estimated LC ₅₀ values mg/L.	for fish and Daphnid and EC_{50} v	value for algae, which are all <1.0	
Fish LC ₅₀		Fish 96-hour $LC_{50} = 0.580 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly Fish 96-hour $LC_{50} = 0.851 \text{mg/L}$ (Estimated) ECOSAR: neutral organics	EPI EPI		
Daphnid LC ₅₀		Daphnid 48-hour $LC_{50} = 0.694$ mg/L (Estimated) ECOSAR: neutral organics Daphnid 48-hour $LC_{50} = 0.774$ mg/L (Estimated)	EPI EPI		
Green Algae EC ₅₀		ECOSAR: phenols, poly Green algae 96-hour $EC_{50} = 0.967 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics Green algae 96-hour $EC_{50} = 1.38 \text{ mg/L}$ (Estimated)	EPI EPI		
		ECOSAR: phenols, poly			
Chronic Aquatic T	oxicity	HIGH: Based on an estimated fish ChV	or 0.0/6 mg/L.		

Bisphenol AP CASRN 1571-75-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Fish ChV	Fish ChV = 0.076 mg/L (Estimated) ECOSAR: neutral organics Fish 30-day ChV = 0.110 mg/L	EPI EPI		
	(Estimated) ECOSAR: phenols, poly			
Daphnid ChV	Daphnid ChV = 0.106 mg/L (Estimated) ECOSAR: neutral organics	EPI		
	Daphnid 21-day ChV = 0.243 mg/L (Estimated) ECOSAR: phenols, poly	EPI		
Green Algae ChV	Green algae ChV = 0.134 mg/L (Estimated) ECOSAR: phenols, poly	EPI		
	Green algae ChV = 0.590 mg/L (Estimated) ECOSAR: neutral organics	EPI		
	ENVIRONMENTAL I	FATE		
Transport	Evaluation of bisphenol AP transport in disassociation constant (pK _a), K _{oc} , volation neutral form at environmentally-relevant therefore, leaching through soil to grow the atmosphere, bisphenol AP is expect the soil and water surfaces through we	ntilization, and vapor pressure. Bit ant pH. Bisphenol AP is expected undwater is not expected to be an intention to exist in the particulate phas	sphenol AP is expected to exist in to partition primarily to soil; important transport mechanism. In	
Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for nonvolatile compounds, based on professional judgment.	
	>30,000 (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonmobile compounds according to SF assessment guidance.	

	Bisphenol AP CASRN 1571-75-1				
PRO	OPERTY/ENDPOINT	DATA REFERENCE DAT		DATA QUALITY	
	Level III Fugacity Model	Air = <1% Water = 2.4% Soil = 44% Sediment = 53% (Estimated)	EPI		
Persistence		HIGH: The persistence of bisphenol Alexpected to partition primarily to soil be persistence of bisphenol AP is based enter from these models estimate primary bio months. Biodegradation under anaeroby contain chromophores that absorb light expected to be susceptible to direct phothydrolysable functional groups. The attached the susceptible is expected to exist primarily assessments based on functional groups, removal process in the environment.	ased on results from a Level III for irely on QSARs of aerobic and a degradation in days-weeks and which methanogenic conditions is not at environmentally-relevant was colysis. It is not expected to undermospheric half-life of bisphenol of as a particulate in air. Based of biodegradation of bisphenol AI	Sugacity model. Evaluation of the macrobic biodegradation. Results altimate degradation in weeks- ot probable. Bisphenol AP does not velengths. Therefore, it is not ergo hydrolysis as it does not contain AP is estimated at 1.5 hours, in the estimated data and qualitative	
Water	Aerobic Biodegradation	Days-weeks (primary survey model) Weeks-months (ultimate survey model)	EPI		
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	ЕРІ		
Soil	Aerobic Biodegradation			No data located.	
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	ЕРІ		
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation			No data located.	
Air	Atmospheric Half-life	1.5 hours	EPI		
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.	

	Bisphenol AP CASRN 1571-75-1				
PROPERT	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Hydrolysis		Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Half	î-life	75 days	EPI	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		MODERATE: The estimated BCF is <1,000.			
	Fish BCF	750 (Estimated)	EPI		
	BAF	250 (Estimated)	EPI		
	Metabolism in Fish			No data located.	
ENVIRONMENTAL MONITORING AND BIOMONITORING					
Environmental Monit	Environmental Monitoring No data located.				
Ecological Biomonitor	ring	No data located.			
Human Biomonitoring	g	This chemical was not included in the NHA	ANES biomonitoring report (CDC	, 2011).	

Aldrich. Handbook of Fine Chemicals and Laboratory Equipment. 2009-2010. Milwaukee, WI: Aldrich Chem Co. 2009, p.344.

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

ChemSpider. *ChemSpider; Structure-based Chemistry Information*. Royal Society of Chemistry: London. **2010**. http://www.chemspider.com, accessed on December 11, 2010.

Coleman, K.P., Toscano, W.A., Wiese, T.E. QSAR Models of the *in vitro* estrogen activity of bisphenol A analogs. *QSAR & Combinatorial Science*. **2003**, 22:78-88.

EINECS. 4,4'-Isopropylidenediphenol (bisphenol A). European Union Risk Assessment Report. 2010.

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.0. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

European Commission. IUCLID Dataset for 4,4-isopropylidenediphenol (CAS No. 80-05-7). European Chemicals Bureau, February 19, 2000. **2000**.

FAO/WHO. Toxicological and health aspects of bisphenol A. Report of Joint FAO/WHO expert meeting 2-5 November 2010 and report of stakeholder meeting on bisphenol A 1 November 2010. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. **2011**.

METI. Current status of testing methods development for endocrine disruptors. Ministry of Economy, Trade and Industry, Japan. 6th meeting of the task force on Endocrine Disruptors Testing and Assessments (EDTA). Tokyo. **2002**.

NIOSH (National Institute for Occupational Safety and Health). Skin Notation (SK) Profile, bisphenol A (BPA) [CAS No. 80-05-7]. Department of Health and Human Services; Centers for Disease Control and Prevention, **2010**.

NTP. Carcinogenesis bioassay of bisphenol-A (CAS No. 80-05-7) in F344 rats and B6C3F1 mice (feed study). National Toxicology Program. Technical Report No. 215, Order No. PB82-184060. **1982.**

NTP-CERHR. *Monograph on the potential human reproductive and developmental effects of biphenol A*. National Toxicology Program; U.S. Department of Health and Human Service. Center for the Evaluation of Risks to Human Reproduction. NIH Publication No. 08-5994. September **2008**.

Oncologic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P)*, *Bioaccumulative (B)*, and *Toxic (T) Chemical (PBT)Profiler*. U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic as of February 09, 2011.

Substituted Phenolic Compound #1

	CASRN: Confidential CASRN
	MW: Confidential MW
	MF: Confidential MF
	Physical Forms:
	Neat: Solid
	Use: Developer for thermal paper
SMILES: This mixture containing confidential material is not amenable to the generation of a single SMILES notation.	

Synonyms:

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None identified

Analog: Bisphenol A (80-05-7)

Endpoint(s) using analog values: Acute toxicity, eye and skin irritation, skin sensitization, reproductive and developmental toxicity, repeated dose effects

Analog Structure:

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1						
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY			
PHYSICAL/CHEMICAL PROPERTIES						
Melting Point (°C)	171.5 (Measured)	Lide, 2008	Adequate; selected value for assessment.			
	171-172 (Measured)	O'Neil et al., 2010	Adequate; reported values, which span a relatively narrow range, are consistent with those provided in other sources.			
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling point compounds according to HPV assessment guidance.			
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.			
Water Solubility (mg/L)	180 (Estimated)	EPI				
	Appreciably soluble in water	O'Neil et al., 2010	Inadequate; qualitative, nonspecific value.			
	Very soluble in water	Lide, 2008				
Log K _{ow}	3.4 (Estimated)	EPI				
Flammability (Flash Point)	208 °C (Measured)	Alfa Aesar, 2010	Adequate.			
Explosivity			No data located.			
pН			No data located.			
pK_a	4.7; 10 (Estimated)	SPARC				
	HUMAN HEALTH EFFECTS					
As a neat material, this substituted phenolic compound is estimated to not be absorbed through the skin and have poor skin absorption when in solution. This compound is expected to be moderately absorbed via the lungs and gastrointestinal tract.						
Dermal Absorption in vitro			No data located.			

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1					
PROPE	RTY/ENDPOINT	INT DATA REFERENCE DATA QUALITY			
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Not absorbed through the skin as neat material and has poor absorption in solution; can be moderately absorbed through the lung and gastrointestinal tract (Estimated by analogy)	Professional judgment	Based on closely related analog with similar structure, functional groups, and physical/chemical properties.	
Acute Mammalian		LOW: Based on analogy to bisphenol A. The acute oral and dermal toxicity hazard of this substituted phenolic compound is estimated to be low based on experimental data in animals for a closely related substance. Data for exposure to the analog bisphenol A via inhalation were inconclusive, as only a single concentration was tested and an LC_{50} was not provided.			
Acute Lethality	Oral	Rat $LD_{50} = 3,200$ ->5,000 mg/kg bw (Estimated by analogy) Mouse $LD_{50} = 4,000$ -5,200 mg/kg bw (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies. Based on the analog bisphenol A; multiple studies, some guideline studies.	
	Dermal	Rabbit $LD_{50} = 3,000-6,400 \text{ mg/kg bw}$ (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate by weight of evidence, multiple studies, although study details were not reported in secondary sources.	
	Inhalation	No deaths among male and female F344 rats (10/sex) exposed to bisphenol A dust at 0.17 mg/L (highest attainable concentration) for 6 hours; transient slight nasal tract epithelial damage was evident (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; test guidelines were not reported in secondary sources.	

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Carcinogenicity		MODERATE: Estimated using OncoLogic expert system, which describes a concern for this compound a potential carcinogen or tumorigenesis promoter arising from its structural similarity to estrogenic/androgenic compounds, using the 'phenols and phenolic compounds' structural alert.		
	8	Moderate (Estimate) OncoLogic class: phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/ Carcinogenicity			No data located.
Genotoxicity		LOW: This compound was not mutageni		
		typhimurium and did not induce micronu		
		Negative, Ames assay (standard plate) in <i>S. typhimurium</i> strains TA97, TA98, TA100, and TA1535 with and without metabolic activation	NTP, 2010	Adequate.
	Gene Mutation in vivo			No data located.
	Chromosomal Aberrations in vitro		*	No data located.
	in vivo	Negative, micronucleus assay of peripheral bone marrow and blood in B6C3F1 mice (males only)	Mutat. Res., 2008 (Sanitized)	Adequate.
	DNA Damage and Repair			No data located.
	Other			No data located.
Reproductive Effe		HIGH: Based on analogy to bisphenol A. mg/kg bw-day for reproductive toxicity in Conclusions of NTP-CERHR (2008) incluoral exposures to the analog bisphenol A (highest NOAEL = 47.5 mg/kg bw-day) at NOAEL = 4.75 mg/kg bw-day). There is reported reproductive and/or development A at oral doses <5 mg/kg bw-day.	n male rats following oral exposunce sufficient evidence in rats and causes female reproductive toxicient male reproductive toxicity at considerable uncertainty regardi	re to the analog bisphenol A. I mice that subchronic or chronic ity at doses ≥475 mg/kg bw-day doses ≥47.5mg/kg bw-day (highest ng the results of recent studies that

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Reproduction/ Developmental Toxicity Screen			No data located.
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
Reproduction and Fertility Effects		judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females Reproductive toxicity: NOAEL = 50 mg/kg bw-day LOAEL = 600 mg/kg bw-day for increased gestation length, decreased epididymal sperm concentration in F ₁ males, increased incidence of gross ovarian cysts in F ₁ and F ₂ females (Estimated by analogy)	judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.	
Summary of Reproductive Effects	Female effects: There is sufficient evidence in rats and mice that bisphenol A causes female reproductive toxicity with subchronic or chronic oral exposures NOAEL of 47.5 mg/kg bw-day LOAEL of 475 mg/kg bw-day. Male effects: There is sufficient evidence in rats and mice that bisphenol A causes male reproductive toxicity with subchronic or chronic oral exposures NOAEL of 4.75 mg/kg bw-day LOAEL of 47.5 mg/kg bw/day. (Estimated by analogy)	judgment	Based on the analog bisphenol A. Classified by NTP-CERHR as having High Utility.	

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1			
PROPER	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		The joint FAO/WHO Expert Panel (2010) reviewed available reproductive and	FAO/WHO, 2011; NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A.
		developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bwday. (Estimated by analogy)		Classified by NTP-CERHR as having High Utility.
Developmental Effec	cts	HIGH: Estimated based on analogy to be there is suggestive evidence that the analogist disruptions in normal sex differences in respect Panel concluded that while there developmental toxicity, low level (<1 mg/lof High concern of the analog, with lower	og bisphenol A causes neural and rats and mice (0.01-0.2 mg/kg bw- was broad agreement in a NOAE kg bw-day) effects were uncertain	behavioral alterations related to day). The FAO/WHO (2011) L of 50 mg/kg bw-day for
	Reproduction/ Developmental Toxicity Screen			No data located.
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Summary of Developmental Effects *do defi high (rat *do ges mg, bw- eva *do wei adu *do mic 6000 *do fen bw- Ano bisy *ca rela diff 0.2	e NTP-CERHR (2008) Expert Panel	NTP–CERHR, 2008; Professional judgment		

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	The joint FAO/WHO (2011) Expert Panel reviewed available reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bwday. (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.
Neurotoxicity	MODERATE: Estimated to have potentialert.	al for neurotoxicity based on the	presence of the phenol structural
Neurotoxicity Screening Battery (Adult)	<u> </u>	U.S. EPA 2010, Professional judgment	Estimated based on structural alert.
Repeated Dose Effects	MODERATE: Estimated based on analoliver (centrilobular hepatocyte hypertropday) and there is uncertainty regarding the bw-day and the LOAEL of 50 mg/kg bw-nasal cavity of rats were reported following these findings indicate a Moderate hazar	ohy) from oral dosing at 50 mg/kg he potential for bisphenol A doses day to cause adverse systemic effo ng repeated inhalation exposure t	s bw-day (NOAEL = 5 mg/kg bw- s between the NOAEL of 5 mg/kg ects. Furthermore lesions in the to bisphenol A dust at 0.05 mg/L.
	The FAO/WHO (2011) Expert Panel		Based on the analog bisphenol A.

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Parental systemic toxicity:	NTP-CERHR, 2008; Professional	Based on the analog bisphenol A;	
		judgment	guideline study as reported in the	
	LOAEL = 47.5 mg/kg bw-day for 12%		secondary source.	
	decreased terminal body weight in F ₁			
	parental males		Classified by NTP-CERHR as having	
		,	High Utility.	
	(Estimated by analogy)			
	Parental systemic toxicity:		Based on the analog bisphenol A;	
		judgment	guideline study as reported in the	
	LOAEL = 50 mg/kg bw-day for increased		secondary source.	
	incidences of centrilobular hepatocellular hypertrophy in males and females		Classified by NTP-CERHR as having	
	hypertrophy in males and females		High Utility.	
	(Estimated by analogy)		riigh Othity.	
		EINECS, 2010; European	Based on the analog bisphenol A.	
	LOAEL = 0.05 mg/L based on microscopic		Duscus on the uniting displaced in	
	changes in the anterior portion of the nasal			
	cavity			
	(Estimated by analogy)			
		EINECS, 2010; European	Based on the analog bisphenol A;	
	LOAEL = 0.047 mg/L for decreased body	Commission, 2000; Professional	single exposure level, insufficient	
		judgment	study details in secondary sources.	
	weight, unspecified "morphological			
	changes" in liver, kidney, and lungs			
	(Estimated by analogy)			

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1				
PROPERTY/ENDPOINT	DATA REFERENCE DATA QUALITY			
Skin Sensitization	MODERATE: Based on analogy to bisphenol A, this substituted phenolic compound is estimated to be a skin sensitizer. Recent data from three bisphenol A manufacturing facilities indicate that it does not elicit skin sensitization; however, results of some human studies suggest the possibility of a dermal sensitization response, although cross-sensitization was not ruled out. Most animal studies conducted on the analog were negative for dermal sensitization, although assays may not have been maximized. There is evidence of ear swelling in a photoallergy test in mice and moderate redness and swelling following repeated dermal exposure in rabbits. Based on suggestive evidence of skin sensitization in humans and mice for the analog, MODERATE hazard call is warranted.			
Skin Sensitization	Negative in a modified local lymph node assay of mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on 3 consecutive days (Estimated by analogy) Negative in a local lymph node assay modified to test for photoreactivity in mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on three consecutive days and irradiated with UV light immediately following application (Estimated by analogy)		Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%. Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%.	
	Negative in comprehensive medical surveillance data obtained from three bisphenol A manufacturing plants for 875 employees examined for several years where workers were potentially exposed to other chemicals (phenol, acetone) that are not considered to be skin sensitizers (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate.	

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1			
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Positive, rabbits; repeated dermal application (30 times over 37 days) of bisphenol A (pure powder) produced moderate swelling and redness; skin turned yellow followed by dark pigmentation after day 15 (Estimated by analogy)	NIOSH, 2010; Professional judgment	Based on the analog bisphenol A; adequate.
		The Joint FAO/WHO Expert Meeting to review toxicological aspects of bisphenol A concurs with previous reviews that bisphenol A is capable of producing a skin sensitization response in humans (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.
Respiratory Sensitizat	tion	No data located.		
R	espiratory Sensitization			No data located.
Eye Irritation		MODERATE: Based on analogy to bisphenol A. The analog bisphenol A was slightly to highly irritating to rabbit eyes.		
E	ye Irritation	Rabbit, slightly to highly irritating	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A. Adequate; multiple studies, weight of evidence indicates potential for bisphenol A to cause eye irritation.
Dermal Irritation		MODERATE: Based on analogy to bisph	nenol A; bisphenol C is estimated	
		moderately irritating based on test data fo		, J
D	Permal Irritation	when applied as undiluted or 10% aqueous suspension to intact or abraded skin (Estimated by analogy)	European Commission, 2000; EINECS, 2010; NIOSH, 2010; Professional judgment	Based on the analog bisphenol A. Adequate; multiple studies, weight of evidence indicates potential for bisphenol A to cause dermal irritation.
		Rabbit, moderately irritating when applied as 40% solution in dimethyl sulfoxide under non-occlusive conditions (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Guinea pig, not irritating when applied as 5% solution in acetone for 24-hours under occlusive conditions (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.	
Endocrine Activity	This compound exhibited a weakly positi	ve ER binding affinity in one <i>in v</i>	itro assay.	
	exhibited weak ER binding activity in preparations from uteri of ovariectomized Sprague-Dawley rats as evidenced by a relative binding affinity (RBA) that was 0.0007% of the binding affinity of 17β-estradiol. RBAs for other tested chemicals included 0.008% for bisphenol A, 0.003% for PHBB and 0.0009% for bisphenol F.	Blair et al., 2000	Adequate.	
Immunotoxicity	No data located.			
Immune System Effects	FCOMOVICION		No data located.	
ECOSAR Class	Phenols, poly - acid			
Acute Toxicity	HIGH: Based on an estimated 96-hour E	C ₅₀ of 7.67 (ECOSAR class: neu	tral organics) for green algae.	
Fish LC ₅₀	Fish 96-hour $LC_{50} = 14.75 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics Fish 96-hour $LC_{50} = 41.53 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly - acid	EPI EPI	Service Servic	
Daphnid LC ₅₀	Daphnid 48-hour $LC_{50} = 10.07 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics Daphnid 48-hour $LC_{50} = 103.05 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly - acid	EPI EPI		

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Green Algae EC ₅₀	Green algae 96-hour $EC_{50} = 7.67 \text{ mg/L}$	EPI		
	(Estimated)			
	ECOSAR: neutral organics			
	Green algae 96-hour $EC_{50} = 18.35 \text{ mg/L}$	EPI		
	(Estimated)			
	ECOSAR: phenols, poly - acid			
Chronic Aquatic Toxicity	MODERATE: Based on ECOSAR-estin	nated data for fish, Daphnid, and g	green algae.	
Fish ChV	Fish $ChV = 1.36 \text{ mg/L}$	EPI		
	(Estimated)			
	ECOSAR: neutral organics			
	Fish 30-day $ChV = 10.16 \text{ mg/L}$	EPI		
	(Estimated)			
	ECOSAR: phenols, poly - acid			
Daphnid ChV	Daphnid ChV = 1.19 mg/L	EPI		
	(Estimated)			
	ECOSAR: neutral organics			
	Daphnid 21-day $ChV = 35.44 \text{ mg/L}$	EPI		
	(Estimated)			
	ECOSAR: phenols, poly - acid			
Green Algae ChV	Green algae $ChV = 3.34 \text{ mg/L}$	EPI		
	(Estimated)			
	ECOSAR: phenols, poly - acid			
	Green algae $ChV = 3.58 \text{ mg/L}$	EPI		
	(Estimated)			
	ECOSAR: neutral organics			

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1					
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY	
	ENVIRONMENTAL FATE				
Transport		Based on the Level III fugacity models incorporating the available experimental property data, this substituted phenolic compound is expected to partition primarily to soil where it is expected to be immobile in based on its estimated K_{oc} . Estimated volatilization half-lives indicate it will be non-volatile from surface water. Volatilization from dry surface is also not expected based on its estimated vapor pressure. In the atmosphere, this substituted phenolic compound is expected to exist solely in the particulate phase, based on its estimated vapor pressure. Particulates may be removed from air by wet or dry deposition.			
	Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for non-volatile compounds based on professional judgment.	
	$\label{eq:sediment/Soil} Sediment/Soil \\ Adsorption/Desorption \\ Coefficient-K_{oc}$	8,900 (Estimated)	EPI		
	Level III Fugacity Model	Air = <1% (Estimated) Water = 15% Soil = 81% Sediment = 4%	EPI		
Persistence		MODERATE: Evaluation of the persistence of this compound is based entirely on QSARs in the compartment that this compound is most likely to be found, soil. Results from these models estimate a persistence half-life in soil of 30 days. The biodegradation models estimate primary biodegradation in daysweeks and ultimate degradation in weeks. Based on these data, the biodegradation half-life is expected to be <60 days. Biodegradation under anaerobic methanogenic conditions is not probable. This compound is not expected to undergo hydrolysis since it does not contain hydrolysable functional groups. The atmospheric half-life of this compound is estimated at 1.5 hours, although it is expected to exist primarily in the particulate phase in air. Based on the estimated data and qualitative assessments based on functional groups, biodegradation of this compound is expected to be the primary removal process in the environment.			
	Aerobic Biodegradation	Days-weeks (primary survey model) Weeks (ultimate survey model)	EPI		
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI		

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY
Soil	Aerobic Biodegradation			No data located.
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI	
	Soil Biodegradation w/ Product Identification			No data located.
	Sediment/Water Biodegradation			No data located.
Air	Atmospheric Half-life	1.5 hours (Estimated)	EPI	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at environmentally significant wavelengths.
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at environmentally significant wavelengths.
	Pyrolysis			No data located.
Environmental H	alf-life	30 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.
Bioaccumulation		LOW: The fish BCF and BAF estimates	are <100.	
	Fish BCF	3.2 (Estimated)	EPI	
	BAF	84 (Estimated)	EPI	
	Metabolism in Fish			No data located.
		ENVIRONMENTAL MONITORING AN	ND BIOMONITORING	
Environmental Monitoring No data located.				

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #1				
PROPERTY/ENDPOINT DATA REFERENCE DATA QUALITY				
Ecological Biomonitoring	No data located.			
Human Biomonitoring	This chemical was not included in the NHANES biomonitoring report (CDC, 2011).			



Alfa Aesar - A Johnson Matthey Company. *Material Safety Data Sheet (MSDS)*. Available at http://www.alfa.com. Accessed on November, 19, 2010.

Blair R.M., Fang H., Branham, W.S., et al. The estrogen receptor relative binding affinities of 188 natural and xenochemicals: structural diversity of ligands. *Toxicol. Sci.* **2000**, 54:138-153.

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

EINECS (European Inventory of Existing Commercial chemical Substances). 4,4'-Isopropylidenediphenol (bisphenol A). European Union Risk Assessment Report. **2010.**

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

European Commission. IUCLID Dataset for 4,4-isopropylidenediphenol (CAS No. 80-05-7). European Chemicals Bureau, February 19, 2000.

FAO/WHO (Food and Agriculture Organization/World Health Organization). 2010. Joint FAO/WHO expert meeting to review toxicological and health aspects of bisphenol A. Summary report including report of stakeholder meeting on bisphenol A. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. November 1-5, 2010.

Lide, D. R, ed. CRC Handbook of Chemistry and Physics, 88th edition; CRC Press Taylor & Francis: Boca Raton, FL. 2008.

Mutat Res. 2008 (Sanitized - article title and author)

NIOSH (National Institute for Occupational Safety and Health). Skin Notation (SK) Profile, bisphenol A (BPA) [CAS No. 80-05-7]. Department of Health and Human Services; Centers for Disease Control and Prevention, **2010**.

NTP (National Toxicology Program). Carcinogenesis bioassay of bisphenol-A (CAS No. 80-05-7) in F344 rats and B6C3F1 mice (feed study). Technical Report No. 215, PB82-184060. **1982.**

NTP (National Toxicology Program). Department of Health and Human Services. 2010. http://ntp-apps.niehs.nih.gov/ntp_tox/

NTP-CERHR. Monograph on the potential human reproductive and developmental effects of biphenol A. National Toxicology Program; U.S. Department of Health and Human Service. Center for the Evaluation of Risks to Human Reproduction. NIH Publication No. 08-5994. September 2008.

Oncologic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

O'Neil, M., et al. eds. *e-Merck Index*. 14th ed. Basic Search. Whitehouse Station, NJ: Merck & Co., Inc. **2010**. https://themerckindex.cambridgesoft.com/TheMerckIndex/index.asp (accessed on December 10, 2010).

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT) Profiler*, U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

Substituted Phenolic Compound #2

CASRN: Confidential CASRN
MW: Confidential MW
MF: Confidential MF
Physical Forms:
Neat: Solid
Use: Developer for thermal paper

SMILES: This confidential material is not amenable to the generation of a single SMILES notation.

Synonyms: None

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None identified

Analog: Bisphenol A (80-05-7)

Endpoint(s) using analog values: Acute toxicity, eye and skin irritation, skin sensitization, reproductive and developmental toxicity, genotoxicity, repeated dose

effects

Analog Structure:

но-

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: R43 - May cause sensitization by skin contact; 62 Possible risk of impaired fertility; 51/53 - Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment (ESIS, 2011).

effects in the aquatic environment (ESIS, 20

Risk Assessments: None identified

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	PHYSICAL/CHEMICAL P	ROPERTIES		
Melting Point (°C)	138 (Measured)	Chemspider, 2010	Adequate; secondary source, study details and test conditions were not provided; selected value for assessment.	
	135-139 (Measured)	Aldrich, 2009	Adequate; measured by chemical supplier, consistent with other reported values.	
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling point compounds according to HPV assessment guidance.	
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.	
Water Solubility (mg/L)	0.12 (Estimated)	EPI		
Log K _{ow}	6.3 (Estimated)	EPI		
Flammability (Flash Point)			No data located.	
Explosivity			No data located.	
pH			No data located.	
pK _a	10 (Estimated)	SPARC		

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2					
PROPEI	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
HUMAN HEALTH EFFECTS					
Toxicokinetics		Substituted phenolic compound #2 is e absorption when in solution via the lur		gh the skin and have poor	
Dermal Absorption	in vitro			No data located.	
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Not absorbed through the skin and has poor absorption through the lung and gastrointestinal tract (Estimated by analogy)	Professional judgment	Based on closely related analog with similar structure, functional groups, and physical/chemical properties.	
Acute Mammalian	Toxicity	LOW: Based on analogy to bisphenol A. The acute oral and dermal toxicity hazard of substituted phenolic compound #2 is estimated to be low based on experimental data in animals for a closely related substance. Data for exposure to the analog bisphenol A via inhalation were inconclusive, as only a single concentration was tested and an LC ₅₀ was not provided.			
Acute Lethality	Oral	Rat $LD_{50} = 3,200-5,000$ mg/kg bw (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies.	
		Mouse $LD_{50} = 4,000-5,200 \text{ mg/kg bw}$ (Estimated by analogy)	NTP, 1982; European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; multiple studies, some guideline studies.	
De	Dermal	Rabbit $LD_{50} = 3,000-6,400 \text{ mg/kg bw}$ (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate by weight of evidence, multiple studies, although study details were not reported in secondary sources.	
	Inhalation	No deaths among male and female F344 rats (10/sex) exposed to bisphenol A dust at 0.17 mg/L (highest attainable concentration) for 6 hours; transient slight nasal tract epithelial damage was evident (Estimated by analogy)	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A; test guidelines were not reported in secondary sources.	

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPE	CRTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Carcinogenicity		MODERATE: Estimated using OncoLogic expert system, which describes a concern for this compound as a potential carcinogen or tumorigenesis promoter arising from its structural similarity to estrogenic/androgenic compounds, using the 'phenols and phenolic compounds' structural alert.			
	OncoLogic Results	Moderate (Estimate) OncoLogic class: phenols and phenolic compounds		OncoLogic SAR analysis using the phenols and phenolic compounds class.	
	Carcinogenicity (Rat and Mouse)			No data located.	
	Combined Chronic Toxicity/ Carcinogenicity			No data located.	



PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2					
PROPERTY/ENDPOINT	DATA REFERENCE DATA QUALITY				
	LOW: Based on analogy to bisphenol anot a mutagen in <i>in vitro</i> test systems, (<i>in vivo</i> evidence for clastogenic effects i although some <i>in vitro</i> studies have sho The conclusion of FAO/WHO (2011) is humans.	2) the analog bisphenol Adoes not nduced by the analog bisphenol A wn bisphenol A to affect chromos	induce cell transformation, and (3) is inconsistent and inconclusive omal structure in dividing cells.		



PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Largely negative results in a variety of in vitro test systems, including studies with Salmonella typhimurium, Chinese hamster V79 cells, Syrian hamster embryo cells, and mouse lymphoma cells. However, DNA damage was induced in MCF-7 and MDA-MB-231 cells, DNA adduct formation in Syrian hamster ovary cells and a number of positive findings have been reported for the potential for bisphenol A to inhibit purified microtubule polymerization, affect the spindle apparatus and produce aneuploidy in in vitro studies with Chinese hamster V79 cells or oocytes from Balb/c or MF1 mice. FAO/WHO Expert Panel concludes: BPA is not a mutagen in in vitro test systems, nor does it induce cell transformation. Bisphenol A has been shown to affect chromosomal structure in dividing cells in in vitro studies, but evidence for this effect in in vivo studies is inconsistent and inconclusive. Bisphenol A is not likely to pose a genotoxic hazard to humans. (Estimated by analogy)		Based on the analog bisphenol A.	

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2			
PROPERTY/ENDPOINT	DATA REFERENCE DATA QUALITY		
	HIGH: Based on analogy to bisphenol A. Based on NOAELs of 4.75 mg/kg bw-day and 47.5 mg/kg b for reproductive toxicity in male and female rats, respectively, following oral exposure to the analog bisphenol A. Conclusions of NTP (2008) include sufficient evidence in rats and mice that subchronic chronic oral exposures to the analog bisphenol A causes female reproductive toxicity at doses ≥475 mg bw-day (highest NOAEL = 47.5 mg/kg bw-day) and male reproductive toxicity at doses ≥47.5mg/kg b (highest NOAEL = 4.75 mg/kg bw-day). There is considerable uncertainty regarding the results of re studies that reported reproductive and/or developmental effects in laboratory animals administered t analog bisphenol A at oral doses <5 mg/kg bw-day.		
Reproduction/ Developmental Toxicity Screen			No data located.
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males Reproductive toxicity: Females: NOAEL = 47.5 mg/kg bw-day LOAEL = 475 mg/kg bw-day for decreases in number of implantation sites, delayed vaginal opening in F ₁ , F ₂ , and F ₃ offspring Males: NOAEL = 4.75 mg/kg bw-day, LOAEL = 47.5 mg/kg-day for delayed preputial separation in F ₁ males (Estimated by analogy)	judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.

P	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females	FAO/WHI, 2011; NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; adequate, guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		
	Reproductive toxicity: NOAEL = 50 mg/kg bw-day LOAEL = 600 mg/kg bw-day for increased gestation length, decreased epididymal sperm concentration in F ₁ males, increased incidence of gross ovarian cysts in F ₁ and F ₂ females (Estimated by analogy)				
Summary of Reproductive Effects	Female effects: There is sufficient evidence in rats and mice that bisphenol A causes female reproductive toxicity with subchronic or chronic oral exposures NOAEL of 47.5 mg/kg bw-day LOAEL of 475 mg/kg bw-day Male effects: There is sufficient evidence in rats and mice that bisphenol A causes male reproductive toxicity with subchronic or chronic oral exposures NOAEL of 4.75 mg/kg bw-day LOAEL of 47.5 mg/kg bw/day (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A. Classified by NTP-CERHR as having High Utility.		

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2			
PROPER'	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		The joint FAO/WHO Expert Panel (2010) reviewed available reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bw-day. (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A. Classified by NTP-CERHR as having High Utility.
Developmental Effec	ets	HIGH: Based on analogy to bisphenol suggestive evidence that the analog bisphis disruptions in normal sex differences in Expert Panel concluded that while ther developmental toxicity, low-level (<1 m call of High concern of the analog, with	ohenol A causes neural and behave n rats and mice (0.01-0.2 mg/kg by the was broad agreement in a NOA g/kg bw-day) effects were uncerta	ioral alterations related to v-day). The FAO/WHO (2011) EL of 50 mg/kg bw/day for
į į	Reproduction/ Developmental Toxicity Screen			No data located.
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
PROPERTY/ENDPOINT Summary of Developmental Effects *d de his da (m *d aft 45 60 do *d we in mi *d mi 60 *d or 47 An bis *c rel dif			· ·

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2			
PROPER	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		The joint FAO/WHO (2011) Expert Panel reviewed available reproductive and developmental toxicity data for bisphenol A as of November, 2010 and noted that most regulatory bodies reviewing the numerous studies on bisphenol A have indicated an oral reproductive and developmental NOAEL of 50 mg/kg bw-day. (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.
Neurotoxicity		MODERATE: Estimated to have poter alert.	ntial for neurotoxicity based on th	e presence of the phenol structural
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA 2010, Professional judgment	Estimated based on structural alert.
Repeated Dose Effe	cts	MODERATE: Estimated based on analogy to bisphenol A, which produced histopathologic changes in the liver (centrilobular hepatocyte hypertrophy) from oral dosing at 50 mg/kg bw-day (NOAEL = 5 mg/kg bw-day) and there is uncertainty regarding the potential for bisphenol A doses between the NOAEL of 5 mg/kg bw-day and the LOAEL of 50 mg/kg bw-day to cause adverse systemic effects. Furthermore, lesions in the nasal cavity of rats were reported following repeated inhalation exposure to bisphenol A dust at 0.05 mg/L. These findings indicate a Moderate hazard concern for the oral and inhalation exposure routes.		

P	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	The FAO/WHO (2011) Expert Panel reviewed the available information regarding repeated-dose oral toxicity of bisphenol A and concluded that results demonstrated effects on the liver, kidney, and body weight at doses of 50 mg/kg bw-day and higher and that the lowest NOAEL was 5 mg/kg bw-day, as identified in several studies. (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.		
	Parental systemic toxicity: NOAEL = 4.75 mg/kg bw-day LOAEL = 47.5 mg/kg bw-day for 12% decreased terminal body weight in F ₁ parental males (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		
	Parental systemic toxicity: NOAEL = 5 mg/kg bw-day LOAEL = 50 mg/kg bw-day for increased incidences of centrilobular hepatocellular hypertrophy in males and females (Estimated by analogy)	NTP-CERHR, 2008; Professional judgment	Based on the analog bisphenol A; guideline study as reported in the secondary source. Classified by NTP-CERHR as having High Utility.		
	NOAEL = 0.01 mg/L LOAEL = 0.05 mg/L based on microscopic changes in the anterior portion of the nasal cavity (Estimated by analogy)	EINECS, 2010; European Commission, 2000; Professional judgment	Based on the analog bisphenol A.		

P	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	NOAEL = None established LOAEL = 0.047 mg/L for decreased body weight gain, increased liver and kidney weight, unspecified "morphological changes" in liver, kidney, and lungs (Estimated by analogy)	EINECS, 2010; European Commission, 2000; Professional judgment	Based on the analog bisphenol A; single exposure level, insufficient study details in secondary sources.		
Skin Sensitization	MODERATE: Based on analogy to bis sensitizer. Recent data from three bisp sensitization; however, results of some response, although cross-sensitization on negative for dermal sensitization, although in a photoallergy test in mice a exposure in rabbits. Based on suggesti MODERATE hazard call is warranted	whenol A manufacturing facilities in human studies suggest the possibition was not ruled out. Most animal strugh assays may not have been mained moderate redness and swelling we evidence of skin sensitization in	indicate that it does not elicit skin lity of a dermal sensitization udies conducted on the analog were ximized. There is evidence of ear g following repeated dermal		
Skin Sensitization	Negative in a modified local lymph node assay of mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on 3 consecutive days (Estimated by analogy)		Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%.		
	Negative in a local lymph node assay modified to test for photoreactivity in mice administered bisphenol A epicutaneously on the ears at concentrations up to 30% on 3 consecutive days and irradiated with UV light immediately following application (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate, although the assay did not include concentrations >30%.		

F	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Negative in comprehensive medical surveillance data obtained from three bisphenol A manufacturing plants for 875 employees examined for several years where workers were potentially exposed to other chemicals (phenol, acetone) that are not considered to be skin sensitizers (Estimated by analogy)	EINECS, 2010; Professional judgment	Based on the analog bisphenol A; adequate.	
	Positive, rabbits; repeated dermal application (30 times over 37 days) of bisphenol A (pure powder) produced moderate swelling and redness. Skin turned yellow followed by dark pigmentation after day 15 (Estimated by analogy)	NIOSH, 2010; Professional judgment	Based on the analog bisphenol A; adequate.	
	The Joint FAO/WHO Expert Meeting to review toxicological aspects of bisphenol A concurs with previous reviews that BPA is capable of producing a skin sensitization response in humans (Estimated by analogy)	FAO/WHO, 2011; Professional judgment	Based on the analog bisphenol A.	
Respiratory Sensitization	No data located.			
Respiratory Sensitization			No data located.	
Eye Irritation	MODERATE: Based on analogy to bisphenol A. Substituted phenolic compound #2 is estimated to be slightly to highly irritating to rabbit eyes based on test data for the analog bisphenol A.			
Eye Irritation	Rabbit, slightly to highly irritating	European Commission, 2000; EINECS, 2010; Professional judgment	Based on the analog bisphenol A. Adequate; multiple studies, weight of evidence indicates potential for bisphenol A to cause eye irritation.	

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPER	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Dermal Irritation		MODERATE: Based on analogy to bisphenol A; substituted phenolic compound #2 is estimated to be slightly irritating to moderately irritating to rabbit skin based on test data for the analog bisphenol A. NIOSH has assigned the analog bisphenol A as a skin irritant.			
	Dermal Irritation	Rabbit, nonirritating to slightly irritating when applied as undiluted or 10% aqueous suspension to intact or abraded skin (Estimated by analogy)	EINECS, 2010; NIOSH, 2010;	Based on the analog bisphenol A. Adequate; multiple studies, weight of evidence indicates potential for BPA to cause dermal irritation.	
		Rabbit, moderately irritating when applied as 40% solution in dimethyl sulfoxide under non-occlusive conditions. (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.	
		Guinea pig, not irritating when applied as 5% solution in acetone for 24 hours under occlusive conditions (Estimated by analogy)	European Commission, 2000; Professional judgment	Based on the analog bisphenol A; adequate.	
Endocrine Activity		Substituted phenolic compound #2 is casubstituted phenolic compound #2 subphenolic compound #2 did not bind to or anti-androgenic responses in another	cutaneously, as evidenced by incre estrogen receptors in one <i>in vitro</i> a	eased uterine weight. Substituted	
		In a uterotrophic assay in which immature female rats were injected with bisphenol F, bisphenol S, or substituted phenolic compound #2 subcutaneously for 3 consecutive days, observed changes in uterine weight indicated that bisphenol F, bisphenol S, and substituted phenolic compound #2 exerted both estrogenic and anti-estrogenic responses.	Akahori et al., 2008	Adequate.	

P	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	In a uterotrophic assay of rats subcutaneously injected with bisphenol F once daily for 3 days, an apparent estrogenic effect was evidenced by increased absolute and relative uterine weight. Similar effects were elicited by bisphenol S and substituted phenolic compound #2.	Toxicol. Lett. 2004 (Sanitized)	Adequate.		
	In a human ER binding assay, the relative binding affinity (RBA) of substituted phenolic compound #2 was 0.175% relative to 17β-estradiol (set at 100%). RBAs for other bisphenol compounds included 0.0719% for bisphenol F and 0.0055% for bisphenol A.	Toxicol. Lett. 2004 (Sanitized)	Adequate.		
	In an ERE-luciferase reporter assay using MCF-7 cells, substituted phenolic compound #2 did not appear to elicit an estrogenic response (EC ₅₀ >1,000 μM). EC ₅₀ values for other bisphenol compounds included 0.63% for bisphenol A, 0.42 μM for bisphenol C, 1.0 μM for bisphenol F, and 1.1 μM for bisphenol S.	Toxicol. Sci., 2005 (Sanitized)	Adequate.		
	In an ERE-luciferase reporter assay using MCF-7 cells in the presence of 17β-estradiol, neither substituted phenolic compound #2, bisphenol A, bisphenol C, bisphenol F, nor bisphenol S, appeared to exert an anti-estrogenic effect.	Toxicol. Sci., 2005 (Sanitized)	Adequate.		

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In an ARE-luciferase reporter assay using NIH3T3 cells without expressing AR, substituted phenolic compound #2 did not elicit an androgenic response or an anti-androgenic response in the presence of dihydrotestosterone.	Toxicol. Sci., 2005 (Sanitized)	Adequate although actual data were not shown in study report.	
Immunotoxicity	No data located.			
Immune System Effects			No data located.	
	ECOTOXICITY			
ECOSAR Class	Phenols, Poly			
Acute Toxicity	HIGH: Based on estimated 96-hour Lalgae (neutral organics).	C_{50} for fish, 48-hour LC_{50} for Dap	hnid, and 96-hour EC ₅₀ for green	
Fish LC ₅₀	Fish 96-hour $LC_{50} = 0.067 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics Fish 96-hour $LC_{50} = 0.106 \text{ mg/L}$ (Estimated)	EPI EPI		
	ECOSAR: phenols, poly			
Daphnid LC ₅₀	Daphnid 48-hour $LC_{50} = 0.065 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI		
	Daphnid 48-hour $LC_{50} = 0.078 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly	EPI		
Green Algae EC ₅₀	Green algae 96-hour EC ₅₀ = 0.16 mg/L (Estimated) ECOSAR: neutral organics	EPI	Chemical may not be sufficiently soluble to measure this predicted effect.	
	Green algae 96-hour EC ₅₀ = 1.24 mg/L (Estimated) ECOSAR: phenols, poly	EPI	Chemical may not be sufficiently soluble to measure this predicted effect.	

PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Chronic Aquatic Toxicity	HIGH: Based on estimated ChVs for f	ish, Daphnid, and green algae.		
Fish ChV	Fish ChV = 0.006 mg/L (Estimated) ECOSAR: neutral organics	EPI		
	Fish 30-day ChV = 0.016 mg/L (Estimated) ECOSAR: phenols, poly	EPI		
Daphnid ChV	Daphnid ChV = 0.013 mg/L (Estimated) ECOSAR: neutral organics	EPI		
	Daphnid ChV = 0.023 mg/L (Estimated) ECOSAR: phenols, poly	EPI		
Green Algae ChV	Green algae ChV = 0.066 mg/L (Estimated) ECOSAR: phenols, poly	EPI		
	Green algae ChV = 0.126 mg/L (Estimated) ECOSAR: neutral organics	EPI	Chemical may not be sufficiently soluble to measure this predicted effect.	
	ENVIRONMENTAL 1	FATE		
Transport	The transport evaluation for substituted phenolic compound #2 is based on available experimental and estimated physical and chemical properties. Based on the Level III fugacity models incorporating the available experimental property data, substituted phenolic compound #2 is expected to partition to sediment and soil. Additionally, substituted phenolic compound #2 is expected to have low mobility in soil based on its estimated K_{oc} therefore, leaching of substituted phenolic compound #2 through soil to groundwater is not expected to be an important transport mechanism. Estimated volatilization half-lives indicate that it will be non-volatile from surface water. In the atmosphere, substituted phenolic compound #2 is expected to exist in the particulate phase, based on its estimated vapor pressure. Particulates will be removed from air by wet or dry deposition.			
Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for non-volatile compounds based on professional judgment.	

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROF	PERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		>30,000 (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for non mobile compounds according to SF assessment guidance.	
	Level III Fugacity Model	Air = <1% (Estimated) Water = 1% Soil = 42% Sediment = 57%	EPI		
Persistence		HIGH: Evaluation of the persistence of aerobic and anaerobic biodegradation, months and primary degradation in we probable based on results from estimate chromophores that absorb light at way direct photolysis. It is not expected to groups. The atmospheric half-life of suis expected to exist primarily as a partidegradation pathway for substituted p	Results from these models estimated as a Biodegradation under anaestion models. Substituted phenolic relengths >290 nm. Therefore, it is undergo hydrolysis as it does not outstituted phenolic compound #2 is culate in air. Therefore, biodegradate	ate ultimate biodegradation in cobic methanogenic conditions is not compound #2 does not contain s not expected to be susceptible to contain hydrolysable functional is estimated at 1.4 hours, although it	
Water	Aerobic Biodegradation	Weeks (primary survey model) Months (ultimate survey model)	EPI		
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI		
Soil	Aerobic Biodegradation			No data located.	
	Anaerobic Biodegradation	Not probable (Anaerobic-methanogenic biodegradation probability model)	EPI		
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation			No data located.	
Air	Atmospheric Half-life	1.4 hours (Estimated)	EPI		

	PROPRIETARY SUBSTITUTED PHENOLIC COMPOUND #2				
PROPERT	ΓY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at environmentally significant wavelengths.	
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Half-	life	>180 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		HIGH: The estimated BAF and fish B	CF values are >5,000.		
	Fish BCF	6,200 (Estimated)	EPI		
	BAF	9,100 (Estimated)	EPI		
	Metabolism in fish			No data located.	
ENVIRONMENTAL MONITORING AND BIOMONITORING					
Environmental Moni	Environmental Monitoring No data located.				
Ecological Biomonito	Ecological Biomonitoring No data located.			_	
Human Biomonitorin	ng	This chemical was not included in the N	HANES biomonitoring report (CDC	, 2011).	

Aldrich. Material Safety Data Sheet (MSDS). Available at: http://www.sigmaaldrich.com/ Accessed on December 21, **2010**.

Akahori, Y., Makai, M., Yamasaki, K., et al. Relationship between the results of *in vitro* receptor binding assay to human estrogen receptor α and *in vivo* uterotrophic assay: Comparative study with 65 selected chemicals. *Toxicology In Vitro* **2008**, 22:225-231.

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

ChemSpider. *ChemSpider; Structure-based Chemistry Information*. Royal Society of Chemistry:London. **2010**. http://www.chemspider.com (accessed on December 11, 2010).

EINECS (European Inventory of Existing Commercial chemical Substances). 4,4'-Isopropylidenediphenol (bisphenol A). European Union Risk Assessment Report. **2010.**

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.0. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

European Commission. IUCLID Dataset for 4,4-isopropylidenediphenol (CAS No. 80-05-7). European Chemicals Bureau, February 19, 2000. **2000**.

FAO/WHO (Food and Agriculture Organization/World Health Organization). Joint FAO/WHO expert meeting to review toxicological and health aspects of bisphenol A. Summary report including report of stakeholder meeting on bisphenol A. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. November 1-5, 2010.

NIOSH (National Institute for Occupational Safety and Health). Skin Notation (SK) Profile, Bisphenol A (BPA) [CAS No. 80-05-7]. Department of Health and Human Services; Centers for Disease Control and Prevention. **2010.**

NTP (National Toxicology Program). Carcinogenesis bioassay of bisphenol-A (CAS No. 80-05-7) in F344 rats and B6C3F1 mice (feed study). Technical Report No. 215, PB82-184060. **1982.**

NTP-CERHR. Monograph on the potential human reproductive and developmental effects of biphenol A. National Toxicology Program; U.S. Department of Health and Human Service. Center for the Evaluation of Risks to Human Reproduction. NIH Publication No. 08-5994. September 2008.

Oncologic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT)Profiler*, U.S. Environmental Protection Agency: Washington D.C. <u>www.pbtprofiler.net</u>.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

Toxicol. Lett. 2004 (Sanitized - article title and author).

Toxicol. Sci., 2005 (Sanitized - article title and author).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA Sustainable Futures. Using Non Cancer Screening within the SF Initiative. Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic as of February 09, 2011.

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

PHBB

| CASRN: 94-18-8 | MW: 228.25 | MF: C₁₄H₁₂O₃ | Physical Forms: Neat: Solid | Use: Developer for thermal paper

SMILES: c1(C(OCc2cccc2)=O)ccc(O)cc1

Synonyms: Benzoic acid, 4-hydroxy-, phenylmethyl ester (TSCA Inventory); Benzyl 4-hydroxybenzoate; Benzyl p-hydroxybenzoate; Benzyl parahydroxybenzoate; Benzyl paraben; Phenylmethyl 4-hydroxybenzoate; AI3-02955; Benzyl Parasept; Benzyl Tegosept; Nipabenzyl; Parosept; Solbrol Z; p-Hydroxybenzoic acid benzyl ester

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: Hydrolysis products - 4-hydroxybenzoic acid (99-96-7) and benzyl alcohol (100-51-6)

Analog: Benzyl-2-hydroxybenzoate (118-58-1)

Endpoint(s) using analog values: Aerobic biodegradation, persistence,

and genotoxicity

Analog Structure:

НО

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	PHYSICAL/CHEMICAL PRO	PERTIES		
Melting Point (°C)	111 (Measured)	PhysProp	Adequate; consistent values reported in secondary source.	
	110–112 (Measured)	CIR, 1986	Adequate; valid, nonguideline study.	
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling point compounds according to HPV assessment guidance.	
Vapor Pressure (mm Hg)	3.8x10 ⁻⁶ (Estimated)	EPI		
Water Solubility (mg/L)	60 at 25 °C (Measured)	Thomas, 2006	Nonguideline study reported in secondary source. Although the value is consistent with other reported properties, the pH of the measurement was not reported, and was interpreted as pH 7.	
$\operatorname{Log} \mathbf{K}_{\operatorname{ow}}$	3.56 (Measured)	PhysProp	Adequate; nonguideline study reported in secondary source. Value is consistent with other reported properties.	
Flammability (Flash Point)			No data located.	
Explosivity			No data located.	
pH			No data located.	
pK _a	7.8 (Estimated)	SPARC		

	PHBB CASRN 94-18-8				
PROPER	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		HUMAN HEALTH EFFEC	CTS		
Toxicokinetics		PHBB is estimated to not be absorbed through the skin as neat material and has moderate absorption through skin when in solution. PHBB can be absorbed through the lung and gastrointestinal tract. Although not readily hydrolyzed, PHBB is expected to undergo ester hydrolysis by esterases in the body and produce the metabolites benzyl alcohol and p-hydroxybenzoic acid.			
Absorption, Distribution,	Oral, Dermal, Inhaled	At 24 hours following application of PHBB to human skin (<i>in vitro</i>), recoveries in the receptor medium as parent compound and its hydrolysis product (4-hydroxybenzoic acid) were 17 and 2.4%, respectively. Hydrolysis of PHBB to 4-hydroxybenzoic acid in the human skin was catalyzed by carboxylesterases, particularly human carboxylesterase 2. 20% dermal absorption <i>in vitro</i> (Estimated by analogy). Trace amounts of PHBB (in conjugated form) were detected in the urine of		Adequate. Based on a confidential study on a closely related analog. Adequate.	
Metabolism & Excretion		39/100 demographically-diverse adult volunteers with no known occupational exposure to PHBB. Following ingestion of PHBB (2 g/day for 5 days) by two volunteers, analysis of the	Crzellitzer, 1954 (as cited in CIR 1986, 2008)	Adequate.	

	PHBB CASRN 94-18-8			
PROPER'	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Not absorbed through the skin as neat material and has moderate absorption through skin when in solution. Can be absorbed through the lung and gastrointestinal tract. PHBB is expected to undergo ester hydrolysis by esterases in the body and produce benzyl alcohol and p-hydroxybenzoic acid. (Estimated by analogy)	Professional judgment	Based on closely related analog with similar structure, functional groups, and physical/chemical properties.
		93% absorbed in gastrointestinal tract (Estimated by analogy)	Professional judgment	Based on a confidential study on a closely related analog.
Acute Mammalian To	ACILY	LOW: Based on experimental data in whof acute oral exposure of laboratory anim was limited to summary statements in seduata were located regarding the hazard of	nals to doses 2,000-10,000 mg/kg condary sources that did not inc of acute inhalation or dermal exp	, although the information located lude important study details. No posure.
Acute Lethality	Oral	10,000 mg/kg PHBB via gavage.	Sabalitschka, 1933 (as cited in CIR, 1986) CTFA, 1985 (as cited in CIR,	Inadequate; details are missing as this is a review on various animal toxicity studies. Adequate.
		CD rats were given 5,000 mg/kg PHBB. No signs of toxicity were evident in guinea pigs fed 2,000 mg PHBB/day for an unspecified period.	1986, 2008) Sabalitschka and Neufeld- Crzellitzer, 1954 (as cited in CIR, 1986, 2008)	Adequate.
	Dermal			No data located.
	Inhalation			No data located.
Carcinogenicity		MODERATE: Estimated to have potenti product; potential is dependent on the rathere is uncertainty due to the lack of datout.	te of hydrolysis and oxidation of	f the alcohol to an aldehyde. Also,
	OncoLogic Results			No data located.

	PHBB CASRN 94-18-8				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Carcinogenicity (Rat and Mouse)	Potential for carcinogenicity (Estimated)	Professional judgment	Estimated based on professional judgment and concern for the benzyl alcohol hydrolysis product; concern is dependent on the rate of hydrolysis and oxidation of the alcohol to an aldehyde.	
	Combined Chronic Toxicity/Carcinogenicity			No data located.	
Genotoxicity		MODERATE: Estimated to have potential product; potential is dependent on the resemble and point was also evaluated by analogy 2 hydroxybenzoate. These chemicals differential which is not anticipated to result in significant. In addition, there is uncertainty of cannot be ruled out.	ate of hydrolysis and oxidation of to measured data for the closely fer only by the position of the hy ficant differences in the mechan	of the alcohol to an aldehyde. This related compound benzyl-ydroxyl grouped (ortho vs. para), nistic interpretation of this end	
	Gene Mutation in vitro	2-hydroxybenzoate) did not induce mutations in <i>Salmonella typhimurium</i> strains TA 98, TA100, TA1535, or TA1537 with and without metabolic activation.	Zeiger, Anderson et al., 1987	Adequate.	
		Uncertain concern for mutagenicity based on the benzyl alcohol hydrolysis product (Estimated by analogy)	Professional judgment	Estimated based on test data located for a hydrolysis product benzyl alcohol and is dependent on the rate of hydrolysis and oxidation of the alcohol to an aldehyde.	
	Gene Mutation in vivo			No data located.	
	Chromosomal Aberrations in vitro			No data located.	
	Chromosomal Aberrations in vivo			No data located.	
	DNA Damage and Repair			No data located.	

PHBB CASRN 94-18-8					
PROPER	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Other (Mitotic Gene Conversion)			No data located.	
Reproductive Effects		LOW: Estimated to have low potential for expert judgment.	or reproductive effects based on	no identified structural alerts and	
	Reproduction/ Developmental Toxicity Screen			No data located.	
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen	No potential for reproductive effects (Estimated)	Expert judgment	Estimated based on expert judgment and because no structural alerts were identified.	
	Reproduction and Fertility Effects			No data located.	
Developmental Effects	S	MODERATE: Estimated to have potential for developmental effects based on the 4-hydroxybenzoic acid hydrolysis product and professional judgment.			
	Reproduction/ Developmental Toxicity Screen	Potential for developmental effects (Estimated)	Professional judgment	Estimated based on the 4-hydroxybenzoic acid hydrolysis product.	
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
	Prenatal Development			No data located.	
	Postnatal Development			No data located.	
Neurotoxicity		MODERATE: Estimated to have potential for neurotoxicity based on the presence of the phenol structural alert.			
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on the phenol structural alert.	

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Repeated Dose Effects	LOW: Estimated to have low potential for repeated dose effects based on no identified structural alerts and expert judgment.			
	No signs of toxicity were evident in guinea pigs fed 1,000 mg PHBB/day for 19 days.		Inadequate; details are missing as this is a review on various animal toxicity studies. Test methodology appears not to be standard with only a 19-day exposure duration period.	
	Low potential for repeated dose effects (Estimated)	Expert judgment	Estimated to have low potential for repeated dose effects based on expert judgment and because no structural alerts were identified.	
Skin Sensitization	MODERATE: Potential for skin sensitiz the 4-hydroxybenzoic acid hydrolysis pro		nalog and based on concerns for	
Skin Sensitization	Contact dermatitis has been observed in several studies of large numbers of eczematous patients or single case reports of patients with dermal disorders topically administered products containing mixed 4-hydroxybenzoates that typically included PHBB. The overall rate of allergic reactions is in the range of 1%. Among patients sensitized to mixed 4-hydroxybenzoate substances, patch testing for sensitivity to individual 4-hydroxy benzoate substances reveal significant cross-sensitization potential and the lowest frequency of sensitization to PHBB compared to the other 4-hydroxybenzoates.	1982 (as cited in CIR, 1986, 2008); Romaguera and Grimalt, 1980 (as cited in CIR, 1986, 2008); Rudner, 1978 (as cited in CIR, 1986, 2008); Menné and Hjorth, 1988;	Inadequate; patients were sensitized to mixed 4-hydroxybenzoates prior to patch testing of individual 4-hydroxybenzoates and crosssensitization was apparent.	

PHBB CASRN 94-18-8					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Potential for dermal sensitization (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for a confidential analog and for the 4-hydroxybenzoic acid hydrolysis product.		
Respiratory Sensitization	No data located.				
Respiratory Sensi	tization		No data located.		
Eye Irritation	VERY LOW: PHBB is not an eye irrita	VERY LOW: PHBB is not an eye irritant.			
Eye Irritation	Negative for ocular irritation in New Zealand rabbits (n = 3) 1, 24, 48 and 72 hours after instillation of 100 mg into the conjunctival sac.	CTFA, 1985 (as cited in CIR, 1986)	Adequate.		
Dermal Irritation	VERY LOW: PHBB is not a skin irritar	VERY LOW: PHBB is not a skin irritant.			
Dermal Irritation	Negative for skin irritation in New Zealand rabbits when applied under occlusive conditions to intact and abraded skin at 500 mg.	European Economic Commission, 1984 (as cited in CIR, 1986)	Inadequate; details are missing as this is a review on various animal toxicity studies.		
	Negative for skin irritation/corrosion in rabbits when 500 mg PHBB was applied under semi-occlusive conditions.	CTFA, 1985 (as cited in CIR 1986, 2008)	Adequate.		

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Endocrine Activity		Based on primarily <i>in vitro</i> test data PHBB exhibits endocrine activity. PHBB exhibited estrogenic and anti-estrogenic activity in various test systems.		
	PHBB demonstrated estrogen agonistic properties both <i>in vitro</i> and <i>in vivo</i> by displacing 17β-estradiol from cytosolic ER of MCF-7 human breast cancer cells, increasing expression of a stably transfected estrogen-responsive reporter gene in MCF-7 cells, increasing the growth of estrogen-dependent MCF-7 cells (which could be inhibited by pure antiestrogen IC1182 780 indicating that the growth effects were ER mediated), increasing the growth of a second estrogen-dependent human breast cancer cell line ZR-75-1 but not the estrogen insensitive MDA-MB-231 line, and by inducing increased uterine weight in immature mice receiving three daily dermal applications of PHBB to unshaven dorsal skin (NOAEL = 10mg, LOAEL = 33 mg).		Adequate.	
	Receptor Binding Assays PHBB exhibited weak ER binding activity in preparations from uteri of ovariectomized Sprague-Dawley rats. Relative binding affinity (RBA) = 0.003% of the binding affinity of 17β-estradiol. An RBA of 0.008% was observed for bisphenol A.	Blair, Fang et al., 2000	Adequate.	

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In a rat uterine cytosolic ER-competitive binding assay, results for PHBB, bisphenol S, and bisphenol A indicated a weak affinity for ER.	Laws, Yavanhxay et al., 2006	Adequate.	
	In a human ER binding assay, the relative binding affinity (RBA) of PHBB was 0.00473% compared to 126% for 17β-estradiol. RBAs for bisphenol compounds included 0.195% for bisphenol A, 0.129% for bisphenol C, 0.0803% for bisphenol AP, 0.0719% for bisphenol F, and 0.0055% for bisphenol S.	METI, 2002	Adequate.	
	PHBB did not elicit an estrogenic response in a receptor binding assay with human $ER\alpha$ or $ER\beta$.	Schultis and Metzger, 2004	Adequate.	
	Gene Transcription and Reporter Gene Assays			
	PHBB exhibited estrogenic activity approximately 4,000-fold less than that of 17β-estradiol) in an <i>in vitro</i> recombinant yeast estrogen assay; the estrogenic activities of bisphenol A and bisphenol F were 10,000-fold and 9,000-fold less than that of 17β-estradiol	Miller, Wheals et al., 2001	Adequate.	
	PHBB exhibited estrogenic activity in multiple <i>in vitro</i> assays. Compared to the activity of 17β-estradiol, the relative activity (RA) values were E-Screen RA (relative to = 1.0×10^{-4} for the E-screen assay, 6.0×10^{-5} for the LYES-assay, and 3.7×10^{-4} for the YES-assay.	Schultis and Metzger, 2004	Adequate.	

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In a reporter gene assay of estrogen- induced transcriptional activity, relative activity (RA) for PHBB was 0.000592% compared to 81.7% for 17β-estradiol. RAs for bisphenol compounds included 0.00278% for bisphenol A, 0.00189% for bisphenol C, 0.000639% for bisphenol F, 0.000254% for bisphenol S, and 0.000184% for bisphenol AP.	METI, 2002	Adequate.	
	PHBB exhibited estrogenic activity in <i>in</i> vitro yeast two-hybrid assays incorporating human or medaka ER α . hER α assay: RA (relative to 17 β -estradiol)= 1.1 x 10 ⁻⁴ MedER α assay: RA = 3.3x10 ⁻³	Terasaki, Kamata et al., 2009b	Adequate.	
	PHBB exhibited estrogenic activity in a hERα competitive enzyme-linked immunosorbent assay (ER-ELISA). RBA (relative to DES) = 8.1 x 10 ⁻⁴	Terasaki, Kamata et al., 2009b	Adequate.	
	PHBB showed relatively high estrogenic activity in an ER yeast reporter assay.	Ozaki, Shinohara et al., 2007	Adequate.	
	Cell Proliferation Assays			
	PHBB was estrogenic in an E-screen (MCF-7 proliferation assay) and inhibited aromatase activity in microsomes derived from a human placenta. Inhibition of aromatase activity results in decreased conversion of testosterone into estrogens suggestive of an anti-estrogenic effect.	van Meeuwen, van Son et al., 2008	Adequate.	

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Thyroid Assays			
	PHBB did not exhibit thyroid hormone receptor binding in a yeast two-hybrid assay system with TRα and coactivator TIF-2.	Kitagawa, Takatori et al., 2003	Adequate.	
Immunotoxicity	No data located.			
Immune System Effects			No data located.	
	ECOTOXICITY			
ECOSAR Class	Phenols, esters			
Acute Toxicity	HIGH: Based on experimental data for fis	h and Daphnid with LC50 values b	between 1.0 and 10 mg/L.	
Fish LC ₅₀	Fathead minnow, static conditions 48-hour $LC_{50} = 3.3 \text{ mg/L}$ (Experimental)	Dobbins, Usenko et al., 2009	Adequate; follows standardized acute and subchronic tests for freshwater fish.	
	Fish 96-hour $LC_{50} = 2.452 \text{ mg/L}$ (Estimated) ECOSAR: phenols	EPI		
	Fish 96-hour LC ₅₀ = 3.98 mg/L (Estimated) ECOSAR: esters	EPI		
	Fish 96-hour $LC_{50} = 8.42 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI		

PHBB CASRN 94-18-8					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Daphnid LC ₅₀	Daphnia magna, static conditions 48-hour $LC_{50} = 4.0 \text{ mg/L}$ (Experimental)	Dobbins, Usenko et al., 2009	Adequate; follows standardized acute and subchronic tests for daphnia.		
	Daphnia magna, acute immobilization test. 48-hour $EC_{50} = 6.6 \text{ mg/L}$ (Experimental)	Terasaki, Makino et al., 2009a	Adequate.		
	Daphnid 48-hour $LC_{50} = 1.559 \text{ mg/L}$ (Estimated) ECOSAR: phenols	EPI			
	Daphnid 48-hour $LC_{50} = 6.69 \text{ mg/L}$ (Estimated) ECOSAR: esters	EPI			
	Daphnid 48-hour $LC_{50} = 5.86 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI			
Saltwater Invertebrate LC ₅₀	Mysid shrimp 96-hour $LC_{50} = 2.526$ mg/L (Estimated) ECOSAR: esters	EPI			
Green Algae EC ₅₀	Green algae 96-hour $EC_{50} = 2.411$ mg/L (Estimated) $ECOSAR$: esters	EPI			
	Green algae 96-hour EC ₅₀ = 6.16 mg/L (Estimated) ECOSAR: phenols	EPI			
	Green algae 96-hour $EC_{50} = 4.79 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI			

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Chronic Aquatic Toxicity	HIGH: Based on an estimated fish 30-day ChV of 0.029 mg/L (ECOSAR class: phenol). The ECOSAR phenol class resulted in the lowest estimated chronic toxicity value. Experimental studies located for fish and daphnia were of insufficient exposure duration to be utilized to assign the hazard concern.			
Fish ChV	Fathead minnow, static-renewal conditions, 7-day LOEC-growth = 1.7 mg/L (Experimental)	Dobbins, Usenko et al., 2009	Inadequate; exposure duration only 7 days.	
	Fish 30-day ChV = 0.293 mg/L (Estimated) ECOSAR: phenol	EPI		
	Fish 60-day ChV = 0.007 mg/L (Estimated) ECOSAR: phenol	EPI		
	Fish 32/33-d-day ChV = 0.246 mg/L (Estimated) ECOSAR: esters	EPI		
	Fish ChV = 0.772 mg/L (Estimated) ECOSAR: neutral organics	EPI		
Daphnid ChV	Daphnia magna, static-renewal conditions, 10-day LOEC (growth) = 0.1 mg/L 10-day LOEC (reproduction) = 2.0 mg/L (Experimental)	Dobbins, Usenko et al., 2009	Inadequate; exposure duration only 10 days.	
	Daphnid 21-day ChV = 0.296 mg/L (Estimated) ECOSAR: phenols	EPI		
	Daphnid 21-day ChV = 2.825 mg/L (Estimated) ECOSAR: esters	EPI		
	Daphnid ChV = 0.714 mg/L (Estimated) ECOSAR: neutral organics	EPI		

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Saltwater Invertebrate ChV	Mysid shrimp ChV = 7.231 mg/L (Estimated) ECOSAR: esters	EPI		
Green Algae ChV	Green algae ChV = 1.010 mg/L (Estimated) ECOSAR: esters	EPI		
	Green algae ChV = 2.84 mg/L (Estimated) ECOSAR: phenols	EPI		
	Green algae ChV = 2.31 mg/L (Estimated) ECOSAR: neutral organics	EPI		
Earthworm Subchronic Toxicity	Earthworm 14-day $LC_{50} = 48.812 \text{ mg/L}$ (Estimated) ECOSAR: phenols	EPI		
	Earthworm 14-day LC ₅₀ = 934.7 mg/L (Estimated) ECOSAR: esters	EPI		
	ENVIRONMENTAL FAT	re		
Transport	The transport evaluation for PHBB is be properties. Based on the Level III fugace PHBB is expected to partition primarily environmentally-relevant pH, based on its est do not bind as strongly to organic carbo leaching of PHBB through soil to ground Estimated volatilization half-lives indica atmosphere, PHBB is expected to exist in pressure. Particulates will be removed for susceptible to atmospheric degradation	ity models incorporating the local to soil. It is expected to exist in late estimated pK_a . The neutral fortimated K_{oc} . The anionic form men and clay due to their enhanced dwater is not expected to be an intential that it will be nonvolatile from a both vapor and particulate pharmone air by wet or dry deposition processes.	ted experimental property data, both neutral and anionic forms at rm of PHBB is expected to have ay have more mobility, as anions water solubility. However, aportant transport mechanism. Is surface water. In the ses, based on its estimated vapor	
Henry's Law Constant (atm-m³/mole)	2.9x10 ⁻¹⁰ (Estimated)	EPI		

		PHBB CASRN 94-18-8		
PROPE	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	$ \begin{array}{l} \textbf{Sediment/Soil} \\ \textbf{Adsorption/Desorption} \\ \textbf{Coefficient} - \textbf{K}_{oc} \end{array} $	3,200 (Estimated)	EPI	
	Level III Fugacity Model	Air = <1% Water = 16% Soil = 83% Sediment = 1.6% (Estimated)	EPI	
Persistence		VERY LOW: No experimental data were located regarding the persistence of PHBB and it was evaluated using measured biodegradation data for the analog benzyl-2-hydroxybenzoate. These chemicals differ only by the position of the hydroxyl group (ortho vs. para) and this is not anticipated to result in a different mechanistic interpretation of this endpoint. Estimates based on this analog are expected to be superior to those based solely on modeling. The analog benzyl-2-hydroxybenzoate passed two ready biodegradability tests, one that met the 10-day window in an activated sludge inoculum and one that did not meet the 10-day window in a secondary effluent inoculum. Based on these data, the environmental persistence of PHBB is estimated to be Very Low. PHBB is not expected to undergo hydrolysis based on estimated half-lives of >1 year at pH 7 and 8. PHBB does not absorb light at environmentally significant wavelengths, and is not expected to be susceptible to direct photolysis. The atmospheric half-life for the vapor-phase hydroxyl radical reaction of PHBB is estimated at 7.5 hours. This is an important removal process for vapor-phase PHBB in the atmosphere. However, it is also expected to exist in the particulate form in the atmosphere. Biodegradation of PHBB is expected to be the primary removal process in aquatic and terrestrial environments.		
Water		Weeks (ultimate survey model)	EPI EPI	
	Model River Volatilization Half-life for Model Lake		EPI	
Soil	Aerobic Biodegradation	87% after 28 days; readily biodegradable, 10-day window met (Estimated by analogy to benzyl-2-hydroxybenzoate in activated sludge inoculum)	HPV Robust Summary, 2003	Adequate; PHBB and benzyl-2-hydroxybenzoate are closely related structures that differ only by position of the hydroxyl group. Benzyl-2-hydroxybenzoate data are for a guideline study.

		PHBB CASRN 94-18-8		
PROPERT	ΓY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		62% after 28 days; 10-day window not met. (Estimated by analogy to benzyl-2-hydroxybenzoate in secondary effluent inoculum during an ISO 14593 Carbon Dioxide Evolution Test)	HPV Robust Summary, 2003	Adequate; PHBB and benzyl-2-hydroxybenzoate are closely related structures that differ only by position of the hydroxyl group. Benzyl-2-hydroxybenzoate data are for a guideline study.
	Anaerobic Biodegradation			No data located.
	Soil Biodegradation w/ Product Identification			No data located.
	Sediment/Water Biodegradation			No data located.
Air	Atmospheric Half-life	7.5 hours (Estimated)	EPI	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.
	Hydrolysis	Half-life >1 year (Estimated at pH = 8 and pH =7)	EPI	Hydrolysis products expected: 4-hydroxybenzoic acid (99-96-7) and benzyl alcohol (100-51-6).
	Pyrolysis			No data located.
Environmental Half-li	fe	30 days	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.
Bioaccumulation		LOW: The estimated fish BAF is <100. anticipated to better account for metabolic part of the state of the sta		to be 100, the BAF model is
	Fish BCF	100 (Estimated)	EPI	
	BAF (upper trophic)	9.8 (Estimated)	EPI	
	Metabolism in Fish	o.o (Listinated)	A. I.	No data located.

PHBB CASRN 94-18-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
ENVIRONMENTAL MONITORING AND BIOMONITORING				
Environmental Monitoring	No data located.			
Ecological Biomonitoring	No data located.			
	PHBB and its metabolites have been detected in human urine biological samples (CIR, 1986; Ye, 2006). This			
	chemical was not included in the NHANES biomonitoring report (CDC, 2011).			



Bandmann, H.J., Calnan C.D., Cronin, E., et al. Dermatitis from applied medicaments. *Arch. Dermatol.* **1972**, 106:335–337 (as cited in CIR 1986, 2008).

Blair, R. M., Fang, H., Branham, W. S., et al. The estrogen receptor relative binding affinities of 188 natural and xenochemicals: structural diversity of ligands. *Toxicol. Sci.* **2000**, 54:138-153.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

CIR. Final report on the safety assessment of benzylparaben. J. Am. Coll. Toxicol. 1986, 5(5):301-307.

CIR. Final amended report on the safety assessment of methylparaben, ethylparaben, propylparaben, isopropylparaben, butylparaben, isobutylparaben, and benzylparaben as used in cosmetics products. *Int. J. Toxicol.* **2008**, 27(Suppl. 4):1-82.

CTFA. Acute oral toxicity, acute dermal irritation/corrosion, acute eye irritation/corrosion, and COLIPA summary. Submission of unpublished data by CFTA. 1985. (as cited in CIR 1986; Golden et al., 2005).

Darbre, P.D., Byford, J.R., Shaw, L.E., et al. Oestrogenic activity of benzylparaben. J. Appl. Toxicol. 2003, 23:43-51.

Dobbins, L., Usenko, S., Brain, R., et al. Probabilistic ecological hazard assessment of parabens using *Daphnia magna* and *Pimephales promelas*. *Environ. Toxicol. Chem.* **2009**, 28(12):2744-2753.

EPI (*EPIWIN/EPISUITE*) *Estimations Programs Interface for Windows*, Version 4.0. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

European Economic Commission. Colipa number 7. 1984. (as cited in CIR, 1986).

FAO/WHO. Toxicological and health aspects of bisphenol A. Report of Joint FAO/WHO expert meeting 2-5 November 2010 and report of stakeholder meeting on bisphenol A 1 November 2010. Food and Agriculture Organization of the United Nations; World Health Organization. Ottawa, Canada. **2011**.

HPV Robust Summary from The Flavor and Fragrance High Production Volume Consortia. *HPV Robust Summary for Benzyl Derivatives*. 2003. Available at: http://www.epa.gov/chemrtk/pubs/summaries/benzylde/c13450rs.pdf.

Ishizeki, Ch., Aoyama, S., Hatta, Y., et al. 1955. Studies on food antiseptic. *I. Bull. Natl. Hyg. Lab.* Tokyo No. 73, 237-243 (as cited in CIR, 1986)

Jewell, C., Prusakiewicz, J.J., Ackerman, C., et al. Hydrolysis of a series of parabens by skin microsomes and cytosol from human and minipigs and in whole skin short-term culture. *Toxicol. Appl. Pharmacol.* **2007**, 225:221-228.

Kitagawa, Y., Takatori, S., Oda, H., et al. Detection of thyroid hormone receptor-binding activities of chemicals using a yeast two-hybrid assay. *J. Health Sci.* **2003**, 49(2):99-104.

Laws, S.C., Yavanhxay, S., Cooper, R.L., et al. Nature of the binding interaction from 50 structurally diverse chemicals with rat estrogen receptors. *Toxicol. Sci.* **2006**, 94(1):45-56.

Menné, T., Hjorth, N. Routine patch testing with paraben esters. Contact Derm. 1988, 19:189-191.

METI. Current status of testing methods development for endocrine disruptors. Ministry of Economy, Trade and Industry, Japan. 6th meeting of the task force on Endocrine Disruptors Testing and Assessments (EDTA). 24-25 June, 2002. Tokyo. **2002.**

Meynadier, J. M., Meynadier, J., Colmas, A., et al. Allergie aux conservateurs (translated from the original French). *Ann. Dermatol. Venereol.* **1982**, 109:1017–1023 (as cited in CIR, 1986).

Miller, D., Wheals, B.B., Beresford, N. et al. Estrogenic activity of phenolic additives determined by an *in vitro* yeast bioassay. *Environ. Health Perspect.* **2001**, 109(2):133-138.

Ozaki, H., Shinohara, S., Tange, S., et al. Parabens and phthalates: Their metabolism, AHR ligand activity, estrogenic activity, and P450-inhibitory activity. Organohalogen Compounds **2007**, 69: 2991-2994.

PhysProp. Physical Properties Database SRC, Inc.

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT)Profiler.* U.S. Environmental Protection Agency: Washington D.C. <u>www.pbtprofiler.net</u>.

Romaguera, C., Grimalt. F. Statistical and comparative study of 4,600 patients tested in Barcelona. *Contact Derm.* **1980**, 6:309-315 (as cited in CIR, 1986; Golden et al., 2005).

Rudner, E. J. Patch test results of the North American Contact Dermatitis Group. *Cosmet. Toilet.* **1978**, 93:53-54 (as cited in CIR, 1986, 2008).

Sabalitschka, T. Arztl. Apotheker. Krankenhaus. Nr. 10. 1933. (as cited in CIR, 1986).

Sabalitschka, T., Neufeld-Crzellitzer, R. Zum Verhalten der *p*oxybenzoesäureester im menschlichen Körper (translated from the original German). *Arzneimittelforschung* **1954**, 4:575–579 (as cited in CIR, 1986, 2008).

Schultis, T., Metzger, J.W. Determination of estrogenic activity by LYES-assay (yeast estrogen screen-assay assisted by enzymatic digestion with lyticase). *Chemosphere* **2004**, 57:1649-1655.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

Terasaki M., Makino, M., Tatarazako, N. Acute toxicity of parabens and their chlorinated by-products with *Dapnia magna* and *Vibrio fischeri* bioassays. *J. Appl. Toxicol.* **2009**, 29:242-247.

Terasaki M., Kamata, R., Shiraishi, F., et al. Evaluation of estrogenic activity of parabens and their chlorinated derivatives by using the yeast two-hybrid assay and the enzyme-linked immunosorbent assay. *Environ. Toxicol. Chem.* **2009**, 28(1):204-208.

Thomas, M.R. *Salicylic Acid and Related Compounds*. Kirk-Othmer Encyclopedia of Chemical Technology. Wiley-Interscience. Posted online: January 27, 2006.

Tosi A., Fanti, F.A., Pileri, S. Short communications. Dermal contact dermatitis from benzylparaben. *Contact Derm.* **1989**, 21:49-63.

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. **1999**. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic as of February 09, 2011.


van Meeuwen, J.A., van Son, O., Piersma, A.H., et al. Aromatase inhibiting and combined estrogenic effects of parabens and estrogenic effects of other additives in cosmetics. *Toxicol. Appl. Pharmacol.* **2008**, 230:372-382.

Würbach, G., Schubert H., Phillipp, I. Contact allergy to benzyl alcohol and benzyl paraben. Contact Derm. 1993, 28:187-188.

Ye, X., Bishop, A.M., Reidy, J.A., et al. Parabens as urinary biomarkers of exposure in humans. *Environ. Health Perspect.* **2006**, 114(12):1843-1846.

Zeiger, E., Anderson, B., Haworth, S., et al. Salmonella mutagenicity tests: III. Results from the testing of 255 chemicals. *Environ. Mutagen.* **1987**, 9(Suppl. 9), 1-110.

Bisphenol S



CASRN: 80-09-1

MW: 250.27

MF: $C_{12}H_{10}O_4S$

Physical Forms: Neat: Solid

Use: Developer for thermal paper

SMILES: O=S(=O)(c1ccc(O)cc1)c2ccc(O)cc2

Synonyms: Phenol, 4,4'-sulfonylbis- (TSCA Inventory); bis(4-hydroxyphenyl)sulfone; 1,1'-Sulfonylbis(4-hydroxybenzene); 2,4'-Sulfonyldiphenol; 4,4'-Bisphenol S; 4,4'-Dihydroxydiphenyl sulfone; 4,4'-Sulfonylbisphenol; 4,4'-Sulfonyldiphenol; 4-Hydroxyphenyl sulfone; Bis(4-hydroxyphenyl) sulfone; Bis(p-hydroxyphenyl) sulfone; Diphone C; p,p'-Dihydroxydiphenyl sulfone

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None

Analog: None

Endpoint(s) using analog values: Not applicable

Analog Structure: Not applicable

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

	Bisphenol S CASRN 80-	-09-1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
PHYSICAL/CHEMICAL PROPERTIES					
Melting Point (°C)	240.5 (Measured)	Lide, 2008	Adequate.		
	245-248 (Measured)	ECHA, 2011	Adequate; reported values, which span a relatively narrow range, are consistent with other sources.		
	242-247 (Measured)	ECHA, 2011	Adequate; reported values, which span a relatively narrow range, are consistent with other sources.		
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling point compounds according to HPV assessment guidance; decomposition is anticipated to occur before the melting point is reached.		
	315 decomposition temperature Boiling point of the test item could not be determined, OECD 103 (Measured)	ECHA, 2011	Inadequate; nonspecific value.		
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.		
Water Solubility (mg/L)	1.1x10 ⁻³ (Measured)	ECHA, 2011	Adequate, nonguideline study reported in secondary source; value is consistent with other reported properties.		
	<2x10 ⁻³ (Measured)	HSNO, 2010	Inadequate; sufficient details were not provided to assess the quality of this study.		
$\operatorname{Log} \mathbf{K}_{\operatorname{ow}}$	1.2 OECD Method 117 (Measured)	ECHA, 2011	Adequate guideline study.		
Flammability (Flash Point)	≥400°C auto-flammability/self-ignition temperature DIN 51 794 (Measured)	ECHA, 2011	Adequate guideline study.		

		Bisphenol S CASRN 8	0-09-1	
PROPE	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Not highly flammable EU Method A.10 (Measured)	ECHA, 2011	
Explosivity				No data located.
pН				No data located.
$\mathbf{pK_a}$		8 OECD Method 112 (Measured)	ECHA, 2011	Adequate, guideline study.
		HUMAN HEALTH EF	FECTS	
Toxicokinetics		No toxicokinetic data located.		
Dermal Absorption	n in vitro			No data located.
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled			No data located.
Acute Mammalian Acute Lethality	Oral	LOW: The weight of evidence indicated and LD ₅₀ of 1,600 mg/kg for the mouse Located data suggest a low hazard coracute inhalation hazard. Referel LD > 5,000 mg/kg	e could not be verified because no	study details were available.
Acute Lemanty	Orai	Rat oral $LD_{50} > 5,000$ mg/kg	ECHA, 2011	401); no deaths at limit dose of 5,000 mg/kg.
		Wistar rat (male) $LD_{50} = 2,830 \text{ mg/kg}$	ECHA, 2011	Adequate guideline comparable to OECD guideline 401; the LD ₅₀ value supports other reported results.
		Rat oral $LD_{50} = 4,556$ mg/kg	BIOFAX Industrial Bio-Test Laboratories, Inc., 1974, cited in CHEMID	Although no study details were provided in the secondary source, the LD ₅₀ value supports other reported results.
		Rat (male, female; strain unspecified) $LD_{50} = 2,540 \text{ mg/kg (females)}$ $LD_{50} = >3,200 \text{ mg/kg (males)}$	Eastman Kodak, 1991	Although study details were lacking in the study summary, the LD ₅₀ value supports other reported results.

	Bisphenol S CASRN 80-09-1				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		Sprague-Dawley rat (male, female) LD ₅₀ >2,000 mg/kg	ECHA, 2011	Although the secondary source indicated that the study followed OECD guideline 401, it was noted that only an abstract of the study was located.	
			Monsanto Company, 1945 (OTS0555048)	Although insufficient numbers of animals were assessed, the results support study results for rats.	
		$LD_{50} = 1,600 \text{ mg/kg}$	Eastman Kodak, 1991	This value could not be verified because the study summary provides only the LD_{50} value for the mouse.	
		Albino rabbit (gender unspecified) One of two rabbits died following a single oral dose of 7,000 mg/kg; a single rabbit given 4,700 mg/kg survived	Monsanto Company, 1945 (OTS0555048)	Although insufficient numbers of animals were assessed, the results support study results for rats.	
	Dermal	Rabbit dermal LD ₅₀ >10,250 mg/kg	BIOFAX Industrial Bio-Test Laboratories, Inc., 1974, cited in CHEMID	Although limited study information was located, the high dose suggests a low hazard concern for the dermal exposure route.	
		Guinea pig (strain and gender unspecified) dermal LD ₅₀ >1,000 mg/kg	Eastman Kodak, 1991	Inadequate, limited study information located.	
	Inhalation			No data located.	
Carcinogenicity		MODERATE: Estimated using OncoLo potential carcinogen or tumorigenesis prestrogenic/androgenic compounds, using	romoter arising from its structur	al similarity to	
	OncoLogic Results	Moderate (Estimate) OncoLogic class: Phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the Phenols and phenolic compounds class.	
	Carcinogenicity (Rat and Mouse)			No data located.	

		Bisphenol S CASRN 80-	-09-1	
PROPI	PROPERTY/ENDPOINT DATA		REFERENCE	DATA QUALITY
	Combined Chronic Toxicity/ Carcinogenicity			No data located.
Genotoxicity		MODERATE: Bisphenol S did not indechromosomal aberrations in vivo in a m Chinese hamster ovary (CHO) cells in v bisphenol S did induce chromosomal ab metabolic activation (at a noncytotoxic result in the in vivo test suggest an equiv	nammalian erythrocyte micronucle itro in the presence of exogenous perrations in CHO cells in vitro in concentration). The positive resu	leus assay in NMRI mice or in metabolic activation. However, a the absence of exogenous alt in the <i>in vitro</i> assay and negative
	Gene Mutation in vitro	Negative, mouse lymphoma L5178Y (TK+/TK-) cells, with and without metabolic activation	CCRIS, 2010	Adequate.
		Negative, Ames assay (standard plate) in <i>Salmonella typhimurium</i> strains TA98, TA100, TA1537, TA1535, and TA1538 with and without metabolic activation	CCRIS, 2010	Adequate.
		Negative, Salmonella/microsome test, <i>S. typhimurium</i> strains TA1535, TA100, TA1537, and TA98 with and without metabolic activation	Miles Inc., 1992; ECHA, 2011	Adequate guideline study (OECD 471).
		Negative, Ames assay (preincubation) in <i>S. typhimurium</i> strains TA98, TA100, TA1537, and TA1535, and <i>Escherichia coli</i> WP2UVRA with and without metabolic activation	CCRIS, 2010; ECHA, 2011	Adequate guideline study (OECD 471).
		Negative, umu test in <i>S. typhimurium</i> strain TA1335	Chen, Michihiko et al., 2002	Adequate.
		Negative, CHO HGPRT mutation assay, with and without metabolic activation	Amoco Corp., 1991a; ECHA, 2011	Adequate.
	Gene Mutation in vivo			No data located.

Bisphenol S CASRN 80-09-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
in vitro	Positive, chromosomal aberrations in CHO cytogenetics assay, without metabolic activation, negative with metabolic activation. Results were obtained in the absence of cytotoxicity.	Amoco Corp., 1991b; ECHA, 2011	Adequate guideline study (similar to OECD 473).	
in vivo	•	ECHA, 2011	Adequate guideline study (OECD 474).	
DNA Damage and Repair			No data located.	
Other (Mitotic Gene Conversion)			No data located.	
MODERATE: In a reproduction/developmental toxicity screening test, oral exposure of parental rats to bisphenol S resulted in marked systemic effects and the NOAEL for reproductive effects is 60 mg/kg-day (prolonged estrous cycle, decreased fertility index and decreased number of live offspring). Based on the NOAEL for reproductive effects a Moderate hazard designation is selected.			oductive effects is 60 mg/kg-day of live offspring). Based on the	

	Bisphenol S CASRN 80-09-1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reproduction/ Developmental Toxicity Screen	In a reproduction/developmental toxicity screening test, groups of Sprague-Dawley rats (12/sex/group) were administered bisphenol S by gavage at 0, 10, 60, or 300 mg/kg bw-day (males for 45 days and females from 14 days before mating to LD 3). The mid dose caused parental gross- and histo-pathological changes in cecum of both sexes. The high dose caused decreased body weight gain and food consumption in females, increased relative liver weight in males, hypertrophy of hepatocytes in both sexes, prolonged estrous cycle, decreased fertility index, and decreased number of live offspring on LD 4. Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day for effects on cecum (distension, diffuse hyperplasia of mucosal epithelium) Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day for prolonged estrous cycle, decreased fertility index, and decreased number of live offspring on LD 4.		Adequate guideline study (OECD 421) reported in a secondary source.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
Reproduction and Fertility Effects			No data located.	

	Bisphenol S CASRN 80-	09-1	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Developmental Effects	MODERATE: In a reproduction/develor bisphenol S resulted in marked systemic highest dose level (300 mg/kg-day), with hazard designation is selected.	effects and decreased number of	f live offspring (PND 4) at the
Reproduction/ Developmental Toxicity Screen	In a reproduction/developmental toxicity screening test, groups of Sprague-Dawley rats (12/sex/group) were administered bisphenol S by gavage at 0, 10, 60, or 300 mg/kg bw-day (males for 45 days and females from 14 days before mating to LD 3). The mid dose caused parental gross- and histo-pathological changes in cecum of both sexes. The high dose caused decreased body weight gain and food consumption in females, increased relative liver weight in males, hypertrophy of hepatocytes in both sexes, prolonged estrous cycle, decreased fertility index, and decreased number of live offspring on LD 4. No changes attributable to the compound were observed in parameters including the sex ratio, the live birth index, body weight, viability index on day 4, anogenital distance, external or necropsy findings. Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day for effects on cecum (distension, diffuse hyperplasia of mucosal epithelium) Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day for prolonged estrous cycle, decreased		Adequate guideline study (OECD 421) reported in a secondary source.

Bisphenol S CASRN 80-09-1				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		fertility index, and decreased number of live offspring on LD 4.		
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
	Prenatal Development			No data located.
	Postnatal Development			No data located.
Neurotoxicity		MODERATE: Estimated to have poten alert.	tial for neurotoxicity based on th	ne presence of the phenol structural
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.
Repeated Dose Eff	ects	HIGH: Among two adequately-designed, repeated-dose oral studies in rats, one study identified a NOAEI of 10 mg/kg-day and a LOAEL of 60 mg/kg-day for systemic effects and the other study identified a NOAEL of 40 mg/kg-day and a LOAEL of 200 mg/kg-day for systemic effects. Based on uncertainty as to the potential systemic toxicity in the range of 40 to 60 mg/kg-day, a High hazard designation is selected. It should be noted that because the standard criteria thresholds are for 90-day studies, the 28-day study was evaluated using modified criteria at 3 times the threshold values.		

Bisphenol S CASRN 80-09-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		ECHA, 2011	Adequate 28-day repeat dose toxicity guideline study; this study will be evaluated using modified criteria at 3 times the thresholds because the standard thresholds are based on 90-day studies.	
	LOAEL = 200 mg/kg-bw-day			

Bisphenol S CASRN 80-09-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In a reproduction/developmental toxicity screening test, groups of Sprague-Dawley rats (12/sex/group) were administered bisphenol S by gavage at 0, 10, 60, or 300 mg/kg bw-day (males for 45 days and females from 14 days before mating to LD 3). The mid dose caused parental gross- and histo-pathological changes in cecum of both sexes. The high dose caused decreased body weight gain and food consumption in females, increased relative liver weight in males, and hypertrophy of hepatocytes in both sexes. NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day for effects on cecum (distension, diffuse hyperplasia of	ECHA, 2011	Adequate guideline study (OECD 421).	
	mucosal epithelium) In a 13-day oral (dietary) study in rats, increases in red blood cell count, hemoglobin concentrations, and hematocrit were observed; histopathologic examinations revealed cytoplasmic basophilia of the renal distal convoluted tubule epithelium. Decreased weight gain, decreased absolute liver and kidney weight, and atrophy in adipose tissue may have been secondary effects of decreased food consumption. NOAEL = 97 mg/kg-day LOAEL = 810 mg/kg-day	Eastman Kodak, 1991	Inadequate; exposure duration only 13 days.	

Bisphenol S CASRN 80-09-1					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Skin Sensitization	LOW: Studies on guinea pigs and mice indicate that bisphenol S not a likely skin sensitizer.				
Skin Sensitization	Negative for skin sensitization, guinea	Eastman Kodak, 1991	Limited study details.		
	pig				
	Negative for skin sensitization, mouse	ECHA, 2011	Adequate guideline study (OECD		
	local lymph node assay		429).		
Respiratory Sensitization	No data located.				
Respiratory Sensitization			No data located.		
Eye Irritation	LOW: Bisphenol S was non-irritating to	o mildly irritating to rabbit eyes.			
Eye Irritation	Slightly irritating, rabbit	Eastman Kodak, 1991	Limited study details.		
	Mildly irritating, rabbit	Monsanto, 1991	Limited study details.		
	Nonirritating, rabbit	ECHA, 2011	Adequate guideline study (OECD		
			405).		
Dermal Irritation	LOW: Bisphenol S was slightly irritating	ig to guinea pig skin and not irrita	ting to rabbit skin.		
Dermal Irritation	Slight skin irritant, guinea pig	Eastman Kodak, 1991	Limited study details.		
	Non-irritant, rabbit	Monsanto, 1991	Adequate.		
	Non-irritant, rabbit	ECHA, 2011	Adequate guideline study (OECD		
			404).		
Endocrine Activity	Based on limited data it appears that bi				
	that bisphenol S can bind to estrogen re				
	cell proliferation in MCF7 cancer cells,				
	ARE-luciferase reporter assay using a m				
	response, but did inhibit the androgenic activity of dihydrotestosterone. Located data indicate that the vitro endocrine activity of bisphenol S is approximately 5-7 orders of magnitude less than that of 17β-				
	estradiol, suggesting that bisphenol S acts as a weak estrogen. Comparative <i>in vitro</i> data suggest that the				
	endocrine activity of bisphenol S is somewhat less than that of bisphenol A, bisphenol AP, bisphenol C, and				
	bisphenol F. Limited in vivo data sugges				
	Receptor Binding Assays				
		•			

Bisphenol S CASRN 80-09-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In a human ER binding assay, the relative binding affinity (RBA) of bisphenol S was 0.0055% relative to 17β-estradiol (set at 100%). RBAs for other bisphenol compounds included 0.175% for bisphenol M and 0.0719% for bisphenol F.		Adequate.	
	In a human ER binding assay, the RBA of bisphenol S was 0.0055% compared to 126% for 17β-estradiol. RBAs for other bisphenol compounds included 0.195% for bisphenol A, 0.129% for bisphenol C, 0.0803% for bisphenol AP, and 0.0719% for bisphenol F. A RBA of 0.00473% was reported for PHBB.		Adequate.	
	binding assay, results for bisphenol S, bisphenol A, and PHBB indicated a weak affinity for ER.	Laws, Yavanhxay et al., 2006	Adequate.	
	Gene Transcription and Reporter Gene Assays			

Bisphenol S CASRN 80-09-1					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Bisphenol S exhibited evidence of estrogenic activity in a yeast (Saccharomyces cerevisiae) two-hybrid assay using ER α and the coactivator TIF2. Based on estrogenic activity that was approximately 7 orders of magnitude lower than that of 17 β -estradiol, bisphenol S was considered less estrogenic than bisphenol A which was considered weakly estrogenic (5 orders of magnitude less active than 17 β -estradiol). Assessment of other bisphenols resulted in a ranking of relative potency as follows: bisphenol C \geq bisphenol A $>$ bisphenol F $>$ bisphenol S.	Chen, Michihiko et al., 2002	Adequate.		
		Nishihara, Nishikawa et al., 2000	Adequate.		
	In yeast two-hybrid systems (reporter gene assay) using β -galactosidase activity as a measure of estrogenic activity, an estrogenic response was elicited by bisphenol S only in the presence of exogenous metabolic activation; estrogenic responses were elicited by bisphenol A and bisphenol F both in the absence and presence of exogenous metabolic activation.	Hashimoto and Nakamura, 2000; Hashimoto, Moriguchi et al., 2001	Adequate.		

Bisphenol S CASRN 80-09-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	In a reporter gene assay of estrogen-induced transcriptional activity, relative activity (RA) for bisphenol S was 0.000254% compared to 81.7% for 17β-estradiol. RAs for other bisphenol compounds included 0.00278% for bisphenol A, 0.00189% for bisphenol C, 0.000639% for bisphenol F, and 0.000184% for bisphenol AP. An RA of	METI, 2002	Adequate.	
	0.000592% was reported for PHBB In an ERE-luciferase reporter assay using MCF-7 cells, an EC ₅₀ was 1.1 μM for bisphenol S compared to an EC ₅₀ of 8.6 x 10^{-6} for 17β -estradiol (i.e., bisphenol A was approximately 5 orders of magnitude less potent than 17β -estradiol at inducing estrogenic activity). EC ₅₀ values for other bisphenol compounds included 0.63 μM for bisphenol A, 0.42 μM for bisphenol C, and 1.0 μM for bisphenol F.		Adequate.	
		Hashimoto, Moriguchi et al., 2001	Adequate.	
	In an ERE-luciferase reporter assay using MCF-7 cells in the presence of 17β-estradiol, neither bisphenol S, bisphenol A, bisphenol C, nor bisphenol F appeared to exert an anti-estrogenic effect Cell Proliferation Assays	Kitamura, Suzuki et al., 2005	Adequate.	

	Bisphenol S CASRN 80-09-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	In a cell proliferation assay using human breast cancer MCF-7 cells, bisphenol S elicited a proliferative response comparable to that of bisphenol A. Androgen Activity	Kuruto-Niwa, Nowaza et al., 2005	Adequate.		
	In an ARE-luciferase reporter assay using a mouse fibroblast cell line (NIH3T3 cells), bisphenol S inhibited the androgenic activity of dihydrotestosterone. Anti-androgenic responses were elicited by bisphenol A, bisphenol C, and bisphenol F as well.		Adequate.		
	In an ARE-luciferase reporter assay using a mouse fibroblast cell line (NIH3T3 cells), neither bisphenol S, bisphenol A, bisphenol C, nor bisphenol F exerted an androgenic effect	Kitamura, Suzuki et al., 2005	Adequate.		
	In Vivo Studies In a uterotrophic assay of rats subcutaneously injected with bisphenol S once daily for 3 days, an apparent estrogenic effect was evidenced by increased absolute and relative uterine weight. Similar effects were elicited by bisphenol F and bisphenol M.	Yamasaki, Noda et al., 2004	Adequate.		
Immunotoxicity	No data located.				
Immune System Effects			No data located.		
	ECOTOXICITY				
ECOSAR Class	Phenols, poly				
Acute Toxicity	MODERATE: Based on an experiment	al 48-hour LC_{50} value of 55 mg/L	for Daphnid.		

	Bisphenol S CASRN 80-09-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Fish LC ₅₀	Fish (species unspecified) 96-hour $LC_{50} > 100 \text{ mg/L}$ (Experimental, nominal)	ECHA, 2011	Adequate guideline study (OECD 203), although information regarding measured test substance concentrations was not located.		
	Oryzias latipes (orange-red killifish) 96-hour LC ₅₀ > 500 mg/L (semi-static) (Experimental, nominal)	ECHA, 2011	Adequate guideline study (Japanese Industrial Standard JIS K 0102-1986-71), although information regarding measured test substance concentrations was not located.		
	Fish 96-hour LC ₅₀ = 37.75 mg/L (Estimated) ECOSAR: phenols, poly	EPI			
Daphnid LC ₅₀	Daphnia magna (water flea) 48 -hour $EC_{50} = 55 \text{ mg/L}$ 24 -hour $EC_{50} = 76 \text{ mg/L}$ (Experimental)	Chen, Michihiko et al., 2002; ECHA, 2011	Adequate guideline study (OECD 202), although information regarding measured test substance concentrations was not located.		
	Daphnid (water flea) 96-hour $LC_{50} = 45 \text{ mg/L}$ NOEC = 10 mg/L (Experimental)	Eastman Kodak, 1991	Adequate, non guideline study, although information regarding measured test substance concentrations was not located.		
	Daphnia sp. (water flea) 48-hour EC ₅₀ = 100 mg/L (Experimental)	ECHA, 2011	Adequate guideline study (OECD 202), although information regarding measured test substance concentrations was not located.		
	Daphnid 48-hour LC ₅₀ = 195.08 mg/L (Estimated) ECOSAR: phenols, poly	EPI			
Green Algae EC ₅₀	Desmodesmus subspicatus (green algae) 72-hour EC ₅₀ = 106 mg/L (growth) 72-hour NOEC = 10.2 mg/L (Measured; static conditions)	ECHA, 2011	Adequate guideline study (OECD 201).		

Bisphenol S CASRN 80-09-1					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Green algae 72-hour $EC_{50} = 65 \text{ mg/L (growth)}$ 72-hour $NOEC = 4.6 \text{ mg/L}$ (Experimental)	ECHA, 2011	Adequate guideline study (OECD 201); secondary source noted that test substance concentrations were measured, but did not indicate whether nominal or measured concentrations were used for effect levels.		
	Green algae 96-hour EC ₅₀ = 2.29 mg/L (Estimated) ECOSAR: phenols, poly	EPI			
Chronic Aquatic Toxicity	MODERATE: The measured EC ₅₀ valu Using a conservative approach, the unid between 2.7 and 14 mg/L, which partly s concern (1-10 mg/L).	lentified LOEC for chronic toxici	ty in Daphnid is assumed to fall		
Fish ChV	Fish 30-day ChV = 12.58 mg/L (Estimated) ECOSAR: phenols, poly	EPI			
Daphnid ChV	Daphnia sp. (water flea) 21-day $EC_{50} = 14 \text{ mg/L}$ (reproduction) 21-day $NOEC = 2.7 \text{ mg/L}$ (Experimental)	ECHA, 2011	Adequate guideline study (OECD 211), although information regarding measured test substance concentrations was not located.		
	Daphnid ChV = 18.31 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Green Algae ChV	Green algae ChV = 0.88 mg/L (Estimated) ECOSAR: phenols, poly	EPI			
ENVIRONMENTAL FATE					

		Bisphenol S CASRN 80-	09-1	
PROPER	ΓΥ/ENDPOINT	DATA REFERENCE DATA QUALITY		
Transport		The transport evaluation for bisphenol Schemical properties. Based on the Level property data, bisphenol S is expected to and anionic forms at environmentally-rebisphenol S is expected to have slight more mobile, as anions do not bind as st solubility. However, leaching of bisphenol S is expected to have slight more mobile, as anions do not bind as st solubility. However, leaching of bisphenol stransport mechanism. Estimated volatil water. In the atmosphere, bisphenol S is vapor pressure. Particulates will be rem	III fugacity models incorporating partition primarily to soil. It is elevant pH, based on its measured oblity in soil based on its estimate rongly to organic carbon and clay fol S through soil to groundwater ization half-lives indicate that it is expected to exist in the particular	g the located experimental expected to exist in both neutral l pKa. The neutral form of ed K _{oc} . The anionic form may be y due to their enhanced water is not expected to be an important will be non-volatile from surface ate phase, based on its estimated
	Henry's Law Constant	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for nonvolatile
	(atm-m³/mole)			compounds based on professional judgment.
	Sediment/Soil	1800 (Estimated)	EPI	
	$\begin{array}{ll} \textbf{Adsorption/Desorption} \\ \textbf{Coefficient} - \textbf{K}_{oc} \end{array}$			
	Level III Fugacity	Air = 0% (Estimated)	EPI	
	Estimations	Water = 16%		
		Soil = 83%		
_		Sediment = 1%		
Persistence		MODERATE: Degradation of bisphenor pass a Japanese MITI ready biodegrada 4 weeks. However in a nonguideline, les aerobic conditions. The persistence of be Bisphenol S is expected to partition prim with approximately 60% removal measure is not expected to significantly partition anticipated to be a significant fate processing the processing processing the processing processing the processing pr	sibility test (OECD TG 301C), which is stringent test, results indicate possible of S is supported by an estimarily to soil. Bisphenol S may desired after 70 days in anoxic bottle to sediment and removal under a ss. Bisphenol S is not expected to ups. Bisphenol S does not absorb se reaction of bisphenol S with at sected to exist primarily in the paragraph.	ch reported 0% degradation after otential for biodegradation under imated half-life of 30 days in soil. Egrade under anaerobic conditions es with pond sediment. However, it maerobic conditions is not o undergo hydrolysis since it does UV light at environmentally mospheric hydroxyl radicals is rticulate phase in air.

	Bisphenol S CASRN 80-09-1				
PRO	OPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Water	Aerobic Biodegradation	Bisphenol S aerobic degradation was not detected after 2 weeks; degradation based on TOC decrease in river water and measured with HPLC (Measured)	Ike, Chen et al., 2006	Adequate nonguideline study.	
		This study measured the degradation of bisphenol A, F, and S in seawater. Degradation of bisphenol S was not detected in seawater. This study used TOC Handai and river die-away methods. (Measured)	Danzl, Sei et al., 2009	Adequate nonguideline study.	
	Volatilization Half-life for Model River		EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI		
Soil Aerobic Biodegradation	Ready Test: MITI-I (OECD 301C) No biodegradation detected; Bisphenol S for 4 weeks with 100 mg/L in 30 mg/L activated sludge BOD 0%; TOC 0% (Measured)	MITI, 1998	Adequate guideline study.		
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI		
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation	Anaerobic degradation of bisphenol S was detected by HPLC analysis. Approximately 60% of bisphenol S was removed after 70 days in anoxic bottles with pond sediment (Measured)	Ike, Chen et al., 2006	Adequate, nonguideline study.	
Air	Atmospheric Half-life	8.8 hours (Estimated)	EPI		
Reactivity	Photolysis	1 ,	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm	

	Bisphenol S CASRN 80-	-09-1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.		
Pyrolysis			No data located.		
Environmental Half-life	30 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.		
Bioaccumulation	ioaccumulation LOW: The low concern for bioaccumulation was based on two experimental BCF values. Both value well below the low criteria cutoff of 100.				
Fish BCF	A BCF of <2.2 at a concentration of 50 μg/L after 6 weeks in carp (<i>Cyprinus carpio</i>); OECD 305C (Measured)	MITI, 1998	Adequate guideline study.		
	A BCF of <0.2 at a concentration of 500 μg/L after 6 weeks in carp (<i>Cyprinus carpio</i>); OECD 305C (Measured)	MITI, 1998	Adequate guideline study.		
BAF	1.8 (Estimated)	EPI			
Metabolism in Fish			No data located.		
	ENVIRONMENTAL MONITORING AN	D BIOMONITORING			
Environmental Monitoring	No data located.				
Ecological Biomonitoring	No data located.				
Human Biomonitoring	BPS was detected in human urine samples from general populations of the United States, China, India, Japan, Korea, Kuwait, Malaysia and Vietnam (Liao, Liu, et al., 2012). This chemical was not included in the NHANES biomonitoring report (CDC, 2011).				

Amoco Corp. *CHO/HGPRT mutation assay (final report) with attachment and cover letter dated 111491*. TSCATS submission OTS0534324. **1991a**.

Amoco Corp. Chromosome aberrations in Chinese hamster ovary (CHO) cells (final report) with attachment and cover letter dated 111491. TSCATS submission OTS0534325. **1991b**.

BIOFAX Industrial Bio-Test Laboratories, Inc. Data sheets. Vol. 601-05501, **1974**, as cited in ChemID. http://chem.sis.nlm.nih.gov/chemidplus/.

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CCRIS. Chemical Carcinogenesis Research Information System. Bisphenol S. **2010.** http://toxnet.nlm.nih.gov/cgibin/sis/htmlgen?CCRIS, (accessed on August, 2010).

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

Chen, M-Y.; Michihiko, I.; Fujita, M. Acute toxicity, mutagenicity, and estrogenicity of bisphenol-A and other bisphenols. *Environ. Toxicol.* **2002**, 17:80-86.

Danzl, E.; Sei, K.; Soda, S., et al. Biodegradation of Bisphenol A, Bisphenol F and Bisphenol S in Seawater. *Int. J. Environ. Res. Public Health.* **2009**, 6:1472-1484.

Eastman Kodak. *Letter concerning enclosed information on bisphenol S with attachments*. Eastman Kodak Company, Rochester NY. TSCATS submission OTS0534330. **1991**.

ECHA. European Chemicals Agency. Information on registered substances. http://apps.echa.europa.eu/registered/registered-sub.aspx (accessed February 18, **2011**).

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

Hashimoto, Y.; Nakamura, M. Estrogenic activity of dental materials and bisphenol-A related chemicals *in vitro*. *Dent. Mater. J.* **2000**, 19(3):245-262.

Hashimoto, Y.; Moriguchi, Y.; Oshima, H.; et al. Measurement of estrogenic activity of chemicals for the development of new dental polymers. *Toxicol. In Vitro* **2001**, 15:421-425.

HSNO. New Zealand Hazardous Substances and New Organisms Chemical Classification Information Database. **2010.** Environmental Risk Management Authority (ERMA) – New Zealand. August 5, 2010.

Ike, M.; Chen, M.Y.; Danzl, E.; et al. Biodegradation of a variety of bisphenols under aerobic and anaerobic conditions. *Water Sci. Technol.* **2006,** 53:153-159.

Kitamura, S.; Suzuki, T.; Sanoh, S.; et al. Comparative study of the endocrine-disrupting activity of bisphenol A and 19 related compounds. *Toxicol. Sci.* **2005**, 84:249-259.

Kuruto-Niwa, R.; Nozawa, R.; Miyakoshi, T.; et al. Estrogenic activity of alkylphenols, bisphenol S, and their chlorinated derivatives using a GFP expression system. *Environ. Toxicol. Pharmacol.* **2005**, 19:121-130.

Laws, S., Yavanhxay, S, Cooper, R., et al. Nature of the binding interaction for 50 structurally diverse chemicals with rat estrogen receptors. *Toxicol. Sci.* **2006**, 94(1):46-56.

Liao, C.; Liu, F.; Alomirah, H.; Loi, V.D.; Mohd, M.A.; Moon, H-B.; Nakata, H.; and Kannan, K. Bisphenol S in Urine from the United States and Seven Asian Countries: Occurrence and Human Exposures. *Environ. Sci. Technol.* Just Accepted version: May 23, 2012.

METI. Current status of testing methods development for endocrine disruptors. Ministry of Economy, Trade and Industry, Japan. 6th meeting of the task force on Endocrine Disruptors Testing and Assessments (EDTA). 24-25 June, 2002. Tokyo. **2002**.

Monsanto, **1945**. National Technical Information Service. Col. OTS0555048, as cited in ChemID. http://chem.sis.nlm.nih.gov/chemidplus/.

Monsanto. Toxicological investigation of dihydroxydiphenyl sulfone (final report) with cover letter dated112190. TSCATS submission OTS0534356. **1991**.

Miles Inc. Salmonella/microsome test (final report) with cover letter dated 04392. TSCATS submission OTS0435648. 1992.

MITI. *Biodegradation and bioaccumulation data of existing chemicals based on the CSCL Japan*. Compiled under the supervision of Chemical Products Safety Division, Basic Industries Bureau, Ministry of International Trade & Industry, Japan; Chemicals Inspection & Testing Institute, Japan. Ed.; Japan Chemical Industry Ecology-Toxicology & Information Center: **1998**.

Nishihara, T.; Nishikawa, J.; Kanayama, T.; et al. Estrogenic activities of 517 chemicals by yeast two-hybrid assay. *J. Health Sci.* **2000**, 46(4) 282-298.

OncoLogic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P)*, *Bioaccumulative (B)*, and *Toxic (T) Chemical (PBT)Profiler*, U.S. Environmental Protection Agency: Washington D.C. <u>www.pbtprofiler.net</u>.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

U.S. EPA Sustainable Futures. *Using NonCancer Screening within the SF Initiative*. Environmental Protection Agency: Washington D.C. available at: http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic as of February 09, 2011.

Yamasaki, K.; Noda, S.; Imatanaka, N.; et al. Comparative study of the uterotrophic potency of 14 chemicals in a uterotrophic assay and their receptor-binding affinity. *Toxicol. Lett.* **2004,** 146:111-120.

2,4-BPS

O, O OH

CASRN: 5397-34-2

MW: 250.3

MF: $C_{12}H_{10}O_4S$

Physical Forms:

Neat: Solid
Use: Developer for thermal paper

SMILES: O=S(=O)(c1ccc(O)cc1)c1c(O)cccc1

Synonyms: Phenol, 2-[(4-hydroxyphenyl)sulfonyl]- (TSCA Inventory); 2,4'-Dihydroxydiphenyl sulfone; 2,4'-Sulfonyldiphenol; 2-((4-

Hydroxyphenyl)sulfonyl)phenol; 4,2'-Dihydroxydiphenyl sulfone; O,P-Dihydroxydiphenyl sulfone; Phenol, 2,4'-sulfonyldi-; o-((4-Hydroxyphenyl)sulphonyl)phenol

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None

Analog: Bisphenol S (80-09-1)

Endpoint(s) using analog values: Boiling point, Acute lethality (oral and dermal); Irritation (eye, dermal); dermal sensitization, repeated dose

effects, reproductive and developmental toxicity

Analog Structure:

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

2,4-BPS CASRN 5397-34-2							
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY				
PHYSICAL/CHEMICAL PROPERTIES							
Melting Point (°C)	184	ChemSpider, 2010	Secondary source; study details and test conditions were not provided.				
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Decomposition may occur before the boiling point is reached based on the experimental decomposition temperature of 315°C for the analog bisphenol S. Cutoff value for high boiling point compounds according to HPV assessment guidance.				
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.				
Water Solubility (mg/L)	1.7x10 ³ (Estimated)	EPI					
Log K _{ow}	1.7 (Estimated)	EPI					
Flammability (Flash Point)			No data located.				
Explosivity			No data located.				
рН			No data located.				
pK_a	7.6; 8.2 (Estimated)	SPARC	Estimates are for pK_1 and pK_2 .				
	HUMAN HEALTH EFFECTS						
Toxicokinetics	2,4-BPS as a neat material is estimated to not be absorbed through the skin and will have poor skin absorption when in solution. 2,4-BPS is expected to be absorbed via the lungs and gastrointestinal tract.						
Dermal Absorption in vitro			No data located.				
Absorption, Distribution, Metabolism & Excretion Oral, Dermal or Inhaled	Not absorbed through the skin as neat material and has poor absorption in solution can be absorbed through the lung and gastrointestinal tract (Estimated by analogy)	Professional judgment;	Based on closely related confidential analog with similar structure, functional groups, and physical/chemical properties.				
Acute Mammalian Toxicity LOW: Estimated based on analogy to bisphenol S. The weight of evidence indicates that the acute of toxicity of the analog bisphenol S is low. Located data suggest a low hazard concern for acute of exposure to this analog. No data were located regarding the acute inhalation hazard.							

2,4-BPS CASRN 5397-34-2						
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Acute Lethality (Oral	Rat oral LD ₅₀ >5,000 mg/kg (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate guideline study (OECD 401). No deaths at limit dose of 5,000 mg/kg.		
		Wistar rat (male) $LD_{50} = 2,830 \text{ mg/kg}$ (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate guideline comparable to OECD guideline 401. The LD ₅₀ value supports other reported results.		
		Rat oral $LD_{50} = 4,556 \text{ mg/kg}$ (Estimated by analogy)	BIOFAX Industrial Bio-Test Laboratories, Inc., Data Sheets. Vol. 601-05501, 1974, cited in CHEMID, 2010; Professional judgment	Adequate; using the analog bisphenol S. Although no study details were provided in the secondary source, the LD_{50} value supports other reported results.		
		Rat oral $LD_{50} = 2,540 \text{ mg/kg (females)}$ and $>3,200 \text{ mg/kg (males)}$ (Estimated by analogy)	Eastman Kodak, 1991; Professional judgment	Adequate; using the analog bisphenol S. Although study details were lacking in the study summary, the LD ₅₀ value supports other reported results.		
		Sprague-Dawley rat (male, female) LD ₅₀ >2,000 mg/kg (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Although the secondary source indicated that the study followed OECD guideline 401, it was noted that only an abstract of the study was located.		
	Dermal	Guinea pig dermal LD ₅₀ >1,000 mg/kg (Estimated by analogy)	Eastman Kodak, 1991; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate, nonguideline study.		
	Inhalation			No data located.		

2,4-BPS CASRN 5397-34-2						
PROPERTY/EN	NDPOINT	DATA	REFERENCE	DATA QUALITY		
Carcinogenicity		MODERATE: Estimated using OncoLogic expert system, which describes a potential for this compound as a potential carcinogen or tumorigenesis promoter arising from its structural similarity to estrogenic/androgenic compounds. The phenols and phenolic compounds structural alert was used.				
Oncol	Logic Results	Moderate (Estimate) OncoLogic class: phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.		
Carcii Mouse	nogenicity (Rat and e)			No data located.		
	oined Chronic ity/Carcinogenicity			No data located.		
Genotoxicity		MODERATE: 2,4-BPS did not cause genetic mutations in <i>Salmonella typhimurium</i> , but did cause chromosomal aberrations in Chinese hamster ovary (CHO) cells <i>in vitro</i> . Based on evidence of mutagenicity in animal cells, Moderate hazard is designated.				
Gene		Negative for gene mutations in <i>S. typhimurium</i> strains TA98, TA100, TA1535, and TA1538 with and without metabolic activation, and TA1537 with exogenous metabolic activation; positive in TA1537 without exogenous metabolic activation, but only at cytotoxic concentration.	NICCA USA Inc., 1996	Adequate; guideline (OECD 473).		
Gene	Mutation in vivo			No data located.		
Chromose Aberratio	rations in vitro	Positive for chromosomal aberrations in CHO cells with and without metabolic activation.	NICCA USA Inc., 1996	Adequate; guideline (OECD 473).		
	mosomal rations in vivo					
DNA 1	Damage and Repair			No data located.		
	r (Mitotic Gene ersion)			No data located.		

2,4-BPS CASRN 5397-34-2			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Reproductive Effects	kg-day (prolonged estrous cyc	uctive/developmental toxicity esulted in marked systemic and the ele, decreased fertility index and ctive effects a Moderate hazard	
Reproduction/ Developmental Toxicity Screen	Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate guideline study (OECD 421) reported in a secondary source.
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
Reproduction and Fertility Effects	Potential for reproductive toxicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol S.
Developmental Effects	MODERATE: Estimated based on analogy to bisphenol S. In a reproductive/developmental toxicity screening test, oral exposure of parental rats to the analog bisphenol S resulted in marked systemic effects and decreased number of live offspring (PND 4) at the highest dose level (300 mg/kg-day) with a NOAEL of 60 mg/kg-day. Based on the NOAEL a Moderate hazard designation is selected.		esulted in marked systemic effects and 0 mg/kg-day) with a NOAEL of 60 ected.
Reproduction/ Developmental Toxicity Screen	Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate guideline study (OECD 421) reported in a secondary source.
	Potential for developmental toxicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol S.

2,4-BPS CASRN 5397-34-2			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Combined Repeated Do with Reproduction/ Developmental Toxicity Screen	se		No data located.
Prenatal Development			No data located.
Postnatal Development			No data located.
Neurotoxicity	MODERATE: Estimated to have potenti alert.	al for neurotoxicity based on t	he presence of the phenol structural
Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.
Repeated Dose Effects	HIGH: Based on analogy to bisphenol S. one study identified a NOAEL of 10 mg/k other study identified a NOAEL of 40 mg following exposure to the analog bisphenorange of 40-60 mg/kg-day, a High hazard	g-day and a LOAEL of 60 mg /kg-day and a LOAEL of 200 poly ol S. Based on uncertainty as t	/kg-day for systemic effects and the mg/kg-day for systemic effects
	In a repeated-dose oral study, Sprague- Dawley rats, NOAEL = 40 mg/kg bw-day LOAEL = 200 mg/kg-bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate 28-day repeat dose toxicity guideline study.
	In a reproduction/developmental toxicity screening test, Sprague-Dawley rats, NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate guideline study (OECD 421).
Skin Sensitization	LOW: Not considered a skin sensitizer in	the guinea pig based on analo	g data for bisphenol S.
Skin Sensitization	Negative for skin sensitization, guinea pig (Estimated by analogy)	Eastman Kodak, 1991; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate study with limited details.

	2,4-BPS CASRN 5397-3	34-2	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Negative for skin sensitization, mouse local lymph node assay (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate guideline study (OECD 429).
Respiratory Sensitization	No data located.		
Respiratory Sensitization			No data located.
Eye Irritation	LOW: Estimated based on analogy to bispirritating to rabbit eyes.	ohenol S. The analog bispheno	l S was nonirritating to mildly
Eye Irritation	Slight eye irritant, rabbit (Estimated by analogy)	Eastman Kodak, 1991; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate, nonguideline study.
	Mild eye irritant, rabbit (Estimated by analogy)	Monsanto, 1991; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate, nonguideline study.
	Nonirritating, rabbit (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate guideline study (OECD 405).
Dermal Irritation	LOW: Estimated based on analogy to bispskin, and not irritating to rabbit skin.	henol S. The analog bispheno	l S was slightly irritating to guinea pig
Dermal Irritation	Slight skin irritant, guinea pig (Estimated by analogy)	Eastman Kodak, 1991; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate, nonguideline study.
	Non-irritant, rabbit (Estimated by analogy)	Monsanto, 1991; Professional judgment	Adequate; using the analog bisphenol S, data are for an adequate, nonguideline study.
	Non-irritant, rabbit (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequate guideline study (OECD 404).
Endocrine Activity	No data located.		
			No data located.

2,4-BPS CASRN 5397-34-2				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Immunotoxicity	No data located.			
Immune System Effects		· ·	No data located.	
	ECOTOXICITY			
ECOSAR Class	Phenols, Poly			
Acute Toxicity	MODERATE: Based on estimated 96-hou	or EC_{50} of 2.3 mg/L for green a	lgae.	
Fish LC ₅₀	Fish 96-hour $LC_{50} = 37.91 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly Fish 96-hour $LC_{50} = 383.85 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI EPI		
Daphnid LC ₅₀	Daphnid 48-hour $LC_{50} = 196.26 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly Daphnid 48-hour $LC_{50} = 212.23 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI EPI		
Green Algae EC ₅₀	Green algae 96-hour EC ₅₀ = 2.29 mg/L (Estimated) ECOSAR: phenols, poly Green algae 96-hour EC ₅₀ = 79.15 mg/L (Estimated) ECOSAR: neutral organics	EPI EPI		
Chronic Aquatic Toxicity	HIGH: Based on estimated a ChV value of	of 0.88 mg/L for green algae.		
Fish ChV	Fish 30-day ChV = 12.64 mg/L (Estimated) ECOSAR: phenols, poly Fish ChV = 36.72 mg/L (Estimated) ECOSAR: neutral organics	EPI EPI		

	2,4-BPS CASRN 5397-34-2			
PROPERTY/ENDP	OINT	DATA	REFERENCE	DATA QUALITY
Daphnid ChV		Daphnia sp. (water flea) 21-day $EC_{50} = 14 \text{ mg/L}$ (reproduction) 21-day NOEC = 2.7 mg/L (Estimated by analogy) (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S. Data are for an adequte guideline study (OECD 211).
		Daphnid ChV = 18.42 mg/L (Estimated) ECOSAR: neutral organics	EPI	
		Daphnid 21-day ChV = 74.99 mg/L (Estimated) ECOSAR: phenols, poly	EPI	
Green Algae ChV		Green algae ChV = 0.88 mg/L (Estimated) ECOSAR: phenols, poly	EPI	
		Green algae ChV = 26.85 mg/L (Estimated) ECOSAR: neutral organics	EPI	
		ENVIRONMENTAL FA	ATE	
Transport		2,4-BPS is expected to exist in both neutral estimated pK_a . The neutral form of 2,4-B estimated K_{oc} . The anionic form may be a groundwater is not expected to be an impoindicate that it will be nonvolatile from subased on its estimated vapor pressure. In phase, based on its estimated vapor pressurelevel III fugacity models incorporating the form of 2,4-BPS is expected to partition process.	PS is expected to have modera more mobile although leaching ortant transport mechanism. I rface water. Volatilization fro the atmosphere, 2,4-BPS is exure. Particulates may be remote located experimental proper rimarily to soil.	te mobility in soil based on its of 2,4-BPS through soil to Estimated volatilization half-lives om dry surface is also not expected pected to exist solely in the particulate ved from air by wet or dry deposition. Ity data, indicate that the unionized
(atm-m ³ /	/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Cutoff value for nonvolatile compounds based on professional judgment.
Sedimen Adsorpti Coefficie	ion/Desorption	1.9x10 ³ (Estimated)	EPI	

	2,4-BPS CASRN 5397-34-2			
PROP	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Level III Fugacity Model	Air = <1% (Estimated) Water = 16% Soil = 83% Sediment = <1%	EPI	
Persistence		MODERATE: Evaluation of the persiste biodegradation. Results from these mode degradation in weeks. The persistence of BPS is expected to partition primarily to under anaerobic conditions is not anticipundergo hydrolysis since it does not contalight at environmentally significant wavelydroxyl radicals is estimated at 8.8 hour air. Consideration of all of these factors in the state of the sectors in the state of the sectors in the sectors	els estimate primary biodegrad 2,4-BPS is supported by an estable 2,4-BPS is not expected to ated to be a significant fate problem hydrolysable functional gradengths. The vapor phase reactes, although it is expected to exist a second control of the second control	ation in days-weeks and ultimate timated half-life of 30 days in soil. 2,4- partition to sediment and removal ocess. 2,4-BPS is not expected to oups. 2,4-BPS does not absorb UV tion of 2,4-BPS with atmospheric ast primarily in the particulate phase in
Water	Aerobic Biodegradation	Days-weeks (primary survey model) Weeks (ultimate survey model)	EPI	
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI	
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI	
Soil	Aerobic Biodegradation			No data located.
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI	
	Soil Biodegradation w/ Product Identification			No data located.
	Sediment/Water Biodegradation			No data located.
Air	Atmospheric Half-life	8.8 hours (Estimated)	EPI	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.

	2,4-BPS CASRN 5397-34-2			
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.
	Pyrolysis			No data located.
Environmental Half-Life		30 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.
Bioaccumulation		LOW: The low potential for bioaccumul criteria cutoff of 100. In addition, the est 2,4-BPS will not bioaccumulate in higher	imated BAF of 3.5, which acco	
	Fish BCF	5.7 (Estimated)	EPI	
	BAF	3.5 (Estimated)	EPI	
	Metabolism in Fish			No data located.
ENVIRONMENTAL MONITORING AND BIOMONITORING				
Environmental Moni	toring	No data located.		
Ecological Biomonito	ring No data located.			
Human Biomonitorin	ng —————	This chemical was not included in the NHA	NES biomonitoring report (CDC	C, 2011).

BIOFAX Industrial Bio-Test Laboratories, Inc. Data sheets. Vol. 601-05501, **1974**, as cited in ChemID. http://chem.sis.nlm.nih.gov/chemidplus/.

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). Fourth national report on human exposure to environmental chemicals, updated tables. Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

ChemID. *ChemIDplus*. National Library of Medicine. **2010**: http://toxnet.nlm.nih.gov/cgi-bin/sis/htmlgen?CHEM (accessed on December 10, 2010).

ChemSpider. *ChemSpider; Structure-based Chemistry Information*. Royal Society of Chemistry:London. **2010**. http://www.chemspider.com (accessed on December 11, 2010).

Eastman Kodak. *Letter concerning enclosed information on bisphenol S with attachments*. Eastman Kodak Company, Rochester NY. TSCATS submission OTS0534330. **1991**.

ECHA. European Chemicals Agency. Information on registered substances. **2011.** http://apps.echa.europa.eu/registered/re

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

Monsanto. Toxicological investigation of dihydroxydiphenyl sulfone (final report) with cover letter dated112190. TSCATS submission OTS0534356. **1991**.

NICCA USA Inc. Letter from NICCA U.S.A. Inc to USEPA regarding genotoxicity testing of phenol, 2-[(4-hydroxyphenyl)-sulfonyl], with attachments and dated 3/5/96. Nicca Chemical Company Limited. OTS0558479. **1996**.

Oncologic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P)*, *Bioaccumulative (B)*, and *Toxic (T) Chemical (PBT)Profiler*. U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm.

U.S. EPA Sustainable Futures. *Using Non-Cancer Screening within the SF Initiative*. Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. 2011. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf.

TGSA

CASRN: 41481-66-7

MW: 330.40

MF: $C_{18}H_{18}O_4S$

Physical Forms: Neat: Solid

Use: Developer for thermal paper

SMILES: S(c1cc(CC=C)c(cc1)O)(c1cc(CC=C)c(cc1)O)(=O)=O

Synonyms: Phenol, 4,4'-sulfonylbis[2-(2- propen-1-yl)- (TSCA Inventory); bis-(3-Allyl-4-hydroxyphenyl) sulfone; Phenol, 4,4'-sulfonylbis(2-(2-propenyl)-; 2,2'-diallyl-4,4'-sulfonyldiphenol; 2-allyl-4-(3-allyl-4-hydroxyphenyl)sulfonylphenol; 4-(4-hydroxy-3-prop-2-enyl-phenyl)sulfonyl-2-prop-2-enyl-phenol

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: Potential for epoxide formation on terminal double bonds.

Analog: Bisphenol S (80-09-1)

Endpoint(s) using analog values: Reproductive and developmental

toxicity.

Analog Structure:

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: 43 - May cause sensitization by skin contact; 51/53 - Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment (ESIS, 2011).

Risk Assessments: None identified

	TGSA CASRN 41481-66-7				
PROPERT	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	PHYSICAL/CHEMICAL PROPERTIES				
Melting Point (°C)		151-155 ±1 (Measured)	Nippon Kayaku Co., 1992b	Adequate; guideline study.	
		144 (Measured)	Submitted confidential study	Adequate.	
Boiling Point (°C)		Decomposed prior to boiling (Measured)	Nippon Kayaku Co., 1992b	Adequate; decomposition occurs before the boiling point is reached.	
Vapor Pressure (mm	Hg)	9.5x10 ⁻¹⁰ (Measured)	Nippon Kayaku Co., 1992b	Adequate; guideline study.	
Water Solubility (mg	/L)	4.79 at 20.3°C ±0.5 (Measured)	Nippon Kayaku Co., 1992b	Adequate; guideline study.	
Log K _{ow}		3.22 (Measured)	Nippon Kayaku Co., 1992b	Adequate; guideline study.	
Flammability (Flash	Point)	Not highly flammable (Measured)	Nippon Kayaku Co., 1992b	Adequate; guideline study.	
Explosivity		Not explosive (Measured)	Nippon Kayaku Co., 1992b	Adequate; guideline study.	
pН				No data located.	
pK_a		8.3-8.5 (Estimated)	SPARC		
		HUMAN HEALTH EFFE	CTS		
Toxicokinetics		TGSA as a neat material is not estimated to absorption when in solution. It is estimate data for bisphenol A. TSGA is a potential are expected to be oxidized in the body via	d to be absorbed via the lungs ar cross-linking agent because it ha	nd gastrointestinal tract based on	
Dermal Absorption i	n vitro			No data located.	
Absorption, Distribution, Metabolism & Excretion		Not absorbed through the skin as neat material and has poor absorption in solution. Can be absorbed through the lung and gastrointestinal tract. (Estimated by analogy) Oxidation of the terminal double bonds in the body via an epoxide intermediate is expected. TGSA is a potential cross-linking agent because it has two terminal double bonds. (Estimated by analogy)	Professional judgment	Estimate based on reported experimental data for the analog bisphenol A; the potential for crosslinking is based on a mechanistic analysis.	

	TGSA CASRN 41481-66-7			
PROPER	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Acute Mammalian		LOW: Based on experimental values for o acute oral and dermal toxicity of TGSA is		
Acute Lethality	Oral	Sprague-Dawley rat LD ₅₀ >2,000 mg/kg	Nippon Kayaku Co., 1991f	Adequate guideline study (OECD 401).
	Dermal	Rat dermal LD ₅₀ >2,000 mg/kg	Nippon Kayaku Co., 1991d	Adequate guideline study (OECD 402).
	Inhalation			No data located.
Carcinogenicity		MODERATE: Estimated to be a concern for oxidation product. In addition, there is unconcerning the concerning the content of th		
	OncoLogic Results			No data located; not amenable to available estimation method.
	Carcinogenicity (Rat and Mouse)	Concern for carcinogenicity (Estimated)	Professional judgment	Estimated based on potential for the epoxide oxidation product.
	Combined Chronic Toxicity/Carcinogenicity			No data located.
Genotoxicity		LOW: Based on experimental data showing aberrations in vitro, and was negative in a		
	Gene Mutation in vitro	Negative, Ames assay (standard plate) in <i>S. typhimurium</i> strains TA98, TA100, TA1537, TA1535, and <i>E. coli</i> WP2 <i>uvr</i> A ⁻ with and without metabolic activation	Nippon Kayaku Co., 1991g	Test conducted in accordance with OECD 471; test substance purity: 96.2%.
	Gene Mutation in vivo			No data located.
	Chromosomal Aberrations in vitro	Negative for chromosome aberrations in human lymphocytes	Nippon Kayaku Co., 2000c	Test conducted in accordance with OECD 473.
		Negative for sister chromatid exchanges	Submitted confidential study	Adequate.
	Chromosomal Aberrations in vivo			No data located.

	TGSA CASRN 41481-66-7			
PROPER	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	DNA Damage and Repair			No data located.
	Other (Mitotic Gene Conversion)	Negative, mammalian erythrocyte micronucleus test in mice (gavage)	Nippon Kayaku Co., 1991i	Test conducted in accordance with OECD 474; test substance purity: 96.2%.
Reproductive Effect		MODERATE: Estimated based on analog screening test, oral exposure of parental ra and the NOAEL for reproductive effects is and decreased number of live offspring). I designation is selected.	ats to the analog bisphenol S resu s 60 mg/kg-day (prolonged estrou	Ited in marked systemic effects s cycle, decreased fertility index
	Developmental Toxicity Screen	Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Using the analog bisphenol S, data are for an adequate guideline study (OECD 421) reported in a secondary source.
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
	Reproduction and Fertility Effects	Concern for male reproductive toxicity (Estimated)	Professional judgment	Estimated based on reported data for the epoxide oxidation product and on reported experimental data for the analog bisphenol S.
Developmental Effects		MODERATE: Estimated based on analog screening test, oral exposure of parental ra and decreased number of live offspring (Pl 60 mg/kg-day. Based on the NOAEL a Mo	nts to the analog bisphenol S resu ND 4) at the highest dose level (30	lted in marked systemic effects 00 mg/kg-day) with a NOAEL of
	Reproduction/ Developmental Toxicity Screen	Concern for developmental toxicity (Estimated)	Professional judgment	Estimated based on reported data for the epoxide oxidation product and on reported experimental data for the analog bisphenol S.

	TGSA CASRN 41481-66-7			
PROPER'	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Using the analog bisphenol S, data are for an adequate guideline study (OECD 421) reported in a secondary source.
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
	Prenatal Development			No data located.
	Postnatal Development			No data located.
Neurotoxicity		MODERATE: Estimated to have potentia alert.	l for neurotoxicity based on the p	resence of the phenol structural
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.

	TGSA CASRN 41481-66-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Repeated Dose Effects	MODERATE: Based on experimental dat mg/kg-day and a LOAEL of 150 mg/kg-da MODERATE hazard designation; howeve the epoxide oxidation product.	y was identified for repeated dose	e effects that would indicate a	
	28-day repeated-dose oral exposure study, Sprague-Dawley rats; There was no mortality and no clinical signs of toxicity; increased salivation with wet fur and red/brown staining of body surface at doses of 150 mg/kg-day and higher; Decreased body weight gain in females administered 1,000 mg/kg-day; no treatment related effects on hematology, serum chemistry, necropsy, or organ weights; increased incidence of basophilic tubules and interstitial mononuclear cell infiltrates in kidneys of males in the 1,000 mg/kg-day group; similar but less pronounce effect occurred at 150 mg/kg-day in males. NOAEL = 15 mg/kg-day LOAEL = 150 mg/kg-day (microscopic renal changes)		Test conducted in accordance with OECD 474; test substance purity: 96.2%.	
Skin Sensitization	HIGH: There is concern that TGSA is a si sensitization in guinea pigs.	kin sensitizer based on experimen	tal data indicating a potential for	

TGSA CASRN 41481-66-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Skin Sensitization	Strong skin sensitizer in guinea pigs; produced a 70% (14/20) sensitization rate in guinea pigs.	Nippon Kayaku Co., 1991h	Test conducted in accordance with OECD 406 skin sensitization Magnusson and Kligman maximization test; test substance purity: 96.2%; intradermal induction: 25% in arachis oil B.P, topical induction: 50% in arachis oil B.P., topical challenge: 50% in arachis oil B.P.	
	Did not produce skin sensitization in guinea pigs	Nippon Kayaku Co., 1992b	Test conducted in accordance with EEC methodology 84/449/EEC (OJ No. L251, 19.9.84), Part B, test substance purity: 97.9 %; Method B.6; Induction: 60% Alembicol D; challenge: 60% in Alembicol D.	
	Classified as non-sensitizer in local lymph node assay in female CBA/JN mice; applied to dorsum of ears for 3 days; all stimulation indexes were below 3.	Nippon Kayaku Co., 2010	Test conducted in accordance with OECD TG429; test substance purity: 97.8%.	
Respiratory Sensitization	MODERATE: There is concern that TGS product.	A is a respiratory sensitizer base	d on the epoxide oxidation	
Respiratory Sensitization	Concern for respiratory sensitization	Professional judgment	Estimated based on reported data for the epoxide oxidation product.	
Eye Irritation	LOW: Based on experimental data suggesting that TGSA is a minimal irritant to rabbit eyes.			
Eye Irritation	Minimal irritant, rabbit	Nippon Kayaku Co., 1991e	Test conducted in accordance with OECD 405; test substance purity: 96.2%.	
ermal Irritation VERY LOW: Based on experimental data indicating that TGSA is not an irritant to rabbit skin.		rritant to rabbit skin.		

	TGSA CASRN 41481-66-7				
PROPER	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Dermal Irritation	Non-irritant, rabbit	Nippon Kayaku Co., 1991c	Test conducted in accordance with OECD 404; test substance purity: 96.2%.	
Endocrine Activity		There was no evidence that TGSA elicits es yeast, and did not have estrogenic effects of			
		Did not cause significant estrogenic activity in a recombinant yeast screen assay in <i>Saccharomyces cerevisiae</i> ; did not bind to estrogen receptor in recombinant yeast; there was an estrogenic response that was 4 orders of magnitude less than 17B-estradiol and 1 order of magnitude less than bisphenol A	Nippon Kayaku Co., 1999a	Adequate study details provided.	
		Uterotrophic assay in immature rat; No evidence of estrogenic effects on uterus of immature rats at oral doses up to 100 mg/kg bd. Wt.	Nippon Kayaku Co., 1999b	Adequate study details provided; TGSA also did not provide a synergistic effect when administered in combination with diethylstilbestrol (positive control).	
Immunotoxicity		No data located.			
	Immune System Effects			No data located.	
		ECOTOXICITY			
ECOSAR Class		Phenols, poly			
Acute Toxicity		HIGH: Based on experimental acute aqua 10 mg/L.	tic toxicity values for fish and Da	phnia which are in the range of 1-	
Fish LC ₅₀		Oncorhynchus mykiss (rainbow trout) 96 hour LC ₅₀ = 4.0 mg/L; NOEC – 96 hour = 1.8 mg/L (Experimental)	Nippon Kayaku Co., 1991b	Test conducted in accordance with OECD 203.	
		Oryzias latipes (medaka) 96 hour LC ₅₀ > 9.8 mg/L (Experimental)	Nippon Kayaku Co., 2011b	Test conducted in accordance with OECD 203; test substance purity: 98%.	

	TGSA CASRN 41481-66-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Fish 96-hour $LC_{50} = 1.17 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly Fish 96-hour $LC_{50} = 2.22 \text{ mg/L}$	EPI EPI			
	(Estimated) ECOSAR: neutral organics				
Daphnid LC ₅₀	Daphnia (<i>Daphnia magna</i>) 48-hour $EC_{50} = 5.5 \text{ mg/L}$ (immobilization); 24-hour $EC_{50} = 7.8 \text{ mg/L}$ (immobilization); NOEC -48 -hour $= 3.2 \text{ mg/L}$ (Experimental)	Nippon Kayaku Co., 1991a	Test conducted in accordance with OECD 202.		
	Daphnia (<i>Daphnia magna</i>) 48-hour EC ₅₀ > 12 mg/L (immobilization); 24-hour EC ₅₀ >12 mg/L (immobilization); (Experimental)	Nippon Kayaku Co., 2011a	Test conducted in accordance with OECD 202; test substance purity: 98%.		
	Daphnid 48-hour $LC_{50} = 1.72 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI			
	Daphnid 48-hour $LC_{50} = 1.87 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly	EPI			
Green Algae EC ₅₀	Green algae (<i>Scenedesmus subspicatus</i>) 72-hour $EC_{50} = > 100 \text{ mg/L}$ (Experimental)	Nippon Kayaku Co., 2000b	Test conducted in accordance with OECD 201; test substance purity: 50% TGSA, 4% PVA, 46% water.		
	Green algae 96-hour $EC_{50} = 1.71 \text{ mg/L}$ (Estimated) $ECOSAR$: phenols, poly	EPI			
	Green algae 96-hour EC ₅₀ = 2.01 mg/L (Estimated) ECOSAR: neutral organics	EPI			

	TGSA CASRN 41481-6	6-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Chronic Aquatic Toxicity	HIGH: Based on estimated ChV values for fish and algae that are in the range of 0.1-1.0 mg/L. Experimental chronic toxicity values were located for daphnia, but not for fish or algae. Experimental values for daphnia are in the Moderate hazard range of 1-10 mg/L. Without experimental values for fish or algae, a conservative approach using estimated values will be the basis for the hazard designation.				
Fish ChV	Fish ChV = 0.20 mg/L (Estimated) ECOSAR: neutral organics	EPI			
	Fish ChV = 0.24 mg/L (Estimated) ECOSAR: phenols, poly	EPI			
Daphnid ChV	Daphnia (<i>Daphnia magna</i>) 14-day EC ₅₀ = 4.1 mg/L (immobilization) (Experimental)	Nippon Kayaku Co., 2000a	Test conducted in accordance with OECD 211; 14-day value determined during 21-day reproduction test in parental daphnia generation; based on time-weighted mean measured test concentrations of the filtered test substance.		
	Daphnia (<i>Daphnia magna</i>) 21-day EC ₅₀ = 2.8 mg/L (immobilization) (Experimental)	Nippon Kayaku Co., 2000a	Test conducted in accordance with OECD 211; 21-day reproduction test in parental daphnia generation; Based on time-weighted mean measured test concentrations of the filtered test substance.		
	Daphnia (<i>Daphnia magna</i>) 21-day EC ₅₀ = 2.0 mg/L (reproduction) (Experimental)	Nippon Kayaku Co., 2000a	Test conducted in accordance with OECD 211; 21-day reproduction test; Based on time-weighted mean measured test concentrations of the filtered test substance.		
	Daphnia (<i>Daphnia magna</i>) LOEC = 1.6 mg/L (reproduction) NOEC = 0.50 mg/L (Experimental)	Nippon Kayaku Co., 2000a	Test conducted in accordance with OECD 211; 21-day reproduction test; based on time-weighted mean measured test concentrations of the filtered test substance.		

		TGSA CASRN 41481-66	5-7	
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Daphnid ChV = 0.25 mg/L (Estimated) ECOSAR: neutral organics	EPI	
		Daphnid ChV = 0.61 mg/L (Estimated) ECOSAR: phenols, poly	EPI	
Green Algae ChV		Green algae ChV = 0.20 mg/L (Estimated) ECOSAR: phenols, poly	EPI	
		Green algae ChV = 1.14 mg/L (Estimated) ECOSAR: neutral organics	EPI	
		ENVIRONMENTAL FA	TE	
Transport		TGSA is expected to exist in both the neut expected to have moderate mobility in soil solubility. However, leaching through soil mechanism. In the atmosphere, TGSA is back to the soil and water surfaces through that TGSA will partition primarily to soil.	. Anionic TGSA may have higher to groundwater is not expected to expected to exist in the particulate th wet or dry deposition. The Lev	r mobility due to enhanced water o be an important transport e phase, which will be deposited
	Henry's Law Constant (atm-m³/mole)	8.6x10 ⁻⁸ (Estimated)	EPI	
	Sediment/Soil Adsorption/Desorption Coefficient – K _{oc}	996 (Measured) HPLC screening method using cyanopropyl packed column; GLP compliance	TSCATS	Adequate, nonguideline study yet established method considered to have higher reliability than QSAR-based estimations.
		>30,000 (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonmobile compounds according to SF assessment guidance.
	Level III Fugacity Estimations	Air = <1% (Estimated) Water = 9.8% Soil = 58.2% Sediment = 31.9%	EPI	

		TGSA CASRN 41481-66	5-7	
PROPERTY/ENDPOINT DATA REFERENCE DATA		DATA QUALITY		
Persistence		HIGH: The persistence of TGSA is based on an estimated half-life of 75 days in soil. TGSA is expected partition primarily to soil. Experimental biodegradation data for TGSA were not located. Evaluation biodegradation potential for TGSA is based entirely on QSARs of aerobic and anaerobic biodegradation Results from these models estimate ultimate biodegradation in weeks-months and primary degradation days-week. Biodegradation under anaerobic methanogenic conditions is not probable based on results estimation models. TGSA does not contain functional groups that absorb light at environmentally-relewavelengths. Therefore, it is not expected to be susceptible to direct photolysis. It is not expected to unhydrolysis as it does not contain hydrolysable functional groups. The atmospheric half-life of TGSA is estimated at 1.8 hours, although it is expected to exist primarily as a particulate in air. Therefore, biodegradation is expected to be the main degradation pathway for TGSA.		
Water	Aerobic Biodegradation	Days-weeks (primary survey model) Weeks-months (ultimate survey model)	EPI	
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI	
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI	
Soil	Aerobic Biodegradation			No data located.
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI	
	Soil Biodegradation w/ Product Identification			No data located.
	Sediment/Water Biodegradation			No data located.
Air	Atmospheric Half-life	1.8 hours (Estimated)	EPI	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.
	Hydrolysis	<10% in 5 days at 50°C, pH 4	Nippon Kayaku Co., 1992b	Adequate; guideline study.
	Pyrolysis	*		No data located.

TGSA CASRN 41481-66-7					
PROPERTY/ENDPOINT DATA REFERENCE DA					
Environmental Half-life	75 days	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.		
Bioaccumulation LOW: The estimated fish BAF and BCF is <100.					
Fish BCF	62 (Estimated)	EPI	Estimate performed using experimental log K _{ow} .		
BAF	18 (Estimated)	EPI	Estimate performed using experimental log K _{ow} .		
Metabolism in	n Fish		No data located.		
	ENVIRONMENTAL MONITORING AND BIOMONITORING				
Environmental Monitoring	No data located.	No data located.			
Ecological Biomonitoring	No data located.	No data located.			
Human Biomonitoring	This chemical was not included	in the NHANES biomonitoring report (CDC, 2011).		

Boethling, R.; Mackay, D. Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences, Boca Raton: Lewis Publishers. **2000.**

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

ECHA (European Chemicals Agency). Information on registered substances. http://apps.echa.europa.eu/registered/registered-sub.aspx (accessed February 18, **2011**)

EPI (EPIWIN/EPISUITE) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

Nippon Kayaku Co. The acute toxicity of TG-SA to daphnia magna. Nippon Kayaku Co. Limited, Tokyo Japan. Project Number: 189-320. 1991a.

Nippon Kayaku Co. *The acute toxicity of TG-SA to rainbow trout (Oncorhynchus mykiss)*. Nippon Kayaku Co. Limited, Tokyo Japan. Project Number: 189/321. **1991b**.

Nippon Kayaku Co. *TG-SA*: Acute dermal irritation test in the rabbit. Nippon Kayaku Co. Limited, Tokyo Japan. Project number: 189/316. **1991c**.

Nippon Kayaku Co. *TG-SA: Acute dermal toxicity (limit test) in the rat.* Nippon Kayaku Co. Limited, Tokyo Japan. Project number: 189/315. **1991d**.

Nippon Kayaku Co. TG-SA: Acute eye irritation test in the rabbit. Nippon Kayaku Co. Limited, Tokyo Japan. Project number 189/317. 1991e.

Nippon Kayaku Co. TG-SA: Acute oral toxicity (limit test) in the rat. Nippon Kayaku Co. Limited, Tokyo Japan. Project number: 189/314. 1991f.

Nippon Kayaku Co. *TG-SA*: Determination of Physico-Chemical Properties. Nippon Kayaku Co. Limited, Tokyo Japan. Project number: 189/324. **1992a**.

Nippon Kayaku Co. *TG-SA: Reverse mutation assay "Ames test" using Salmonella typhimurium and Escherichia coli*. Nippon Kayaku Co. Limited, Tokyo Japan. Project number 189/322. **1991g**.

Nippon Kayaku Co. *TG-SA: Magnusson & Kligman maximization*. *Study in the guinea pig*. Nippon Kayaku Co. Limited, Tokyo Japan. Project number: 189/318. **1991h**.

Nippon Kayaku Co. TG-SA: Micronucleus test. Nippon Kayaku Co. Limited, Tokyo Japan. Project number: 189/323. 1991i.

Nippon Kayaku Co. *TG-SA: Twenty-eight day sub-acute oral toxicity study in the rat*. Nippon Kayaku Co. Limited, Tokyo Japan. Project number 189/325. **1991j**.

Nippon Kayaku Co. TG-SA: Skin sensitisation in the guinea-pig. Nippon Kayaku Co. Limited, Tokyo Japan. 920596D/NKU 268/SS. 1992b.

Nippon Kayaku Co. *TG-SA (Lot No. 710427): Assessment of oestrogenic activity using a recombinant yeast screen assay.* Nippon Kayaku Co. Limited, Tokyo Japan.SPL project number: 189/1663. **1999a**.

Nippon Kayaku Co. *TG-SA: Uterotrophic assay in the immature rat.* Nippon Kayaku Co. Limited, Tokyo Japan. SPL project number: 189/1659. **1999b**.

Nippon Kayaku Co. *TG-SA: Daphnia magna reproduction test*. Nippon Kayaku Co. Limited, Tokyo Japan. SPL project number: 189/1717. **2000a**.

Nippon Kayaku Co. TG-SA 50% liquid: Algal inhibition test. Nippon Kayaku Co. Limited, Tokyo Japan. SPL project number: 189/1743. 2000b.

Nippon Kayaku Co. *TG-SA: Chromosome aberration test in human lymphocytes in vitro*. Nippon Kayaku Co. Limited, Tokyo Japan. SPL project number: 189/1716. **2000c**.

Nippon Kayaku Co. *Evaluation of skin sensitization potency of TG-SH based on EC3 value derived from local lymph node assay (LLNA)*. Nippon Kayaku Co. Limited, Tokyo Japan. Study code 937-10-V-0069. **2010**.

Nippon Kayaku Co. *A 48-hour acute immobilization study of TG-SH(H) in daphnia magna*. Nippon Kayaku Co. Limited, Tokyo Japan. Receipt number 662-10-E-5538. Study number 95538. **2011a**.

Nippon Kayaku Co. *A 96-hour acute toxicity study of TG-SH(H) in Medaka*. Nippon Kayaku Co. Limited, Tokyo Japan. Receipt number 662-10-E-5540. Study number 95540. **2011b**.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

TSCATS. Marubeni. *PMN # P-85-67 2, 2'-diallyl-4,4'-sulfonyl diphenol (or commonly known as TGSA).* Marubeni Specialty Chemicals Inc., White Plains NY. Submitted March 22, 2005 to TSCATS submission FYI.

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

BPS-MAE

CASRN 97042-18-7

MW: 290.34

MF: $C_{15}H_{14}O_4S$

Physical Forms:

Neat: Solid

Use: Developer for thermal paper

SMILES: C=CCOc2ccc(cc2)S(=O)(=O)c1ccc(O)cc1

Synonyms: BPS-MAE; bis(4-Hydroxyphenyl) sulfone monoallyl ether; 4-[[4-(2-Propenyloxy)phenyl]sulfonyl]phenol; 4-{[4-(allyloxy)phenyl]sulfonyl}phenol

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: Potential for epoxide formation on terminal double bond.

Analog: Bisphenol S (80-09-1)

Endpoint(s) using analog values: Boiling point, carcinogenicity,

reproductive and developmental toxicity.

Analog Structure:

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

BPS-MAE CASRN 97042-18-7					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	PHYSICAL/CHEMICAL 1	PROPERTIES			
Melting Point (°C)	172 (Measured)	Submitted confidential study	Adequate.		
Boiling Point (°C)	>300 (Estimated)		Decomposition may occur before the boiling point is reached based on the experimental decomposition temperature of 315 degrees C for an analogous structure, bisphenol S. Cutoff value for high boiling point compounds according to HPV assessment guidance.		
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.		
Water Solubility (mg/L)	83 (Estimated)	EPI			
Log K _{ow}	3.1 (Estimated)	EPI			
Flammability (Flash Point)			No data located.		
Explosivity			No data located.		
рН			No data located.		
pK _a	8.2 (Estimated)	SPARC			

	BPS-MAE CASRN 97042-18-7				
PROPI	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		HUMAN HEALTH E	FFECTS		
Toxicokinetics		BPS-MAE is estimated not to be absorbed through the skin as the neat material and have poor skin absorption when in solution. BPS-MAE is estimated to have good absorption via the lungs and gastrointestinal tract based on data for the analog bisphenol A. BPS-MAE is a potential cross-linking agent because it has two terminal double bonds that are expected to be oxidized in the body via an epoxide intermediate.			
Dermal Absorption	on in vitro			No data located.	
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Estimated to be poorly absorbed as neat material and in solution through the skin. Absorption through lungs and gastrointestinal tract is expected to be good. The terminal double bonds have the potential be oxidized metabolically to the epoxide. (Estimated to be poorly absorbed as neat material and in solution through the experimental data for the analysisphenol A; the potential formation is based on a mechanism analysis.			
Acute Mammalia	n Toxicity	LOW: BPS-MAE was not toxic follow	ing acute oral exposure based on t	the acute oral LC ₅₀ value of >2,000	
		mg/kg-bw in rats.			
Acute Lethality	Oral	Rat (Sprague-Dawley CD) oral LD_{50} > 2,000 mg/kg-bw, no mortalities or signs of systemic toxicity at the highest dose tested (2,000 mg/kg-bw).	Submitted Confidential Study	Adequate; guideline study (OECD 423).	
	Dermal			No data located.	
	Inhalation			No data located.	
Carcinogenicity	enicity MODERATE: Estimated to have potential for carcinogenicity based on data reported for the epoxide oxidation product and structural analogy to bisphenol S. In addition, there is uncertainty due to the ladata for this substance. Carcinogenic effects cannot be ruled out.				
	OncoLogic Results			Not amenable to available estimation method.	
	Carcinogenicity (Rat and Mouse)	Potential for carcinogenicity (Estimated)	Professional judgment	Estimated based on potential for the epoxide oxidation product and based on analogy to bisphenol S.	

	BPS-MAE CASRN 97042-18-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Combined Chronic Toxicity/Carcinoge			No data located.		
Genotoxicity	MODERATE: BPS-MAE was clastog mutations in bacterial cells nor cause or bone marrow cells in CD-1 mice.				
Gene Mutation in	Salmonella typhimurium strains TA98, TA100, TA1535, and TA1537 and Escherichia coli WP2 uvrA/pKM101 with and without metabolic activation. Cytotoxicity was observed in Salmonella typhimurium strains TA98, TA1535, and TA1537 in the presence of activation at 5000 µg/plate.	Submitted Confidential Study	Adequate; guideline study (OECD 471).		
Gene Mutation in			No data located.		
Chromosomal Abe in vitro	with activation in the CHL/IU cell line; the incidences of cells with structural chromosome aberrations was 6.0% (1250 µg/mL), 7.5% (2500 µg/mL) and 11% (5000 µg/ml) with metabolic activation.		Adequate; guideline study (Japanese Guidelines on Industrial Chemicals (1997) and OECD Guideline (1997)).		
Chromosomal Abe	the induction of micronucleated immature erythrocytes or bone marrow cells following oral gavage exposure to CD-1 mice.	Submitted Confidential Study	Adequate; guideline study (OECD 474).		
DNA Damage and	Repair		No data located.		
Other (Mitotic Ger Conversion)	ne		No data located.		

BPS-MAE CASRN 97042-18-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reproductive Effects MODERATE: Estimated based screening test, oral exposure of and the NOAEL for reproductive and the NOAEL for reproductive screening test.				
Reproduction/ Developmental Toxicity	Parental toxicity: NOAEL = 10 mg/kg bw-day	ECHA, 2011; Professional judgment	Using the analog bisphenol S, data are for an adequate guideline study	
Screen	LOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)	Judgment	(OECD 421) reported in a secondary source.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
Reproduction and Fertility Effects	Potential for male reproductive toxicity (Estimated)	Professional judgment	Estimated based on reported data for the epoxide oxidation product and on reported experimental data for the analog bisphenol S.	

	BPS-MAE CASRN 97042-18-7					
PROPERTY	/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Developmental Effects						
		screening test, oral exposure of parental rats to the analog bisphenol S resulted in marked systemic effects				
		and decreased number of live offspring (PND 4) at the highest dose level (300 mg/kg-day with a NOAEL of 60				
_		mg/kg-day. Based on the NOAEL a Moderate hazard designation is selected.				
	roduction/		ECHA, 2011; Professional	Using the analog bisphenol S, data are		
	-		judgment	for an adequate guideline study		
Scre	een	LOAEL = 60 mg/kg bw-day		(OECD 421) reported in a secondary		
		Reproductive toxicity:		source.		
		NOAEL = 60 mg/kg bw-day				
		LOAEL = 300 mg/kg bw-day				
		201122 300 mg ng aw day				
		(Estimated by analogy)				
			Professional judgment	Estimated based on reported data for		
		(Estimated)		the epoxide oxidation product and on		
			,	reported experimental data for the		
				analog bisphenol S.		
	nbined Repeated Dose			No data located.		
	Reproduction/					
	elopmental Toxicity					
Scre						
	natal Development			No data located.		
	natal Development			No data located.		
Neurotoxicity		MODERATE: Estimated to have potential for neurotoxicity based on the presence of the phenol structural				
		alert.				
	rotoxicity Screening		U.S. EPA 2010, Professional	Estimated based on structural alert.		
Batte			judgment			
		phenol structural alert				
		(Estimated)				

BPS-MAE CASRN 97042-18-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Repeated Dose Effects	LOW: Effects from BPS-MAE were limited to increased kidney weights at 1,000 mg/kg/day in a 28-day		
	repeated-dose toxicity study in rats.		
	Adverse effects were limited to higher absolute and relative kidney weights in female Crj :CD (SD) IGS rats at 1,000 mg/kg-bw; NOEL = 1,000 mg/kg-bw/day (males) and 200 mg/kg-bw/day (females).	Submitted Confidential Study	Adequate; guideline study (OECD 407).
Skin Sensitization	LOW: BPS-MAE was not a skin sensitizer in one study of Guinea pigs.		
Skin Sensitization	Negative for skin sensitization in Dunkin Hartley guinea pigs.	Submitted Confidential Study	Adequate; guideline study (OECD 406).
Respiratory Sensitization	MODERATE: BPS-MAE is estimated to have potential to be a respiratory sensitizer based on the epoxide oxidation product.		
Respiratory Sensitization	Potential for respiratory sensitization	Professional judgment	Estimated based on reported data for the epoxide oxidation product.
Eye Irritation	LOW: Minimal conjunctival irritation was observed that cleared by the 24-hour observation.		
Eye Irritation	Slight irritant (maximum group mean score: 2.7) in New Zealand White rabbits, minimal conjunctival irritation, treated eyes appeared normal at the 24-hour observation.	Submitted Confidential Study	Adequate; guideline study (OECD 405).
Dermal Irritation	VERY LOW: BPS-MAE was not a dermal irritant in one study of rabbits.		
Dermal Irritation	Non-irritant (primary irritation index: 0) in New Zealand White rabbits.	Submitted Confidential Study	Adequate; guideline study (OECD 404).
Endocrine Activity	No data located.		
			No data located.
Immunotoxicity	No data located.		
Immune System Effects			No data located.
ECOTOXICITY			
ECOSAR Class	Phenols; Vinyl/allyl ethers		

BPS-MAE CASRN 97042-18-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Acute Toxicity	HIGH: Based on measured EC ₅₀ values for fish, daphnia, and algae of 4.5, 13.5, and 4.5 mg/L, respectively.		
Fish LC ₅₀	Rainbow trout (<i>Oncorhynchus mykiss</i>) 96-hour $LC_{50} = 4.5$ mg/L; mean measured concentrations; static-renewal test system; solvent: dimethylformamide (DMF); sub-lethal effects included loss of equilibrium, hyperventilation, lying on base of tank, increased pigmentation, and erratic swimming.	Submitted Confidential Study	Adequate; guideline study (OECD 203).
Daphnid LC ₅₀	Daphnia magna 48-hour EC ₅₀ = 13.5 mg/L; mean measured concentrations; static test system; solvent: DMF.	Submitted Confidential Study	Adequate; guideline study (OECD 202).
Green Algae EC ₅₀	Pseudokirchneriella subcapitata 72- hour EC ₅₀ = 4.5 mg/L (biomass), 7.8 mg/L (growth rate); mean measured concentrations; solvent: DMF.	Submitted Confidential Study	Adequate; guideline study (OECD 201).
Chronic Aquatic Toxicity	HIGH: Based on measured fish and d	aphnd ChV values of 0.162 mg/L a	and 0.102 mg/L, respectively.
Fish ChV	Fathead minnow (<i>Pimephales promelas</i>) 32-day NOEC= 0.0939 mg/L, LOEC= 0.28 mg/L, ChV (MATC)= 0.162 mg/L; mean measured concentrations; flow-through test system; solvent: tetrahydrofuran (THF); basis of effect level: survival.		Adequate; guideline study (OECD 210).

BPS-MAE CASRN 97042-18-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Daphnid ChV	Daphnia magna 21-day NOEC= 0.0664 mg/L, LOEC= 0.157 mg/L, ChV = 0.102 mg/L; mean measured concentrations; static-renewal test system; solvent: DMF; basis of effect level: parental survival and reproduction.	Submitted Confidential Study	Adequate; guideline study (OECD 211).
Green Algae ChV	Pseudokirchneriella subcapitata 72- hour NOEC = 1.8 mg/L, LOEC = 3.7 mg/L, ChV = 2.6 mg/L; mean measured concentrations; solvent: DMF.	Submitted Confidential Study	Adequate; guideline study (OECD 201).
Earthworm Subchronic Toxicity	Earthworm 14-day LC ₅₀ = 100.029 mg/L (Estimated) ECOSAR: phenols	EPI	
	ENVIRONMENTAL	FATE	
Transport	BPS-MAE is expected to exist in both neutral and anionic forms at environmentally-relevant pH, based on its estimated pKa. The neutral form of BPS-MAE is expected to be immobile in soil based on its estimated $K_{\rm oc}$. The anionic form may be more mobile although leaching of BPS-MAE through soil to groundwater is not expected to be an important transport mechanism. Estimated volatilization half-lives indicate that it will be non-volatile from surface water. Volatilization from dry surface is also not expected based on its estimated vapor pressure. In the atmosphere, BPS-MAE is expected to exist solely in the particulate phase, based on its estimated vapor pressure. Particulates may be removed from air by wet or dry deposition. Level III fugacity models incorporating the available experimental property data indicate that the unionized form of BPS-MAE is expected to partition primarily to soil.		
Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI; Professional judgment	Cutoff value for non-volatile compounds.
$\begin{tabular}{ll} Sediment/Soil\\ Adsorption/Desorption\\ Coefficient-K_{oc} \end{tabular}$	3.0x10 ³ (Estimated)	EPI	

BPS-MAE CASRN 97042-18-7				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY
		Air = <1% (Estimated) Water = 11% Soil = 87% Sediment = 2%	EPI	
Persistence		HIGH: High persistence concern for compartment where according to fug models estimate ultimate biodegradat <60 days with no persistent metabolit methanogenic conditions is not probato undergo hydrolysis since it does no BPS-MAE is estimated at 3 hours, alt	acity models; it is expected to primition in weeks to months, which sugges in aquatic environments. Biodegole ble based on results from estimation to the contain hydrolysable functional g	arily partition. Evaluation of QSARs gest a biodegradation half-life of gradation under anaerobic n models. BPS-MAE is not expected roups. The atmospheric half-life of
Water		Days-weeks (primary survey model) Weeks-months (ultimate survey model)		
	for Model River	>1 year (Estimated)	EPI	
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI	
Soil	Aerobic Biodegradation		*	No data located.
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI	
	Soil Biodegradation w/ Product Identification			No data located.
	Sediment/Water Biodegradation			No data located.
Air	Atmospheric Half-life	3.0 hours (Estimated)	EPI	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.

BPS-MAE CASRN 97042-18-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Pyrolysis			No data located.	
Environmental Half-life	75 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation	LOW: The estimated BCF and BAF are both <100.			
Fish BCF	48 (Estimated)	EPI		
BAF	76 (Estimated)	EPI		
Metabolism in Fish	· ·		No data located.	
ENVIRONMENTAL MONITORING AND BIOMONITORING				
Environmental Monitoring	No data located.			
Ecological Biomonitoring	No data located.			
Human Biomonitoring	This chemical was not included in the NHANES biomonitoring report (CDC, 2011).			



Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

ECHA (European Chemicals Agency). Information on registered substances. http://apps.echa.europa.eu/registered/registered-sub.aspx (accessed February 18, **2011**).

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT) Profiler*, U.S. Environmental Protection Agency: Washington D.C. <u>www.pbtprofiler.net</u>.

SPARC, 2010. *SPARC On Line Calculator pKa/property server*. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

BPS-MPE

CASRN: 63134-33-8

MW: 340.4

MF: $C_{19}H_{16}O_4S$

Physical Forms: Neat: Solid

Use: Developer for thermal paper

SMILES: O=S(=O)(c(ccc(OCc(ccc1)c1)c2)c2)c(ccc(O)c3)c3

Synonyms: Phenol, 4-[[4-(phenylmethoxy)phenyl]sulfonyl]- (TSCA Inventory); 4-Benzyloxy-4'-hydroxydiphenyl sulfone; 4-Hydroxy-4'-benzyloxydiphenylsulfone

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None

Analog: Bisphenol S (80-09-1)

Endpoint(s) using analog values: Boiling point, reproductive and

developmental toxicity, repeated dose toxicity, genotoxicity

Analog Structure:

но — В — ОН

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

	BPS-MPE CASRN 63134-33-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	PHYSICAL/CHEMICAL PR	ROPERTIES			
Melting Point (°C)	170	ChemSpider, 2010	Secondary source; study details and test conditions were not provided.		
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling point compounds according to the HPV assessment guidance; decomposition may occur before the boiling point is reached based on the experimental decomposition temperature of 315°C for the analog bisphenol S (80-09-1).		
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.		
Water Solubility (mg/L)	10 (Estimated)	EPI			
Log K _{ow}	3.9 (Estimated)	EPI			
Flammability (Flash Point)			No data located.		
Explosivity			No data located.		
pН			No data located.		
pK _a	8.2 (Estimated)	SPARC			

	BPS-MPE CASRN 63134-33-8				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
		HUMAN HEALTH EFF	ECTS		
Toxicokinetics		One experimental study indicated that B MPE is estimated not to be absorbed thr when in solution. BPS-MPE is estimated based on data for the analog bisphenol A	ough the skin as a neat material a I to have good absorption via the A.	and to have poor skin absorption	
Dermal Absorption	n <i>in vitro</i>			No data located.	
Absorption, Distribution, Metabolism & Excretion	Oral	Not absorbed through the skin as a neat material and has poor absorption in solution; can be absorbed through the lung and gastrointestinal tract (Estimated by analogy)	Professional judgment	Estimated based on experimental data for the analog bisphenol A.	
	Dermal	No evidence of skin absorption at 1,000 mg/kg; three guinea pigs, solid-moist with water	Eastman Kodak, 1991	Adequate.	
Acute Mammalian	a Toxicity	LOW: Based on acute oral LD_{50} values guinea pigs failed to identify an LD_{50} , althighest dose tested.			
Acute Lethality	Oral	Rat LD ₅₀ >3,200 mg/kg; 10 male rats, moderate weakness and diarrhea	Eastman Kodak, 1991	Adequate.	
		Mouse $LD_{50} = 3,200 \text{ mg/kg}$; 10 male mice, moderate weakness, rough hair coats	Eastman Kodak, 1991	Adequate.	
	Dermal	Guinea pig LD ₅₀ >1,000 mg/kg; slight edema, desquamation, slight to moderate alopecia	Eastman Kodak, 1991	Adequate.	
	Inhalation			No data located.	
Carcinogenicity		MODERATE: There is uncertain potential for carcinogenicity due to the lack of data located for this substance. Carcinogenic effects cannot be ruled out.			
	OncoLogic Results			No data located.	
	Carcinogenicity (Rat and Mouse)			No data located.	

	BPS-MPE CASRN 63134-33-8			
PROPERTY/ENDPOIN	T	DATA	REFERENCE	DATA QUALITY
Combined Ch Toxicity/Care				No data located.
Genotoxicity	several <i>in</i> micronucle exogenous CHO cells positive res	vitro assays and did not induce eus assay in NMRI mice or in metabolic activation. Howeve in vitro in the absence of exog	ogy to bisphenol S. Bisphenol S de chromosomal aberrations <i>in vivo</i> Chinese hamster ovary (CHO) celer, the analog bisphenol S did independent metabolic activation (at a negative result in the <i>in vivo</i> test su	o in a mammalian erythrocyte lls <i>in vitro</i> in the presence of uce chromosomal aberrations in oncytotoxic concentration). The
Gene Mutatio	(TK+/TK-) metabolic a	nouse lymphoma L5178Y cells, with and without activation by analogy)		Adequate; based on experimental data measured for the analog bisphenol S.
	Salmonella TA100, TA with and w	Ames assay (standard plate) in a typhimurium strains TA98, A1537, TA1535, and TA1538 ithout metabolic activation by analogy)	CCRIS database; Professional judgment	Adequate; based on experimental data measured for the analog bisphenol S.
	typhimurium TA1537, ar metabolic a	Salmonella/microsome test, <i>S. m</i> strains TA1535, TA100, and TA98 with and without activation by analogy)	Professional judgment	Adequate; based on experimental data measured for the analog bisphenol S in an adequate guideline study (OECD 471).
	typhimurius TA1537, T. WP2UVRA activation	Ames assay (preincubation) in <i>S. m</i> strains TA98, TA100, A1535 and <i>Escherichia coli</i> A with and without metabolic by analogy)	2011; Professional judgment	Adequate; based on experimental data measured for the analog bisphenol S in an adequate guideline study (OECD 471).
	TA1335	nmu test in <i>S.typhimurium</i> strain by analogy)		Adequate; based on experimental data measured for the analog bisphenol S.

		BPS-MPE CASRN 6313	4-33-8	
PROPER	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Negative, CHO HGPRT mutation assay, with and without metabolic activation (Estimated by analogy)		Adequate; based on experimental data measured for the analog bisphenol S.
		Potential for mutagenicity (Estimated by analogy)		Estimated based on experimental data for the analog bisphenol S.
	Gene Mutation in vivo			No data located.
	Chromosomal Aberrations <i>in vitro</i>	Positive, without metabolic activation; negative, with metabolic activation (Estimated by analogy)	Amoco Corp., 1991b; ECHA, 2011; Professional judgment	Adequate; based on experimental data measured for the analog bisphenol S in an adequate guideline study (similar to OECD 473).
	Chromosomal Aberrations <i>in vivo</i>	Negative, mammalian erythrocyte micronucleus assay in male NMRI mice (gavage) (Estimated by analogy)		Adequate; based on experimental data measured for the analog bisphenol S in an adequate guideline study (OECD 474).
	DNA Damage and Repair			No data located.
	Other (Mitotic Gene Conversion)			No data located.
Reproductive Effect	S	MODERATE: Estimated based on anal screening test, oral exposure of parental and the NOAEL for reproductive effects and decreased number of live offspring). designation is selected.	rats to the analog bisphenol S res is 60 mg/kg-day (prolonged estro	sulted in marked systemic effects ous cycle, decreased fertility index
	Reproduction/ Developmental Toxicity Screen	Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)		Adequate; based on experimental data measured for the analog bisphenol S in an adequate guideline study (OECD 421) reported in a secondary source.

	BPS-MPE CASRN 63134-33-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.		
Reproduction and Fertility Effects	Potential for reproductive toxicity (Estimated by analogy)	Professional judgment	Estimated based on experimental data for the analog bisphenol S.		
•	MODERATE: Estimated based on analogy to bisphenol S. In a reproductive/developmental toxicity screening test, oral exposure of parental rats to the analog bisphenol S resulted in marked systemic effect and a decreased number of live offspring (PND 4) at the highest dose level (300 mg/kg-day) with a NOA 60 mg/kg-day. Based on the NOAEL a Moderate hazard designation is selected.		sulted in marked systemic effects I (300 mg/kg-day) with a NOAEL of		
Developmental Toxicity Screen	Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; based on experimental data measured for the analog bisphenol S in an adequate guideline study (OECD 421) reported in a secondary source.		
	Potential for developmental toxicity (Estimated by analogy)	Professional judgment	Estimated based on experimental data for the analog bisphenol S.		
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.		
Prenatal Development			No data located.		
Postnatal Development			No data located.		
· · · · · · · · · · · · · · · · · · ·	MODERATE: Estimated to have potent alert.	ial for neurotoxicity based on the	e presence of the phenol structural		
	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.		

	BPS-MPE CASRN 63134-33-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Repeated Dose Effects	HIGH: Based on analogy to bisphenol S. In two adequately-designed repeated dose oral studies in rats, one study identified a NOAEL of 10 mg/kg-day and a LOAEL of 60 mg/kg-day for systemic effects and the other study identified a NOAEL of 40 mg/kg-day and a LOAEL of 200 mg/kg-day for systemic effects following exposure to the analog bisphenol S. The High hazard designation is based on uncertainty as to the potential systemic toxicity in the range of 40-60 mg/kg-day. Data located for BPS-MPE are inadequate to assess the hazard for repeated dose effects.				
Oral	12-Day repeated dose oral (dietary) study, 5 male rats/group, test compound concentrations of 0, 0.1, and 1.0% in corn oil (~0, 100, and 980 mg/kg-day, respectively), slightly increased absolute (high dose) and relative (high and low dose) liver weights, no abnormalities or changes in body weight, clinical chemistry, gross pathology, or histopathology NOAEL = 100 mg/kg-day LOAEL = 980 mg/kg-day	Eastman Kodak, 1991	Inadequate; exposure duration only 12 days, and only one species tested.		
	In a repeated-dose oral study, Sprague- Dawley rats, NOAEL = 40 mg/kg bw-day LOAEL = 200 mg/kg-bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; based on experimental data measured for the analog bisphenol S in an adequate 28-day repeat dose toxicity guideline study.		
	In a reproduction/developmental toxicity screening test, Sprague-Dawley rats, NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; based on experimental data measured for the analog bisphenol S in an adequate guideline study (OECD 421).		
	Potential for liver and kidney toxicity (Estimated by analogy)	Professional judgment	Estimated based on experimental data for the analog bisphenol S.		

BPS-MPE CASRN 63134-33-8				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY
Dermal		10-Day repeated-dose dermal study, 5 guinea pigs; repeated dosing slightly exacerbated skin reaction; by day 10, severe erythema and minute eschar formation in 2/5 guinea pigs	Eastman Kodak, 1991	Inadequate; treatment period only 10 days, no dose level.
Skin Sensitization		LOW: Not an apparent skin sensitizer i		
Skin Sensitization	on	Negative for skin sensitization; 10 guinea pigs	Eastman Kodak, 1991	Adequate.
Respiratory Sensitization		No data located.		
Respiratory Ser	nsitization			No data located.
Eye Irritation		LOW: Slightly irritating to rabbit eyes		
Eye Irritation		Slight irritant, rabbits, clearing within 24 hours	Eastman Kodak, 1991	Adequate.
Dermal Irritation		LOW: Slightly irritating to the skin of a	guinea pigs.	
Dermal Irritation	on	Slight irritant at 24 hours recovering within 2 weeks, guinea pigs	Eastman Kodak, 1991	Adequate.
Endocrine Activity		No data located.		
				No data located.
Immunotoxicity		No data located.		
Immune System	Effects			No data located.

BPS-MPE CASRN 63134-33-8					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
ECOTOXICITY					
ECOSAR Class	Phenols				
Acute Toxicity	VERY HIGH: Based on measured 96-healthough detailed study results were not		hnid in the range of 0.34-3.4 mg/L,		
Fish LC ₅₀	Fathead minnow 96-hour $LC_{50} = 0.34$ -3.4 mg/L (Experimental)	Eastman Kodak, 1991	Although experimental details were not provided, the study demonstrates the potential for adverse effects at concentrations corresponding to a Very High hazard concern.		
	Fish 96-hour $LC_{50} = 2.01 \text{ mg/L}$ (Estimated) ECOSAR: phenols	EPI			
	Fish 96-hour LC ₅₀ = 6.28 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Daphnid LC ₅₀	Daphnid 96-hour $LC_{50} = 0.34-3.4 \text{ mg/L}$ (Experimental)	Eastman Kodak, 1991	Although experimental details were not provided, the study demonstrates the potential for adverse effects at concentrations corresponding to a Very High hazard concern.		
	Daphnid 48-hour $LC_{50} = 1.46 \text{ mg/L}$ (Estimated) ECOSAR: phenols	EPI			
	Daphnid 48-hour $LC_{50} = 4.57 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI			

	BPS-MPE CASRN 63134-33-8				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Green Algae EC ₅₀	Green algae 96-hour EC ₅₀ = 4.32 mg/L (Estimated) ECOSAR: neutral organics	EPI			
	Green algae 96-hour EC ₅₀ = 5.58 mg/L (Estimated) ECOSAR: phenols	EPI			
Chronic Aquatic Toxicity	HIGH: Based on an estimated fish 30-da	ay ChV of 0.27 mg/L.			
Fish ChV	Fish 30-day ChV = 0.27 mg/L (Estimated) ECOSAR: phenols	EPI			
	Fish ChV = 0.57 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Daphnid ChV	Daphnid 21-day ChV = 0.28 mg/L (Estimated) ECOSAR: phenols	EPI			
	Daphnid ChV = 0.59 mg/L (Estimated) ECOSAR: neutral organics	EPĬ			
Green Algae ChV	Green algae ChV = 2.22 mg/L (Estimated) ECOSAR: neutral organics	EPI			
	Green algae ChV = 2.56 mg/L (Estimated) ECOSAR: phenols	EPI			
Earthworm Subchronic Toxicity	Earthworm 14-day LC ₅₀ = 52.09 mg/L (Estimated) ECOSAR: phenols (chemical may not be soluble enough to measure this predicted effect)	EPI			

	BPS-MPE CASRN 63134-33-8				
PROPERTY/ENDPO	INT	DATA	REFERENCE	DATA QUALITY	
	ENVIRONMENTAL FATE				
Transport		Based on the Level III fugacity models incorporating the located experimental property data, BPS-MPE is expected to partition primarily to soil. BPS-MPE is expected to exist in both neutral and anionic forms at environmentally-relevant pH, based on its estimated pK_a . The neutral form of BPS-MPE is expected to be immobile in soil based on its estimated K_{oc} . The anionic form may be more mobile, as anions do not bind as strongly to organic carbon and clay as their neutral counterparts. However, leaching of BPS-MPE through soil to groundwater is not expected to be an important transport mechanism. Estimated volatilization half-lives indicate that it will be nonvolatile from surface water. Volatilization from dry surface is also not expected based on its estimated vapor pressure. In the atmosphere, BPE-MPE is expected to exist solely in the particulate phase, based on its estimated vapor pressure. Particulates may be removed from air by wet or dry deposition.			
Henry's L (atm-m³/n	Law Constant nole)	<1x10 ⁻⁸ (Estimated)	EPI, Professional judgment	Cutoff value for nonvolatile	
Sediment/ Adsorptio Coefficien	n/Desorption	>30,000 (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonmobile compounds according to SF assessment guidance.	
Level III I Model	Fugacity	Air = <1% (Estimated) Water = 8.5% Soil = 75% Sediment = 16%	EPI		
Persistence		HIGH: Evaluation of the persistence of BPS-MPE is based entirely on QSARs for aerobic and anaerobic biodegradation. Results from these models estimate primary biodegradation in days-weeks and ultimate degradation in weeks-months. BPS-MPE is expected to partition primarily to soil. Based on these data, the biodegradation half-life is expected to be 75 days in soil. Biodegradation under anaerobic methanogenic conditions is not probable. BPS-MPE is not expected to undergo hydrolysis since it does not contain hydrolysable functional groups. BPS-MPS does not absorb UV light at environmentally significant wavelengths. The vapor phase reaction of BPS-MPE with atmospheric hydroxyl radicals is estimated at 5.7 hours, although it is expected to exist primarily in the particulate phase in air. Considerations of all these factors indicate that the persistence concern is High for BPS-MPE.			
Water Aerobic Biodegrad	lation	Days-weeks (Primary survey model) Weeks-months (Ultimate survey model)	EPI		

	BPS-MPE CASRN 63134-33-8				
PROPER'	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI		
Soil	Aerobic Biodegradation			No data located.	
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI		
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation			No data located.	
Air	Atmospheric Half-life	5.7 hours (Estimated)	EPI		
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.	
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Ha	lf-life	75 days (Estimated)	EPI, PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		MODERATE: Both the estimated BCF	for fish and the BAF are in the r	ange from 100 to 1,000.	
	Fish BCF	180 (Estimated)	EPI		
	BAF	110 (Estimated)	EPI		
	Metabolism in Fish			No data located.	

BPS-MPE CASRN 63134-33-8				
PROPERTY/ENDPOINT DATA REFERENCE DATA QUALITY				
ENVIRONMENTAL MONITORING AND BIOMONITORING				
Environmental Monitoring No data located.				
Ecological Biomonitoring No data located.				
Human Biomonitoring This chemical was not included in the NHANES biomonitoring report (CDC, 2011).				



Amoco Corp. *CHO/HGPRT mutation assay (final report) with attachment and cover letter dated 111491*. TSCATS submission OTS0534324. **1991a.**

Amoco Corp. *Chromosome aberrations in Chinese hamster ovary (CHO) cells (final report) with attachment and cover letter dated 111491.* TSCATS submission OTS0534325. **1991b.**

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CCRIS. *Chemical Carcinogenesis Research Information System*. Bisphenol S. **2010.** http://toxnet.nlm.nih.gov/cgibin/sis/htmlgen?CCRIS (accessed on August, 2010).

Chemspider. *ChemSpider; Structure-based Chemistry Information*. Royal Society of Chemistry: London. **2010**. http://www.chemspider.com (accessed on December 11, 2010).

Chen, M-Y.; Michihiko, I.; Fujita, M. Acute toxicity, mutagenicity, and estrogenicity of bisphenol-A and other bisphenols. *Environ. Toxicol.* **2002**, 17:80-86.

CDC (Centers for Disease Control and Prevention). Fourth national report on human exposure to environmental chemicals, updated tables. Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

Eastman Kodak. *Letter concerning enclosed information on bisphenol S with attachments*. Eastman Kodak Company, Rochester NY. TSCATS submission OTS0534330. **1991.**

ECHA. European Chemicals Agency. Information on registered substances. http://apps.echa.europa.eu/registered/registered-sub.aspx (accessed February 18, 2011).

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

Miles Inc. Salmonella/microsome test (final report) with cover letter dated 04392. TSCATS submission OTS0435648. 1992.

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT) Profiler.* U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. **1999**. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA (Environmental Protection Agency). Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncanscreen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

D-8

CASRN 95235-30-6

MW: 292.35

MF: $C_{15}H_{16}O_4S$

Physical Forms: Neat: Solid

Use: Developer for thermal paper

SMILES: O=S(=O)(c1ccc(O)cc1)c2ccc(OC(C)C)cc2

Name: 4-hydroxyphenyl 4-isoprooxyphenylsulfone

Synonyms: Phenol, 4-[[4-(1-methylethoxy)phenyl]sulfonyl]- (TSCA Inventory); 4-(4-isopropoxyphenylsulfonyl)phenol; Phenol, 4-[[4-(1-methylethoxy)phenyl]sulfonyl]

methylethoxy)phenyl]sulfonyl]-; 4-Hydroxy-4-isopropoxydiphenylsulfone; D-8; DD-8; ALD-2000

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None identified

Analog: Bisphenol S (80-09-1)

Endpoint(s) using analog values: Boiling point, persistence, reproductive effects,

developmental effects, and repeated dose effects

Analog: BPS-MPE (63134-33-8)

Endpoint(s) using analog values: Acute mammalian toxicity; eye irritation; dermal irritation;

skin sensitization

Analog Structures:

Name:

Structure:

но-

Bisphenol S (80-09-1)

BPS-MPE (63134-33-8)

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: 51/53 - Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment (ESIS, 2011).

Risk Assessments: None identified

	D-8 CASRN 95235-30-6				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	PHYSICAL/CHEMICAL	PROPERTIES			
Melting Point (°C)	129 (Measured)	Submitted confidential study	Adequate.		
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Decomposition may occur before the boiling point is reached based on the experimental decomposition temperature of 315 degrees C for an analogous structure, bisphenol S. Cutoff value for high boiling point compounds according to HPV assessment guidance.		
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.		
Water Solubility (mg/L)	21 (Measured)	Submitted confidential study	Adequate.		
Log K _{ow}	3.1 (Estimated)	EPI			
Flammability (Flash Point)			No data located.		
Explosivity			No data located.		
рН			No data located.		
pK_a	8.2 (Estimated)	SPARC			
	HUMAN HEALTH I	EFFECTS			
Toxicokinetics	D-8 is estimated not to be absorbed when in solution. D-8 is estimated t data for the analog bisphenol A.		rial and have poor skin absorption ngs and gastrointestinal tract based on		
Dermal Absorption in vitro			No data located.		
Absorption, Distribution, Metabolism & Excretion	Estimated to not be absorbed through skin as neat material and has poor absorption in solution. Can be absorbthrough the lung and gastrointestinal tract (Estimated by analogy)	3 6	Estimated based on reported experimental data for the analog bisphenol A.		
Acute Mammalian Toxicity	LOW: Estimated based on analogy	to BPS-MPE.			

		D-8 CASRN 95235-3	0-6	
PROPI	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Acute Lethality	Oral	Rat LD ₅₀ >3,200 mg/kg; 10 male rats, moderate weakness and diarrhea	Eastman Kodak, 1991	Adequate.
		Mouse LD ₅₀ = 3,200 mg/kg; 10 male mice, moderate weakness, rough hair coats	Eastman Kodak, 1991	Adequate.
	Dermal	Guinea pig LD ₅₀ >1,000 mg/kg; slight edema, desquamation, slight to moderate alopecia	Eastman Kodak, 1991	Adequate.
	Inhalation			No data located.
Carcinogenicity		MODERATE: There is uncertain potential for carcinogenicity due to the lack of data for this substan Carcinogenic effects cannot be ruled out.		
	OncoLogic Results			No data located.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/Carcinogenicity			No data located.
Genotoxicity		MODERATE: There is uncertain pote Genotoxic effects cannot be ruled out.	ential for genotoxicity due to the	ack of data for this substance.
	Gene Mutation in vitro	Potential for mutagenicity (Estimated)	Professional judgment	Estimated by analogy to confidential analog and professional judgment.
	Gene Mutation in vivo			No data located.
	Chromosomal Aberrations in vitro	Negative, chromosomal aberrations in Chinese hamster lung cells (Measured)	Submitted confidential study	Adequate.
	Chromosomal Aberrations in vivo			
	DNA Damage and Repair			No data located.
	Other (Mitotic Gene Conversion)			No data located.

D-8 CASRN 95235-30-6				
PROPERT	TY/ENDPOINT	DATA REFERENCE DATA QUALITY		
Reproductive Effects		MODERATE: Estimated based on analogy to bisphenol S. In a reproduction/developmental toxicity screening test, oral exposure of parental rats to the analog bisphenol S resulted in marked systemic effects and the NOAEL for reproductive effects is 60 mg/kg-day (prolonged estrous cycle, decreased fertility index and decreased number of live offspring). Based on the NOAEL for reproductive effects a Moderate hazard designation is selected.		
De	eproduction/ evelopmental Toxicity creen	Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S, data are for an adequate guideline study (OECD 421) reported in a secondary source.
wi Do	ombined Repeated Dose ith Reproduction/ evelopmental Toxicity creen			No data located.
	eproduction and Fertility ffects	Potential for reproductive toxicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol S.
Developmental Effects		MODERATE: Estimated based on an screening test, oral exposure of parent and decreased number of live offspring 60 mg/kg-day. Based on the NOAEL a	al rats to the analog bisphenol S r g (PND 4) at the highest dose leve	resulted in marked systemic effects l (300 mg/kg-day with a NOAEL of

	D-8 CASRN 95235-30-6				
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Reproduction/ Developmental Toxicity Screen	Parental toxicity: NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day Reproductive toxicity: NOAEL = 60 mg/kg bw-day LOAEL = 300 mg/kg bw-day (Estimated by analogy)		Adequate; using the analog bisphenol S, data are for an adequate guideline study (OECD 421) reported in a secondary source.	
		Potential for developmental toxicity (Estimated by analogy)		Estimated based on reported experimental data for the analog bisphenol S.	
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
	Prenatal Development			No data located.	
	Postnatal Development			No data located.	
Neurotoxicity		MODERATE: Estimated to have pote alert.	ntial for neurotoxicity based on t	he presence of the phenol structural	
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA 2010, Professional judgment	Estimated based on structural alert.	

	D-8 CASRN 95235-3	0-6	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Repeated Dose Effects	HIGH: Based on analogy to bisphenol S. Among two adequately-designed repeated-dose oral sturats, one study identified a NOAEL of 10 mg/kg-day and a LOAEL of 60 mg/kg-day for systemic of the other study identified a NOAEL of 40 mg/kg-day and a LOAEL of 200 mg/kg-day for systemic following exposure to the analog bisphenol S. Based on uncertainty as to the potential systemic to the range of 40 to 60 mg/kg-day, a High hazard concern is selected.		0 mg/kg-day for systemic effects and 200 mg/kg-day for systemic effects
	In a repeated-dose oral study, Sprague- Dawley rats, NOAEL = 40 mg/kg bw-day LOAEL = 200 mg/kg-bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S, data are for an adequate 28-day repeated dose toxicity guideline study (Japan).
	In a reproduction/developmental toxicity screening test, Sprague-Dawley rats, NOAEL = 10 mg/kg bw-day LOAEL = 60 mg/kg bw-day (Estimated by analogy)	ECHA, 2011; Professional judgment	Adequate; using the analog bisphenol S, data are for an adequate guideline study (OECD guideline 421).
	Potential for liver and kidney toxicity (Estimated by analogy)	Professional judgment	Estimated based on reported experimental data for the analog bisphenol S.
Skin Sensitization	LOW: Estimated based on analogy to on analog data for BPS-MPE.	BPS-MPE. Not considered a ski	n sensitizer in the guinea pig based
Skin Sensitization	Negative for skin sensitization; 10 guinea pigs	Eastman Kodak, 1991	Adequate.
Respiratory Sensitization	No data located.		
Respiratory Sensitization			No data located.
Eye Irritation	LOW: Estimated based on analogy to slightly irritating to rabbit eyes.	BPS-MPE. The analog bispheno	I BPS-MPE was non-irritating to
Eye Irritation	Slight irritant, rabbits, clearing within 24 hours	Eastman Kodak, 1991	Adequate.
Dermal Irritation	LOW: Estimated based on analogy to guinea pig skin.	BPS-MPE. The analog bispheno	BPS-MPE was slightly irritating to
Dermal Irritation	Slight irritant at 24 hours recovering within 2 weeks, guinea pigs	Eastman Kodak, 1991	Adequate.

		D-8 CASRN 95235-3	0-6	
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Endocrine Activity		Based on several in vitro studies there is limited evidence of endocrine activity. Negative for estrogenicity in two ER binding assays and one competitive ER binding assay, positive for anti-estrogenicity in a competitive binding assay in the presence of 17β-estradiol.		
		Negative for ER binding in yeast two- hybrid assay using human and medaka fish estrogen receptor (hERα and medERα, respectively) and coactivator TIF2 in <i>Saccharomyces cerevisiae</i> with or without exogenous metabolic activation	Terasaki et al., 2007	Adequate.
		Negative for competitive ER-binding affinity in ER-ELISA assay with or without exogenous metabolic activation	Terasaki et al., 2007	Adequate.
		Positive for anti-estrogenic activity in cell proliferation assay of ERE-GFP-MCF7 cells treated with 17β-estradiol	Kuruto-Niwa et al., 2005	Adequate.
		Negative for estrogenic activity in cell proliferation assay of ERE-GFP-MCF7 cells in the absence of 17β-estradiol	Kuruto-Niwa et al., 2005	Adequate.
Immunotoxicity		No data located.		
	Immune System Effects			No data located.
		ECOTOXICITY		
ECOSAR Class		Phenols		
Acute Toxicity		HIGH: Based on estimated LC ₅₀ for fi		e range of 1-10 mg/L.
Fish LC ₅₀		Fish 96-hour $LC_{50} = 6.64$ mg/L (Estimated) ECOSAR: phenols	EPI	

	D-8 CASRN 95235-30-6				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Fish 96-hour LC ₅₀ = 25.58 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Daphnid LC ₅₀	Daphnid 48-hour $LC_{50} = 3.56 \text{ mg/L}$ (Estimated) ECOSAR: phenols	EPI			
	Daphnid 48-hour $LC_{50} = 16.89 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI			
Green Algae EC ₅₀	Green algae 96-hour $EC_{50} = 11.52 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI			
	Green algae 96-hour EC ₅₀ = 14.70 mg/L (Estimated) ECOSAR: phenols	EPI			
Chronic Aquatic Toxicity	HIGH: Based on estimated ChVs ₀ for	fish and Daphnid, which are in th	ne range of 0.1-1 mg/L.		
Fish ChV	Fish 30-day ChV = 0.69 mg/L (Estimated) ECOSAR: phenols	EPI			
	Fish 60-day ChV = 2.37 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Daphnid ChV	Daphnid 21-day ChV = 0.68 mg/L (Estimated) ECOSAR: phenols	EPI			
	Daphnid 21-day ChV = 1.90 mg/L (Estimated) ECOSAR: neutral organics	EPI			

	D-8 CASRN 95235-30-6			
PROPERTY/ENDP	OINT	DATA	REFERENCE	DATA QUALITY
Green Algae ChV		Green algae ChV = 5.11 mg/L (Estimated) ECOSAR: neutral organics	EPI	
		Green algae ChV = 5.11 mg/L (Estimated) ECOSAR: phenols	EPI	
Earthworm Subchronic Toxicit	y	Earthworm 14-day LC ₅₀ = 6.81 mg/L (Estimated) ECOSAR: phenols	EPI	
		ENVIRONMENTAL F	FATE	
Transport		Evaluation of D-8 transport is based e disassociation constant (pK _a), adsorpti air, an estimated vapor pressure of <12 phase in the atmosphere. Particulate-p deposition. If released to soil, D-8 is ex 2,500. Volatilization from water surfacompound's estimated Henry's Law co	on coefficient (K_{oc}), volatilization $\times 10^{-8}$ mmHg at 25 °C indicates the phase D-8 will be removed from tapected to have moderate mobility ces is not expected to be an imporpostant.	, and vapor pressure. If released to at D-8 will exist in the particulate he atmosphere by wet or dry y based upon an estimated $K_{\rm oc}$ of tant fate process based upon this
Henry's I (atm-m³/r	Law Constant nole)	<1x10 ⁻⁸ (Estimated)	EPĬ	Cutoff value for non-volatile compounds based on professional judgment.
Sediment Desorptio Coefficier	on	2.5x10 ³ (Estimated)	EPI	
Level III	Fugacity Model	Air = 0% (Estimated) Water = 11% Soil = 87% Sediment = 2%	EPI	
Persistence		MODERATE: Moderate, estimated ba	sed on analogy to bisphenol S.	
Water Aerobic E	Biodegradation	Days-weeks (primary survey model) Weeks-months (ultimate survey model)	EPI	

	D-8 CASRN 95235-30-6				
PROPERTY/EN	DPOINT	DATA	REFERENCE	DATA QUALITY	
		Bisphenol S aerobic degradation was not detected after 2 weeks; degradation based on total organic carbon (TOC) decrease in river water and measured with high performance liquid chromatography (HPLC). (Estimated by analogy)	Ike et al., 2006	Estimated based on reported experimental data for the analog bisphenol S.	
Volati Model	lization Half-life for River	>1 year (Estimated)	EPI		
Volati Model	lization Half-life for Lake	>1 year (Estimated)	EPI		
Soil Aerob	ic Biodegradation	Ready Test: MITI-I (OECD 301C) No biodegradation detected; Bisphenol S for 4 weeks with 100 mg/L in 30 mg/L activated sludge biological oxygen demand 0%; TOC 0%. (Estimated by analogy)	MITI, 1998	Estimated based on reported experimental data for the analog bisphenol S.	
Anaer Biodeg	obic gradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI		
	iodegradation w/ ct Identification			No data located.	
	ent/Water gradation	Anaerobic degradation of bisphenol S was detected by HPLC analysis. Approximately 60% of bisphenol S was removed after 70 days in anoxic bottles with pond sediment (Estimated by analogy)	Ike et al., 2006	Estimated based on reported experimental data for the analog bisphenol S.	
Air Atmos	pheric Half-life	5.3 hours (Estimated)	EPI		

	D-8 CASRN 95235-30-6				
PROPEI	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to absorb light at environmentally significant wavelengths.	
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	The substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Half-life		75 days	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		LOW: The estimated fish BCF a	LOW: The estimated fish BCF and BAF values are both <100.		
	Fish BCF	53 (Estimated)	EPI		
	BAF	83 (Estimated)	EPI		
	Metabolism in Fish			No data located.	
ENVIRONMENTAL MONITORING AND BIOMONITORING					
Environmental Monitoring		No data located.	No data located.		
Ecological Biomonit	oring	No data located.			
Human Biomonitoring This chemical was not included in the NHANES biomonitoring report (CDC, 2011).			DC, 2011).		

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

Eastman Kodak. *Letter concerning enclosed information on bisphenol S with attachments*. Eastman Kodak Company, Rochester NY. TSCATS submission OTS0534330. **1991.**

ECHA (European Chemicals Agency). Information on registered substances. http://apps.echa.europa.eu/registered/registered-sub.aspx (accessed February 18, **2011**)

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

Ike, M.; Chen, M.Y.; Danzl, E.; et al. Biodegradation of a variety of bisphenols under aerobic and anaerobic conditions. *Water Sci. Technol.* **2006**, 53:153-159.

Kuruto-Niwa, R., Nozawa, R., Miyakoshi, T., et al. Estrogenic activity of alkylphenols, bisphenol S, and their chlorinated derivatives using a GFP expression system. *Environ. Toxicol. Pharmacol.* **2005**, 19:121-130.

MITI (Ministry of International Trade & Industry). *Biodegradation and bioaccumulation data of existing chemicals based on the CSCL Japan.* Compiled under the supervision of Chemical Products Safety Division, Basic Industries Bureau, Ministry of International Trade & Industry, Japan; Chemicals Inspection & Testing Institute, Japan. Ed.; Japan Chemical Industry Ecology-Toxicology & Information Center: **1998**.

PBT Profiler *Persistent (P)*, *Bioaccumulative (B)*, and *Toxic (T) Chemical (PBT)Profiler*, U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/(accessed on August 12, 2010).

Terasaki, M., Shiraishi, F., Fukazawa, H., et al. Occurrence and estrogenicity of phenolics in paper-recycling process water: Pollutants originating from thermal paper in waste paper. *Environ. Toxicol. Chem.* **2007**, 26(11):2356-2366.

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA Sustainable Futures. *Using Noncancerous Screening within the SF Initiative*. Environmental Protection Agency: Washington D.C. **2010**. available at: http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

D-90

CASRN 191680-83-8

MW: 570.63 (n = 1) 891.00 (n = 2)

MF: $C_{28}H_{26}O_9S_2$ (n = 1) $C_{44}H_{42}O_{14}S_3$ (n = 2)

Physical Forms: Neat: Solid

Use: Developer for thermal paper

SMILES:

(n = 1): O = S(C1 = CC = C(OCCOCCOCC2 = CC = C(S(=O)(C3 = CC = C(O)C = C3) = O)C = C2)C = C1)(C4 = CC = C(O)C = C4) = O(C1 = CC = CC) = O(C1 = CC = CC) = O(C1 = CC = CC) = O(C1 = C4) = O(C1 = CC) =

(n = 2):

O=S(C1=CC=C(OCCOCCOC2=CC=C(S(=O)(C3=CC=C(OCCOCCOC4=CC=C(S(=O)(C5=CC=C(O)C=C5)=O)C=C4)C=C3)=O)C=C2)C=C1)(C6=CC=C(O)C=C6)=O

Synonyms: Bis(2-chloroethyl)ether-4,4'-dihydroxydiphenyl sulfone copolymer; Ethane, 1,1'-oxybis(2-chloro-, polymer with 4,4'-sulfonylbis(phenol); Phenol, 4,4'-sulfonylbis-, polymer with 1,1'-oxybis(2-chloroethane); 4,4'-Dihydroxydiphenyl sulfone- 2,2'-dichlorodiethyl ether copolymer; 4,4'-Dihydroxydiphenyl sulfone-bis(2-chloroethyl) ether copolymer

Polymeric: Yes

Oligomers: Two representative structures for the low MW oligomers evaluated in this assessment are indicated above (n = 1 or 2). These representative structures are anticipated to be the predominant components of the polymeric mixture.

Metabolites, Degradates and Transformation Products: None identified

Analog: No analogs Analog Structure: Not applicable

Endpoint(s) using analog values: Not applicable

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

	D-90 CASRN 191680-	83-8	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	PHYSICAL/CHEMICAL PR	OPERTIES	
Melting Point (°C)			No data located.
Boiling Point (°C)	>300 (Estimated for n = 1 and n = 2)	EPI; U.S. EPA, 1999	Estimates were performed on representative components of the polymer that have a MW <1,000; those with n = 1 or 2. Higher oligomers are expected to have a similar value. Cutoff value for high boiling point compounds according to HPV assessment guidance.
Vapor Pressure (mm Hg)	$<1x10^{-8}$ (Estimated for n = 1 and n = 2)	EPI; U.S. EPA, 2011	Estimates were performed on representative components of the polymer that have a MW <1,000; those with n = 1 or 2. Higher oligomers are expected to have a similar value. Cutoff value for nonvolatile compounds according to SF assessment guidance.
Water Solubility (mg/L)	0.54 (n = 1) (Estimated)	EPI	Estimates performed on representative components of the polymer indicated.
	$<1x10^{-3}$ (n = 2) (Estimated)	EPI; U.S. EPA, 1999	Estimates performed on representative components of the polymer indicated. Cutoff value for non-soluble compounds according to HPV assessment guidance.
Log K _{ow}	3.8 (n = 1) (Estimated)	EPI	Estimates performed on representative components of the polymer indicated.
	5.9 (n = 2) (Estimated)	EPI	Estimates performed on representative components of the polymer indicated.

D-90 CASRN 191680-83-8				
PROPER	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Flammability (Flash	ammability (Flash Point)		No data located.	
Explosivity				No data located.
pН				No data located.
pK _a		6.9-7.5 (Estimated, identical values obtained for both $n=1$ and $n=2$)	ACD/Labs, 2010	SMILES notation was too long for SPARC estimations, which were used for the other chemicals assessed, and an alternative estimation method was used.
		HUMAN HEALTH EFF	ECTS	
Toxicokinetics		No data located.		
Dermal Absorption				No data located.
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled			No data located.
Acute Mammalian	Toxicity	LOW: D-90 was not toxic following act >2,000 mg/kg-bw in rats.	ute exposure, based on the acute	oral and dermal LC ₅₀ values of
Acute Lethality	Oral	Rat (Sprague-Dawley CD) oral LD ₅₀ >2,000 mg/kg bw; no mortalities or signs of systemic toxicity at the highest dose tested (2,000 mg/kg bw).	Submitted confidential study	Adequate; guideline study (OECD 401).
	Dermal	Rat (Sprague-Dawley CD) dermal LD ₅₀ >2,000 mg/kg bw; no mortalities or signs of systemic toxicity at the highest dose tested (2,000 mg/kg bw).	Submitted confidential study	Adequate; guideline study (OECD 402).
	Inhalation			No data located.
Carcinogenicity MODERATE: There is uncertainty due to the lack of data for this substance. Carcinogenic education be ruled out.		tance. Carcinogenic effects cannot		
	OncoLogic Results			No data located.

		D-90 CASRN 191680-	83-8		
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY	
	Carcinogenicity (Rat and Mouse)			No data located.	
	Combined Chronic Toxicity/Carcinogenicity			No data located.	
Genotoxicity		LOW: D-90 does not cause mutations in bacterial cells <i>in vitro</i> and is not clastogenic in human lymphocytes <i>in vitro</i> .			
		Negative, reverse mutation assay in Salmonella typhimurium strains TA98, TA100, TA1535, and TA1537 and Escherichia coli WP2 uvrA with and without metabolic activation.	Submitted confidential study	Adequate; non-standard guideline study (Japanese guideline for mutagenicity tests using microorganisms).	
	Gene Mutation in vivo			No data located.	
	in vitro	Non-clastogenic, chromosome aberrations test in human lymphocytes with and without activation.	Submitted confidential study	Adequate; guideline study (OECD 473).	
	Chromosomal Aberrations in vivo		7	No data located.	
	DNA Damage and Repair			No data located.	
	Other (Mitotic Gene Conversion)			No data located.	
Reproductive Tox		LOW: A combination of limited prediction toxicological concerns from repeated deconfidence. (Professional judgment)			
	Reproduction/ Developmental Toxicity Screen	Low potential for reproductive toxicity (Estimated)	Professional judgment	Estimated based on predicted limited absorption, low metabolism, lack of evidence from repeated dose studies.	
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	

D-90 CASRN 191680-83-8				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY
	Reproduction and Fertility Effects			No data located.
Developmental Toxicity		LOW: A combination of limited predicted absorption, low predicted metabolism, and lack of significant toxicological concerns from repeated dose testing suggests low potential for developmental effects, with lower confidence. (Professional judgment)		
	Reproduction/ Developmental Toxicity Screen	Low potential for developmental toxicity (Estimated)	Professional judgment	Estimated based on predicted limited absorption, low metabolism, lack of evidence from repeated dose studies.
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
	Prenatal Development			No data located.
	Postnatal Development			No data located.
Neurotoxicity		MODERATE: Estimated to have potential for neurotoxicity based on the presence of the phenol structural alert.		
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010, Professional judgment	Estimated based on structural alert.

D-90 CASRN 191680-83-8					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Repeated Dose Effects	LOW: D-90 did not cause mortality or systemic effects at oral doses as high as 1,000 mg/kg-day in a 28-day repeated-dose toxicity study in rats.				
	No adverse effects (e.g., mortality; clinical signs; and changes in body weights, food consumption, urinalysis data, hematology data, gross pathology, organ weights, organ-to-body weight ratios or histopathology) were observed in a 28-day oral (gavage) study in male and female Fischer 344 rats; increases in y-glutamyl transpeptidase was observed in females exposed to 300 and 1,000 mg/kg-bw-day, which did not correspond to histopathological effects. NOEL = 1,000 mg/kg-bw-day (highest dose tested)	Submitted confidential study	Adequate; not specified as a guideline study, but follows general OECD guidelines.		
Skin Sensitization	LOW: D-90 was not a skin sensitizer in one study of guinea pigs.				
Skin Sensitization	Negative for skin sensitization, Dunkin Hartley guinea pigs	Submitted confidential study	Adequate; guideline study (OECD 406).		
Respiratory Sensitization	No data located.				
Respiratory Sensitization			No data located.		
Eye Irritation	MODERATE: Iridial inflammation and moderate conjunctival irritation were observed up to the 48- or 72-hour observation in on study of rabbits.				
Eye Irritation	Irritant (maximum group mean score: 13), iridial inflammation and moderate conjunctival irritation, treated eyes appeared normal at the 48- or 72-hour observation, New Zealand White rabbits	Submitted confidential study	Adequate; guideline study (OECD 405).		
Dermal Irritation	VERY LOW: D-90 was not a dermal irritant in one study of rabbits.				
Dermal Irritation	Non-irritant (primary irritation index: 0), New Zealand White rabbits	Submitted confidential study	Adequate; guideline study (OECD 404).		

	D-90 CASRN 191680-	83-8	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Endocrine Activity	No data located.		
			No data located.
Immunotoxicity	No data located.		
Immune System Effects			No data located.
	ECOTOXICITY		
ECOSAR Class	Phenols, poly		<u> </u>
Acute Toxicity	LOW: Based on estimated 96-hour LC_{50} for fish, 48-hour LC_{50} for Daphnid, and 96-hour EC_{50} for green algae that result in no effects at saturation, as obtained for representative components of the polymer that have a MW <1,000. Higher MW components of the polymer are expected to have similar behavior.		
Fish LC ₅₀	Fish 96-hour $LC_{50} = 4.76 \text{ mg/L } (n = 1)$ (Estimated) ECOSAR: phenols, poly	ЕРІ	NES for representative component of the polymer with a MW <1,000.
	Fish 96-hour $LC_{50} = 0.31$ mg/L (n = 2) (Estimated) ECOSAR: neutral organics	EPI	NES for representative component of the polymer with a MW <1,000.
Daphnid LC ₅₀	Daphnid 48-hour LC ₅₀ = 9.46 mg/L (n = 1) (Estimated) ECOSAR: neutral organics	EPI	NES for representative component of the polymer with a MW <1,000.
	Daphnid 48-hour LC ₅₀ = 0.29 mg/L (n = 2) (Estimated) ECOSAR: neutral organics	ЕРІ	NES for representative component of the polymer with a MW <1,000.
Green Algae EC ₅₀	Green algae 96-hour $EC_{50} = 3.36 \text{ mg/L}$ (n = 1) (Estimated) ECOSAR: phenols, poly	EPI	NES for representative component of the polymer with a MW <1,000.
	Green algae 96-hour $EC_{50} = 0.63$ mg/L (n = 2) (Estimated) ECOSAR: phenols, poly	EPI	NES for representative component of the polymer with a MW <1,000.

	D-90 CASRN 191680-	83-8	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Chronic Aquatic Toxicity	LOW: Based on ChV values for fish, I obtained for representative component of the polymer are expected to have sin	s of the polymer that have a MW	
Fish ChV	Fish 30-day ChV = 1.08 mg/L (n = 1) (Estimated) ECOSAR: phenols, poly	EPI	NES for representative component of the polymer with a MW <1,000.
	Fish 30-day ChV = 0.027 mg/L (n = 2) (Estimated) ECOSAR: neutral organics	EPI	NES for representative component of the polymer with a MW <1,000.
Daphnid ChV	Daphnid ChV = 1.20 mg/L (n = 1) (Estimated) ECOSAR: neutral organics	EPI	NES for representative component of the polymer with a MW <1,000.
	Daphnid ChV = 0.054 mg/L (n = 2) (Estimated) ECOSAR: neutral organics	EPI	NES for representative component of the polymer with a MW <1,000.
Green Algae ChV	Green algae ChV = 0.51 mg/L (n = 1) (Estimated) ECOSAR: phenols, poly	EPI	NES for representative component of the polymer with a MW <1,000.
	Green algae ChV = 0.206 mg/L (n = 2) (Estimated) ECOSAR: phenols, poly	EPI	NES for representative component of the polymer with a MW <1,000.
	ENVIRONMENTAL E	FATE	
Transport	Evaluation of D-90 transport is based or representative components of the polyn MW oligomers are anticipated to behathe predominate components of the polynon its expected strong absorption to so particulate. As a particulate, atmosphen environmental removal. Level III fugations and sediment.	ner (n = 1 and n = 2) that are a Move similarly. These representativelymeric mixture. D-90 is expected it. If released to the atmosphere, eric oxidation is not expected to be	IW <1,000, although the higher e structures are anticipated to be d to have low mobility in soil based D-90 is likely to exist solely as e a significant route of

	D-90 CASRN 191680-83-8			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Henry's Law Const (atm-m³/mole)	ant $<1x10^{-8}$ (Estimated for $n = 1$ and $n = 2$)	Professional judgmenet; EPI	Estimates were performed on representative components of the polymer that have a MW <1,000; those with $n=1$ or 2. Higher oligomers are expected to have a similar value. Cutoff value for non-volatile compounds, based on professional judgment.	
Sediment/Soil Adsorption/Desorpt Coefficient – K _{oc}	ion $>30,000$ (Estimated for $n = 1$ and $n = 2$)	EPI; U.S. EPA, 2011	Estimates were performed on representative components of the polymer that have a MW <1,000; those with n = 1 or 2. Higher oligomers are expected to have a similar value. Cutoff value for nonmobile compounds according to SF assessment guidance.	
Level III Fugacity Estimations	Estimated for n = 1: Air = 0% Water = 3% Soil = 57% Sediment = 40%	EPI	Estimates performed on representative components of the polymer indicated.	
	Estimated for n = 2: Air = 0% Water = 1% Soil = 52% Sediment = 48%	EPI	Estimates performed on representative components of the polymer indicated.	

		D-90 CASRN 191680-8	33-8	
PROPERTY	PROPERTY/ENDPOINT DATA REFERENCE DATA QUAL		DATA QUALITY	
Persistence		VERY HIGH: Evaluation of D-90 persistence is based entirely on estimations that were performed on two representative components of the polymer (n = 1 and n = 2) that have a MW <1,000 and are anticipated to be the predominant component of the polymeric mixture. Primary aerobic degradation was estimated to be in the order of weeks for both representative structures. Ultimate biodegradation was estimated to be it the order of months for the n = 1 polymer, and the n = 2 polymer was estimated to be recalcitrant. Estimated volatilization half-lives of >1 year for both representative structures indicate that volatilization not expected to occur. D-90 does not contain functional groups that absorb light at environmentally-relevant wavelengths, and is not expected to be susceptible to direct photolysis. Atmospheric hydroxyl-radical photooxidation half-lives were estimated to be 2.5 and 1.4 hours, respectively. However, this is not expected to be an important removal process since D-90 is expected to exist in the particulate phase in the atmosphere. Higher MW components of the polymer are expected to have similar persistence behavior.		
Water	Aerobic Biodegradation	Weeks (primary survey model; n = 1) Months (ultimate survey model; n = 1) Weeks (primary survey model; n = 2) Recalcitrant (ultimate survey model; n = 2)	EPI	Estimates performed on representative components of the polymer indicated.
	Volatilization Half-life for Model River	>1 year (Estimated for $n = 1$ and $n = 2$)	EPI	Estimates performed on representative components of the polymer indicated.
	Volatilization Half-life for Model Lake	>1 year (Estimated for n = 1 and n = 2)	EPI	Estimates performed on representative components of the polymer indicated.
Soil	Aerobic Biodegradation			No data located.
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model; for n = 1 and n = 2)	EPI	Estimates performed on representative components of the polymer that have a MW <1,000; those with n = 1 or 2; higher oligomers are expected to have a similar value.
	Soil Biodegradation w/ Product Identification			No data located.

		D-90 CASRN 191680-8	33-8	
PROPI	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Sediment/Water Biodegradation			No data located.
Air	Atmospheric Half-life	2.5 hours (Estimated for n = 1 for hydroxyl radical reaction assuming a 12-hour day and a hydroxyl radical concentration of 1.5x10 ⁶ OH/cm ³); 1.4 hours (Estimated for n = 2 for hydroxyl radical reaction assuming a 12-hour day and a hydroxyl radical concentration of 1.5x10 ⁶ OH/cm ³)	EPI	Estimates performed on representative components of the polymer that have a MW <1,000; those with n = 1 or 2; higher oligomers are expected to have a similar value.
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at wavelengths >290 nm.
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.
	Pyrolysis			No data located.
Environmental Half-life		120 days in soil (Estimated for n = 1); 540 days in sediment (Estimated for n = 2) 360 days in soil (Estimated for n = 1); 1,600 days in sediment (Estimated for n = 2)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology; estimates were performed on representative components of the polymer indicated.
Bioaccumulation		HIGH: The estimated BAF value for the low MW oligomers with $n = 2$ is >1,000, indicating that this		
		component has the potential to bioaccur		
	Fish BCF	149 (n = 1) (Estimated)	EPI	Estimates performed on representative components of the polymer indicated.

D-90 CASRN 191680-83-8				
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		166 (n = 2) (Estimated)	ЕРІ	Estimates performed on representative components of the polymer indicated.
	BAF	163 (n = 1) (Estimated)	EPI	Estimates performed on representative components of the polymer indicated.
		4,270 (n = 2) (Estimated)	EPI	Estimates performed on representative components of the polymer indicated.
	Metabolism in Fish			No data located.
	ENVIRONMENTAL MONITORING AND BIOMONITORING			
Environmental Monit	ntal Monitoring No data located.			
Ecological Biomonito	ring	No data located.		
Human Biomonitorin	g	This chemical was not included in the NH	ANES biomonitoring report (CDC	, 2011).

ACD/Labs, 2010. ACD/LogP, version 5.0, Advanced Chemistry Development, Inc., Toronto, ON, Canada, www.acdlabs.com, 2010.

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

PBT Profiler *Persistent (P)*, *Bioaccumulative (B)*, and *Toxic (T) Chemical (PBT)Profiler*. U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA Sustainable Futures. *Using Noncancerous Screening within the SF Initiative*. Environmental Protection Agency: Washington D.C. **2010**. available at: http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

DD-70

| CASRN 93589-69-6 | MW: 352.5 | MF: C₁₇H₂₀O₄S₂ | Physical Forms: Neat: Solid | Use: Developer for thermal paper

SMILES: Oc1ccc(cc1)SCCOCOCCSc2ccc(cc2)O

Synonyms: Phenol, 4,4'-(methylenebis(oxy-2,1-ethanediylthio))bis- (TSCA Inventory)

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None identified

Analog: No Analog Structure: Not applicable

Endpoint(s) using analog values: Not applicable

Structural Alerts: Phenols, neurotoxicity (U.S. EPA, 2010)

Risk Phrases: 51/53 - Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment (ESIS, 2011).

Risk Assessments: None identified

		DD-70 CASRN 93589-	69-6	
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		PHYSICAL/CHEMICAL PRO	OPERTIES	
Melting Point (°C)		108 (Measured)	Submitted confidential study	Adequate.
Boiling Point (°C)		>350 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling compounds according to HPV assessment guidance.
Vapor Pressure (m	m Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for non volatile compounds according to HPV assessment guidance.
Water Solubility (g	g/L)	0.13 (Estimated)	EPI	
Log K _{ow}		3.4 (Estimated)	EPI	
Flammability (Flas	sh Point)			No data located.
Explosivity				No data located.
рН				No data located.
pK _a		9.6 (Estimated)	SPARC	
		HUMAN HEALTH EFF	ECTS	
Toxicokinetics		DD-70, as a neat material, is estimated t when in solution. DD-70 is expected to b		
Dermal Absorption	n in vitro			No data located.
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal or Inhaled	Not absorbed through the skin as neat material and has poor absorption in solution. Poorly absorbed through the lung and gastrointestinal tract (Estimated by analogy)	Professional judgment	Based on closely related confidential analog with similar structure, functional groups, and physical/chemical properties.
Acute Mammalian	Toxicity	LOW: Based on high MW, lack of absorption and the absence of structural alerts.		
Acute Lethality	Oral	Low potential for acute mammalian toxicity (Estimated)	Professional judgment	Estimated based on professional judgment.
	Dermal			No data located.

	DD-70 CASRN 93589-69-6			
PROPI	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Inhalation			No data located.
Carcinogenicity		MODERATE: Estimated using OncoLo a potential carcinogen or tumorigene estrogenic/androgenic compounds, u	esis promoter arising from its	structural similarity to
	OncoLogic Results	Moderate (Estimate) OncoLogic class: phenols and phenolic compounds	OncoLogic	OncoLogic SAR analysis using the phenols and phenolic compounds class.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/Carcinogenicity			No data
Genotoxicity		LOW: Based on professional judgment,	the absence of structural alerts	suggests lower concern.
	Gene Mutation in vitro	Low potential for genotoxicity toxicity (Estimated)	Professional judgment	Estimated based on professional judgment.
	Gene Mutation in vivo			No data located.
	Chromosomal Aberrations in vitro			No data located.
	Chromosomal Aberrations in vivo			No data located.
	DNA Damage and Repair			No data located.
	Other (Mitotic Gene Conversion)			No data located.
Reproductive Effe	ects	MODERATE: There are no data and n is toxicologically active in repeated dose toxicity cannot be ruled out. (Profession	and developmental toxicity stud	
	Reproduction/ Developmental Toxicity Screen			No data located.

	DD-70 CASRN 93589-69-6			
PROPI	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
	Reproduction and Fertility Effects			No data located.
Developmental Ef	fects	MODERATE: Based on confidential analog. Unspecified effects occurred at a dose of 100 mg/kg-day in a developmental study in rats.		
	Developmental Toxicity Screen	Rabbit, oral, developmental study NOAEL = 300 mg/kg-day (Estimated by analogy)	Professional judgment	Estimated based on available test data for a confidential analog.
		Rat, oral, developmental study LOAEL = 100 mg/kg-day (NOAEL not established) (Estimated by analogy)	Professional judgment	Estimated based on available test data for a confidential analog.
Neurotoxicity		MODERATE: Estimated to have poten alert.	tial for neurotoxicity based on t	he presence of the phenol structural
	Neurotoxicity Screening Battery (Adult)	There is potential for neurotoxicity effects based on the presence of the phenol structural alert (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on structural alert.
Repeated Dose Effects MODERATE: Based on a confidential analog. Repeated dose effects including blood toxicity, several gastrointestinal irritation and histopathological changes to the glandular stomach occurred at dose >50 mg/kg-day. Because the LOAEL is not specified, there is uncertainty as to the dose at which occur. Using a conservative approach in the absence of a specified LOAEL, a Moderate hazard conservative selected because it is possible that effects can occur at doses between 50 and 100 mg/kg-day.		or stomach occurred at doses that it is as to the dose at which these effects AEL, a Moderate hazard concern is		

	DD-70 CASRN 93589-69-6				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Rat, 13-week oral exposure Blood toxicity, severe gastrointestinal irritation, histopathogical changes in the glandular stomach NOAEL = 50 mg/kg-day LOAEL – not identified (Estimated by analogy)	Professional judgment	Estimated based on available test data for a confidential analog.		
Skin Sensitization	MODERATE: Based on confidential ar				
Skin Sensitization	Positive for dermal sensitization in guinea pigs (Estimated by analogy)	Professional judgment	Estimated based on available test data for a confidential analog.		
Respiratory Sensitization	Respiratory Sensitization No data located.				
Respiratory Sensitization			No data located.		
Eye Irritation	HIGH: Based on confidential analog. D				
Eye Irritation	Concern for potential corrosion to mucous membranes and eyes (Estimated by analogy)	Professional judgment	Estimated based on available test data for a confidential analog.		
Dermal Irritation	MODERATE: Based on confidential an	alog. DD-70 may have the pote	ntial to cause dermal irritation.		
Dermal Irritation	Concern for dermal irritation (Estimated by analogy)	Professional judgment	Estimated based on available test data for a confidential analog.		
Endocrine Activity	No data located.				
			No data located.		
Immunotoxicity	No data located.				
Immune System Effects	Immune System Effects		No data located.		
	ECOTOXICITY				
ECOSAR Class	Phenols, poly				

	DD-70 CASRN 93589	-69-6	
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Acute Toxicity	HIGH: Based on estimated 96-hour LO the range of 1-10 mg/L.	C ₅₀ value for fish and 96-hour EC	50 value for green algae that are in
Fish LC ₅₀	Fish 96-hour $LC_{50} = 5.39 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly	EPI	
	Fish 96-hour LC ₅₀ = 19.6 mg/L (Estimated) ECOSAR: neutral organics	EPI	
Daphnid LC ₅₀	Daphnia 48-hour $LC_{50} = 13.30 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI	
	Daphnia 48-hour $LC_{50} = 13.6 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly	ЕРІ	
Green Algae EC ₅₀	Green algae 96-hour $EC_{50} = 2.28 \text{ mg/L}$ (Estimated) ECOSAR: phenols, poly	EPI	
	Green algae 96-hour EC ₅₀ = 9.98 mg/L (Estimated) ECOSAR: neutral organics	EPI	
Chronic Aquatic Toxicity	HIGH: Based on an estimated ChV of	0.42 mg/L for green algae.	
Fish ChV	Fish 30-day ChV = 1.33 mg/L (Estimated) ECOSAR: phenols, poly	EPI	
	Fish ChV = 1.80 mg/L (Estimated) ECOSAR: neutral organics	EPI	

DD-70 CASRN 93589-69-6			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Daphnid ChV	Daphnid ChV = 1.56 mg/L (Estimated) ECOSAR: neutral organics	ЕРІ	
	Daphnid ChV = 4.68 mg/L (Estimated) ECOSAR: phenols, poly	EPI	
Green Algae ChV	Green algae ChV = 0.422 mg/L (Estimated) ECOSAR: phenols, poly	EPI	
	Green algae ChV = 4.62 mg/L (Estimated) ECOSAR: neutral organics	EPI	
	ENVIRONMENTAL F	ATE	
Transport	Based on the Level III fugacity models in expected to partition primarily to soil. environmentally-relevant pH, based on immobile in soil based on its estimated is strongly to organic carbon and clay as it to groundwater is not expected to be an indicate that it will be non-volatile from based on its estimated vapor pressure. phase, based on its estimated vapor predeposition.	DD-70 is expected to exist in both its estimated pK_a . The neutral f K_{oc} . The anionic form may be made in heir neutral counterparts. However, important transport mechanism a surface water. Volatilization from the atmosphere, DD-70 is expensive. Particulates may be removed.	h neutral and anionic forms at form of DD-70 is expected to be sore mobile, as anions do not bind as ever, leaching of DD-70 through soil a. Estimated volatilization half-lives com dry surface is also not expected sected to exist solely in the particulate oved from air by wet or dry
Henry's Law Constant (atm-m³/mole)	<1x10 ⁻¹⁰ (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for non-volatile compounds according to HPV assessment guidance.
$\begin{tabular}{ll} Sediment/Soil\\ Adsorption/Desorption\\ Coefficient-K_{oc} \end{tabular}$	3.3x10 ⁴ (Estimated)	ЕРІ	

	DD-70 CASRN 93589-69-6			
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY
	Level III Fugacity Model	Air = <1% (Estimated) Water = 8.6% Soil = 75% Sediment = 16%	EPI	
Persistence		HIGH: Evaluation of the persistence of biodegradation. Results from these modegradation in weeks-months. DD-70 is days. Biodegradation under anaerobic undergo hydrolysis since it does not conchromophores that absorb at wavelengt direct photolysis by sunlight. The vapor estimated at 1.2 hours, although it is expressional considerations of all these factors indicated.	dels estimate primary biodegrad s expected to partition primarily methanogenic conditions is not p tain hydrolysable functional gro hs >290 nm, and therefore, it is r phase reaction of DD-70 with a pected to exist primarily in the p	lation in days-weeks and ultimate to soil; the half-life is estimated as 75 probable. DD-70 is not expected to oups. DD-70 does not contain not expected to be susceptible to atmospheric hydroxyl radicals is particulate phase in air.
Water		Days-weeks (primary survey model) Weeks-months (ultimate survey model)	EPI	
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI	
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI	
Soil	Aerobic Biodegradation			No data located.
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI	
	Soil Biodegradation w/ Product Identification			No data located.
	Sediment/Water Biodegradation			No data located.
Air	Atmospheric Half-life	1.2 hours (Estimated)	EPI	
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at environmentally significant wavelengths.

	DD-70 CASRN 93589-69-6				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY	
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Half-life		75 days (Estimated)	EPI, PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		LOW: The estimated BCF for fish is lead of 35, which accounts for metabolism, st			
	Fish BCF	75 (Estimated)	EPI		
	BAF	35 (Estimated)	EPI		
	Metabolism in Fish			No data located.	
ENVIRONMENTAL MONITORING AND BIOMONITORING					
Environmental Monitoring		No data located.			
Ecological Biomonitoring		No data located.			
Human Biomonitoring	g	This chemical was not included in the NH	ANES biomonitoring report (CDC	C, 2011).	

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

Oncologic. U.S. EPA and LogiChem, Inc. 2005, Version 7.0. 2008.

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT)Profiler*. U.S. Environmental Protection Agency: Washington D.C. <u>www.pbtprofiler.net</u>.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic as of February 09, 2011.

Pergafast 201

H₃C — CASRN: 232938-43-1

MW: 460.5

MF: C₂₁H₂₀N₂O₆S₂

Physical Forms:
Neat: Solid

Use: Developer for thermal paper

SMILES: O=S(=O)(Oc1cccc(c1)NC(=O)NS(=O)(=O)c2ccc(C)cc2)c3ccc(C)cc3

Synonyms: Benzenesulfonamide, 4-Methyl-N-(((3-(((4-Methylphenyl)Sulfonyl)Oxy)Phenyl)Amino)Carbonyl)-;

N-(P-Toluenesulfonyl)-N'-(3-P-Toluenesulfonyloxyphenyl)Urea;

N-(4-Methylphenylsulfonyl)-N'-(3-(4-Methylphenylsulfonyloxy)Phenyl)Urea; N-P-Tolylsulfonyl-N'-3-(P-Tolylsulfonyloxy)Phenylurea;

Pergafast 201; PF 201

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None identified

Analog: No Analog Structure: Not applicable

Endpoint(s) using analog values: Not applicable

Structural Alerts: Sulfonamides, photoreactions; Alkyl esters of sulfonic acids, toxicity caused by electrophiles (U.S. EPA, 2011)

Risk Phrases: 51/53 - Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment (ESIS, 2011).

Risk Assessments: Risk assessment completed for Pergafast 201 by the Australian Department of Health and Ageing in 2004 (NICNAS, 2004).

Pergafast 201 CASRN 232938-43-1				
PROPERTY/I	ENDPOINT	DATA	REFERENCE	DATA QUALITY
		PHYSICAL/CHEMICAL P	PROPERTIES	
Melting Point (°C)		157.7 (Measured)	NICNAS, 2004	Adequate; selected value.
		>155 (Measured)	BASF, 2010	Adequate; measured by chemical supplier.
Boiling Point (°C)		Decomposes at 250 (Measured)	NICNAS, 2004	Adequate.
Vapor Pressure (mm Hg))	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.
Water Solubility (mg/L)		35 (Measured)	NICNAS, 2004	Adequate; selected value.
		35 at 20 °C(Measured)	BASF, 2010	Adequate; measured by chemical supplier.
Log K _{ow}		2.6 (Measured)	NICNAS, 2004	Adequate.
Flammability (Flash Poin	nt)	Not highly flammable; not auto- flammable (Measured)	NICNAS, 2004	Adequate.
Explosivity		Non-explosive either by thermal or mechanical (shock and friction) stress. (Measured)	NICNAS, 2004	Adequate.
рН				No data located.
pK _a		$pKa_1 = 12.5$ $pKa_2 = 5.3$ $pKa_3 = -3.8$ $pKa_4 = -13.6$ (Estimated)	SPARC	
		HUMAN HEALTH EI	FFECTS	
Toxicokinetics		Pergafast 201 is not estimated to be ab through the skin if in solution. Further		neat material and has poor absorption absorption from the lungs and GI tract.
Dermal Absorption in vit	tro			No data located.
	, Dermal or Inhaled	Not absorbed through the skin as the near		Based on closely related analog with
Distribution,		material poor absorption through the skin	n	similar structure, functional groups, and
Metabolism & Excretion		if in solution; poor absorption from the lungs and GI tract.		physical/chemical properties.
Acute Mammalian Toxic	ity		al I D., values >2 000 mg/kg. No	data were located regarding the acute
Acute Manimanan 10xic	ity	inhalation hazard.	ai LD ₅₀ values >2,000 mg/kg. 100	data were located regarding the acute
		minutation nazara.		

Pergafast 201 CASRN 232938-43-1				
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY
Acute Lethality	Oral	Rat oral LD ₅₀ >2,000 mg/kg	NICNAS, 2004	Adequate.
	Dermal	Rat dermal LD ₅₀ >2,000 mg/kg	NICNAS, 2004	Adequate.
	Inhalation			No data located.
Carcinogenicity		MODERATE: There is uncertainty duruled out.	ie to the lack of data for this su	bstance. Carcinogenic effects cannot be
	OncoLogic Results			No data located.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/Carcinogenicity			No data located.
Genotoxicity		LOW: Pergafast 201 did not cause generated 201 did induce chromosomal aberration concentrations.		
	Gene Mutation in vitro	Negative, Ames assay of Salmonella typhimurium strains TA98, TA100, TA1535, TA1537 and Escherichia coli WP2 uvrA both with and without metabolic activation	NICNAS, 2004	Adequate.
	Gene Mutation in vivo			No data located.
	Chromosomal Aberrations in vitro	Positive, chromosomal aberrations in Chinese hamster V79 cells at cytotoxic concentrations	NICNAS, 2004	Adequate.
		Negative, <i>in vivo</i> micronucleus test in mouse, gavage exposure	NICNAS, 2004	Adequate.
	DNA Damage and Repair			No data located.
	Other			No data located.
Reproductive Effe		MODERATE: There were no reproduction/developmental toxicity so considered the NOAEL. This NOAEL but because it was the highest dose test between 200 and 250 mg/kg bw-day.	creening test in rats. The higher value falls in the "Moderate" l	est dose tested (200 mg/kg bw-day) is

	Pergafast 201 CASRN 232938-43-1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reproduction/ Developmental Toxicity Screen	Rat, oral gavage; Males exposed for 29 days pre-mating, during mating, and up to sacrifice; Females exposed 42-46 days (2 weeks pre-mating, during mating, during post-coitum, up to LD 4. No reproductive toxicity was observed at any dose. NOAEL (maternal toxicity): 50 mg/kg bw-day LOAEL (maternal toxicity): 100 mg/kg bw-day (accentuated lobular pattern of the liver, increased liver to body weight ratio) NOAEL (F1 pups): ≥200 mg/kg bw-day	Submitted confidential study	Adequate; according to OECD guideline 421.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
Reproduction and Fertility Effects			No data located.	
Developmental Effects	MODERATE: Decreased body weight bw-day. It should be noted that develo toxicity to dams (liver and kidney toxic	pmental effects occurred in the p	resence of maternal toxicity, although	

	Pergafast 201 CASRN 232938-43-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Reproduction/ Developmental Toxicity Screen	Rat, oral gavage; Males exposed for 29 days pre-mating, during mating, and up to sacrifice; Females exposed 42-46 days (2 weeks pre-mating, during mating, during post-coitum, up to LD 4. There were no relevant adverse effects to the offspring, changes in litter size, or mortality of newborns compared to controls; there was decreased body weight in pups (LDs 1 and 4) of dams exposed to the highest dose. NOAEL (maternal toxicity): 50 mg/kg bw-day LOAEL (maternal toxicity): 100 mg/kg bw-day (accentuated lobular pattern of the liver, increased liver to body weight ratio) NOAEL (F1 pups): 100 mg/kg bw-day LOAEL (F1 pups): 200 mg/kg bw-day (decreased pup body weight on LDs 1 and 4)	Submitted confidential study	Adequate; according to OECD guideline 421.		
Combined Repeated Dose			No data located.		
with Reproduction/ Developmental Toxicity					
Screen					
Prenatal Development			No data located.		
Postnatal Development			No data located.		
Neurotoxicity	LOW: No structural alerts or mechanic	stic pathways associated with new	urotoxic effect identified.		

Pergafast 201 CASRN 232938-43-1				
PROPEI	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
	Neurotoxicity Screening Battery (Adult)	Low potential for neurotoxicity effects. (Estimated)	Professional judgment	Estimated based on no identified structural alerts or mechanistic pathways associated with neurotoxicity.
Repeated Dose Effe		MODERATE: A 28-day oral toxicity s 150 mg/kg-day for clinical signs, organ According to DfE guidance, the guidan estimate effect levels from 90 days of tr Therefore, Moderate hazard is indicate and 300 mg/kg bw-day. A 90-day study bw-day; while the LOAEL value is >10 25 mg/kg bw-day. Based on uncertaint study indicating effects occurring in the	weight changes, and histopathol ce values are tripled for chemica eatment in order to assess the ha ed in a 28-day study when oral to y identified a LOAEL of 150 mg/ 0 mg/kg bw-day (suggestive of a y in the dose range of 25-100 mg	ogic liver and kidney lesions. als evaluated in a 28-day study to azard of repeated-dose toxicity. exicity is observed at doses between 30 along bw-day and a NOAEL of 25 mg/kg low hazard concern), the NOAEL is along bw-day, and data from the 28-day
		28-Day repeated-dose study, rat, oral gavage, salivation, indications of hemolytic anemia, increased liver and kidney weights, microscopic changes including minimal hypertrophy of ventrilobular hepatocytes in liver of males and females and extramedullary haemopoiesis in spleen of females. NOAEL = 30 mg/kg bw-day, LOAEL = 150 mg/kg bw-day	NICNAS, 2004	Adequate.
		90-Day repeated-dose study, rat, oral gavage; Changes in hematology parameters and increased extramedullary hematopoiesis, increased absolute and relative organ weights with histopathological correlation in the liver; histopathological changes in spleen and adrenal glands. NOAEL = 25 mg/kg bw-day LOAEL = 150 mg/kg bw-day	Submitted confidential study	Adequate; according to OECD guideline 408.

	Pergafast 201 CASRN 232938-43-1			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	5-Day range finding study, rat, oral gavage; decreased mean daily food consumption (male and female), decreased body weight gain (females), decreased absolute and relative thymus weights (males), increased absolute and relative liver weight (male and female). LOAEL = 200 mg/kg bw-day (lowest dose tested)	Submitted confidential study	Adequate.	
Skin Sensitization	LOW: Pergafast 201 did not appear to be a skin sensitizer in guinea pigs.			
Skin Sensitization	Skin irritation was observed in 1/10 guinea pigs at 24 hours (but not at 48 hours) following induction and subsequent challenge. The severity of the response was not described in the available source.	NICNAS, 2004	Inadequate; limited study details.	
	Non-sensitizing, Guinea pig	BASF, 2010	Valid.	
Respiratory Sensitization	No data located.			
Respiratory Sensitization			No located.	
Eye Irritation	LOW: Pergafast 201 was slightly irrit	ating to rabbit eyes.		
Eye Irritation	Slightly irritating, rabbits	NICNAS, 2004	Adequate.	
	Non-irritating, rabbits	BASF, 2010	Valid.	
Dermal Irritation	VERY LOW: Pergafast 201 was not in	rritating to rabbit skin.		
Dermal Irritation	Non-irritating, rabbits	NICNAS, 2004	Adequate.	
Endocrine Activity	A single study showed Pergafast 201 to to 17-beta-estradiol.	be non-estrogenic with a relative	e potency substantially low compared	

	Pergafast 201 CASRN 232938-43-1			
PROPER	TY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
		Negative for estrogenic activity; Increased luciferase activity in a human estrogen recetpro-α transcriptional activation assay. Relative potency was estimated to be about 10 ⁷ times less than estrogen.	Submitted confidential study	Adequate; similar to OECD guideline 455.
Immunotoxicity		There is uncertain concern for immun	otoxicity based on effects to the s	<u> </u>
	·	90-day repeated-dose study, rat, oral gavage; changes in spleen and adrenal glands. NOAEL = 25 mg/kg bw-day LOAEL = 150 mg/kg bw-day	Submitted confidential study	Adequate; according to OECD guideline 408.
		ECOTOXICITY	Y	
ECOSAR Class		Esters, Amides, Sulfonyl ureas		
Acute Toxicity		VERY HIGH: Based on a measured 7	2-hour EC_{50} of 0.77 mg/L for bio	mass in Scenedesmus subspicatus.
Fish LC ₅₀		Zebra fish 96-hour LC ₅₀ >63 mg/L, NOEC = 63 mg/L (Experimental)	NICNAS, 2004	Chemical may not be soluble enough to measure this effect; LC ₅₀ value exceeds water solubility.
		Fish 96-hour $LC_{50} = 19.88 \text{ mg/L}$ (Estimated) ECOSAR: amides	EPI	
		Fish 96-hour $LC_{50} = 28.42 \text{ mg/L}$ (Estimated) ECOSAR: esters	EPI	
		Fish 96-hour LC ₅₀ = 110.21 mg/L (Estimated) ECOSAR: neutral organics	EPI	Chemical may not be soluble enough to measure this predicted effect; LC_{50} value exceeds water solubility.
		Brachydanio rerio 96-hour LC50 ≥100 mg/L (Experimental)	BASF, 2010	Chemical may not be soluble enough to measure this effect; LC ₅₀ value exceeds water solubility.

	Pergafast 201 CASRN 232938-43-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Daphnid LC ₅₀	Daphnia magna 48-hour $EC_{50} = 57 \text{ mg/L}$ (Experimental)	NICNAS, 2004	Inadequate (OECD 202). Chemical may not be soluble enough to measure this effect; EC_{50} value exceeds water solubility.		
	Daphnid 48-hour $LC_{50} = 13.78 \text{ mg/L}$ (Estimated) ECOSAR: amides	EPI			
	Daphnid 48-hour $LC_{50} = 54.07 \text{ mg/L}$ (Estimated) ECOSAR: esters	EPI	Chemical may not be soluble enough to measure this predicted effect; LC ₅₀ value exceeds water solubility.		
	Daphnid 48-hour $LC_{50} = 40.69 \text{ mg/L}$ (Estimated) ECOSAR: Sulfonyl ureas	EPI	Chemical may not be soluble enough to measure this predicted effect; LC ₅₀ value exceeds water solubility.		
	Daphnid 48-hour $LC_{50} = 68.38 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI	Chemical may not be soluble enough to measure this predicted effect; LC ₅₀ value exceeds water solubility.		
Saltwater Invertebrate LC ₅₀	Mysid shrimp 96-hour LC ₅₀ = 29.89 mg/L (Estimated) ECOSAR: esters	EPI			
Green Algae EC ₅₀	Scenedesmus subspicatus 72-hour $EC_{50} = 0.77 \text{ mg/L (nominal)}$ based on biomass inhibition; 72-hour $EC_{50} = 3 \text{ mg/L (nominal)}$ based on growth rate (Experimental)	NICNAS, 2004; Submitted confidential study	Adequate; OECD 201.		
	Scenedesmus subspicatus 96-hour EC_{50} = 6.3 mg/L (nominal) based on biomass; 96-hour $EC_{50} > 10$ mg/L (nominal) based on growth rate Static conditions (Experimental)		Adequate; OECD 201.		

	Pergafast 201 CASRN 232938-43-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Scenedesmus subspicatus 72-hour $EC_{50} = 1.3 \text{ mg/L}$ (nominal) based on biomass; 72-hour $EC_{50} = 3.2 \text{ mg/L}$ (nominal) based on growth rate Static conditions (Experimental)	Submitted confidential study	Adequate; OECD 201.		
	Green algae 96-hour $EC_{50} = 21.60 \text{ mg/L}$ (Estimated) ECOSAR: esters	EPI			
	Green algae 96-hour $EC_{50} = 0.69 \text{ mg/L}$ (Estimated) ECOSAR: amides	EPI			
	Green algae 96-hour EC ₅₀ = 0.05 mg/L (Estimated) ECOSAR: sulfonyl ureas	EPI			
	Green algae 96-hour EC ₅₀ = 37.71 mg/L (Estimated) ECOSAR: neutral organics	EPI	Chemical may not be soluble enough to measure this predicted effect; EC_{50} value exceeds water solubility.		
T v	HIGH: Based on an estimated ChV of	0.013 mg/L for green algae.			
	Fish ChV = 0.12 mg/L (Estimated) ECOSAR: amides	EPI			
	Fish 32/33-day ChV = 2.21 mg/L (Estimated) ECOSAR: esters	EPI			
	Fish ChV = 10.32 mg/L (Estimated) ECOSAR: neutral organics	EPI			
	Pimephales promelas, flow through conditions. 32-day NOEC = 0.89 mg/L (Experimental)	Submitted confidential study	Adequate; EPA OPPTS 850.1400 guidelines; LOEC not identified.		

	Pergafast 201 CASRN 232938-43-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Daphnid ChV	Daphnia magna 21-day $EC_{50} = 21 \text{ mg/L}$ (Experimental)	NICNAS, 2004	Adequate; LOEC not identified.		
	Daphnid ChV = 0.18 mg/L (Estimated) ECOSAR: amides	EPI			
	Daphnid 21-day ChV = 29.23 mg/L (Estimated) ECOSAR: esters	EPI			
	Daphnid ChV = 4.11 mg/L (Estimated) ECOSAR: sulfonyl ureas	EPI			
	Daphnid ChV = 7.02 mg/L (Estimated) ECOSAR: neutral organics	EPI			
	Daphnia magna 21-day NOEC = 10.2 mg/L (Experimental)	BASF, 2010	Valid; LOEC not identified.		
	Daphnia Magna; semi-static conditions; 21-day NOEC = 10.2 mg/L 21-day LOEC = 34.5 mg/L (for immobilization) (Experimental)	Submitted confidential study	Adequate; OECD 211; Chemical may not be soluble enough to measure this predicted effect; LOEC value is at the level of water solubility.		
Saltwater Invertebrate ChV	Mysid shrimp ChV = 640 mg/L (Estimated) ECOSAR: esters	EPI	Chemical may not be soluble enough to measure this predicted effect.		
Green Algae ChV	Green algae ChV = 0.013 mg/L (Estimated) ECOSAR: sulfonyl ureas	EPI			
	Green algae ChV = 6.62 mg/L (Estimated) ECOSAR: esters	EPI			

Pergafast 201 CASRN 232938-43-1					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Green algae ChV = 0.77 mg/L (Estimated) ECOSAR: amides	EPI			
	Green algae ChV = 15.23 mg/L (Estimated) ECOSAR: neutral organics	EPI			
Earthworm Subchronic Toxicity	Earthworm 14-day LC ₅₀ = 3,500 mg/L (Estimated) ECOSAR: esters	EPI	NES for measured water solubility of 35 mg/L.		
	ENVIRONMENTAL	FATE			
Transport The transport evaluation for Pergafast 201 is based on available experimental and estimated phychemical properties. Based on the Level III fugacity models incorporating the available experimental property data, Pergafast 201 is expected to partition primarily to soil. Pergafast 201 is expected slight mobility in soil based on its estimated K_{oc} . However, leaching of Pergafast 201 through so groundwater is not expected to be an important transport mechanism. Estimated volatilization indicate that it will be non-volatile from surface water. In the atmosphere, Pergafast 201 is experimental and estimated phycological properties. Based on its estimated to partition primarily to soil. Pergafast 201 is expected slight mobility in soil based on its estimated K_{oc} . However, leaching of Pergafast 201 through so groundwater is not expected to be an important transport mechanism. Estimated volatilization indicate that it will be non-volatile from surface water. In the atmosphere, Pergafast 201 is experimental and estimated phycical physical			ting the available experimental Pergafast 201 is expected to have Pergafast 201 through soil to Estimated volatilization half-lives ere, Pergafast 201 is expected to exist ulates will be removed from air by wet		
Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI; Professional judgment	Cutoff value for non-volatile compounds, based on professional judgment.		
$\begin{array}{c} \textbf{Sediment/Soil} \\ \textbf{Adsorption/Desorption} \\ \textbf{Coefficient} - \textbf{K}_{oc} \end{array}$	12,000 (Estimated)	ЕРІ			
Level III Fugacity Estimations	Air = <1% (Estimated) Water = 8% Soil = 85% Sediment = 7%	EPI			
Persistence	VERY HIGH: Experimental guidelin aerobic conditions.	e studies indicate that little or no	biodegradation was observed under		

	Pergafast 201 CASRN 232938-43-1				
PRO	PERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Water		OECD TG 301 F Ready Biodegradability: Manometric Respirometry Test. Pergafast 201 is not readily biodegradable; 1.5% degradation of the test substance occurred after 28 days (Measured)	NICNAS, 2004	Adequate; guideline study described in secondary source.	
		OECD 302B: Not readily biodegradable; >99% after 28 days (Measured)	BASF, 2010	Adequate, guideline study.	
		No biodegradation occurred after 28 days in. Ready biodegradability test with non-adapted, activated sludge. (Measured)	Submitted confidential study	Adequate; non-guideline study reported in secondary source.	
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	for Model Lake		EPI		
Anaer Biodeg Soil Bi Produ Sedim		Half-life of 4.9 days according to OECD 307; decreased to 14% of applied amount in 30 days (Measured)		Inadequate as reported in a secondary source. The cited source indicated that the material did not mineralize over the course of the study, although no mass balance information was provided. These are results are not consistent with other biodegradation results.	
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI		
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation			No data located.	
Air	Atmospheric Half-life	0.64 hours (Estimated)	EPI		
Reactivity	Photolysis	Not a significant fate process	Professional judgment	Qualitative assessment based on functional groups.	

Pergafast 201 CASRN 232938-43-1				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Hydrolysis	Half-life >1 year at pH 4, 7, and 9 OECD 111; <10% hydrolysis after 5 days (Measured)	NICNAS, 2004	Adequate; guideline study described in secondary source.	
Pyrolysis			No data located.	
Environmental Half-life	120 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation	LOW: The measured BCF in fish is <100.			
Fish BCF	<1 (0.2 mg/L) (Measured); <8 (0.02 mg/L) (Measured) according to guideline study OECD 305	Submitted confidential study	Adequate; guideline study described in a secondary source.	
	30 (Measured)	NICNAS, 2004	Reported in a secondary source, although the resulting hazard is consistent with other studies.	
BAF	18 (Estimated)	EPI		
Metabolism in Fish			No data located.	
ENVIRONMENTAL MONITORING AND BIOMONITORING				
Environmental Monitoring	No data located.			
Ecological Biomonitoring	No data located.			
Human Biomonitoring	This chemical was not included in the NHANES biomonitoring report (CDC, 2011).			

BASF. BASF The Chemical Company. Material Safety Data Sheet. 2010.

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

EPI. (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

NICNAS (National Industrial Chemicals Notification and Assessment Scheme). *Full public report. Pergafast 201*. National Industrial Chemicals Notification and Assessment Scheme. National Occupational Health and Safety Commission, Australia. **2004**.

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT) Profiler*, U.S. Environmental Protection Agency: Washington D.C. www.pbtprofiler.net.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

BTUM

CASRN 151882-81-4

MW: 592.70

MF: C₂₉H₂₈N₄O₆S₂

Physical Forms:
Neat: Solid

Use: Developer for thermal paper

SMILES: O=C(NS(C1=CC=C(C)C=C1)(=O)=O)NC(C=C2)=CC=C2CC3=CC=C(NC(NS(C4=CC=C(C)C=C4)(=O)=O)=O)C=C3

Synonyms: 4,4'-bis(*N*-carbamoyl-4-methylbenzenesulfonamide)diphenylmethane

Polymeric: No

Oligomers: Not applicable

Metabolites, Degradates and Transformation Products: None identified

Analog: None Analog Structure: Not applicable

Endpoint(s) using analog values: Not applicable

Structural Alerts: None identified

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

BTUM CASRN 151882-81-4					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
PHYSICAL/CHEMICAL PROPERTIES					
Melting Point (°C)	154-156 (Measured)	Non-confidential PMN submission	Adequate.		
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Cutoff value for high boiling compounds according to HPV assessment guidance.		
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for nonvolatile compounds according to SF assessment guidance.		
Water Solubility (mg/L)	0.77 (Measured)	Non-confidential PMN submission	Adequate.		
Log K _{ow}	2.61 (Measured)	Non-confidential PMN submission	Adequate.		
Flammability (Flash Point)			No data located.		
Explosivity			No data located.		
рН			No data located.		
pK_a	4.8-5.4 (Estimated)	SPARC			
HUMAN HEALTH EFFECTS					
Toxicokinetics BTUM is not absorbed through the skin and will have poor absorption from the lungs and gastrointes tract.			rom the lungs and gastrointestinal		
Dermal Absorption in vitro			No data located.		
Absorption, Distribution, Metabolism & Excretion Oral, Dermal or Inhaled Excretion	Not absorbed through the skin; poor absorption through the lung and gastrointestinal tract	Professional judgment	Based on closely related analog with similar structure, functional groups, and physical/chemical properties.		

BTUM CASRN 151882-81-4					
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY	
Acute Mammalian Toxicity		LOW: The acute oral and dermal toxicity concern of BTUM is low based on experimental data in animals. Data indicate no mortality or signs of toxicity at doses up to 2,000 mg/kg.			
Acute Lethality	Oral	Rat, $LD_0 = 2,000 \text{ mg/kg}$ No signs of toxicity	Non-confidential PMN submission	Adequate.	
	Dermal	Rat, $LD_0 = 2,000 \text{ mg/kg}$ No signs of toxicity	Non-confidential PMN submission	Adequate.	
	Inhalation			No data located.	
Carcinogenicity		MODERATE: There is uncertainty due to the lack of data for this substance. Carcinogenic effects cannot be ruled out.			
	OncoLogic Results			No data located.	
	Carcinogenicity (Rat and Mouse)			No data located.	
	Combined Chronic Toxicity/Carcinogenicity			No data located.	
Genotoxicity		LOW: BTUM did not cause mutations in bacteria or chromosomal aberrations in human lymphocytes.			
	Gene Mutation in vitro	Negative for mutations in <i>Salmonella typhimurium</i> and <i>Escherichia coli</i> with and without activation	Non-confidential PMN submission	Adequate.	
	Gene Mutation in vivo			No data located.	
	Chromosomal Aberrations in vitro	Negative for chromosomal aberrations in human lymphocytes	Non-confidential PMN submission	Adequate.	
	Chromosomal Aberrations in vivo			No data located.	
	DNA Damage and Repair			No data located.	
	Other (Mitotic Gene Conversion)			No data located.	

	BTUM CASRN 151882	2-81-4		
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Reproductive Effects	LOW: A combination of poor predicted absorption through all routes, low predicted metabolism, and lack of significant toxicological concerns from repeated dose testing suggests low potential hazard, with lower confidence. (Professional judgment)			
Reproduction/ Developmental Toxicity Screen	Low potential for reproductive effects (Estimated)	Professional judgment	Estimated based on professional judgment.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen		X	No data located.	
Reproduction and Fertility Effects			No data located.	
Developmental Effects	LOW: A combination of poor predicted absorption through all routes, low predicted metabolism, and lack of significant toxicological concerns from repeated dose testing suggests low potential hazard, with lower confidence. (Professional judgment)			
Reproduction/ Developmental Toxicity Screen	Low potential for reproductive effects (Estimated)	Professional judgment	Estimated based on professional judgment.	
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.	
Prenatal Development			No data located.	
Postnatal Development			No data located.	
Neurotoxicity	LOW: No structural alerts or mechanistic pathways associated with neurotoxic effect identified.			
Neurotoxicity Screening Battery (Adult)	Low potential for neurotoxicity effects (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on no identified structural alerts or mechanistic pathways associated with neurotoxicity.	

BTUM CASRN 151882-81-4					
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
Repeated Dose Effects	MODERATE: Blood toxicity and liver changes resulted in rats at a dose of 1,000 mg/kg-day following a 28-day exposure to BTUM. While the LOAEL identified in the study indicates a Low hazard concern (>300 mg/kg-day), the NOAEL is within the Moderate hazard concern range for a 28-day study duration (30-300 mg/kg-day). The uncertainty of where effects might occur warrants a Moderate hazard concern.				
	Rat, 28-day oral (gavage) blood toxicity and liver changes. NOAEL = 200 mg/kg-day LOAEL = 1,000 mg/kg-day	Non-confidential PMN submission	Adequate.		
Skin Sensitization	LOW: BTUM did not cause dermal sensitization in one study of guinea pigs.				
Skin Sensitization	No skin sensitization in guinea pigs using the Magnusson Kligman assay	Non-confidential PMN submission	Adequate.		
Respiratory Sensitization	No data located.	No data located.			
Respiratory Sensitization			No data located.		
Eye Irritation	LOW: BTUM was slightly irritating to eyes in one study of rabbits.				
Eye Irritation	Mild eye irritation in rabbits	Non-confidential PMN submission	Adequate.		
Dermal Irritation	LOW: BTUM did not cause dermal irritation in one study of rabbits.				
Dermal Irritation	No skin irritation in rabbits	Non-confidential PMN submission	Adequate.		
Endocrine Activity	No data located.				
			No data located.		
Immunotoxicity	No data located.				
Immune System Effects			No data located.		
ECOTOXICITY					
ECOSAR Class	Sulfonyl ureas				
Acute Toxicity	HIGH: Based on an estimated acute toxicity value of <1.0 mg/L for algae, although there is a high degree of uncertainty and limited confidence in the estimation.				

BTUM CASRN 151882-81-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Fish LC ₅₀	Fish 96-hour $LC_{50} = 37 \text{ mg/L}$ (Estimated)	EPI	NES; estimated LC ₅₀ is greater than the measured water solubility (0.77 mg/L).	
	Fish 96-hour LC ₅₀ = 137 mg/L (Estimated) ECOSAR: neutral organics	EPÍ	NES; estimated LC_{50} is greater than the measured water solubility (0.77 mg/L).	
	Daphnid 48-hour $LC_{50} = 34 \text{ mg/L}$ (Estimated) ECOSAR: sulfonyl ureas	EPI	NES; estimated LC_{50} is greater than the measured water solubility (0.77 mg/L).	
	Daphnid 48-hour $LC_{50} = 82 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI	NES; estimated LC_{50} is greater than the measured water solubility (0.77 mg/L).	
Green Algae EC ₅₀	Green algae 96-hour EC ₅₀ = 0.188 mg/L (Estimated) ECOSAR: sulfonyl ureas	EPI	There is some uncertainty to the estimated value for this compound since all chemicals in the training set for the sulfonyl urea class equation consists solely of triazine herbicides.	
	Green algae 96-hour EC ₅₀ = 76. mg/L (Estimated) ECOSAR: neutral organics	EPI	NES; estimated EC_{50} is greater than the measured water solubility (0.77 mg/L).	
Chronic Aquatic Toxicity	HIGH: Based on an estimated ChV of 0. degree of uncertainty and limited confidence.		for algae, although there is a high	
Fish ChV	Fish ChV = 2.5 mg/L (Estimated) ECOSAR: sulfonyl ureas	EPI	NES; estimated ChV is greater than the measured water solubility (0.77 mg/L).	
	Fish ChV = 14 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES; estimated ChV is greater than the measured water solubility (0.77 mg/L).	

BTUM CASRN 151882-81-4				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
Daphnid ChV	Daphnid ChV = 0.73 mg/L (Estimated) ECOSAR: sulfonyl ureas	EPI	There is a high degree of uncertainty for this estimate since the chemical may not be soluble enough to measure this predicted effect; ChV value is near the water solubility.	
	Daphnid ChV = 9.4 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES; estimated ChV is greater than the measured water solubility (0.77 mg/L).	
Green Algae ChV	Green algae ChV = 0.035 mg/L (Estimated) ECOSAR: sulfonyl ureas	EPI	There is some uncertainty to the estimated value for this compound since all chemicals in the training set for the sulfonyl urea class equation consists solely of triazine herbicides.	
	Green algae ChV = 76 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES; estimated ChV is greater than the measured water solubility (0.77 mg/L).	
	ENVIRONMENTAL E	FATE		
Transport	Evaluation of BTUM transport is based disassociation constant (pK _a), adsorption exist in both the neutral and anionic formobility in soil. Anionic BTUM may haleaching through soil to groundwater is atmosphere, BTUM is expected to exist i water surfaces through wet or dry depos	n coefficient (K _{oc}), volatilization, a m at environmentally-relevant pI we higher mobility due to enhanc not expected to be an important t n the particulate phase, which w	and vapor pressure. It is expected to H. BTUM is expected to have low ed water solubility. However, cransport mechanism. In the	
Henry's Law Constant (atm-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI; Professional judgment	Cutoff value for non-volatile compounds, based on professional judgment.	
$\begin{tabular}{ll} Sediment/Soil \\ Adsorption/Desorption \\ Coefficient-K_{oc} \\ \end{tabular}$	>30,000 (Estimated)	EPI; U.S. EPA, 2011	Cutoff value for non mobile compounds according to SF assessment guidance.	

	BTUM CASRN 151882-81-4				
PROPI	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Level III Fugacity Model	Air = <1% Water = 2 % Soil = 72% Sediment = 26% (Estimated)	EPI		
Persistence		HIGH: Evaluation of the persistence of BTUM is based entirely on QSARs of aerobic and anaerobic biodegradation. Results from these models estimate ultimate biodegradation in months and primary degradation in weeks. Biodegradation under anaerobic methanogenic conditions is not probable based on results from estimation models. BTUM does not contain chromophores that absorb light at wavelengths >29 nm. Therefore, it is not expected to be susceptible to direct photolysis. It is not expected to undergo hydrolysis as it does not contain hydrolysable functional groups. The atmospheric half-life of BTUM is estimated at 1.2 hours, although it is expected to exist primarily as a particulate in air. Therefore, biodegradation is expected to be the main degradation pathway for BTUM.			
Water	Aerobic Biodegradation	Weeks (primary survey model); Recalcitrant (ultimate survey model)	EPI		
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI		
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI		
Soil	Aerobic Biodegradation			No data located.	
	Anaerobic Biodegradation	Not probable (anaerobic-methanogenic biodegradation probability model)	EPI		
	Soil Biodegradation w/ Product Identification			No data located.	
	Sediment/Water Biodegradation			No data located.	
Air	Atmospheric Half-life	1.2 hours (Estimated)	EPI		
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to absorb light at environmentally significant wavelengths.	

	BTUM CASRN 151882-81-4				
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Hydrolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain functional groups that would be expected to hydrolyze readily under environmental conditions.	
	Pyrolysis			No data located.	
Environmental Half-l	ife	120 days (Estimated)	EPI; PBT Profiler	Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology.	
Bioaccumulation		LOW: Based on both the estimated BCF	and BAF that are <100.		
	Fish BCF	25 (Estimated)	EPI		
	BAF	4 (Estimated)	EPI		
	Metabolism in Fish			No data located.	
ENVIRONMENTAL MONITORING AND BIOMONITORING					
Environmental Monit	toring	ing No data located.			
Ecological Biomonito	toring No data located.				
Human Biomonitorin	g	This chemical was not included in the NHANES biomonitoring report (CDC, 2011).			

Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.0. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT)Profiler*, U.S. Environmental Protection Agency: Washington D.C. <u>www.pbtprofiler.net</u>.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, 2009. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010.

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf

UU

CASRN: 321860-75-7

MW: 784.9

(for representative structure)

MF: $C_{42}H_{36}N_6O_8S$

(for representative structure)

Physical Forms:

Neat: Solid

Use: Developer for thermal paper

SMILES: c1(NC(=O)Oc6cccc6)c(C)cc(NC(=O)Nc2ccc(S(=O)(=O)c3ccc(NC(=O)Nc4c(C)cc(NC(=O)Oc5cccc5)cc4)cc3)cc2)cc1 (for representative structure)

Synonyms: Urea Urethane Compound

Polymeric: Yes

Oligomers: A representative structure for the low molecular weight oligomer evaluated in this assessment is drawn above.

Metabolites, Degradates and Transformation Products: None

Analog: Confidential analog

Endpoint(s) using analog values: Eye and skin irritation, respiratory and skin sensitization, immunotoxicity, neurotoxicity, genotoxicity,

repeated dose

Analog Structure: Not applicable

Structural Alerts: None identified

Risk Phrases: Not classified by Annex VI Regulation (EC) No 1272/2008 (ESIS, 2011).

Risk Assessments: None identified

UU CASRN 321860-75-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	PHYSICAL/CHEMIC	CAL PROPERTIES		
Melting Point (°C)			No data located.	
Boiling Point (°C)	>300 (Estimated)	EPI; U.S. EPA, 1999	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture. Cutoff value for high boiling point compounds according to HPV assessment guidance.	
Vapor Pressure (mm Hg)	<1x10 ⁻⁸ (Estimated)	EPI; U.S. EPA, 2011	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture. Cutoff value for nonvolatile compounds according to SF assessment guidance.	
Water Solubility (mg/L)	<1x10 ⁻³ (Estimated)	EPI; U.S. EPA, 1999	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture. Cutoff value for nonsoluble compounds according to HPV assessment guidance.	

	UU CASRN 321860-75-7			
PROPE	RTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Log K _{ow}		6.5 (Estimated)	EPI	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture.
Flammability (Flas	sh Point)			No data located.
Explosivity				No data located.
pН				No data located.
pK _a		10.3 (Estimated)	SPARC	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture.
		HUMAN HEALTH EF		
Toxicokinetics		UU is not absorbed by skin, poorly abs	orbed by the lung, and can be abs	<u> </u>
Dermal Absorption	n in vitro			No data located.
Absorption, Distribution, Metabolism & Excretion	Oral, Dermal, or Inhaled	No absorption through skin, poor absorption by lung, and can be absorbed by the gastrointestinal tract.	Professional judgment	Based on closely related analog with similar structure, functional groups, and physical/chemical properties.
Acute Mammalian	Toxicity	LOW: No acute mammalian toxicity observed at oral and dermal exposure doses of less than or equal to 2,000 mg/kg.		
Acute Lethality	Oral	Rat oral LD ₀ =2,000 mg/kg (Measured)	Submitted Confidential Study	Adequate.
	Dermal	Rat dermal LC ₀ =3161 mg/kg (Measured)	Submitted Confidential Study	Adequate.
	Inhalation			No data located.

		UU CASRN 321860-	75-7	
PROPE	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Carcinogenicity		MODERATE: There is uncertainty du cannot be ruled out.	e to the lack of data located for th	his substance. Carcinogenic effects
	OncoLogic Results			No data located.
	Carcinogenicity (Rat and Mouse)			No data located.
	Combined Chronic Toxicity/Carcinogenicity			No data located.
Genotoxicity		LOW: UU was negative in bacterial m mammalian cells.	utagenicity assays and negative f	or chromosomal aberration in
	Gene Mutation in vitro	Negative, Ames Assay, with and without activation (Measured)	Submitted Confidential Study	Adequate.
		Negative, <i>E. coli</i> reverse mutation assay, with and without activation (Measured)	Submitted Confidential Study	Adequate.
	Gene Mutation in vivo			No data located.
	Chromosomal Aberrations in vitro			No data located.
	Chromosomal Aberrations in vivo	Negative, chromosomal aberration in CHL cells, with and without activation (Measured)	Submitted Confidential Study	Adequate.
	DNA Damage and Repair			No data located.
	Other (Mitotic Gene Conversion)			No data located.
Reproductive Effe	ects	LOW: Based on professional judgmen metabolism, and lack of significant tox suggests low potential hazard, with low	icological concerns from repeated	
	Reproduction/ Developmental Toxicity Screen	Low potential for reproductive effects (Estimated)	Professional judgment	Estimated based on professional judgment.

UU CASRN 321860-75-7			
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
Reproduction and Fertility Effects			No data located.
Developmental Effects	LOW: Based on professional judgmen metabolism, and lack of significant toxi suggests low potential hazard, with low	icological concerns from repeated	
Reproduction/ Developmental Toxicity Screen	Low potential for developmental effects (Estimated)	Professional judgment	Estimated based on professional judgment.
Combined Repeated Dose with Reproduction/ Developmental Toxicity Screen			No data located.
Prenatal Development			No data located.
Postnatal Development			No data located.
Neurotoxicity	LOW: No structural alerts or mechanis	stic pathways associated with neu	rotoxic effect identified.
Neurotoxicity Screening Battery (Adult)	Low potential for neurotoxicity effects (Estimated)	U.S. EPA, 2010; Professional judgment	Estimated based on no identified structural alerts or mechanistic pathways associated with neurotoxicity.
Repeated Dose Effects	LOW: There were no repeated dose ef	fects at oral doses ≤1,000 mg/kg-o	day.
	28-Day repeated-dose study, rat, oral, gavage, no clinical signs, no macroscopic or histopathological abnormalities, NOAEL = 1000 mg/kg-day. (Measured)	Submitted Confidential Study	Adequate.
Skin Sensitization	LOW: Based on closely related confidently physical/chemical properties.	ential analog with similar structu	re, functional groups, and
Skin Sensitization	Non-sensitizing, Guinea pigs (Measured)	Submitted Confidential Study	Adequate.

UU CASRN 321860-75-7					
PROPERTY/ENDPOINT	DATA	DATA REFERENCE DATA QUALITY			
Respiratory Sensitization	No data located.				
Respiratory Sensitization			No data located.		
Eye Irritation	LOW: UU is not an eye irritant.				
Eye Irritation	Slight irritation, rabbits (Measured)	Submitted Confidential Study	Adequate.		
Dermal Irritation	LOW: UU is not a dermal irritant.				
Dermal Irritation	Non-irritating, rabbits (Measured)	Submitted Confidential Study	Adequate.		
Endocrine Activity	No data located.				
			No data located.		
Immunotoxicity	No data located.				
Immune System Effects			No data located.		
	ECOTOXICITY	7			
ECOSAR Class	Substituted ureas; Amides; Carbamate es	ters			
Acute Toxicity	LOW: Based on measured 96-hour LC_{50} for fish and on estimated 96-hour LC_{50} for fish, 48-hour LC_{50} for Daphnid, and 96-hour EC_{50} for green algae that result in no effects at saturation (NES), as obtained for a representative component of the polymer that has a MW <1,000.				
Fish LC ₅₀	Fish 96-hour LC ₅₀ >250 mg/L (Measured)	Submitted Confidential Study	Adequate		
	Fish 96-hour $LC_{50} = 0.028 \text{ mg/L}$ (Estimated) ECOSAR: amides	EPI	NES; estimates were performed for the representative component of the polymer shown above.		

UU CASRN 321860-75-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY	
	Fish 96-hour $LC_{50} = 0.118$ mg/L (Estimated) ECOSAR: substituted ureas	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
	Fish 96-hour $LC_{50} = 0.061$ mg/L (Estimated) ECOSAR: carbamate esters	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
	Fish 96-hour LC ₅₀ = 0.094 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
Daphnid LC ₅₀	Daphnid 48-hour $LC_{50} = 0.074 \text{ mg/L}$ (Estimated) ECOSAR: amides	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
	Daphnid 48-hour $LC_{50} = 0.088 \text{ mg/L}$ (Estimated) ECOSAR: substituted ureas	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
	Daphnid 48-hour $LC_{50} = 0.958 \text{ mg/L}$ (Estimated) ECOSAR: carbamate esters	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
	Daphnid 48-hour $LC_{50} = 0.093 \text{ mg/L}$ (Estimated) ECOSAR: neutral organics	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
Green Algae EC ₅₀	Green algae 96-hour $EC_{50} = 0.096$ mg/L (Estimated) ECOSAR: amides	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
	Green algae 96-hour $EC_{50} = 0.288 \text{ mg/L}$ (Estimated) ECOSAR: substituted ureas	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
	Green algae 96-hour $EC_{50} = 0.223$ (Estimated) ECOSAR: carbamate esters	EPI	NES; estimates were performed for the representative component of the polymer shown above.	

	UU CASRN 321860-75-7				
PROPERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY		
	Green algae 96-hour EC ₅₀ = 0.255 (Estimated) ECOSAR: neutral organics	ЕРІ	NES; estimates were performed for the representative component of the polymer shown above.		
Chronic Aquatic Toxicity	LOW: Based on ChV values for fish, las obtained for a representative compo				
Fish ChV	Fish ChV = 0.00016 mg/L (Estimated) ECOSAR: amides	EPI	NES; estimates were performed for the representative component of the polymer shown above.		
	Fish ChV = 0.003 mg/L (Estimated) ECOSAR: substituted ureas	EPI	NES; estimates were performed for the representative component of the polymer shown above.		
	Fish ChV = 0.005 mg/L (Estimated) ECOSAR: carbamate esters	ЕРІ	NES; estimates were performed for the representative component of the polymer shown above.		
	Fish ChV = 0.008 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES; estimates were performed for the representative component of the polymer shown above.		
Daphnid ChV	Daphnid ChV = 0.00098 mg/L (Estimated) ECOSAR: amides	ЕРІ	NES; estimates were performed for the representative component of the polymer shown above.		
	Daphnid ChV = 0.019 mg/L (Estimated) ECOSAR: substituted ureas	ЕРІ	NES; estimates were performed for the representative component of the polymer shown above.		
	Daphnid ChV = 0.006 mg/L (Estimated) ECOSAR: carbamate esters	EPI	NES; estimates were performed for the representative component of the polymer shown above.		
	Daphnid ChV = 0.019 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES; estimates were performed for the representative component of the polymer shown above.		

	UU CASRN 321860-75-7				
PROPERTY/EN	DPOINT	DATA	REFERENCE	DATA QUALITY	
		Green algae ChV = 0.046 mg/L (Estimated) ECOSAR: substituted ureas	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
		Green algae ChV = 1.311mg/L (Estimated) ECOSAR: amides	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
		Green algae ChV = 0.488 mg/L (Estimated) ECOSAR: carbamate esters	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
		Green algae ChV = 0.210 mg/L (Estimated) ECOSAR: neutral organics	EPI	NES; estimates were performed for the representative component of the polymer shown above.	
		ENVIRONMENTAL	FATE		
Transport		Evaluation of UU transport is based e component of the polymer that has a M predominant component of the polyme expected strong absorption to soil. If I As a particulate, atmospheric oxidatio Based on the Henry's Law constant, vo appreciable rate. Level III fugacity m sediment.	MW <1,000. This representative steric mixture. UU is expected to have released to the atmosphere, UU is n is not expected to be a significant olatilization from water or moist standard indicate that UU will partition.	tructure is anticipated to be the ave low mobility in soil based on its likely to exist solely as particulate. It route of environmental removal. It is not expected to occur at an on predominantly to the soil and	
	ry's Law Constant n-m³/mole)	<1x10 ⁻⁸ (Estimated)	EPI	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture. Cutoff value for nonvolatile compounds based on professional judgment.	

		UU CASRN 321860-	75-7				
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY			
$\begin{array}{c} \textbf{Sediment/Soil} \\ \textbf{Adsorption/Desorption} \\ \textbf{Coefficient} - \textbf{K}_{oc} \\ \end{array}$		>30,000 (Estimated)	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture. Cutoff value for nonmobile compounds according to SF assessment guidance.				
	Level III Fugacity Model	Air = <1% (Estimated) Water = 1% Soil = 52% Sediment = 47%	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture.				
Persistence		VERY HIGH: UU is not ready biode persistence of UU is based on predictive recalcitrant to ultimate biodegradation larger oligomers in the polymeric mixtupotential based on DfE assessment guid bioavailable.	e QSAR models for the representa , and suggest a biodegradation ha are with a MW>1,000 are expecte	ative component estimates UU to be alf-life of >180 days. In addition, the d to have Very High persistence			
Water	Ready Biodegradability	Not ready biodegradable in Japanese MITI test (OECD 301C). 1% (by BOD) and 2% (by HPLC) biodegradation in 28 days. (Measured)	Submitted Confidential Study	Adequate.			
	Aerobic Biodegradation	Weeks (primary survey model) Recalcitrant (ultimate survey model))		Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture.			

		UU CASRN 321860-	75-7					
PROP	ERTY/ENDPOINT	DATA	REFERENCE	DATA QUALITY				
	Volatilization Half-life for Model River	>1 year (Estimated)	EPI	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture.				
	Volatilization Half-life for Model Lake	>1 year (Estimated)	EPI	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture.				
Soil	Aerobic Biodegradation			No data located.				
	Anaerobic Biodegradation			No data located.				
	Soil Biodegradation w/ Product Identification			No data located.				
	Sediment/Water Biodegradation			No data located.				
Air	Atmospheric Half-life	0.64 hours (Estimated)	EPI	The estimated half-life is for a gas- phase reaction; UU is expected to exist as a particulate in the atmosphere and the rate of this process will be highly attenuated.				
Reactivity	Photolysis	Not a significant fate process (Estimated)	Boethling and Mackay, 2000; Professional judgment	Substance does not contain function groups that would be expected to absorb light at environmentally significant wavelengths.				

		UU CASRN 321860-	75-7				
PROPERT	Y/ENDPOINT	DATA	REFERENCE	DATA QUALITY			
	Hydrolysis	42 minutes at pH 8; 7 hours at pH 7 (Estimated)	Limited confidence in the estimated half-lives given the limited solubility anticipated for this material. Hydrolysis is not expected to occur to an appreciable extent and UU is anticipated to lie outside the domain of this model.				
	Pyrolysis			No data located.			
Environmental Half-life		360 days (Estimated)		Half-life estimated for the predominant compartment, as determined by EPI and the PBT Profiler methodology for the representative component of the polymer shown above.			
Bioaccumulation		LOW: The measured BCF for UU is < polymer is <100 (7.9). Although the B0 anticipated to better account for metal components of the mixture that have a general, substances with a MW >1,000	CF model results in a higher hazar polism for this class of compounds MW >1,000 are not expected to b	rd concern, the BAF model is . In addition, the polymeric e bioaccumulative because, in			
	Fish BCF	0.46-4.6 (Measured)	Submitted Confidential Study	Adequate.			
Fish BCF		9,100 (Estimated)	EPI	Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture.			
		7.9 (Estimated)		Estimates were performed on a representative component of the polymer shown above. This representative structure is anticipated to be the predominant component of the polymeric mixture.			

UU CASRN 321860-75-7								
PROPERTY/ENDPOINT		DATA	REFERENCE	DATA QUALITY				
	Metabolism in Fish			No data located.				
	I	ENVIRONMENTAL MONITORING A	ND BIOMONITORING					
Environmental Monito	oring	No data located.						
Ecological Biomonitor	ing	No data located.						
Human Biomonitoring	5	This chemical was not included in the NH	ANES biomonitoring report (CDC	C, 2011).				



Boethling, R., Mackay, D. *Handbook of Property Estimation Methods for Chemicals, Environmental Health Sciences*. Boca Raton: Lewis Publishers. **2000**.

CDC (Centers for Disease Control and Prevention). *Fourth national report on human exposure to environmental chemicals, updated tables.* Department of Health and Human Services. **2011.** http://www.cdc.gov/exposurereport/ (accessed on May 10, 2011).

EPI (*EPIWIN/EPISUITE*) Estimations Programs Interface for Windows, Version 4.00. U.S. Environmental Protection Agency: Washington D.C. http://www.epa.gov/opptintr/exposure/.

ESIS (European chemical Substances Information System) Classification, labeling and Packaging of dangerous substances annex VI to regulation (EC) No 1272/2008 [Online] http://esis.jrc.ec.europa.eu/ (accessed on June 10, 2011).

PBT Profiler *Persistent (P), Bioaccumulative (B), and Toxic (T) Chemical (PBT) Profiler*, U.S. Environmental Protection Agency: Washington D.C. <u>www.pbtprofiler.net</u>.

SPARC On Line Calculator pKa/property server. Ver 4.5 September, **2009**. Available from, http://ibmlc2.chem.uga.edu/sparc/ (accessed on August 12, 2010).

U.S. EPA (Environmental Protection Agency). High Production Volume (HPV) Challenge. Determining the Adequacy of Existing Data. U.S. Environmental Protection Agency: Washington D.C. 1999. http://www.epa.gov/hpv/pubs/general/datadfin.htm

U.S. EPA Sustainable Futures *Using NonCancer Screening within the Sustainable Futures Initiative* Environmental Protection Agency: Washington D.C. **2010**. http://www.epa.gov/opptintr/sf/pubs/noncan-screen.htm#systemic (accessed on February 09, 2011).

U.S. EPA (Environmental Protection Agency). Sustainable Futures Summary Assessment. Assessment of Discrete Organic Chemicals. U.S. Environmental Protection Agency: Washington D.C. **2011**. http://www.epa.gov/oppt/sf/pubs/iad_discretes_092011.pdf.

References

- FAO/WHO (2011). Toxicological and Health Aspects of Bisphenol A: Report of Joint FAO/WHO Expert Meeting 2-5 November 2010 and Report of Stakeholder Meeting on Bisphenol A 1 November 2010. Ottawa.
- International Agency for Research on Cancer. (2006). "Preamble to the IARC Monographs." Retrieved April 17, 2012, from http://monographs.iarc.fr/ENG/Preamble/currentb6evalrationale0706.php.
- Mayo-Bean, K., K. V. Nabholz, et al. (2011). Methodology Document for the Ecological Structure-Activity Relationship Model (ECOSAR) Class Program. Office of Pollution Prevention and Toxics. Washington, DC.
- Meylan, W. M. and P. H. Howard (1995). "Atom/fragment contribution method for estimating octanol-water partition coefficients." <u>J Pharm Sci</u> **84**(1): 83-92.
- Meylan, W. M., P. H. Howard, et al. (1996). "Improved method for estimating water solubility from octanol/water partition coefficient." <u>Environ Toxicol Chem</u> **15**(2): 100-106.
- Nabholz, J. V., R. G. Clements, et al. (1993). Validation of Structure Activity Relationships Used by the USEPA's Office of Pollution Prevention and Toxics for the Environmental Hazard Assessment of Industrial Chemcials. Environmental Toxicology and Risk Assessment. J. W. Gorsuch, F. J. Dwyer, C. G. Ingersoll and T. W. La Point. Philadelphia, American Society for Testing and Materials. 2: 571-590.
- National Toxicology Program-Center for the Evaluation of Risks to Human Reproduction (NTP-CERHR) (2008). NTP-CERHR Monograph on the Potential Human Reproductive and Developmental Effects of Bisphenol A. U.S. Department of Health and Human Services.
- U.S. Environmental Protection Agency (U.S. EPA) (1994). Joint Project on the Evaluation of (Quantitative Structure Activity Relationships. Office of Prevention Pesticides and Toxic Substances. Washington DC, EPA **743R-94-001**.
- U.S. Environmental Protection Agency (U.S. EPA) (1997). Special Report on Environmental Endocrine Disruption: An Effects Assessment and Analysis. R. A. Forum. Washington, DC.
- U.S. Environmental Protection Agency (U.S. EPA) (1999a). Guidelines for Carcinogen Risk Assessment, Review Draft. Office of Research and Development. **CEA-F-0644**.
- U.S. Environmental Protection Agency (U.S. EPA) (1999b). High Production Volume (HPV) Challenge: Determining the Adequacy of Existing Data. Office of Pollution Prevention & Toxics. Washington, DC.
- U.S. Environmental Protection Agency (U.S. EPA) (2002). A Review of the Reference Dose and Reference Concentration Processes. Risk Assessment Forum. December 2002 Final Report. Washington, DC, EPA. **EPA/630/P-02/002F**.

- U.S. Environmental Protection Agency (U.S. EPA) (2005a). Guidelines for Carcinogen Risk Assessment. Risk Assessment Forum. Washington, DC, EPA. **EPA/630/P-03/001F**.
- U.S. Environmental Protection Agency (U.S. EPA) (2005b). Pollution Prevention (P2) Framework. Office of Pollution Prevention and Toxics. Washington D.C.
- U.S. Environmental Protection Agency (U.S. EPA) (2010b). Interpretive Assistance Document for Assessment of Polymers. Sustainable Futures Summary Assessment. Office of Pollution Prevention and Toxics. Washington D.C.
- U.S. Environmental Protection Agency (U.S. EPA) (2010c). TSCA New Chemicals Program (NCP) Chemical Categories. Office of Pollution Prevention and Toxics. Washington, DC.
- U.S. Environmental Protection Agency (U.S. EPA). (2011b). "Assay Development." Retrieved April 17, 2012, from http://www.epa.gov/oscpmont/oscpendo/pubs/assayvalidation/index.htm.
- U.S. Environmental Protection Agency (U.S. EPA) (2011c). Design for the Environment Program Alternatives Assessment Criteria for Hazard Evaluation, Version 2.0. Office of Pollution Prevention & Toxics. Washington D.C.
- U.S. Environmental Protection Agency (U.S. EPA) (2011d). Endocrine Disruptor Screening Program, Weight-of-Evdence: Evaluating Results of EDSP Tier 1 Screening to Identify the Need for Tier 2 Testing. Office of Chemical Safety and Pollution Prevention. Washington, DC.
- U.S. Environmental Protection Agency (U.S. EPA). (2011e). "Estimation Program Interface (EPI) Suite." Retrieved April 18, 2012, from http://www.epa.gov/oppt/exposure/pubs/episuite.htm.
- U.S. Environmental Protection Agency (U.S. EPA) (2011f). Interpretive Assistance Document for Assessment of Discrete Organic Chemicals. Sustainable Futures Summary Assessment. Office of pollution Prevention and Toxics. Washington, DC.
- U.S. Environmental Protection Agency (U.S. EPA) (2011g). On-line AOPWIN™ User's Guide.
- U.S. Environmental Protection Agency (U.S. EPA) (2011h). On-line BCFBAFTM User's Guide.
- U.S. Environmental Protection Agency (U.S. EPA) (2011i). On-line KOWWIN™ User's Guide.
- U.S. Environmental Protection Agency (U.S. EPA). (2012a). "Analog Identification Methodology (AIM)." Retrieved April 17, 2012, from http://www.epa.gov/oppt/sf/tools/aim.htm.
- U.S. Environmental Protection Agency (U.S. EPA). (2012b). "Endocrine Disruptor Screening Program (EDSP)." Retrieved April 17, 2012, from http://www.epa.gov/scipoly/oscpendo/index.htm.

5 General Exposure and Lifecycle Information

The purpose of this chapter is to provide general information on exposure and life-cycle considerations of thermal paper developers. This discussion will be framed in the context of six life-cycle stages: manufacture of developers (Section 5.2.1), manufacture of thermal paper (Section 5.2.2), conversion of thermal paper (Section 5.2.3), use of thermal paper (Section 5.2.4), end-of-life (Section 5.2.5), and manufacture of recycled paper products (Section 5.2.6), as shown in Figure 5-1. A quantitative exposure assessment is outside the scope of this project and not necessary for comparative hazard assessment. Rather, this chapter represents a qualitative review of potential environmental releases and exposures based on limited information from the published literature and publicly available sources (Section 5.3). Understanding the factors that affect exposure to bisphenol A (BPA) and alternative developers across the life-cycle provides additional context to the alternative selection process. This chapter includes information on the presence of BPA in people and the environment, which is generally not available for other chemicals in the assessment. The information on BPA can be considered as a surrogate for the other developers that have similar physical-chemical properties and behaviors and use patterns.

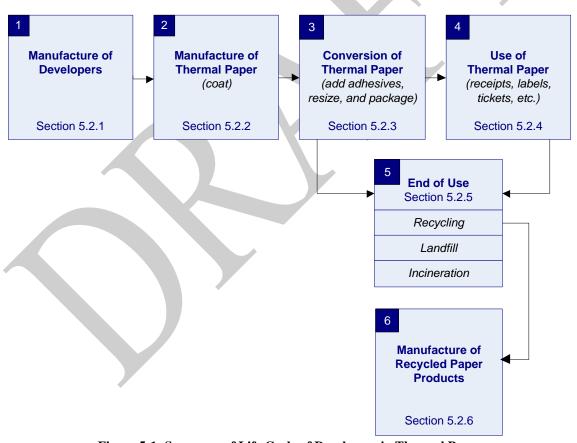


Figure 5-1: Summary of Life Cycle of Developers in Thermal Paper

5.1 Potential Exposure Pathways and Routes (General)

Exposure to developers can occur at many points in the life cycle of a thermal paper. There is a potential for occupational exposures during chemical and product manufacturing and product end-of-life (i.e., recycling, landfilling, or incineration). Additionally, there may be exposures to workers and consumers while thermal paper is being used and to the general population and the environment from releases during product manufacturing, use, and end-of-life.

The risk associated with a given chemical or substance is influenced by how exposure occurs. For example, exposure associated with inhaling the chemical can be different from exposure via ingestion, in turn influencing the toxic outcome. As a result, exposure is typically characterized by different pathways and routes. An exposure pathway is the physical course a chemical takes from the source of release to the organism that is exposed, whereas the exposure route is how the chemical gets inside the organism. The three primary routes of exposure are inhalation, dermal absorption, and ingestion. The physical-chemical properties of the chemical influence the pathways and routes of exposure.

5.1.1 Inhalation Exposures

The physical state of the chemical during chemical manufacturing, downstream processing, incorporation into consumer use products, and after release to the environment significantly influences the potential for inhalation exposure. In particular, there are three types of inhalation exposures to consider.

Dust: Chemicals that are manufactured, processed, and used as solids have the potential to result in occupational and consumer exposures to fugitive dusts. The potential for fugitive dust formation depends on whether the solid chemical is handled in the crystalline form, as an amorphous solid, or as a fine powder, as well as the particle size distribution and solids handling techniques. It is important to note the physical state of the chemical at the potential point of release and contact. The pure chemical may be manufactured as a solid powder, indicating a potential occupational exposure to dust. However, it may be formulated into solution before anyone comes in contact with it, thereby eliminating inhalation exposure to dust as a potential route. If there is exposure to dust, particle size influences the degree to which the chemical enters the body. Particles less than 10 microns in diameter are "respirable" with potential to reach and attach to tissues in the respiratory tract and deep lung where they may irritate lung tissue or be absorbed into the body. Once released into air or other media, the chemical can associate with particulate material through sorption onto particles or as particulates. For example, vapor phase chemicals can partition onto house dust and contribute to ingestion and dermal exposure pathways as well as inhalation.

Vapor: Exposure to vapors can occur when chemicals volatilize during manufacturing, processing, and use, or are associated with particulates in air. Most chemical manufacturing operations occur in closed systems. However, fugitive emissions are expected during manufacturing processes if there are open mixing operations, transfer operations, and loading/unloading of raw materials. The more volatile the chemical, the greater the fugitive releases and higher the potential occupational and consumer exposures. Therefore, vapor

pressure (a measure of volatility) is a key indicator of potential exposures to vapors. Particulate exposures can result in physical breakdown of products, erosion of materials from surfaces etc.

Mist: Both volatile and non-volatile liquids can result in inhalation exposure if manufacturing operations or use results in the formation of mist. Droplet size is an important consideration in determining exposure to chemicals released as a mist; as with dust, mist particles less than 10 microns in diameter are "respirable" with potential to be absorbed in the respiratory tract.

5.1.2 Dermal Exposures

Dermal exposure is also affected by the physical state of the chemical at the point of release and contact. For example, the likelihood of liquids being splashed or spilled during sampling and drumming operations is different than for similar operations involving polymerized solids, powders, or pellets. Dermal exposure is also generally assumed to be proportional to the concentration of chemical in the formulation. For example, in general the dermal exposure from contacting a pure chemical is greater than the exposure from contacting a solution that contains only 10 percent of the chemical (unless the formulation contains penetration enhancers). Screening-level evaluations of dermal exposure can be based on the worker activities involving the chemical, and consumer uses and contact. For example, there may be significant exposure when workers handle bags of solid materials during loading and transfer operations. Maintenance and cleanup activities during shutdown procedures, connecting transfer lines, and sampling activities also result in potential for dermal exposures. In the case of thermal paper, workers may be exposed to high concentrations of developer while changing cash register receipt rolls or cleaning machines. Consumer exposure from dermal contact will be dependent upon the amount and availability of the chemical in the product.

5.1.3 Ingestion Exposures

Exposures via ingestion typically occur when individuals eat food or drink water that has become contaminated with chemicals. Dust particles may spread throughout the facility and settle (or deposit) on tables, on lunchroom surfaces, or even on food itself. Vapors may similarly spread throughout the facility and may be adsorbed onto food or particles in drinking water or dissolved in the drinking water. Another potential pathway for ingestion occurs from dust particles that are too large to be absorbed through the lungs. These "non-respirable particles" are often swallowed, resulting in exposures from this route. Children and others can be exposed by transfer from dust or other media to hands to mouth. Compared to inhalation and dermal exposures, ingestion is typically considered a less significant exposure pathway from an occupational and consumer health standpoint. However, ingestion is often an equally or more significant exposure route for the general population, and especially for children that ingest house dust, than inhalation and dermal exposure, as described in the next section.

5.1.4 Environmental and General Population Exposures

Releases to the environment can result in contamination of environmental media, leading to exposures in the general population and environmental organisms. In general, exposure concentrations may be lower, but they may be most widespread and may occur over a lifetime. Wildlife may be impacted by direct contact with contaminated media. If the chemical is

bioaccumulative, it may concentrate in the animal and reach higher trophic levels and people through the food chain. Food contamination can also come from contaminants in biosolids derived from wastewater treatment plants (WWTP) that are applied to agricultural fields, or the ingestion of contaminated feed by livestock.

Direct human contact with contaminated environmental media, such as soil, sediment, house dust, and surface water, can lead to dermal exposure and incidental ingestion. Contact with contaminated drinking water can result in dermal and inhalation exposures, via washing and showering, as well as ingestion through consumption.

Products used in the home can lead to exposures in the general population. Chemicals can volatilize from products and become incorporated into indoor air, or dust in the home, office, car, or other locations where products are used. Inhalation of contaminants in air, dermal contact with contaminated surfaces and dust, and incidental ingestion of dust or hand-to-mouth contact are all viable exposure pathways in the home. The physical properties of the chemical, along with how the chemical is incorporated into the product, influence how much of a chemical will enter the dust in a consumer's environment. A person who does not have direct contact with products containing a particular chemical still has the potential to be exposed to them once the chemical is released.

5.1.5 Exposures to Susceptible Populations

Individuals within a population can vary with respect to susceptibility and exposure. Variability can be characterized but not reduced, and therefore it can be helpful to consider potentially exposed susceptible populations when considering chemical alternatives. Genetics, gender, lifestage, pregnancy status, lifestyle, predisposition to diseases and other medical conditions, and other chemical exposures are examples of factors that lead to differential susceptibility (National Academy of Sciences 2008).

For example, children may be more susceptible to environmental exposures than adults because:

- Their bodily systems are still developing;
- They eat more, drink more, and breathe more in proportion to their body size;
- Their behavior can expose them more to chemicals and organisms, for example, hand-to-mouth and object-to-mouth behaviors (Xue, Zartarian et al. 2007); and
- They may be exposed to chemicals, including BPA, in human milk (Landrigan, Sonawane et al. 2002) and infant formula (Cao, Dufresne et al. 2008).

Prenatal development represents a potential window of susceptibility whereby exposures to chemicals in the environment can contribute to adverse pregnancy and developmental outcomes (Stillerman 2008). During prenatal development, biological systems are forming, and disruption of these processes can have consequences later in life. While the placenta is designed to protect the fetus from stressors, including chemical exposures, chemicals (including BPA) have been shown to pass through this organ resulting in prenatal exposures (Perera, Rauh et al. 2003; Myren, Mose et al. 2006).

Potential perinatal and childhood exposures to thermal paper chemicals can occur via exposure pathways that are unique to, or more common during early life, including:

- Maternal consumer and occupational exposures resulting in exposures to the fetus;
- Maternal consumer and occupational exposures resulting in ingestion via human milk;
- Transfer of thermal paper chemicals on hands to mouth; and
- Mouthing of thermal paper (chew and/or swallow).



5.1.6 Physical-Chemical Properties for the Alternatives to BPA included in this Assessment that May Impact Exposure

CASRN	Chemical Name	Common Name	Molecular Formula	Structure	WM	pKa	MP (°C)	BP (°C)	VP (mmHg @ 25 °C)	$ m H_2O_{sol}(g/L)$	Henry's Law (atm•m³/mole)	Log Kow
80-05-7	2,2-bis(p- hydroxyphenyl)propane	Bisphenol A	C ₁₅ H ₁₆ O ₂	ю-Ф-он	228.29	9.59-11.30	55	60.5	3.99×10 ⁻⁸	120-300	<1×10 ^{-8 a}	3.32
620-92-8	Bis(4- hydroxyphenyl)methane	Bisphenol F	$C_{13}H_{12}O_2$	ю	200.24	7.55	162.5	sub	3.73×10 ^{-7 a}	190ª	<1×10 ^{-8 a}	2.91
79-97-0	2,2'-Bis(4-hydroxy-3- methylphenyl)propane	Bisphenol C	$C_{17}H_{20}O_2$	но	256.35	10.5ª	138-140	368 ^b	2.3×10 ^{-6 b}	4.7 ª	<1×10 ^{-8 a}	4.7
5129-00-0	Methyl bis(4- hydroxyphenyl)acetate	мвна	C ₁₅ H ₁₄ O ₄	HOOLO	258.28	9.7-9.9	ND	>300ª	3.3×10 ^{-8a}	360 ^a	<1×10 ^{-8 a}	2.8ª
24038-68-4	4,4'-Isopropyllidenebis(2- phenylpheno)	BisOPP-A	C ₂₇ H ₂₄ O ₂	HO OH	380.49	10.8-10.9 ^a	118	>300ª	<1×10 ^{-8 a}	0.011 ^a	<1×10 ^{-8 a}	7.2ª
1571-75-1	4,4'-(1- Phenylethylidene)bisphenol	Bisphenol AP	C ₂₀ H ₁₈ O ₂	но—Он	290.36	9.91-10.1	189	>300ª	<1×10 ⁻⁸ a	1.1ª	<1×10 ^{-8 a}	4.9ª
PROPRIETARY	PROPRIETARY	Substituted phenolic compound #1				4.7, 10 ^a	171-172	>300ª	<1×10 ⁻⁸ a	180ª	<1×10 ^{-8 a}	3.4ª
PROPRIETARY	PROPRIETARY	Substituted phenolic compound #2				10ª	135-139	>300ª	<1×10 ^{-8 a}	0.12ª	<1×10 ^{-8 a}	6.3ª
94-18-8	Benzyl 4-hydroxybenzoate	РНВВ	$C_{14}H_{12}O_3$	но	228.25	7.8ª	111-112	>300ª	3.8×10-6	60	2.9×10 ^{-10 a}	3.56
80-09-1	4-Hydroxyphenyl sulfone	Bisphenol S	$C_{12}H_{10}O_4S$	но — В — О Н	250.27	8	240.5	>300ª	<1×10 ^{-8 a}	1.1×10 ⁻³	<1×10 ^{-8 a}	1.2
5397-34-2	2,4'- Bis(hydroxyphenyl)sulfone	2,4-BPS	$C_{12}H_{10}O_4S$	HO O OH	250.3	7.6, 8.2 ^a	184	>300ª	<1×10 ^{-8 a}	1.7×10 ^{3a}	<1×10 ^{-8 a}	1.7ª

CASRN	Chemical Name	Common Name	Molecular Formula	Structure	MW	pKa	MP (°C)	BP (°C)	VP (mmHg @ 25 °C)	$ m H_2O_{sol}(g/L)$	Henry's Law (atm•m³/mole)	Log Kow
41481-66-7	bis-(3-allyl-4-hydroxyphenyl) sulfone	TGSA	C ₁₈ H ₁₈ O ₄ S	HO - S - OH	330.40	8.3-8.5ª	151-155	dec	9.2×10 ⁻¹⁰	4.79	8×10 ^{-8a}	3.22
97042-18-7	Phenol,4-[[4-(2-propen-1-yloxy)phenyl]sulfonyl]-	BPS-MAE	C ₁₅ H ₁₄ O ₄ S	HO	290.34	8.20ª	172	>300ª	<1×10 ^{-8 a}	83ª	<1×10 ^{-8 a}	3.1
63134-33-8	4-Hydroxy-4'- benzyloxydiphenylsulfone	BPS-MPE	C ₁₉ H ₁₆ O ₄ S	О = S — ОН	340.40	8.2	170°	>300ª	<1×10 ^{-8 a}	10ª	<1×10 ^{-8 a}	3.9
95235-30-6	4-hydroxyphenyl 4- isoprooxyphenylsulfone	D-8	$C_{15}H_{16}O_4S$	о — я — о н о — я — о н	292.35	8.2ª	129	>300ª	<1×10 ^{-8 a}	21	<1×10 ^{-8 a}	3.1ª
191680-83-8	4-[4'-[(1'-methylethyloxy) phenyl]sulfonyl]phenol	D-90	$C_{28}H_{26}O_{9}S_{2} \\ (n = 1); \\ C_{44}H_{42}O_{14}S_{3} \\ (n = 2)$	но о о о о о о о о о о о о о о о о о о	570.6; 891.00	6.9-7.5 ^a	ND	>300ª	<1×10 ^{-8 a}	0.54 a; <1×10 ^{-3 a}	<1×10 ^{-8 a}	3.8 ^a ; 5.9 ^a
93589-69-6	1,7-bis(4- Hydroxyphenylthio)-3,5- dioxaheptane	DD-70	C ₁₇ H ₂₀ O ₄ S ₂	во S О О О В О О Н	352.5	9.6ª	108	>300ª	<1×10 ^{-8 a}	130 ^a	<1×10 ^{-8 a}	3.4ª
232938-43-1	N-(p-Toluenesulfonyl)-N'-(3- p- toluenesulfonyloxyphenyl)ure a	Pergafast 201	C ₂₁ H ₂₀ N ₂ O ₆ S	H ₃ C — O — O — O — CH ₃	460.5	12.5; 5.3; -3.8; -13.6 ^a	157.7	250 (dec)	<1×10 ⁻⁸ a	35	<1×10 ^{-8 a}	2.6
151882-81-4	4,4'-bis(N-carbamoyl-4- methylbenzenesulfonamide)d iphenylmethane	BTUM	C ₂₉ H ₂₈ N ₄ O ₆ S		592.70	4.8-5.4 ^a	154-156	>300ª	<1×10 ^{-8 a}	0.77	<1×10 ^{-8 a}	2.61
321860-75-7	Urea Urethane Compound	UU	C ₄₂ H ₃₆ N ₆ O ₈ S		784.9 ^d	10.3	ND	>300ª	<1×10 ⁻⁸ a	<1×10 ⁻³	<1×10 ^{-8 a}	6.5ª

5.2 Potential Sources of Exposure in the Life-cycle of Thermal Paper

This section addresses potential releases and exposures throughout the life-cycle of thermal paper. Exposure pathways can be extremely complex. For example, the release of a chemical to the environment during manufacture and use could potentially lead to environmental contamination. The entry of chemicals into the environment may then lead to exposure of the general population to substances through the consumption of contaminated drinking water, contact with contaminated environmental media (e.g., soil, house dust, sediment, water), and/or the consumption of contaminated food. This section is not intended to be a comprehensive exposure assessment but instead is designed to offer readers a general overview of potential sources of exposure throughout the life-cycle of thermal paper.

5.2.1 Manufacture of Developers

This section addresses potential exposure scenarios associated with the manufacture of BPA and alternative developers. Unit operations, operating conditions, transfer procedures, and packaging operations vary with the manufacture of different developers. Potential releases and occupational exposures will depend on each of these parameters. While it is outside the scope of this report to identify and quantify the releases and exposures associated with individual chemicals, this section presents a general description of typical chemical manufacturing processes and identifies potential releases.

Throughout the chemical manufacturing process, there are several release points that may pose an exposure risk to workers including packaging operations, leaks from pumps and tanks, fugitive emissions from equipment, cleaning of process equipment, and product sampling activities. Additionally, crude or finished products are often stored on-site in drums, day-tanks, or more permanent storage vessels until the chemical is packaged and shipped to next user. Transfer and packaging operations, as well as any routine and unplanned maintenance activities, and spills or accidents may result in releases of chemicals to environmental media leading to general population exposures.

Potential release points from manufacturing and formulating can include:

- Transfer and packaging operations involving handling a chemical product;
- Routine and unplanned maintenance activities;
- Leaks from pumps and pipelines;
- Fugitive emissions from equipment;
- Product sampling;
- Transport and cleaning or equipment and storage vessels; and
- Accidental releases.


BPA is present in the environment as a result of direct releases from manufacturing or processing facilities (U.S. EPA 2010a). BPA may also be present in the environment as a result of fugitive emissions during processing and handling, or a release of unreacted monomer from products (NTP-CERHR 2008). Workers may be exposed to BPA by inhalation or skin contact during the

manufacture of BPA and BPA-containing products. A worst-case potential inhalation exposure to BPA during manufacturing is estimated at 100 µg/kg body weight/day (NTP-CERHR 2008). The general population may be exposed to BPA through the contamination of drinking water, or contact with contaminated environmental media. Alternative chemicals with similar physical-chemical properties are likely to result in similar exposure and release pathways.

5.2.2 Manufacture of Thermal Paper

A general manufacturing process for paper, in six major steps, is depicted in Figure 5-2 below (Evergreen Packaging 2011).

Figure 5-2 The Overall Paper Production Process



- The first step of the paper manufacturing process involves the generation of pulp. To accomplish this, wood chips and cooking liquor are mixed in a digester and heated. The wood chips are then expelled through the high-pressure digester, which breaks them up into individual fibers, or pulp.
- The oxygen delignification step next removes 40 to 50 percent of the lignin that remains in the pulp. The pulp is washed and bleached, which aids in the removal of the pulp's raw brown color.
- A large volume of water is then added in order to manufacture the paper. A slurry is created, with a pulp to water ratio of about 1 to 99. The slurry is moved on a moving wire mesh to form a uniform sheet. As the wet sheet travels along the wire, water drains through the wire mesh.
- This wet sheet is then moved onto a moving belt of felt where the sheet is pressed and squeezed in sections to compact the fibers.
- Once the fibers have been pressed, the sheet is moved onto dryer felts that pass over a series of heating rollers. Nine-five percent of the water is removed, leaving a small percentage of moisture to prevent cracking.
- Lastly, in the paper winding process, the paper is wound onto large reels, which are then cut into smaller rolls for convenient shipping and packaging.

The manufacture of thermal paper follows the same general manufacturing process as for non-specialty paper, with a few extra steps to incorporate additives in the formulation. The manufacturing process for thermal paper is shown below in Figure 5-3.

A release liner is added to the pulp prior to the coalescing of the thermal paper's multiple layers. This liner contains a release agent that provides a release effect against any type of sticky material. The various formulated layers (see Section 3.1), which contain the key additives in thermal paper (see Section 3.1.2), are pressed or calendered together between metal cylinders called calendars; this renders the paper's surface smooth. This step also defines the paper's texture: matte or glossy. The paper is then wound, bound, and shipped to product stores (see Section 5.2.3 for further details on the conversion process) (Torraspapel 2008).

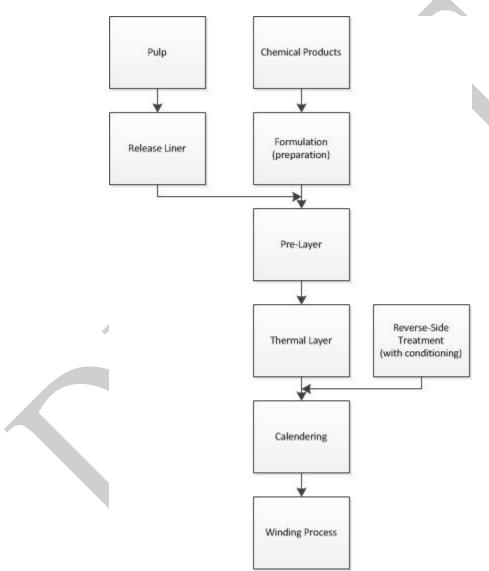


Figure 5-3: The Production Process for Thermal Paper

Reference: (Torraspapel 2008)

Potential release points from paper manufacturing can include:

• Addition and handling of chemicals,

- Fugitive emissions from equipment, and
- Wastewater discharges.

The amount of thermal paper manufactured in Europe in 2005 - 2006 was approximately 370 million pounds of paper or an area of approximately 2.9 billion square yards (JRC-IHCP 2010). This accounts for 4.2 million pounds of BPA. Similar statistics are not available for manufacture of thermal paper in the United States or for the amounts of alternatives used in thermal paper.

Very little information exists regarding releases of BPA, or alternative developers, by paper manufacturers in the United States. BPA is listed under section 313 of the Emergency Planning and Community Right-to-Know Act (EPCRA) of 1986. Under EPCRA, facilities with more than 10 employees, subject to Toxics Release Inventory (TRI) reporting requirements, that are manufacturing or processing more than 25,000 pounds of a listed chemical within a calendar year, or are using more than 10,000 pounds of a listed chemical within a calendar year, must report releases and transfers to the U.S. Environmental Protection Agency (EPA). None of the alternatives are TRI-listed chemicals. A review of TRI reporting for 2009 for BPA by paper companies (North America Industry Classification System (NAICS) Code 322) indicates two companies reporting: one that reported releases of 60 pounds for fugitive emissions, and another that reported total off-site transfers of 14,796 pounds (4,829 pounds transferred to treatment; 9,967 pounds transferred to a wastewater treatment facility) (U.S. EPA 2011j).

5.2.3 Conversion of Thermal Paper

Once thermal paper is manufactured, it is then sent to a facility where it is converted into a specific paper application. During this conversion process, thermal paper is wound onto large rolls. If the paper is to be used for label applications, such as shipping labels or labels for deli food packaging, adhesives may be applied to the paper. (See Section 2.2 for additional applications of thermal paper.) The thermal paper is then cut into smaller rolls, packaged, and sent to product stores (Torraspapel 2008).

Potential release points from converting thermal paper can include:

- Addition or handling of chemicals, such as adhesives applied to labels,
- Cutting and packaging operations, and
- Fugitive emissions from equipment.

Up to ten percent of thermal paper from European manufacturers, which manufacture an estimated three millions pounds of thermal paper annually (JRC-IHCP 2010), is removed during manufacturing as trimmings. This waste material, known as "broke," is immediately sent to a recycling facility. Similar statistics are not available for U.S. thermal paper conversion industry.

5.2.4 Use of Thermal Paper

Thermal paper is used in a variety of applications. Most commonly this includes point-of-sale receipts, but it may also include tickets, labels, and medical applications. In its finished form, thermal paper may release chemicals, including developers such as BPA, via dermal contact.

While thermal paper does not account for a large percentage of the production volume of BPA, unlike most applications, BPA in thermal paper is a free monomer and is not chemically bound; thus, it is expected that the free BPA in this use would be more readily available to humans and the environment (Zalko, Jacques et al. 2011). Studies show that BPA is transferred from thermal receipt paper to currency when they come in contact, suggesting thermal receipt paper is an important source of BPA in paper currency (Schreder 2010; Liao and Kannan 2011a). Braun, Kalkbrenner et al. (2011) found that, by occupation, cashiers had the highest relative BPA concentrations in their blood.

5.2.5 End-of-Life

After use, thermal paper has several end-of-life possibilities, including recycling, landfilling, and incineration, as well as abandonment. Limited information is available on the fate of BPA in thermal paper during end-of-life processes. No information is available on the other thermal paper developers. The European Union Risk Assessment Report for BPA included an analysis of thermal paper recycling and disposal practices that estimated that approximately 4 million pounds of BPA was used to produce thermal paper in 2005-2006, with 1.5 million pounds of BPA reaching paper recycling sites each year (JRC-IHCP 2010). In the EU, about 10 percent of thermal paper is sent for recycling when trimmed with an additional 30 percent from commercial uses and consumer uses eventually ending up in the paper recycling stream (JRC-IHCP 2010). According to the European Union (EU) report, BPA releases from paper recycling plants can vary greatly based on capacity and process differences, such as the de-inking and pulping processes, and the level of wastewater treatment. There is also some evidence from Europe that BPA is entering recycled paper streams, including consumer paper products such as towels and tissue paper (Vinggaard, Körner et al. 2000). It is expected that disposal practices in the EU differ from the United States because recycling and incineration are much more common in the EU. Information on U.S. practices is not available but it is likely that recycled paper in the U.S. also contains BPA.

The concentration of BPA in paper processing wastewater effluent depends on the recycled paper treated. The concentration of BPA in the final effluent of 20 recycling facilities in Japan ranged from 0.2 to 370 μ g/L (average of 59 μ g/L) (Fukazawa, Watanabe et al. 2002). Effluents from facilities where only pulp was processed contained lower BPA concentrations.

Chlorinated BPA byproducts may be formed in secondary paper mills that use recycled paper feedstock containing thermal paper with BPA. BPA contaminants from recycled thermal paper can react with low concentrations of chlorine and sodium hypochlorite, which is added as a bleaching agent, yielding poly-chlorinated derivatives of BPA (Fukazawa, Watanabe et al. 2002). Chlorinated derivatives of BPA were detected at concentrations ranging from trace to 2.0 µg/L. Estrogenic activities of chlorinated derivatives of BPA were found to be relatively more potent than BPA, based on the yeast two-hybrid system assay (Fukazawa, Watanabe et al. 2002).

Post-use thermal paper that is sent to a landfill can contribute to leachate (i.e., the mixture of rainwater and contaminants within the waste). This leachate has the potential to seep into the ground or drain into nearby surface water, transporting chemicals where humans and wildlife might be exposed to them. For example, there is concern that free monomeric BPA can leach out of thermal paper and contaminate landfill leachate. Gehring et al. (2004) concluded that

continuous emissions of BPA from leachate from landfills receiving significant amounts of wastepaper can occur under anaerobic conditions. Although no data are available, the same concern would exist for alternatives to BPA depending on their suitability to anaerobic degradation and transport processes.

5.2.6 Manufacture of Recycled Paper Products

Several researchers have analyzed the BPA content in recycled paper products. Gehring et al. examined various sources of recycled paper collected in the city of Dresden, Germany (2004). Samples included toilet paper, imported cellulose, and various types of post-use paper stock including brown/grey corrugated board, advertising supplements, magazines, catalogues, newspapers, free advertising papers, and chromo board. Of the types of recycled products analyzed, Gehring et al. found the most significant levels of BPA in toilet paper. The amount of BPA in toilet paper derived from recycled paper varied greatly, ranging from 3.2 to 41.1 mg/kg dry matter (2004). Gehring et al. also demonstrated that BPA in toilet paper also results in significant emission of the chemical into domestic wastewater, contributing about 36,000 pounds of BPA to wastewater annually (2004).

Other sources of BPA in recycled paper products include paper and paperboard commonly used for food packaging. These products are often adapted to directly contact foodstuff. According to a study conducted by Ozaki et al. (2004), 67 percent of the recycled paper analyzed contained BPA (0.19-26 μ g/g) (2004). BPA was also detected in virgin paper products however, its concentrations were ten-fold higher in recycled paper products (Ozaki, Yamaguchi et al. 2004). Similarly, Vinggaard et al. (2000) analyzed BPA levels in 20 different brands of paper towels sold in retail shops in Denmark. Results indicated that paper towels manufactured from recycled paper contained 0.6 to 24 mg/kg of BPA whereas extracts from virgin paper contained negligible levels. Although no data are available, it is likely that alternatives to BPA would also be present in recycled paper products.

5.3 Available Data on Occupational, Consumer, and Environmental Exposures to BPA, Thermal Paper Lifecycle

A quantitative exposure assessment is outside the scope of this project and not necessary for comparative hazard assessment. However, this section presents information on the levels of human and environmental exposures to developers in thermal paper that have already been published in the literature. Most published studies pertain to BPA but chemicals with similar physical-chemical and environmental properties can be expected to behave similarly.

5.3.1 BPA in Receipts

As discussed in Chapter 2, BPA is widely used as a developer in thermal paper, including receipts. Several studies evaluated the presence of BPA in thermal paper, noting that alternatives to BPA are currently on the market. In one study, BPA was detected at levels up to 2.2 percent of the total weight in 11 of the 22 point-of-sale receipts sampled, but half of the receipts were BPA-free (Biedermann, Tschudin et al. 2010). Mendum et al. (2011) likewise found BPA in 8 of 10 receipts tested with levels ranging from 0.3-1.54 percent of the total weight.

The Environmental Working Group (EWG) conducted a similar study to determine BPA levels in cash register receipts. Of the 36 receipts tested, 16 contained BPA in levels from 0.8 percent to 2.8 percent (Lunder, Andrews et al. 2010). The Washington Toxics Coalition found BPA in 11 of the 22 receipts it tested (Schreder 2010). The study also found BPA in 21 of the 22 dollar bills it tested, concluding that BPA travels from receipts to other objects.

Liao and Kannan studied levels of BPA in paper currency from 21 countries (2011a). BPA was found in all paper currencies analyzed at concentrations ranging from 0.001 to 82.7 µg/g (equal to 0.000001 to 0.0827 mg/g). They also found that concentrations of BPA increased after 24 hours of contact with thermal paper, which suggests that thermal paper is a major source of BPA in paper currency bills. Liao and Kannan conducted a similar study that found BPA in 94 percent of receipts tested at a geometric mean level of 0.211 mg/g (Liao and Kannan 2011b). Other paper products tested, such as napkins and toilet paper made from recycled paper, contained BPA at microgram-per-gram concentrations, and the authors concluded that contamination during the paper recycling process is a source of BPA in paper products.

5.3.2 BPS in Receipts

Liao, Liu et al. (2012b) also evaluated levels of BPS in 16 types of paper and paper products and paper currency from 21 countries. BPS was found in all thermal receipt paper samples at concentrations ranging from 0.0000138 to 22.0 mg/g. BPS was detected in 14 other types of paper products, such as napkins and toilet paper, at concentrations ranging from the level of quantitation to 0.00838 mg/g. BPS was found in 87% paper currencies analyzed at concentrations ranging from the limit of quantitation to 0.00626 mg/g.

5.3.3 BPA Transfer to Skin and Potential for Dermal Absorption

Releases of free BPA monomers in thermal paper can occur upon contact with the paper and can be subsequently absorbed into the skin, leading to exposure during handling and use. Several studies have analyzed such releases of BPA, particularly in point-of-sale receipts. Biedermann et al. (2010) demonstrated that BPA can be extracted from the receipts and has the potential to be absorbed in the skin upon contact; 2 hours after contact, about $0.17~\mu g$ (equal to 0.00017~mg) BPA migrated into the skin, such that it could not be recovered by washing with water.

Zalko, Jacques et al. (2011) demonstrated that BPA can penetrate the skin under experimental conditions. Applying BPA to pig and human explants demonstrated that only two percent of the BPA remained on the skin surface; nearly half of the chemical passed completely through the skin and the rest persisted in the skin after 72 hours. There is also evidence that enzymes located in the skin glucuronidate BPA (Zalko, Jacques et al. 2011), a mechanism that facilitates elimination.

5.3.4 Occupational Exposure

Occupational exposures may occur during the manufacture of developers, the manufacture of thermal paper, or the handling of thermal paper. There is limited information on worker exposures to BPA during chemical manufacture. A series of studies conducted by Li and colleagues suggests a relationship between exposure to BPA and reproductive and

developmental effects in Chinese workers in the BPA and epoxy manufacturing industry (Li, Zhou et al. 2010; Li, Zhou et al. 2011; Miao, Yuan et al. 2011); however, similar studies are not available for U.S. manufacturers of BPA. To our knowledge, there are no studies examining BPA exposures in thermal paper manufacturing.

Occupational exposure to BPA may come from handling receipts. Biedermann et al. (2010) estimated that repeated handling of thermal paper containing BPA could result in transfer of up to 71µg/day (equal to 0.071 mg/day), which is well below 3000 µg/day (equal to 3 mg/day), a value derived by Biederman et al from the present total daily intake (TDI)¹⁰ of 0.050 mg/kg bw/day, assuming 60 kg body weight. Liao and Kannan estimated that mean daily intake of BPA through dermal absorption in adults handling thermal paper was 921 ng/day (equal to 0.000921 mg/day) for occupationally exposed individuals (2011b), significantly lower than the estimates of Biederman et al. The cumulative occupational exposure from handling a variety of thermal paper products was estimated to be 1303 ng/day (equal to 0.001303 mg/day) (Liao and Kannan 2011b). Liao and Kannan (2011a) also estimated that the mean daily intake of BPA from handling U.S. paper currency to be 1.02 ng/day (equal to 0.00000102 mg/day) for occupationally exposed individuals in the United States.

In one U.S. study pregnant women who worked as cashiers, who presumably had frequent contact with thermal paper used in cash register receipts, had the highest urinary BPA concentrations at 2.8 µg/g (equal to 0.0028 mg/g) compared with pregnant women in other occupations, including 1.8 µg/g (equal to 0.0018 mg/g) in teachers and 1.2 µg/g (equal to 0.0012 mg/g) in industrial workers (Braun, Kalkbrenner et al. 2011).

To date, one study has estimated the mean daily intake of BPS from handling paper products and currency. Liao, Liu et al. (2012b) estimated that mean daily intake of BPS through dermal absorption in adults handling paper products and paper currency was 789 ng/day (equal to 0.000789 mg/day) for occupationally exposed individuals.

5.3.5 **Consumer and General Population Exposure**

Several studies have estimated consumer and/or general population exposures. This section provides an overview of this research. Based on BPA concentrations in thermal paper, the Washington Toxics Coalition estimated that an average shopper would transfer approximately 30 μg (equal to 0.030 mg) of BPA to the skin by rubbing a receipt (five times between two fingers and a thumb) (Schreder 2010). Liao and Kannan (2011b) estimated that the mean daily intake of BPA, via handling of thermal paper to be 12.3 ng/day (equal to 0.0000123 mg/day) for the general population (2011b). Liao and Kannan (2011a) also estimated that the mean daily intake of BPA from handling paper currency to be 0.102 ng/day (equal to 0.000000102 mg/day) for the general population in the United States.

http://www.efsa.europa.eu/en/topics/topic/bisphenol.htm.

¹⁰ TDI is a protective estimate of the amount of a chemical substance humans can be exposed to daily basis over the course of a lifetime without experiencing significant health risk. The TDI value set by the European Food Safety Authority (EFSA) for BPA is 0.05 mg/kg bw. More information about EFSA and BPA can be found at:

Although BPA exposure from dietary sources is estimated to be much greater, thermal paper accounted for more than 98 percent of the exposure from paper products, mainly because thermal receipt papers contain relatively high concentrations of BPA (Liao and Kannan 2011b). BPA is also used in numerous other applications with which consumers and the general public come into contact on a regular basis contributing to exposure. Measured levels of urinary BPA reflect these complex exposure patterns.

The Centers for Disease Control (CDC) reported that 95 percent of a sample size of 294 Americans had detectable levels of BPA in their urine (Calafat, Ye et al. 2008). The median concentration of BPA in urine across all ages was found to be 2.7 ng/mL (equal to 0.0000027 mg/mL) (uncorrected for creatinine) (Calafat, Ye et al. 2008). Based on currently available exposure data, BPA exposures appear to be higher in infants and children (NTP-CERHR 2008). Two studies evaluating exposure in children based on the National Health and Nutrition Examination Survey indicate that children ages 6-11 have higher exposures relative to adults (LaKind and Naiman 2008; LaKind and Naiman 2011).

Subsequent studies have sought to clarify sources of BPA exposures in children. In one recent study, Morgan, Jones et al. (2011) quantified urinary total BPA in 81 Ohio preschool children ages 23-64 months over 48-hours. This study found the BPA intake through diet correlated with urinary excretion, suggesting that diet is the predominant source. The study authors estimated mean intake of 156. 5 ng/kg/day (equal to 0.0001565 mg/kg/day) through dietary ingestion, and 0.11 ng/kg/day (equal to 0.00000011 mg/kg/day) through non-dietary ingestion. The data were in agreement with an earlier study in which dietary ingestion through the consumption of both solid and liquid foods was shown to be the major route of exposure for 257 preschool children to BPA at their homes and daycare centers in North Carolina and Ohio (Wilson, Chuang et al. 2007).

BPA is also found in breast milk; in a study of 23 healthy women, all breast milk samples registered positive for BPA (Sun, Irie et al. 2004). Additionally, the presence of BPA has been documented in human amniotic fluid (Ikezuki, Tsutsumi et al. 2002), although there is controversy regarding the ability of the fetus to metabolize BPA (Nishikawa, Iwano et al. 2010; Doerge, Twaddle et al. 2011), which would influence the concentration of free and glucuronidated BPA in this compartment.

To date, one study has estimated the mean daily intake of BPS from handling paper products and currency. Liao, Liu et al. (2012b) estimated that mean daily intake of BPS through dermal absorption in adults handling paper products and paper currency was 12.0 ng/day (equal to 0.000012 mg/day) for the general population. The results of this study suggest that other alternatives with similar physical-chemical properties and behavior would also transfer from the surface of thermal paper at least to the surface of skin, and potentially be absorbed through the skin or ingested.

Another study reported exposure to bisphenol S based on urinary measurements (Liao, Liu et al. 2012a). BPS was detected in 81% of the urine samples collected from 315 individuals in eight countries. The mean value in the US was reported as 0.299 ng/ml (equal to 0.000000299 mg/day). Using a pharmokinetic model, the authors estimated that the median estimated daily

intake of BPS associated with these urinary values is $0.316 \mu g/person$ (equal to 0.000316 mg/person).

5.3.6 Environmental Exposure

As noted above, there are releases and transfers of BPA from the paper sector that are reportable to TRI. The relationship between these releases and transfers and environmental concentrations is not known. There are several studies on concentrations of BPA in the environment (Klecka, Staples et al. 2009). BPA is present in the environment as a result of direct releases and fugitive emissions from manufacturing or processing facilities (U.S. EPA 2011a). In addition, based on information from European and Japanese studies, the use of monomeric BPA in thermal paper also may contribute to environmental releases of BPA from paper manufacturing and recycling plants and to the presence of BPA in the stream of recycled paper used in toilet paper, paper tableware, and other products, and may contribute to the presence of BPA in landfills because paper products are a major contributor to the U.S. solid waste stream (JRC-IHCP 2010; Vinggaard, Körner et al. 2000; Fukazawa, Hoshino et al. 2001; Gehring, Vogel et al. 2004; Ozaki, Yamaguchi et al. 2004; Terasaki, Shiraishi et al. 2007). Liao and Kannan estimated that between 33.5 tons (based on the median concentration of BPA in thermal paper) and 1040 tons (based on the 95th percentile) are released into the environment in the United States and Canada through the disposal of thermal receipt papers (2011b). The following paragraphs provide a brief overview of some of the available studies of BPA in environmental media.

Surface Water: Most environmental monitoring results show that the concentrations of BPA in surface water bodies are lower than 1 μ g/L (ppb), mainly due to its partitioning and biodegradability (Tsai 2006). Current Predicted No Effect Concentrations (PNEC) for ecological organisms are 1.5 μ g/L (European Union), 1.6 μ g/L (Japan), and 0.175 μ g/L (Canada) (U.S. EPA 2010a). BPA was detected at a median concentration of 0.14 μ g/L (ppb) and a maximum concentration of 12 μ g/L (ppb) in 41.2 percent of 85 samples collected from U.S. streams in 1999 and 2000, although the authors suggest that the maximum concentration of 12 μ g/L (ppb) may be an outlier as it was much higher than any of the other samples (Kolpin, Furlong et al. 2002). A recent review of BPA monitoring studies found that out of 26 studies in North America (2 in Canada and 24 in the United States), 80 percent (852 of 1,068) of surface water samples reported BPA concentrations below the detection limit. The median concentration reported was 0.081 μ g/L (ppb) and the 95th percentile concentration was 0.47 μ g/L (ppb) (Klecka, Staples et al. 2009).

Wastewater: Two studies have addressed individual WWTPs; BPA was not detected above the detection limit of 0.0001 μ g/L (ppb) in Louisiana in effluent from a WWTP, in samples collected from surface waters in Louisiana, or in drinking water at various stages of treatment at plants in Louisiana (Boyd, Reemtsma et al. 2003). A California study detected BPA in two of three treated wastewater samples at 0.38 and 0.31 μ g/L (ppb) (limit of detection = 0.25 μ g/L (ppb)) (Jackson and Sutton 2008). It also reported detecting BPA in wastewater generated by a pharmaceutical manufacturer (0.295 μ g/L (ppb)), an industrial laundry (21.5 μ g/L (ppb)), and a paper products manufacturer (0.753 μ g/L (ppb)).

A Canadian study reported BPA concentrations ranging from 0.031 to 49.9 μ g/L (ppb) in sewage influent and effluent (generally < 1 μ g/L (ppb) in the influent and < 0.3 μ g/L (ppb) in the

effluent) and from 0.104 to 36.7 μ g/g (ppm) in raw and digested sewage sludge from multiple WWTPs in Canada (Lee and Peart 2000b). The same authors reported that BPA was detected in 100 percent of sewage samples from 31 WWTPs across Canada with concentrations ranging from 0.080 to 4.98 μ g/L (ppb) (median 0.329 μ g/L (ppb)) for the influent and from 0.010 to 1.08 μ g/L (ppb)(median 0.136 μ g/L (ppb)) for the effluent (Lee and Peart 2000a). Based on comparison of influent and effluent levels, they estimated that BPA in the influent was removed by the sewage treatment process with a median reduction rate of 68 percent. BPA was detected in sludge samples at concentrations ranging from 0.033 to 36.7 μ g/g (ppm), on a dry weight basis. A wide range of BPA was detected in wastewater discharges from industrial facilities with concentrations ranging from 0.23 to 149.2 μ g/L (ppb). Higher BPA levels in wastewater were associated with facilities producing chemicals and chemical products and packaging and paper products, and with commercial dry cleaning establishments. BPA concentrations in pulp and paper mill sludge ranged from < 0.02 (below detection limit) to 3.33 μ g/g (ppm), with a median value of 0.076 μ g/g (ppm), on a dry weight basis (Lee and Peart 2000a; Melcer and Klecka 2011).

WWTP Biosolids: One recent study measured BPA in biosolids (treated municipal waste sewage sludge) products from WWTPs in seven states and found concentrations between 1,090 and 14,400 μg/kg (ppb) BPA (median 4,690 μg/kg (ppb)) (Kinney, Furlong et al. 2006). Another study reported BPA in treated biosolids from a single municipal U.S. WWTP at 4,600 μg/kg (ppb) and reported 81μg/ kg (ppb) in soil that received the land applied biosolids, and concentrations of 147μg/ kg (ppb) in a nearby "control" soil that did not receive treatment with biosolids (Kinney, Furlong et al. 2008). That study also detected BPA at 81 μg/kg (ppb) in earthworms living in treated soil. A separate study conducted by Staples, Friederich et al. (2010) investigated the risk of BPA in sludge-amended soil to invertebrates and plants at the bottom of the terrestrial food chain. The risks for adverse effects to potworms, springtails, and six plant species were found to be low based on hazard quotient values that were \leq 0.04 (Staples, Friederich et al. 2010)

Groundwater: The U.S. Geological Survey (USGS) collected samples from 47 ambient ground water sites (not drinking water wells) in 18 States and analyzed them for 65 organic wastewater contaminants. BPA was detected in 29.8 percent of the sampled ground water sites, with a mean detected concentration of 1.78 μ g/L (ppb) and a range of 1.06 to 2.55 μ g/L (ppb). BPA was among the top 5 most frequently detected organic compounds in this study (Barnes, Kolpin et al. 2008a; Barnes, Kolpin et al. 2008b). The analysis of BPA concentrations in areas that were known or suspected to have at least some human and/or animal wastewater sources in upstream or upgradient areas detected BPA in 9.5 percent of the samples at a reporting level of 1 μ g/L (ppb). The maximum concentration measured in these samples was 1.9 μ g/L (ppb) (Barnes, Kolpin et al. 2008a; Focazio, Kolpin et al. 2008).

Landfill Leachate: BPA has been detected in landfill leachate with maximum concentrations of $1.7 \,\mu\text{g/L}$ (ppb) and $1.4 \,\mu\text{g/L}$ (ppb) in the receiving ground water plume at a landfill that was known to be leaking (Rudel, Melly et al. 1998). Data for other landfill sites in the United States were not available, and this single point is not likely to be representative of the country. Landfill leachate measured in other countries contained more than 500 $\,\mu\text{g/L}$ (ppb) of BPA (Tsai 2006). Studies conducted at Japanese landfills resulted in maximum untreated leachate concentrations

of 17,200 μ g/L (ppb) and treated leachate concentrations of 5.1 μ g/L (ppb) (Crain, Eriksen et al. 2007).

Soil: Wilson et al. reported that BPA concentrations in soil samples taken from outdoor play areas of homes and daycare centers ranged from 4–14 ppb dry weight, with means of 6–7 ppb dry weight (2003). Klecka et al. reported a median concentration of 0.6 ppb BPA in North American freshwater sediments, including samples with measurements below the detection limit; BPA concentrations in samples from the United States ranged from 1.4 to 140 ppb dry weight (2009). Levels in U.S. marine sediments were reported to have a median of 3.5 ppb of BPA and to range from 1.5 to 5 ppb dry weight (Stuart, Capulong et al. 2005).

No data have been reported on releases to the environment for any of the alternative developers. However, it is possible that alternatives will be released to the environment during the thermal paper lifecycle. This is particularly true of alternatives with physicochemical properties that are similar to BPA.



References

- Barnes, K. K., D. W. Kolpin, et al. (2008a). Water-Quality Data for Pharmaceuticals and Other Organic Wastewater Contaminants in Ground Water and in Untreated Drinking Water Sources in the United States, 2000-01. U.S. Geological Survey and U.S. Department of Interior.
- Barnes, K. K., D. W. Kolpin, et al. (2008b). "A national reconnaissance of pharmaceuticals and other organic wastewater contaminants in the United States I) Groundwater." <u>The Science of the Total Environment</u> **402**: 192-200.
- Biedermann, S., P. Tschudin, et al. (2010). "Transfer of bisphenol A from thermal printer paper to the skin." Anal Bioanal Chem **398**: 571-576.
- Boyd, G. R., H. Reemtsma, et al. (2003). "Pharmaceuticals and personal care products (PPCPs) in surface and treated waters of Louisiana, USA and Ontario, Canada." <u>The Science of the Total Environment</u> **311**: 135-149.
- Braun, J. M., A. E. Kalkbrenner, et al. (2011). "Variability and Predictors of Urinary Pisphenol A Concentrations during Pregnancy." <u>Environmental Health Perspectives</u> **119**(1): 131-137.
- Cao, X. L., G. Dufresne, et al. (2008). "Levels of bisphenol A in canned liquid infant formula products in Canada and dietary intake estimates." J Agric Food Chem **56**(17): 7919-7924.
- Calafat, A. M., X. Ye, et al. (2008). "Exposure of the U.S. Population to Bisphenol A and 4-tertiary-Octylphenol: 2003-2004." Environmental Health Perspectives **116**(1): 39-44.
- Crain, D. A., M. Eriksen, et al. (2007). "An ecological assessment of bisphenol-A: Evidence from comparative biology." <u>Reproductive Toxicology</u> **24**: 225-239.
- Doerge, D. R., N. C. Twaddle, et al. (2011). "Distribution of bisphenol A into tissues of adult, neonatal, and fetal Sprague-Dawley rats." <u>Toxicology and Applied Pharmacology</u> **255**(3): 261-270.
- Evergreen Packaging. (2011). "How Paper is Made." from http://www.evergreenpackaging.com/fresh-by-design/how-paper-is-made.
- Focazio, M. J., D. W. Kolpin, et al. (2008). "A national reconnaissance for pharmaceuticals and other organic wastewater contaminants in the United States II) Untreated drinking water sources." The Science of the Total Environment **402**: 201-216.
- Fukazawa, H., K. Hoshino, et al. (2001). "Identification and quantification of chlorinated bisphenol A in wastewater from wastepaper recycling plants." <u>Chemosphere</u> **44**: 973-979.
- Fukazawa, H., M. Watanabe, et al. (2002). "Formation of Chlorinated Derivatives of Bisphenol A in Waste Paper Recycling Plants and Their Estrogenic Activities." <u>Journal of Health Science</u> **48**(3): 242-249.

- Gehring, M., D. Vogel, et al. (2004). Bisphenol A contamination of wastepaper, cellulose and recycled paper products. <u>Waste Management and the Environment II</u>. V. Popov, H. Itoh, C. A. Brebbia and A. Kungolos. Billerica, WIT Press. **78:** 293-300.
- Ikezuki, Y., O. Tsutsumi, et al. (2002). "Determination of bisphenol A concentrations in human biological fluids reveals significant early prenatal exposure." <u>Human Reproduction</u> **17**(11): 2839-2841.
- Jackson, J. and R. Sutton (2008). "Sources of endocrine-disrupting chemicals in urban wastewater, Oakland, CA." The Science of the Total Environment **405**: 153-160.
- Joint Research Centre-Institute for Health and Consumer Protection (JRC-IHCP) (2010). European Union Risk Assessment Report, 4,4'-Isopropylidenediphenol (Bisphenol-A).
- Kinney, C. A., E. T. Furlong, et al. (2008). "Bioaccumulation of Pharmaceuticals and Other Anthropogenic Waste Indicators in Earthworms from Agricultural Soil Amended With Biosolid or Swine Manure." <u>Environ. Sci. Technol.</u> **42**: 1863-1870.
- Kinney, C. A., E. T. Furlong, et al. (2006). "Survey of Organic Wastewater Contaminants in Biosolids Destined for Land Application." <u>Environ. Sci. Technol.</u> **40**: 7207-7215.
- Klecka, G. M., C. A. Staples, et al. (2009). "Exposure Analysis of Bisphenol A in Surface Water Systems in North America and Europe." <u>Environ. Sci. Technol.</u> **43**: 6145-6150.
- Kolpin, D. W., E. T. Furlong, et al. (2002). "Pharmaceuticals, Hormones, and Other Organic Wastewater Contaminants in U.S. Streams, 1999-2000: A National Reconnaissance." Environ. Sci. Technol. 36: 1202-1211.
- LaKind, J. S. and D. Q. Naiman (2008). "Bisphenol A (BPA) Daily intakes in the United States: Estimates from the 2003-2004 NHANES Urinary BPA data." <u>Journal of Exposure</u> Science and Environmental Epidemiology **18**: 608-615.
- LaKind, J. S. and D. Q. Naiman (2011). "Daily intake of bisphenol A and potential sources of exposure: 2005–2006 National Health and Nutrition Examination Survey." <u>Journal of Exposure Science and Environmental Epidemiology</u> **21**: 272-279.
- Landrigan, P. J., B. Sonawane, et al. (2002). "Chemical contaminants in breast milk and their impacts on children's health: an overview." <u>Environmental Health Perspectives</u> **110**(6): a313-a315.
- Lee, H.-B. and T. E. Peart (2000a). "Bisphenol A Contamination in Canadian Municipal and Industrial Wastewater and Sludge Samples." <u>Water Qual. Red. J. Canada</u> **35**(2): 283-298.
- Lee, H.-B. and T. E. Peart (2000b). "Determination of Bisphenol A in Sewage Effluent and Sludge by Solid-Phase and Supercritical Fluid Extraction and Gas Chromatography/Mass Spectrometry." <u>Journal of the Association of Analytical Communities (AOAC)</u> International **83**(2): 290-297.

- Li, D.-K., Z. Zhou, et al. (2010). "Relationship Between Urine Bisphenol-A Level and Declining Male Sexual Function." <u>Journal of Andrology</u> **31**(5): 500-506.
- Li, D.-K., Z. Zhou, et al. (2011). "Urine bisphenol-A (BPA) level in relation to semen quality." Fertility and Sterility **95**(2): 625-630.
- Liao, C. and K. Kannan (2011a). "High Levels of Bisphenol A in Paper Currencies from Several Countries, and Implications for Dermal Exposure." <u>Environ. Sci. Technol.</u> **45**: 6761-6768.
- Liao, C. and K. Kannan (2011b). "Widespread Occurence of Bisphenol A in Paper and Paper Products: Implications for Human Exposure." Environ. Sci. Technol. **45**: 9372-9379.
- Liao, C., F. Liu, et al. (2012a). "Bisphenol S in Urine from the United States and Seven Asian Countries: Occurrence and Human Exposures." <u>Environ Sci Technol</u>. Epub May 23, 2012.
- Liao, C., F. Liu, et al. (2012b). "Bisphenol S, a New Bisphenol Analogue, in Paper Products and Currency Bills and Its Association with Bisphenol A Residues." <u>Environ Sci Technol</u>. Epub May 16, 2012.
- Lunder, S., D. Andrews, et al. (2010). "Synthetic estrogen BPA coats cash register receipts." <u>Environmental Working Group (EWG)</u>, from http://www.ewg.org/bpa-in-store-receipts.
- Melcer, H. and G. Klecka (2011). "Treatment of wastewaters containing bisphenol A: State of the science review." <u>Water Environ Res</u> **83**(7): 650-666.
- Mendum, T., E. Stoler, et al. (2011). "Concentration of bisphenol A in thermal paper." <u>Green Chemistry Letters and Reviews</u> **4**(1): 81-86.
- Miao, M., W. Yuan, et al. (2011). "*In utero* exposure to bisphenol-A and its effect on birth weight." <u>Reproductive Toxicology</u> **32**: 64-68.
- Morgan, M. K., P. A. Jones, et al. (2011). "Assessing the quantitative relationships between preschool children's exposures to bisphenol A by route and urinary biomonitoring." <u>Environ. Sci. Technol.</u> **45**(1): 5309-5316.
- Myren, M., T. Mose, et al. (2006). "The human placenta an alternative for studying foetal exposure." <u>Toxicology in Vitro</u> **21**(7): 1332-1340.
- National Academy of Sciences (2008). Science and Decisions: Advancing Risk Assessment. Washington D.C.
- National Toxicology Program-Center for the Evaluation of Risks to Human Reproduction (NTP-CERHR) (2008). NTP-CERHR Monograph on the Potential Human Reproductive and Developmental Effects of Bisphenol A. U.S. Department of Health and Human Services.

- Nishikawa, M., H. Iwano, et al. (2010). "Placental Transfer of Conjugated Bisphenol A and Subsequent Reactivation in the Rat Fetus." <u>Environmental Health Perspectives</u> **118**(9): 1196-1203.
- Ozaki, A., Y. Yamaguchi, et al. (2004). "Chemical analysis and genotoxicological safety assessment of paper and paperboard used for food packaging." Food and Chemical Toxicology **42**: 1323-1337.
- Perera, F. P., V. Rauh, et al. (2003). "Effects of transplacental exposure to environmental pollutants on birth outcomes in a multiethnic population." <u>Environmental Health</u> Perspectives **111**(2): 201-205.
- Rudel, R. A., S. J. Melly, et al. (1998). "Identification of Alkylphenols and Other Estrogenic Phenolic Compounds in Wastewater, Septage, and Groundwater on Cape Cod, Massachusetts." Environ. Sci. Technol.(861-869).
- Schreder, E. (2010). On the Money: BPA on Dollar Bills and Receipts. Washington Toxics Coalition.
- Staples, C., U. Friederich, et al. (2010). "Estimating potential risks to terrestrial invertebrates and plants exposed to bisphenol A in soil amended with activated sludge biosolids." <u>Environmental Toxicology and Chemistry</u> **29**(2): 467-475.
- Stillerman, K. P. (2008). "Environmental Exposures and Adverse Pregnancy Outcomes: A Review of the Science." Reproductive Sciences **15**(7): 631-650.
- Stuart, J. D., C. P. Capulong, et al. (2005). "Analyses of phenolic endocrine disrupting chemicals in marine samples by both gas and liquid chromatography-mass spectrometry." <u>Journal of Chromatography A</u> **1079**: 136-145.
- Sun, Y., M. Irie, et al. (2004). "Determination of bisphenol A in human breast milk by HPLC with column-switching and fluorescence detection." <u>Biomedical Chromatography</u> **18**(8): 501-507.
- Terasaki, M., F. Shiraishi, et al. (2007). "Occurence and estrogenicity of phenolics in paper-recycling process water: pollutants originating from thermal paper in waste paper." Environmental Toxicology and Chemistry **26**(11): 2356-2366.
- Torraspapel (2008). About Paper: Thermal Paper.
- Tsai, W.-T. (2006). "Human Health Risk on Environmental Exposure to Bisphenol-A: A Review." Journal of Environmental Science and Health Part C **24**: 225-255.
- U.S. Environmental Protection Agency (U.S. EPA) (2010a). Bisphenol A Action Plan.
- U.S. Environmental Protection Agency (U.S. EPA) (2011a). "Advanced notice of proposed rulemaking: Testing of Bisphenol A." Federal Register **76**(143): 44535-44547.

- U.S. Environmental Protection Agency (U.S. EPA) (2011j). Toxics Release Inventory.
- Vinggaard, A. M., W. Körner, et al. (2000). "Identification and Quantification of Estroggenic Compunds in Recycled and Virgin Paper for Household Use As Determined by an in Vitro Yeast Estrogen Screen and Chemical Analysis." Chem. Res. Toxicol. 13: 1214-1222.
- Wilson, N., J. Chuang, et al. (2007). "An observation study of the potential exposures of preschool children to pentachlorophenol, bisphenol A, and nonylphenol at home and daycare." <u>Environ. Res.</u> **103**(1): 9-20.
- Wilson, N. K., J. C. Chuang, et al. (2003). "Aggregate exposures of nine preschool children to persistent organic pollutants at day care and at home." <u>Journal of Exposure Analysis and</u> Environmental Epidemiology **13**: 187-202.
- Xue, J., V. Zartarian, et al. (2007). "A Meta-Analysis of Children's Hand-to-Mouth Frequency Data for Estimating Nondietary Ingestion Exposure." <u>Risk Anal.</u> **27**(2): 411-420.
- Zalko, D., C. Jacques, et al. (2011). "Viable skin efficiently absorbs and metabolizes bisphenol A." <u>Chemosphere</u> **82**(3): 424-430.

6 Considerations for Selecting Thermal Paper Developers

Selecting an appropriate developer for use in the manufacture of thermal paper involves consideration of a range of factors. Design for the Environment (DfE) alternatives assessments provide information on chemical hazards and discuss other factors relevant to substitution decisions, such as use information, exposure considerations, and performance. Decision makers will likely supplement the human health and environmental information in this report with information on cost and performance.

This chapter begins by describing five general attributes evaluated in this assessment that can inform decision-making about chemical hazards: human health hazard, ecotoxicity, persistence, bioaccumulation, and exposure potential. This chapter provides a discussion of data gaps in the full characterization of chemicals included in this assessment. Performance, economic, and social considerations are also briefly addressed. This chapter concludes by discussing interim risk management measures that may be relevant for instances in which alternatives are associated with tradeoffs, and by providing additional resources related to state, federal, and international regulations, and available life cycle assessment (LCA) information.

6.1 Human Health and Environmental Considerations

This section identifies a set of attributes for consideration when formulating or selecting alternative thermal paper developers. In general, a safer chemical has low human health hazard, low exposure potential, low ecotoxicity, rapid degradability, and low potential for bioaccumulation.

6.1.1 Human Health Hazard

The DfE alternatives assessment criteria address a consistent and comprehensive list of hazard endpoints (U.S. EPA 2011c). Chemical hazards to human health include acute lethality, carcinogenicity, genotoxicity, reproductive and developmental toxicity, neurotoxicity, repeated dose toxicity, skin and respiratory sensitization, irritation/corrosivity, and endocrine activity. DfE criteria for most of these endpoints involve thresholds establishing levels of concern. Where data for certain endpoints were not available, hazard values were assigned using structure-activity modeling and professional judgment.

Several of the chemicals evaluated in this assessment are structurally similar to either bisphenol A (BPA) or bisphenol S, resulting in similar human health hazard profiles. Some general trends based on the information provided in Chapter 4 include: all chemicals exhibit low concern for acute toxicity; and most chemicals exhibit low to moderate concern for carcinogenicity, genotoxicity, repeated dose toxicity, irritation, and sensitization, however an important caveat is that most hazard calls are based on modeled data and expert judgment. There are some opportunities for distinction based on reproductive and developmental toxicity. With lower absorption, systemic effects are not as likely.

6.1.2 Ecotoxicity

Ecotoxicity includes adverse effects observed in wildlife, discussed in detail in Section 4.5.1. Aquatic organisms have historically been the focus of this endpoint.¹¹ Industry and government chemical reviews have traditionally focused on fish, aquatic invertebrates, and algae. Both acute and chronic aquatic toxicity should be considered in choosing a developer for use in thermal paper. Where data or expert knowledge is available, ecotoxic effects on other classes of animals and plants should be included in the hazard evaluation. Data from standard laboratory animals presented in respect to human health attributes can also be relevant to wildlife. To prevent concerns for higher trophic level organisms, bioaccumulation potential (Section 6.1.4) is an important consideration for substitution decisions.

For the thermal paper developers evaluated in this report, acute and chronic aquatic toxicity are variable and thus may present an opportunity for distinction among the alternatives.

6.1.3 Persistence

Persistence describes the tendency of a chemical to resist degradation and removal from environmental media, such as air, water, soil, and sediment. This is an important characteristic for chemicals used in thermal paper, as the paper may be recycled with potential releases to the environment. Chemical degradation in the environment either occurs through chemical reactivity with its surroundings or through biodegradation by microorganisms. Chemical reactivity is most commonly a result of hydrolysis (reactions with water) and photolysis (reactions with sunlight). Oxidative gas-phase processes may also play a role. In the absence of rapid chemical reactivity, biodegradation is the primary process that causes degradation. The destruction of a chemical by biodegradation is accomplished by the action of a living organism. Depending on the organism and chemical substrate combination, chemicals may degrade into other chemical substances (primary degradation) or may be completely mineralized into carbon dioxide and water (ultimate degradation) or may be completely broken down into carbon dioxide and water (ultimate degradation).

The rate of degradation is important, but equally important are the byproducts formed through the degradation process. In some cases, the products of biodegradation might be more toxic and persistent than the parent compound.

For the thermal paper developers evaluated in this report, persistence is variable and may be an opportunity for distinction among the alternatives (see Chapter 4).

6.1.4 Bioaccumulation Potential

The ability of a chemical to accumulate in living organisms is described by the bioconcentration, bioaccumulation, biomagnification, and/or trophic magnification factors. Most of the

¹¹ Aquatic organisms became the focus of ecotoxicology assessments for several reasons: releases to water were a prominent concern, data were more abundant, and hence computer models were developed based on aquatic organisms.

alternatives assessed in this report have been assessed as having low-moderate potential for bioaccumulation but nearly all of the assessments are based on computer models. Based on structure activity relationships, the potential for a molecule to be absorbed by an organism tends to be lower when the molecule is larger than 1,000 daltons. None of the chemicals in this assessment meet this threshold. Note that care should be taken not to consider the 1,000 daltons size to be an absolute threshold for absorption – biological systems are dynamic and even relatively large chemicals may be absorbed under certain conditions.

The test guidelines available to predict potential for bioaccumulation have some limitations. Bioconcentration tests tend to be limited for chemicals that have low water solubility (hydrophobic. Even if performed properly, a bioconcentration test may not adequately measure bioaccumulation potential because bioaccumulation is a measure of all uptake while most bioconcentration tests do not currently measure dietary uptake (i.e., uptake by fish via food versus via their gills respectively). Under review in the Organisation for Economic Cooperation and Development (OECD) program and close to finalization is a major upgrade to the fish bioconcentration test, in which dietary uptake is included for the first time. Dietary uptake is of critical importance and is probably the dominant route of exposure for hydrophobic chemicals.

For the thermal paper developers evaluated in this report, bioaccumulation concerns generally fall within the low-moderate range (see Chapter 4).

6.1.5 Exposure Considerations

For humans, chemical exposures may occur at different points throughout the chemical and product lifecycle, through skin contact, by inhalation, and by ingestion, and exposures are affected by multiple physicochemical factors, as discussed in Chapter 5. The DfE alternatives assessment begins with the assumption that exposure scenarios for chemicals and their alternatives within a functional use class are roughly equivalent. The assessment also recognizes that in some instances chemical properties or use patterns may affect exposure scenarios. For example, some BPA alternatives may require different amounts to achieve the same technical specifications. Stakeholders should evaluate whether manufacturing changes, lifecycle considerations, and physicochemical properties will result in different patterns of exposure as a result of informed chemical substitution. In general, the chemicals included in this assessment have similar physicochemical parameters and their use as developers is roughly equivalent. Therefore, exposure patterns are expected to be similar.

6.2 Considerations for Poorly or Incompletely Characterized Chemicals and Variable Amounts of Data

For most industrial chemicals, experimental data for hazard characterization are limited. For chemicals in this report without full data sets, analogs, structure activity relationship (SAR) modeling, and expert judgment were used. More information on predicted hazard levels can be found in Chapter 4. Estimated values in the report can be used to prioritize testing needs.

Several chemicals included in this analysis appear to have more preferable profiles, with low human health and ecotoxicity endpoints (see Chapter 4). However, because no chemical-specific empirical data were available, their hazard evaluations were entirely predicted based on

structure-activity relationships, analogs, and expert judgment. Empirical data will allow for a more robust assessment that will support expert judgments, therefore we strongly encourage additional studies to fill these data gaps.

In the absence of measured data, users of this alternatives assessment should be cautious in the interpretation of hazard profiles. For chemicals without data, developing data would prevent unexpected consequences if a prediction did not hold true. If chemicals are used at higher volumes, or are likely to be in the future, this fact should also be given weight when considering data needs. Decision-makers should proceed with caution and are advised to read the full hazard assessments for each chemical (see Chapter 4) which may inform whether additional testing is needed.

Where hazard characterizations are based on measured data, there are often cases where the amount of test data supporting the hazard rating varies considerably between alternative chemicals. In Table 4-4, the hazard characterizations based on SAR or expert judgment are listed in black italics, while those with hazard characterizations based on measured test data are listed in color. The amount of measured test data available to inform the evaluation of endpoints can vary from only one study to many studies in many species with different routes of exposure and exposure duration. In some instances, testing may go beyond basic guideline studies, and it can be difficult to compare data for such chemicals against those with only a single guideline study, even though hazard calls for both chemicals are "based on empirical data" and thus come with a higher level of confidence. Comparisons between a chemical with only one study and a second chemical with many studies are complex and merit careful consideration. For hazard screening assessments, such as the DfE approach, a single adequate study can be sufficient to provide a hazard rating. Therefore some ratings reflect assessment based on one study while others reflect assessment based on multiple studies of different design. The hazard rating does not convey these differences – the full hazard profile should be consulted to understand the limitations of the available data.

6.3 Performance Considerations

This section identifies general performance attributes that companies can consider when formulating or selecting alternative chemicals. These attributes are critical to the overall function and marketability of the chemicals and can be considered jointly with economic considerations and the human health and environmental attributes described above.

Known thermal paper developers are typically organic or organometallic-compounds that have the following physical properties: low water solubility, substantially colorless, odorless, and chemically inert towards water and oxygen over a pH range from 6 to 10 (D. Keller, personal communication, December 1, 2011).

As discussed in Chapter 3, performance characteristics of effective developers in thermal paper include:

- Appropriate acidity, such that it produces no background imaging;
- Ability to fully react with the colorformer when heated;
- Reaction at the temperature of the specific printer;

- Stable at end use temperatures;
- Appropriate level of permanence for the application;
- Appropriate performance vs. cost balance; and
- Feasibility for large-scale production.

In considering alternative formulations or chemical substitutions, decision makers will need to consider the pH, temperature, and water solubility of the developer, as well as the stability and durability of the resulting image. The following conditions may limit the durability of thermal images: exposure to temperatures greater than 40°C, wet environments, direct sunlight, and certain chemicals such as alcohol, fuels, and oils (Koehler Thermal Papers 2011). However, depending on the grade, thermal papers can retain their image integrity even in conditions of bright lights, moisture, scuffing, and high temperatures up to 180°F (Appleton 2003).

In addition to considering the hazard information provided in Chapter 4 and the performance characteristics described above, other considerations include:

- **Printer Compatibility:** Modifications to thermal paper manufacture, either to developers or more broadly to other chemistry or process, should require consideration of how these changes may affect compatibility with existing thermal printers or what changes to printer technology or re-design may be required as a result.
- Compatibility with End Use: Specific developers and types of thermal paper are used
 for specific applications, depending on performance, design, and economic
 considerations. Direct thermal paper can be used in a wide range of applications,
 including amusement park tickets, produce labels, retail hang tags, ski lift tickets,
 baggage tags, mass transit tickets, parking receipts, and lottery tickets (Appleton 2011).
 Modifications to thermal paper design would require consideration of appropriateness for
 specific end uses.
- **Appropriate Image Quality:** Alternatives should ensure appropriate image quality at the time of printing and stability for the required time period. Thermal images have sufficient resolutions for printing of text, graphics, and barcodes. Depending on grade, image integrity can last up to ten years (Appleton 2003; Koehler Thermal Papers 2011).

6.4 Economic Considerations

This section identifies economic attributes that companies can consider when formulating or selecting alternative chemicals. Full consideration of economic factors is often more fully addressed by decision-makers within the context of their companies or organizations. Accurate cost estimations are company-specific; the impact of substituting chemicals on complex product formulations can only be analyzed using in-house data that is likely to be business confidential; and a company should determine for itself how changes will impact market share or other business factors. Cost considerations may be relevant across the chemical and/or product lifecycle. These attributes are critical to the overall function and marketability of alternatives and can be considered jointly with performance attributes and human health and environmental attributes.

To ensure economic viability, alternatives should be easy to process and cost-effective to integrate into products. The most desirable alternatives are compatible with existing process equipment and can be integrated in existing products. If this compatibility is not available, manufacturers will need to modify their processes and potentially purchase new equipment. From an economic standpoint, the ideal alternative would be a drop-in replacement that has similar physical and chemical properties such that existing storage and transfer equipment as well as manufacturing technologies could be used without significant modification. However, chemicals with similar physical and chemical properties may have similar hazard and exposure profiles.

Substituting chemicals can involve significant costs, as industries may need to adapt their production processes and have products re-tested for all required performance and product standards. Decision-makers are advised to see informed chemical substitution decisions as long-term investments, and to replace the use of BPA with a chemical they anticipate using for many years to come. This includes attention to potential future regulatory actions as well as market trends.

Alternatives that are either more expensive per pound or require more chemical per unit area to be functional will increase costs. In this situation, the cost of a chemical that must be used at a higher application rate may be passed on to customers, who will subsequently pass the cost on to consumers. In some cases, the price premium may diminish over the different stages of the value chain.

Some of the alternative chemicals assessed in this report are currently manufactured in high volume. Others are not currently available in quantities that would allow for immediate widespread use. Prices and availability are likely to change with an increase in demand.

Handling, disposal, and treatment costs may be important considerations when evaluating alternatives. Inherently high-hazard chemicals may require special engineering controls and worker protections that are not required of less hazardous alternatives. Disposal costs for high hazard chemicals may also be greater than for low hazard alternatives. High hazard chemicals may be more likely to result in unanticipated clean-up requirements should risk management protections fail or unanticipated exposures or spills occur. Also, some chemicals may require specific treatment technologies prior to discharge through wastewater treatment systems. These costs can be balanced against the up-front costs for the purchase of the alternative chemical, new equipment, etc. Finally, initial chemical substitution expenses may reduce future costs of mitigating consumer concerns and perceptions related to hazardous chemicals.

6.5 Social Considerations

Decision-makers should be mindful of a number of social considerations when choosing alternative chemicals. This section highlights occupational, consumer, and environmental justice considerations. Stakeholders may identify additional social considerations for application to their own decision-making processes.

Awareness of social considerations related to informed substitutions includes attention to participation in decision-making processes, the impacts of human behaviors on the implementation or on outcomes of interventions, and the distributions of impacts across populations. Social considerations are one of the three pillars of sustainability (National Academy of Sciences 2011), and a focus on sustainability recognizes that human and environmental systems are coupled and interdependent (Clark 2007). Decisions should be made to maximize social, environmental, and economic benefits and to minimize the adverse effects of conflicts between these areas. According to the National Academy of Sciences report on "Sustainability and the U.S. EPA" (2011), the U.S. Environmental Protection Agency (EPA) would benefit from working with stakeholders to develop robust indicators for these attributes.

Occupational considerations: Some stakeholders have raised concerns for differential exposure to BPA based on occupation. In particular, some partners noted that cashier jobs are often held by young women of childbearing age, who may experience greater exposures to BPA due to frequent handling of thermal paper receipts. Existing research reinforces these concerns (see Section 5.3.4). Braun et al. (2011) found that prenatal urinary BPA exposures were highest among cashiers, although this finding was attenuated after adjustment for socioeconomic factors. Prenatal exposures are of particular concern due to the increased susceptibility of early life stages, discussed in Section 5.3.4. Liao and Kannan (2011b) compared occupational exposure, based on handling 150 pieces of thermal paper/day, to exposure in the general population, based on handling two pieces of thermal paper/day. They estimated occupational exposure to thermal paper at 1303 ng/day of BPA, compared to BPA exposure in the general population of only 17.5 ng/day.

Consumer considerations: Consumers are potentially exposed to any chemicals found on thermal paper. As detailed in Section 5.3.5, exposure research documents that Americans carry body burdens of BPA (Calafat, Ye et al. 2008), although thermal paper is not considered to be the primary source of exposure (Rudel, Gray et al. 2011). Nonetheless, consumer reactions to exposure concerns can impact markets by creating pressure for substitution. DfE alternatives assessments can assist companies navigating these substitution pressures. There is greater emphasis on "green" products, and some consumers and non-governmental organizations (NGOs) advocate for informed substitution of chemicals, moving away from certain classes of chemicals entirely, with product re-design.

In recent years there has been a greater emphasis on 'green' products. In addition to substituting in alternative chemicals, some organizations advocate for moving away from certain classes of chemicals entirely, with product re-design, to avoid future substitutions altogether. Product manufacturers should be mindful of the role of these organizations in creating market pressure for alternative chemicals and strategies, and should choose replacement chemicals – or re-designs – that meet the demands of their customers.

Environmental justice considerations: At EPA, environmental justice concerns refer to the disproportionate impacts on minority, low-income, or indigenous populations that exist prior to or that may be created by the proposed action. These disproportionate impacts arise because these population groups experience higher exposures, are more susceptible in response to exposure, or experience both conditions. Factors that are likely to influence resilience/ability to

withstand harm from a toxic insult can vary with sociodemographics (e.g. co-morbidities, diet, metabolic enzyme polymorphisms, etc) and are therefore important considerations. Adverse outcomes associated with exposure to chemicals may be disproportionately borne by minority and low income populations. Insights into EPA's environmental justice policy can be accessed at: www.epa.gov/compliance/ej/resources/policy/considering-ej-in-rulemaking-guide-07-2010.pdf.

Some populations have higher exposures to certain chemicals in comparison to the average member of the general population. Minority and low-income populations are over-represented in the manufacturing sector, increasing their occupational exposure to chemicals. Higher exposures to environmental chemicals may also be attributable to atypical product use patterns and exposure pathways. This may be due to a myriad of factors such as cultural practices, language and communication barriers, and economic conditions. The higher exposures may also be a result of the proximity of these populations to sources that emit the environmental chemical (e.g. manufacturing industries, industries that use the chemical as production input, hazardous waste sites, etc), access to and use of consumer products that may result in additional exposures to the chemical, or higher employment of these groups in occupations associated with exposure to the chemical.

Considering environmental justice in the assessment of an alternative chemical may include exploring product use patterns, pathways and other sources of exposure to the substitute, recognizing how upstream factors such as socio-economic position, linguistic and communication barriers, may alter typical exposure considerations. One tool available to these populations is the Toxics Release Inventory (TRI), which was established under the Emergency Planning and Community Right-to-Know Act (EPCRA) to provide information about the presence, releases, and waste management of toxic chemicals. Communities can use information reported to TRI to learn about facilities in their area that release toxic chemicals and to enter into constructive dialogue with those facilities. This information can empower impacted populations by providing an understanding about chemical releases and the associated environmental impacts in their community. Biomonitoring data for the alternative chemical, if available, can also signal the potential for disproportionate exposure among populations with environmental justice issues.

6.6 Trade-offs and Interim Risk Mitigation

In the absence of clearly-preferable low hazard functional alternatives, risk mitigation may be necessary in the interim. The hazard evaluations in Chapter 4 of this alternatives assessment include an analysis of the intrinsic properties that influence exposure, fate and transport. Further information on exposure pathways and life cycle considerations is presented in Chapter 5. A chemical alternative that poses a significantly greater opportunity for exposure should be further evaluated, and decision-makers should supplement the comparative chemical hazard assessment described in this report with other assessments, such as risk assessments, for potentially preferable alternatives.

In many instances it is apparent that alternative chemicals come with trade-offs. For any chemical identified as a potential alternative, some endpoints may appear preferable while others

indicate increased concern relative to the original chemical. For example, a chemical may have a lower concern for human health but a higher concern for aquatic toxicity or persistence.

These types of trade-offs can be difficult to evaluate, and such decisions should take into account relevant information about the chemical's hazard profile, expected product use, the potential for worker and consumer exposure, and the opportunity for the chemical to enter various waste streams, among other life-cycle and mitigation considerations. For example, chemicals expected to have high levels of developmental or reproductive toxicity should not be used in products intended for use by children or women of child-bearing age. Chemicals with high aquatic toxicity concerns should not be used if releases to water cannot be mitigated in the manufacturing, use, and disposal process.

Risk mitigation actions provide the opportunity to limit human health and environmental exposure. These actions provide immediate opportunities to address exposure concerns and may be considered alone or in conjunction with selection of an alternative, if appropriate. Examples of actions that may be appropriate are presented below.

The traditional hierarchy of exposure control practices begins with elimination and substitution (NIOSH 2011). When chemicals cannot be eliminated or substituted with safer alternatives, there are a variety of modifications and engineering controls that should be considered. For example, in the manufacture and use of chemicals in industrial processes, exposure can be limited through innovative engineering controls such as containment, improvements to local ventilation, and the use of negative-pressure systems for feeding materials (He, Miao et al. 2009). Personal protective equipment can also be used, and is considered to be the last line of protection in the exposure control hierarchy.

Traditional Hierarchy
of Exposure Control Practices

Elimination

Substitution

Modification

Containment

Ventilation

Work Practices

Personal Protection

Figure 6-1: Traditional Hierarchy of Exposure Control Practices

Source: (NIOSH 2011)

In consumer and occupational settings, risk mitigation measures may help reduce or avoid exposure to BPA in thermal paper. For example, after handling receipts consumers and retail workers can limit their exposure to BPA by washing their hands prior to preparing or eating food, storing receipts separately in a wallet or purse, and avoiding the use of alcohol-based hand

cleaners, which have the potential to increase dermal BPA absorption (Lunder, Andrews et al. 2010).

Risk mitigation measures may also limit human and environmental exposures to BPA and other chemicals during recycling or disposal. For example, recycling of thermal paper can lead to release of BPA into the environment through sludge and wastewater (JRC-IHCP 2010), and BPA contamination of recycled paper products, which are often used to store food (Ozaki, Yamaguchi et al. 2004). As an alternative to recycling, thermal paper can be disposed of in a landfill. While the anaerobic conditions associated with many landfills do not favor the degradation of BPA (Ying and Kookana 2005), the collection and treatment of landfill leachate can decrease the likelihood of BPA entering the environment.

A recent study suggests that the burning of plastics in waste disposal is a significant source of atmospheric BPA, but further research is needed to confirm the results and determine if prolonged exposure to low level atmospheric BPA could be associated with negative health effects (Fu and Kawamura 2010). Incineration produces negligible waste to soil and aquatic environments (JRC-IHCP 2010).

6.7 Innovation and Design Challenges

A DfE alternatives assessment can suggest directions for innovation and product development, especially when clearly preferable alternatives are not available. This can spur innovation by identifying design challenges and by highlighting the hazard endpoints and measures of exposure potential that delineate safer chemicals. Green chemistry tools and expertise are growing. The DfE approach enables identification of safer substitutes that emphasize greener chemistry and points the way to innovation in safer chemical design where hazard becomes a part of a performance evaluation. EPA encourages collaboration to identify safer solutions to complex chemical hazards. For more information on green chemistry, please refer to the EPA Green Chemistry Program (http://www.epa.gov/greenchemistry/) or the American Chemical Society Green Chemistry Institute (www.acs.org/greenchmistry/).

Options to be considered include the development of new chemicals that have a preferable hazard profile, while still meeting the performance considerations required by particular applications. Another option would be to redesign thermal paper. This would include consideration of a variety of sustainability considerations, including use of recycled materials and low concern chemicals as developers, colorformers, and sensitizers. Other approaches could include additional research to determine if the application of a top coat (currently an optional design characteristic depending on a particular application) helps to limit exposure to consumers or workers. It is important to note that these approaches are not mutually exclusive; a combination of techniques may be appropriate.

In addition to reconfiguring thermal printing systems, decision makers may wish to consider alternative printing systems. These systems should be evaluated and compared to thermal printing to better understand relative performance, cost, and hazard. To make an informed substitution, chemicals used in alternative printing systems must not be assumed to be low hazard. Thermal transfer printing, impact printing, and laser printing are all alternatives to direct

thermal printing (Seiko Instruments U.S.A. Inc. n.d.). However, thermal paper printers are unique because they require no ribbons, inks, or toner cartridges. Thermal paper printers typically have fewer moving parts and low maintenance costs compared to similar technology (Appleton 2003).

A significant use of thermal paper is for point-of-sale receipts. Every year, an estimated 9.6 million trees are cut down in the United States for receipts (Clifford 2011), although many companies strive for sustainability through stewardship and management programs. Electronic receipts (e-receipts) are becoming increasingly common in the retail industry, being offered by Apple, Nordstrom, Whole Foods, and other major retailers. They are either emailed directly to consumers or uploaded to a password-protected website. E-receipts allow consumers to keep searchable records of purchases on their computer. E-receipts could reduce paper waste and also limit exposure to BPA and other chemicals, making them an approach to be considered in alternatives discussions. A full examination of the relative merits of thermal paper versus e-receipts requires the consideration of lifecycle attributes, which is beyond the scope of this project.

6.8 Relevant Resources

In addition to the information provided in this report there are a variety of resources which provide information on chemical regulations at the state, national and global levels, some of which are cited in this section. Tools, including GreenScreenTM are also available to assist in using the information in this report to make a substitution decision.

6.8.1 Resources for State and Local Authorities

The University of Massachusetts at Lowell created an online database that contains a collection of state and local legislative and executive branch policies from all 50 states from 1990 to the present that regulate or ban specific chemicals, provide comprehensive state policy reform, establish biomonitoring programs, or foster "green" chemistry. (National Caucus of Environmental Legislators 2008).

http://www.chemicalspolicy.org/chemicalspolicy.us.state.database.php

The Washington Department of Ecology concluded that averting toxic exposures and avoiding future health and cleanup costs is the smartest, cheapest and healthiest approach to preventing the harm associated with toxic chemicals, and created the Reducing Toxic Threats initiative to coordinate activities to achieve this goal (see: http://www.ecy.wa.gov/toxics/index.htm). Although the Department has conducted alternatives assessments as part of this effort, they are now focused on developing tools and guidance documents to allow businesses to conduct their own alternatives assessments to facilitate the movement to safer substitutes for chemicals of concern. The Department of Ecology has developed the Quick Chemical Assessment Tool, based on the Green Screen (see 6.7.4 below), to rapidly assess chemical options and remove from consideration those that are likely to be most toxic, so that in-depth assessments can focus on those chemicals that are likely to be safer. This is particularly important for businesses with limited resources. At the time of the writing of this report, the Department is in the process of developing an alternatives assessment guidance document.

6.8.2 Federal Agency Resources

EPA's website contains information on how the Agency develops regulations, the regulations that are in place, and information to assist companies in maintaining compliance with regulations. The website also provides information on EPA's partnership programs, such as DfE. Some EPA resources are listed below.

EPA Laws and Regulations http://www.epa.gov/lawsregs/

EPA Office of Pollution Prevention and Toxics (OPPT) http://www.epa.gov/oppt/

EPA Design for the Environment (DfE) Program http://www.epa.gov/oppt/dfe/

Websites from other federal agencies that may be relevant to this alternatives assessment are provided below.

Consumer Product Safety Commission (CPSC) http://www.cpsc.gov/

U.S. Food and Drug Administration (FDA) http://www.fda.gov/

National Institute for Occupational Safety and Health (NIOSH) (part of the Centers for Disease Control and Prevention (CDC)) http://www.cdc.gov/niosh/

6.8.3 Resources for Global Regulations

The European Union (EU)'s REACH (Registration, Evaluation, Authorisation and Restriction of Chemical substances) legislation was enacted in 2007 and aims "to improve the protection of human health and the environment through the better and earlier identification of the intrinsic properties of chemical substances" (European Commission 2011a). Their website contains information on legislation, publications and enforcement.

http://ec.europa.eu/environment/chemicals/reach/enforcement_en.htm

The EU's Restriction of Hazardous Substances (RoHS) legislation ensures that new electrical and electronic equipment put on the market does not contain any of the six banned substances: lead, mercury, cadmium, hexavalent chromium, poly-brominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) above specified levels (European Commission 2011b).

http://www.rohs.eu/english/index.html

6.8.4 GreenScreenTM for Safer Chemicals

The GreenScreenTM for Safer Chemicals was developed by the non-profit group Clean Production Action. It is a method for chemical hazard assessment to help move society toward the use of greener and safer chemicals. At the foundation of the GreenScreenTM method are the Principles of Green Chemistry and the work of the EPA DfE program. The GreenScreenTM addresses many of the principles of green chemistry and design for the environment through its focus on hazard reduction and informed substitution.

http://www.cleanproduction.org/Greenscreen.php

6.9 Related Assessments

In 2008, the European Commission published an environmental and human health addenda to its risk assessment of BPA.

European Union Risk Assessment Report, Human Health Addendum of April 2008, 4,4'-ISOPROPYLIDENEDIPHENOL (Bisphenol-A), Part 1 Environment

http://publications.jrc.ec.europa.eu/repository/bitstream/1111111111115063/1/lbna24588enn.pdf

European Union Risk Assessment Report, Human Health Addendum of April 2008, 4,4'-ISOPROPYLIDENEDIPHENOL (Bisphenol-A), Part 2 Human Health

http://publications.jrc.ec.europa.eu/repository/bitstream/1111111111115069/1/lbna24589enn.pdf

References

- Appleton (2003). It's Everywhere...It's Direct Thermal. Appleton: Thermal and Advanced Technical Products.
- Appleton (2011). End Use Applications. Appleton.
- Braun, J. M., A. E. Kalkbrenner, et al. (2011). "Variability and Predictors of Urinary Pisphenol A Concentrations during Pregnancy." <u>Environmental Health Perspectives</u> **119**(1): 131-137.
- Calafat, A. M., X. Ye, et al. (2008). "Exposure of the U.S. Population to Bisphenol A and 4-tertiary-Octylphenol: 2003-2004." Environmental Health Perspectives **116**(1): 39-44.
- Clark, W. C. (2007). "Sustainability Science: A room of its own." <u>Proceedings of the National Academy of Sciences of the United States of America</u> **104**(6): 1737-1738.
- Clifford, S. (2011) "Shopper Receipts Join Paperless Age." The New York Times.
- European Commission. (2011a). "REACH." Retrieved March 30, 2011, from http://ec.europa.eu/environment/chemicals/reach/reach_intro.htm.
- European Commission. (2011b). "Working with EEE producers to ensure RoHS compliance through the European Union." Retrieved November 30, 2011, from http://www.rohs.eu/english/index.html.
- Fu, P. and K. Kawamura (2010). "Ubiquity of bisphenol A in the atmosphere." <u>Environmental Pollution</u> **158**(10): 3138-3143.
- He, Y., M. Miao, et al. (2009). "Occupational Exposure Levels of Bisphenol A among Chinese Workers." <u>Journal of Occupational Health</u> **51**(5): 432-436.
- Joint Research Centre-Institute for Health and Consumer Protection (JRC-IHCP) (2010). European Union Risk Assessment Report, 4,4'-Isopropylidenediphenol (Bisphenol-A).
- Koehler Thermal Papers (2011). Koehler Thermal Papers: Product Range.
- Liao, C. and K. Kannan (2011b). "Widespread Occurence of Bisphenol A in Paper and Paper Products: Implications for Human Exposure." <u>Environ. Sci. Technol.</u> **45**: 9372-9379.
- Lunder, S., D. Andrews, et al. (2010). "Synthetic estrogen BPA coats cash register receipts." <u>Environmental Working Group (EWG)</u>, from http://www.ewg.org/bpa-in-store-receipts.
- National Academy of Sciences (2011). Sustainability and the U.S. EPA. Washington D.C.
- National Caucus of Environmental Legislators. (2008). "Lowell Center Releases Searchable State Chemical Policy Database." Retrieved March 30, 2011, from http://www.ncel.net/newsmanager/news_article.cgi?news_id=193.

- NIOSH. (2011). "Workplace Safety & Health Topics." from http://www.cdc.gov/niosh/topics/ctrlbanding/ctrlbandingfaq.html.
- Ozaki, A., Y. Yamaguchi, et al. (2004). "Chemical analysis and genotoxicological safety assessment of paper and paperboard used for food packaging." Food and Chemical Toxicology **42**: 1323-1337.
- Rudel, R. A., J. M. Gray, et al. (2011). "Food Packaging and Bisphenol A and Bis(2-Ethyhexyl) Phthalate Exposure: Findings from a Dietary Intervention." <u>Environmental Health Perspectives</u> **119**(7): 914-920.
- Seiko Instruments U.S.A. Inc. (n.d.). A Primer on Selecting Printers for Embedded Applications.
- U.S. Environmental Protection Agency (U.S. EPA) (2011c). Design for the Environment Program Alternatives Assessment Criteria for Hazard Evaluation, Version 2.0. Office of Pollution Prevention & Toxics. Washington D.C.
- Ying, G.-G. and R. S. Kookana (2005). "Sorption and degradation of estrogen-like-endocrine disrupting chemicals in soil." <u>Environmental Toxicology and Chemistry</u> **24**(10): 2640-2645.