



#### RESOURCE AND PATIENT MANAGEMENT SYSTEM

## **Clinical Reporting System**

(BGP)

# CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures

Version 12.1 May 2012

Office of Information Technology (OIT)
Division of Information Resource Management
Albuquerque, New Mexico

## **Table of Contents**

1.0	Introdu	uction	1
2.0	Perfor	mance Measure Logic	2
	2.1	Performance Measure Logic Basics	2
	2.1.1	CRS Denominator Definitions	2
	2.1.2	Performance Measure Logic Example	. 12
	2.1.3	Age Ranges	. 14
	2.1.4	Standard Health Care Codes	
	2.2	Diabetes Related Measure Topics	. 16
	2.2.1	Diabetes Prevalence	
	2.2.2	Diabetes Comprehensive Care	. 19
	2.2.3	Diabetes: Glycemic Control	
	2.2.4	Diabetes: Blood Pressure Control	. 29
	2.2.5	Diabetes: LDL Assessment	. 33
	2.2.6	Diabetes: Nephropathy Assessment	. 37
	2.2.7	Diabetic Retinopathy	. 41
	2.2.8	RAS Antagonist Use in Diabetic Patients	. 45
	2.2.9	Diabetes: Access to Dental Services	. 50
	2.3	Dental Measure Topics	
	2.3.1	Access to Dental Services	. 53
	2.3.2	Dental Sealants	. 56
	2.3.3	Topical Fluoride	. 59
	2.4	Immunization Measure Topics	
	2.4.1	Influenza	. 61
	2.4.2	Adult Immunizations	. 66
	2.4.3	Childhood Immunizations	. 70
	2.4.4	Adolescent Immunizations	. 82
	2.5	Childhood Diseases Group	
	2.5.1	Appropriate Treatment for Children with Upper Respiratory Infection	
	2.5.2	Appropriate Testing for Children with Pharyngitis	
	2.6	Cancer Related Measure Topics	
	2.6.1	Cancer Screening: Pap Smear Rates	
	2.6.2	Cancer Screening: Mammogram Rates	
	2.6.3	Colorectal Cancer Screening	
	2.6.4	Comprehensive Cancer Screening	
	2.6.5	Tobacco Use and Exposure Assessment	
	2.6.6	Tobacco Cessation	
	2.7	Behavioral Health Related Performance Measure Topics	
	2.7.1	Alcohol Screening (FAS Prevention)	
	2.7.2	Alcohol Screening and Brief Intervention (ASBI) in the ER	128
	2.7.3	Intimate Partner (Domestic) Violence Screening	132

2.	7.4	Depression Screening	135
2.	7.5	Antidepressant Medication Management	140
2.8	(	Cardiovascular Disease Related Measure Topics	146
2.	.8.1	Obesity Assessment	
2.	8.2	Childhood Weight Control	
2.	.8.3	Nutrition and Exercise Education for At Risk Patients	154
2.	.8.4	Physical Activity Assessment	158
2.	.8.5	Comprehensive Health Screening	
2.	8.6	Cardiovascular Disease and Cholesterol Screening	168
2.	.8.7	Cardiovascular Disease and Blood Pressure Control	
2.	8.8	Controlling High Blood Pressure	174
2.	.8.9	Comprehensive CVD-Related Assessment	178
2.	.8.10	Appropriate Medication Therapy after a Heart Attack	185
2.	.8.11	Persistence of Appropriate Medication Therapy after a Heart Attack	196
2.	.8.12	Appropriate Medication Therapy in High Risk Patients	
2.	8.13	Stroke and Stroke Rehabilitation: Anticoagulant Therapy Prescribed	for
		Atrial Fibrillation at Discharge	
2.	8.14	Cholesterol Management for Patients with Cardiovascular Conditions	
2.	.8.15	Heart Failure and Evaluation of LVS Function	
2.9		STD-Related Measure Topics	
	.9.1	HIV Screening	
	.9.2	HIV Quality of Care	
2.	.9.3	Hepatitis C Screening	235
2.	9.4	Chlamydia Screening	
2.	.9.5	Sexually Transmitted Infection Screening	
2.1		Other Clinical Measures Topics	
2.	.10.1	Osteoporosis Management	
2.	.10.2	Osteoporosis Screening in Women	
	.10.3	Rheumatoid Arthritis Medication Monitoring	
	.10.4	Osteoarthritis Medication Monitoring	257
	.10.5	Asthma	
	.10.6	Asthma Assessments	_
2.		Asthma Quality of Care	
		Medication Therapy for Persons with Asthma	274
2.	.10.9	Community-Acquired Pneumonia (CAP): Assessment of Oxygen	
		Saturation	
		Chronic Kidney Disease Assessment	
		Prediabetes/Metabolic Syndrome	
		Proportion of Days Covered by Medication Therapy	
		Medications Education	
		Medication Therapy Management Services	
		Self Management (Confidence)	
2	10.16	Public Health Nursing	302

	2.10.17 Breastfeeding Rates	
	2.10.18 Use of High-Risk Medications in the Elderly	
	2.10.19 Functional Status Assessment in Elders	314
	2.10.20 Fall Risk Assessment in Elders	317
	2.10.21 Palliative Care	319
	2.10.22 Annual Wellness Visit	322
	2.10.23 Goal Setting	324
Contac	ct Information	326

## **Preface**

The Government Performance and Results Act (GPRA) requires federal agencies to report annually on how the agency measured up against the performance targets set in its annual Plan. The Indian Health Service (IHS) GPRA report includes measures for clinical prevention and treatment, quality of care, infrastructure, and administrative efficiency functions.

The IHS Clinical Reporting System (CRS) is a Resource and Patient Management System (RPMS) software application designed for national reporting as well as Area Office and local monitoring of clinical GPRA and developmental measures. CRS was first released for Fiscal Year (FY) 2002 performance measures (as GPRA+) and is based on a design by the Aberdeen Area (GPRA2000).

This manual contains the FY 2012 clinical performance measure definitions and logic for the CRS 2012 Version 12.0 software. CRS is the reporting tool used by the IHS Office of Planning and Evaluation to collect and report clinical performance results annually to the Department of Health and Human Services and to Congress.

Each year, an updated version of CRS software is released to reflect changes in the logic descriptions of the different denominators and numerators. Additional performance measures may also be added. Local facilities can run reports as often as they want to and can also use CRS to transmit data to their Area. The Area Office can use CRS to produce an aggregated Area report for either annual GPRA or Area Director Performance reports.

CRS produces reports on demand from local RPMS databases for both GPRA and developmental clinical measures that are based on RPMS data, thus eliminating the need for manual chart audits for evaluating and reporting clinical measures.

To produce reports with comparable data across every facility, the GPRA measures definitions was "translated" into programming code with the assistance of clinical subject matter experts. CRS uses predefined taxonomies to find data items in the RPMS Patient Care Component (PCC) to determine if a patient meets the performance measure criteria. Taxonomies contain groups of codes (e.g., diagnoses or procedures) or site-specific terms. Each performance measure has one or more defined denominators and numerators.

Administrative and clinical users can produce reports for selected measures at any time to:

• Identify potential data issues in their RPMS, i.e., missing or incorrect data.

- Monitor their site's performance against past national performance and upcoming agency goals.
- Identify specific areas where the facility is not meeting the measure in order to initiate business process or other changes.
- Quickly measure impact of process changes on performance measures.
- Identify areas meeting or exceeding measures to provide lessons learned.

#### Users of the RPMS CRS include:

- Area Office and site quality improvement staff
- Compliance Officers
- GPRA coordinators
- Clinical staff, such as physicians, nurses, nurse practitioners, and other providers
- Area Office directors
- Any staff involved with quality assurance initiatives
- Staff who run various CRS reports

## 1.0 Introduction

This manual provides information on the performance measure logic used by the Clinical Reporting System (CRS) Version 12.1 Selected Measures (Local) Report (Fiscal Year [FY] 2012 Clinical Performance Measures). For information on system setup, available reports and steps for running the reports, and performing Area Office functions, refer to the CRS Version 12.1 User Manual.

## 2.0 Performance Measure Logic

This section provides the following information for each performance measure topic:

- For Government Performance and Results Act (GPRA) measures, the measure description is provided as stated in the Indian Health Service (IHS) Annual Performance Report to Congress
- Definitions of all denominators and numerators for each performance measure topic
- Detailed description of the logic for the denominator and numerator, including specific codes, fields, taxonomies, and/or values searched
- Key changes to logic from the previous year, if any
- Description of which patients and information are contained on the patient list
- Performance measure source and past IHS performance, if any, and IHS or Healthy People (HP) 2020 targets for the performance measure
- Report examples
- Patient list examples

**Note:** All report examples and patient list examples used in this section were produced from "scrubbed" demonstration databases and do not represent individual patient data.

## 2.1 Performance Measure Logic Basics

#### 2.1.1 CRS Denominator Definitions

Each performance measure topic has one or more define denominators and numerators. The denominator is the total population that is being reviewed for a specific measure. For the National GPRA & Program Assessment Rating Tool (PART) Report, only one denominator for each topic is reported. These denominators are pre-defined, based on the Active Clinical Population definition. For the Selected Measures reports for local use (CRS Version 12.1 User Manual, Section 5.12), multiple denominators may be reported to provide a complete picture of clinical performance. There are also additional options available to further refine denominator definitions.

#### 2.1.1.1 Denominator Definitions for National GPRA Reporting

The Active Clinical population is the denominator definition used as the basis for *most* GPRA measures. This denominator was developed in FY 2003 specifically for clinical performance measures because it is more representative of the active clinical population.

Note: There are facilities that do not offer direct care. Patients in these facilities receive only Contract Health Services (CHS) and therefore do not meet the requirements of the Active Clinical population. A new site parameter, Contract Health Site Only, was added for these facilities in FY2006.

Prior to FY 2003, the GPRA User Population denominator definition was used for national reporting, similar to the agency's IHS User Population definition.

The *Active Clinical* population for the National GPRA & PART Report is defined by the following criteria:

- Patients with the name of "DEMO, PATIENT" or who are included in the Resource and Patient Management System (RPMS) Demo/Test Patient Search Template (DPST option located in the PCC Management Reports, Other section) will be automatically excluded from the denominator.
- Patient must have two visits to medical clinics in the past three years. At least one visit must be to one of the following core medical clinics:

Clinic Code	Clinic Description
01	General
06	Diabetic
10	GYN
12	Immunization
13	Internal Medicine
20	Pediatrics
24	Well Child
28	Family Practice
57	EPSDT
70	Women's Health
80	Urgent Care
89	Evening

The second visit can be either to one of the core medical clinics in the previous list or to one of the following additional medical clinics:

Clinic Code	Clinic Description
02	Cardiac
03	Chest And TB
05	Dermatology
07	ENT
08	Family Planning
16	Obstetrics
19	Orthopedic
23	Surgical
25	Other
26	High Risk
27	General Preventive
31	Hypertension
32	Postpartum
37	Neurology
38	Rheumatology
49	Nephrology
50	Chronic Disease
69	Endocrinology
75	Urology
81	Men's Health Screening
85	Teen Clinic
88	Sports Medicine
B8	Gastroenterology - Hepatology
B9	Oncology - Hematology
C3	Colposcopy

- Patient must be alive on the last day of the report period.
- Patient must be American Indian/Alaska Native (AI/AN) (defined as Beneficiary 01). This data item is entered and updated during the patient registration process.
- Patient must reside in a community included in the site's "official" GPRA
  community taxonomy, defined as all communities of residence in the CHS
  catchment area specified in the community taxonomy specified by the user.

The Active Clinical Plus Behavioral Health Population for National GPRA & PART Reports is defined as follows:

- Patients with the name of "DEMO, PATIENT" or who are included in the RPMS Demo/Test Patient Search Template (DPST option located in the Patient Care Component [PCC] Management Reports, Other section) will be automatically excluded from the denominator.
- Patient must have *two* visits to *medical* clinics in the past three years. At least one visit must be to one of the following core medical clinics:

Clinic Code	Clinic Description
01	General
06	Diabetic
10	GYN
12	Immunization
13	Internal Medicine
20	Pediatrics
24	Well Child
28	Family Practice
57	EPSDT
70	Women's Health
80	Urgent Care
89	Evening

The second visit can be *either* to one of the core medical clinics in the previous list *or* to one of the following additional medical clinics:

Clinic Code	Clinic Description
02	Cardiac
03	Chest And TB
05	Dermatology
07	ENT
08	Family Planning
14	Mental Health
16	Obstetrics
19	Orthopedic
23	Surgical
25	Other
26	High Risk

Clinic Code	Clinic Description
27	General Preventive
31	Hypertension
32	Postpartum
37	Neurology
38	Rheumatology
43	Alcohol & Substance Abuse
48	Medical Social Services
49	Nephrology
50	Chronic Disease
69	Endocrinology
75	Urology
81	Men's Health Screening
85	Teen Clinic
88	Sports Medicine
B8	Gastroenterology – Hepatology
В9	Oncology – Hematology
C3	Colposcopy
C4	Behavioral Health
C9	Telebehavioral Health

- Patient must be alive on the last day of the report period.
- Patient must be AI/AN (defined as Beneficiary 01). This data item is entered and updated during the patient registration process.
- Patient must reside in a community included in the site's "official" GPRA community taxonomy, defined as all communities of residence in the CHS catchment area specified in the community taxonomy that is specified by the user.

The *Active Clinical CHS Population* for National GPRA & PART Reports is defined as follows:

- Patients with the name of "DEMO, PATIENT" or who are included in the RPMS Demo/Test Patient Search Template (DPST option located in the Patient Care Component [PCC] Management Reports, Other section) will be automatically excluded from the denominator.
- Patient must have two CHS visits in the three years prior to the end of the report period.
- Patient must be alive on the last day of the report period.

- Patient must be AI/AN (defined as Beneficiary 01). This item is entered and updated during the patient registration process.
- User must reside in a community included in the site's official GPRA community taxonomy, defined as all communities of residence in the CHS catchment area specified in the community taxonomy that is specified by the user.

The *Active Clinical Behavioral Health Population* for National GPRA & PART Reports is defined as follows:

- Patients with the name of "DEMO, PATIENT" or who are included in the RPMS Demo/Test Patient Search Template (DPST option located in the Patient Care Component [PCC] Management Reports, Other section) will be automatically excluded from the denominator.
- Patient must have two behavioral health visits in the three years prior to the end of the report period.
- Patient must be alive on the last day of the report period.
- Patient must be AI/AN (defined as Beneficiary 01). This item is entered and updated during the patient registration process.
- User must reside in a community included in the site's official GPRA community taxonomy, defined as all communities of residence in the Urban Outreach & Referral catchment area specified in the community taxonomy that is specified by the user.

The *GPRA User Population* for the National GPRA & PART Report is defined by the following criteria:

- Patients with the name of "DEMO, PATIENT" or who are included in the RPMS Demo/Test Patient Search Template (DPST option located in the PCC Management Reports, Other section) will be automatically excluded from the denominator.
- Patient must have been seen at least once in the three years prior to the end of the time period, regardless of the clinic type.
- Patient must be alive on the last day of the report period.
- Patient must be AI/AN (defined as Beneficiary 01). This data item is entered and updated during the patient registration process.
- Patient must reside in a community included in the site's "official" GPRA
  community taxonomy, defined as all communities of residence in the CHS
  catchment area specified in the community taxonomy specified by the user.

**Note:** The GPRA User Population definition is similar, but not identical, to the definition used by IHS headquarters (HQ) for annual user population statistics. GPRA "visits" are not required to be workload reportable as defined by IHS HQ.

#### 2.1.1.2 Denominator Definitions for Selected Measures Reports

In addition to the National GPRA & PART Report, CRS provides Selected Measures reports intended for local facility use for specific public health and/or performance improvement initiatives (CRS Version 12.0 User Manual, Section 5.12). Multiple denominators and numerators will be reported for each measure (e.g., *both* Active Clinical and GPRA User Population). Users have additional options to define the denominators as explained below.

The Active Clinical Population for Selected Measures (Local) Reports is defined as follows:

- Patients with name "DEMO, PATIENT" or who are included in the RPMS
  Demo/Test Patient Search Template (DPST option located in the PCC
  Management Reports, Other section) will be automatically excluded from the
  denominator.
- Patient must have two visits to medical clinics in the past three years. At least one visit must be to one of the following core medical clinics:

Clinic Code	Clinic Description
01	General
06	Diabetic
10	GYN
12	Immunization
13	Internal Medicine
20	Pediatrics
24	Well Child
28	Family Practice
57	EPSDT
70	Women's Health
80	Urgent Care
89	Evening

The second visit can be either to one of the core medical clinics in the previous list or to one of the following additional medical clinics:

Clinic Code	Clinic Description
02	Cardiac
03	Chest And TB
05	Dermatology
07	ENT
08	Family Planning
16	Obstetrics
19	Orthopedic
23	Surgical
25	Other
26	High Risk
27	General Preventive
31	Hypertension
32	Postpartum
37	Neurology
38	Rheumatology
49	Nephrology
50	Chronic Disease
69	Endocrinology
75	Urology
81	Men's Health Screening
85	Teen Clinic
88	Sports Medicine
B8	Gastroenterology - Hepatology
B9	Oncology - Hematology
C3	Colposcopy

- Patient must be alive on the last day of the Report period.
- User defines population type: AI/AN patients only, non AI/AN, or both. This data item is entered and updated during the patient registration process.
- User defines general population: single community; group of multiple communities (community taxonomy); user-defined list of patient (patient panel); or all patients regardless of community of residence.

The Active Clinical Plus Behavioral Health Population for Selected Measures (Local) Reports is defined as follows:

- Patients with the name of "DEMO, PATIENT" or who are included in the RPMS Demo/Test Patient Search Template (DPST option located in the PCC Management Reports, Other section) will be automatically excluded from the denominator.
- Patient must have *two* visits to *medical* clinics in the past three years. At least one visit must be to one of the following core medical clinics:

Clinic Code	Clinic Description
01	General
06	Diabetic
10	GYN
12	Immunization
13	Internal Medicine
20	Pediatrics
24	Well Child
28	Family Practice
57	EPSDT
70	Women's Health
80	Urgent Care
89	Evening

The second visit can be *either* to one of the core medical clinics in the previous list *or* to one of the following additional medical clinics:

Clinic Code	Clinic Description
02	Cardiac
03	Chest And TB
05	Dermatology
07	ENT
08	Family Planning
14	Mental Health
16	Obstetrics
19	Orthopedic
23	Surgical
25	Other
26	High Risk

Clinic Code	Clinic Description	
27	General Preventive	
31	Hypertension	
38	Rheumatology	
43	Alcohol & Substance Abuse	
48	Medical Social Services	
49	Nephrology	
50	Chronic Disease	
69	Endocrinology	
75	Urology	
81	Men's Health Screening	
85	Teen Clinic	
88	Sports Medicine	
B8	Gastroenterology – Hepatology	
B9	Oncology – Hematology	
C3	Colposcopy	

- Patient must be alive on the last day of the report period.
- User defines population type: AI/AN patients only, non-AI/AN, or both. This data item is typed and updated during the patient registration process.
- User defines general population: single community; group of multiple communities (community taxonomy); user-defined list of patients (patient panel); or all patients, regardless of community of residence.

The *Active Clinical CHS Population* for Selected Measures (Local) Reports is defined as follows:

- Patients with the name of "DEMO, PATIENT" or who are included in the RPMS Demo/Test Patient Search Template (DPST option located in the PCC Management Reports, Other section) will be automatically excluded from the denominator.
- Patient must have two CHS visits in the three years prior to the end of the Report Period.
- Patient must be alive on the last day of the report period.
- User defines population type: AI/AN patients only, non AI/AN, or both.
- User defines general population: single community; group of multiple communities (community taxonomy); user-defined list of patient (patient panel); or all patients regardless of community of residence.

The *Active Clinical Behavioral Health Population* for Selected Measures (Local) Reports is defined as follows:

- Patients with the name of "DEMO, PATIENT" or who are included in the RPMS Demo/Test Patient Search Template (DPST option located in the PCC Management Reports, Other section) will be automatically excluded from the denominator.
- Patient must have two behavioral health visits in the three years prior to the end of the Report Period.
- Patient must be alive on the last day of the report period.
- User defines population type: AI/AN patients only, non AI/AN, or both.
- User defines general population: single community; group of multiple communities (community taxonomy); user-defined list of patient (patient panel); or all patients regardless of community of residence.

The *User Population* for Selected Measures (Local) reports is defined as follows:

- Patients with the name of "DEMO, PATIENT" or who are included in the RPMS Demo/Test Patient Search Template (DPST option located in the PCC Management Reports, Other section) will be excluded from the denominator automatically.
- Patient must have been seen at least once in the three years prior to the end of the time period, regardless of the clinic type.
- Patient must be alive on the last day of the report period.
- User defines population type: AI/AN patients only, non AI/AN, or both.
- User defines general population: single community, group of multiple communities (community taxonomy); user-defined list of patient (patient panel); or all patients regardless of community of residence.

## 2.1.2 Performance Measure Logic Example

**Cancer Screening: Pap Smear Rates**: During FY 2012, achieve the tentative target rate of 59.5% for the proportion of female patients ages 21 through 64 without a documented history of hysterectomy who have had a Pap screen within the previous three years.

For CRS, the GPRA measure definition is defined as:

- Denominator (total number of patients evaluated): Active Clinical female patients ages 21 through 64, excluding those with documented history of hysterectomy. (The clinical owner of the measure has determined based on current medical guidelines that "eligible" women are defined as ages 21–64.)
- Numerator (those from the denominator who meet the criteria for the measure): patients with documented Pap smear in past three years or refusal in past year.

For the programmer, the Pap Smear measure is described in terms of the following logic:

- 1. Begin with the Active Clinical population definition.
  - Exclude any patients with the name of "DEMO, PATIENT."
  - Exclude any patient records that are included in the RPMS Demo/Test Patient Search Template.
  - Exclude any patients with a date of death in the Patient Registration file.
  - Exclude any patients who do *not* have value 01 (AI/AN) in the Beneficiary field in Patient Registration file.
  - Exclude any patients whose Community of Residence is not included in the site's defined GPRA Community Taxonomy for this report.
  - For the remaining patients, search visit files for the three years prior to the selected report end date; exclude any patients whose visits do not meet the "two medical clinics" definition; *or*, for facilities with the CHS-Only site parameter set to Yes, exclude any patients who do not have two CHS visits in the past three years.
- 2. From these patients, identify the subset that are female and that are at least age 21 on the first day of the current report period and less than age 65 on the last day of the report period.
- 3. Exclude patients with documented hysterectomy by searching the V Procedure file for procedure codes 68.4 through 68.8 or V CPT for CPT codes 51925, 56308 (old code), 57540, 57545, 57550, 57555, 57556, 58150, 58152, 58200 through 58294, 58548, 58550 through 58554, 58570 through 58573, 58951, 58953 through 58954, 58956, 59135 or V POV 618.5, V88.01, V88.03 or Women's Health procedure called Hysterectomy any time before the end of the report period.
- 4. For these patients (the denominator), check for a Pap smear in the past three years in the following order:

- a. Check V Lab for a lab test called Pap Smear and for any site-populated pap smear lab test documented in the BGP PAP SMEAR TAX taxonomy; *or*
- b. Check V Lab for any LOINC code listed in the predefined BGP PAP LOINC CODES taxonomy (see the *CRS Technical Manual* for specific codes); *or*
- c. Check the Purpose of Visit file (V POV) for: a diagnosis of: V67.01 Follow-up Vaginal Pap Smear, V76.2-Screen Mal Neop-Cervix, V72.32 Encounter for Pap Cervical Smear to Confirm Findings of Recent Normal Smear Following Initial Abnormal Smear, V72.3 Gynecological Examination, Pap Cervical Smear as Part of General Gynecological Exam, Pelvic Exam (annual) (periodic) (old code, to be counted for visits prior to 10/1/04 only), V76.47 Vaginal Pap Smear for Post-Hysterectomy Patients, 795.0\*, 795.10–16, 795.19; or
- d. Check V Procedures for a procedure of 91.46; or
- e. Check V CPT for the following CPT codes: 88141 through 88167, 88174 through 88175, G0123, G0124, G0141, G0143 through G0145, G0147, G0148, P3000, P3001, Q0091; *or*
- f. Check the Women's Health Tracking package for documentation of a procedure called Pap Smear and where the result does *not* have "ERROR/DISREGARD".

If a visit with any of the specified codes is found, the patient is considered to have met the measure, and the program checks the next patient.

## 2.1.3 Age Ranges

Unless otherwise noted, for the purposes of CRS reports, the age of a patient is calculated at the beginning of the report period. For example, for a report period of July 1, 2011 through June 30, 2012, Jane Doe is defined as age 74 if her birth date is June 10, 1937, even though she becomes age 75 during the report period.

#### 2.1.4 Standard Health Care Codes

#### 2.1.4.1 Current Procedural Terminology Codes

One of several code sets used by the healthcare industry to standardize data, and allow for comparison and analysis. Current Procedural Terminology (CPT) was developed and is updated annually by the American Medical Association, and is widely used in producing bills for services rendered to patients. CPTs include codes for diagnostic and therapeutic procedures, and specify information that differentiates the codes based on cost. CPT codes are the most widely accepted nomenclature in the United States for reporting physician procedures and services for federal and private insurance third-party reimbursement. CRS searches for CPT and other codes as specified in the logic definition to determine if a patient meets a denominator or numerator definition.

#### 2.1.4.2 International Classification of Disease Codes

One of several code sets used by the healthcare industry to standardize data. The International Classification of Disease (ICD) is an international diagnostic coding scheme. In addition to diseases, ICD also includes several families of terms for medical-specialty diagnoses, health status, disablements, procedure, and reasons for contact with healthcare providers. IHS currently uses ICD, Ninth Revision (ICD-9) for coding. CRS searches for ICD and other codes as specified in the logic definition, to determine if a patient meets a denominator or numerator definition.

#### 2.1.4.3 Logical Observation Identifiers Names and Codes

Logical Observation Identifiers Names and Codes (LOINC®). A standard coding system originally initiated for laboratory values, the system is being extended to include non-laboratory observations (electrocardiograms, vital signs, etc.). Standard code sets are used to define individual tests and mitigate variations in local terminologies for laboratory and other healthcare procedures, for example, Glucose or Glucose Test. IHS began integrating LOINC values into RPMS in several pilot sites in 2002.

Refer to the CRS Version 12.1 Technical Guide for a list of specific LOINC codes included in each LOINC taxonomy.

## 2.2 Diabetes Related Measure Topics

#### 2.2.1 Diabetes Prevalence

#### **Denominators**

All *User Population patients*. Broken down by gender and age groups (less than (<)15, 15 through 19, 20 through 24, 25 through 34, 35 through 44, 45 through 54, 55 through 64, greater than (>)64 years).

#### **Numerators**

Anyone diagnosed with Diabetes at any time before the end of the Report Period.

Anyone diagnosed with Diabetes *during* the Report Period.

#### **Logic Description**

Age is calculated at the beginning of the Report Period.

*Diabetes definition*: At least one diagnosis of 250.00 through 250.93 recorded in V POV file.

#### **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of diabetic patients with most recent diagnosis.

#### **Measure Source**

HP 2010 5-2, 5-3

#### **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance	12.8%
IHS FY 2010 Performance	12.0%
IHS FY 2009 Performance	12.0%
IHS FY 2008 Performance	12.0%
IHS FY 2007 Performance	11.0%
IHS FY 2006 Performance	11.0%
IHS FY 2005 Performance	11.0%

Performance	Percent
IHS FY 2004 Performance	10.0%

DU November 25, 2012 Page 1 \*\*\* IHS 2012 Selected Measures with Community Specified Report \*\*\* DEMO INDIAN HOSPITAL Report Period: Jan 01, 2012 to Dec 31, 2012 Previous Year Period: Jan 01, 2011 to Dec 31, 2011 Baseline Period: Jan 01, 2000 to Dec 31, 2000 Diabetes Prevalence Denominator(s): - All User Population patients. Broken down by gender and by age groups: < 15, 15-19, 20-24, 25-34, 35-44, 45-54, 55-64, > 64. Numerator(s): - Anyone diagnosed with Diabetes at any time before the end of the Report - Anyone diagnosed with Diabetes during the Report Period. Age is calculated at the beginning of the Report Period. Diabetes diagnosis is defined as at least one diagnosis 250.00-250.93 recorded in the V POV file. Performance Measure Description: Continue tracking (i.e., data collection and analyses) Area age-specific diabetes prevalence rates to identify trends in the age-specific prevalence of diabetes (as a surrogate marker for diabetes incidence) for the AI/AN population. Past Performance and/or Target: IHS Performance: FY 2011 - 12.8%, FY 2010 - 12%, FY 2009 - 12%, FY 2008 - 12%, FY 2007 - 11%, FY 2006 - 11%, FY 2005 - 11%, FY 2004 - 10% Source: HP 2010 5-2, 5-3 Diabetes Prevalence REPORT % PREV YR % CHG from BASE % CHG from PREV YR % PERIOD PERIOD PERIOD BASE % # User Pop 2,896 2,456 2,346 # w/ any DM DX 265 9.2 243 9.9 -0.7 197 8.4 +0.8 # w/ DM DX w/in past year 173 6.0 146 5.9 +0.0 100 4.3 +1.7 # Male User Pop 1,368 1,152 1,109 114 8.3 104 9.0 # w/ any DM DX -0.7 72 6.5 +1.8 # w/DM DX

w/in past year	82	6.0	78	6.8	-0.8	48	4.3	+1.7	
# Female User Pop	1,528		1,304			1,237			
# w/ any DM DX # w/ DM DX	151	9.9	139	10.7	-0.8	125	10.1	-0.2	
w/in past year	91	6.0	68	5.2	+0.7	52	4.2	+1.8	

Figure 2-1: Sample Summary Report, Diabetes Prevalence Topic

DU *** IHS 2012 Sel Repo		Measure	NDIAN H	Communi OSPITAL	ı			Page 2
	Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000							
Diabetes Prevalence (co	on't)							
		TOTAL U	-	-				
	<15	15-19	_		bution 35-44		55-64	>64 yrs
CURRENT REPORT PERIOD	720	220	261	402	200	200	262	222
Total # User Pop	/30	239 3	261	403	389	390	262 50	
# w/ DM DX ever % w/ DM DX ever	0 1	1 2	2 7	3/	57 14.7			
∘ w/ DM DA ever	0.1	1.3	2.1	9.2	14./	17.2	19.1	19.4
# w/DM DX in past yr	0	2	3	14	42	49	34	29
% w/DM DX in past yr		0.8		3.5				
.,								
PREVIOUS YEAR PERIOD								
Total # User Pop	711	227	243	352	316	277	181	149
	_		_					
# w/ DM DX ever % w/ DM DX ever	0.4	1.8	3.7	8.8	17.1	20.6	24.9	26.8
		_	_	_	2.2	2.5	0.1	0.0
# w/DM DX in past yr	1	1.3	3	9	33			
% w/DM DX in past yr	0.1	1.3	1.2	2.6	10.4	13.4	17.1	19.5
CHANGE FROM PREV YR %								
w/ DM DX ever	-0 3	-0.5	-1 0	+0 4	-2 4	-3 4	-5 8	-7 5
w/DM DX ever w/DM DX in past yr		-0.5						
w/Dil Di III past yi	0.1	0.5	0.1	10.9	10.4	0.0	7.1	0.1
BASELINE REPORT PERIOD								
	787	208	217	329	293	228		
Total # User Pop # w/ DM DX ever	2	4	12	20	38	46	31	44
% w/ DM DX ever	0.3	1.9	5.5	6.1	13.0	20.2	22.0	
# w/DM DX in past yr								
% w/DM DX in past yr	0.3	0.5	1.4	2.1	6.1	9.2	14.2	19.6
CHANGE FROM BASE YR %	0 1	0 5	0 0	. 2 1	. 1 -	2 0	0 0	11 4
w/ DM DX ever		-0.7						
w/DM DX in past yr	-0.3	+0.4	-0.2	+1.3	+4./	+3.4	-1.2	-6.5

Figure 2-2: Sample Age Breakdown Page, Diabetes Prevalence Topic

DU	November 25, 2012	Page 1					
*** IHS 2012 Clinical Performance Measure Patient List ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Entire Patient List							
PREG=Pregnant Fema	UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient						
Diabetes Prevalence	ce: List of diabetic patients with most	recent diagnosis					
PATIENT NAME DENOMINATOR	HRN COMMUNITY SEX AGE NUMERATOR						
PATIENT1, DEBORAH UP PATIENT2, TARA UP PATIENT3, BOBBIE UP PATIENT4, WINONA UP PATIENT5, NADINE UP PATIENT5, RUTH UP	000001 COMMUNITY #1 F 20 02/01/12 POV 250.00 000002 COMMUNITY #1 F 21 05/24/12 POV 250.00 000003 COMMUNITY #1 F 28 03/30/12 POV 250.00 000004 COMMUNITY #1 F 37 04/30/12 POV 250.00 000005 COMMUNITY #1 F 44 03/19/12 POV 250.00 000006 COMMUNITY #1 F 44 03/19/12 POV 250.00						

Figure 2-3: Sample Patient List, Diabetes Prevalence, Patients with Diabetes Diagnosis

#### 2.2.2 Diabetes Comprehensive Care

#### **Denominators**

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two diabetes mellitus- (DM-) related visits ever.

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two diabetes mellitus- (DM-) related visits ever, without a documented history of bilateral foot amputation or two separate unilateral foot amputations.

#### **Numerators**

Patients with hemoglobin A1c documented during the Report Period, regardless of result

Patients with blood pressure (BP) documented during the Report Period

Patients with controlled BP, defined as less than (<) 130/80, i.e., the mean systolic value is less than 130 and the mean diastolic value is less than 80

Patients with low-density lipoprotein (LDL) completed during the Report Period, regardless of result

Patients with nephropathy assessment, defined as an estimated GFR with result and a quantitative urinary protein assessment during the Report Period *or* with the evidence of diagnosis and/or treatment of end-stage renal disease (ESRD) at any time before the end of the Report Period

Patients receiving a qualified retinal evaluation during the Report Period

**Note**: This numerator does *not* include refusals.

Patients with diabetic foot exam during the Report Period

**Note**: This numerator does *not* include refusals.

Patients with comprehensive diabetes care (Documented A1c and Blood Pressure and LDL and Nephropathy Assessment and Retinal Exam and Diabetic Foot Exam).

#### **Logic Description**

*Diabetes definition*: First Purpose of Visit (POV) 250.00 through 250.93 recorded in the POV file prior to the Report Period.

*A1c definition*: Searches for most recent A1c test with a result during the Report Period. If none found, CRS searches for the most recent A1c test without a result. A1c defined as: CPT 83036, 83037, 3044F through 3046F, 3047F (old code); LOINC taxonomy; or site-populated taxonomy DM AUDIT HGB A1C TAX.

*BP documented definition*: Having a minimum of two BPs documented on non-Emergency Room (ER) visits during the Report Period.

CRS uses mean of last three BPs documented on non-ER visits during the Report Period. If three BPs are not available, uses mean of last two non-ER BPs. If a visit contains more than one BP, the lowest BP will be used, defined as having the lowest systolic value. The mean Systolic value is calculated by adding the last three (or two) systolic values and dividing by three (or two). The mean Diastolic value is calculated by adding the diastolic values from the last three (or two) BPs and dividing by three (or two).

If CRS is not able to calculate a mean BP, it will search for CPT 0001F, 2000F, 3074F through 3080F or POV V81.1 documented on a non-ER visit during the Report Period.

Controlled BP definition: CRS uses a mean, as described above. If the mean systolic and diastolic values do not both meet the criteria for controlled, then the value is considered not controlled.

BP documented and Controlled BP: If CRS is not able to calculate a mean BP from BP measurements, it will search for the most recent of any of the following CPT codes documented on non-ER visits during the Report Period: BP Documented: 0001F or 2000F; *or* Systolic 3074F, 3075F, or 3077F *with* Diastolic: 3078F, 3079F, or 3080F. The systolic and diastolic values do not have to be recorded on the same day. If there are multiple values on the same day, the CPT indicating the lowest value will be used. The following combination represents BP less than (<) 130/80 and will be included in the Controlled BP numerator: CPT 3074F *and* 3078F. All other combinations *will not* be included in the Controlled BP numerator.

LDL definition: Finds last test done during the Report Period; defined as CPT 80061, 83700, 83701, 83704, 83715 (old code), 83716 (old code), 83721, 3048F, 3049F, 3050F; LOINC taxonomy; site-populated taxonomy DM AUDIT LDL CHOLESTEROL TAX.

Nephropathy assessment definition: (1) Estimated GFR with result during the report period, defined as any of the following: (A) Site-populated taxonomy BGP GPRA ESTIMATED GFR TAX or (B) LOINC taxonomy, and (2) Quantitative Urinary Protein Assessment during the Report Period, defined as any of the following: (A) CPT 82042, 82043, or 84156; (B) LOINC taxonomy; or (C) site-populated taxonomy BGP QUANT URINE PROTEIN.

**Note**: Be sure and check with your laboratory supervisor that the names you add to your taxonomy reflect quantitative test values.

(3) ESRD diagnosis/treatment defined as any of the following ever: (A) V CPT 36145, 36147, 36800, 36810, 36815, 36818, 36819, 36820, 36821, 36831 through 36833, 50300, 50320, 50340, 50360, 50365, 50370, 50380, 90951 through 90970 or old codes 90918 through 90925, 90935, 90937, 90939 (old code), 90940, 90945, 90947, 90989, 90993, 90997, 90999, 99512, G0257, G0308 through G0327 (old codes), G0392 (old code), G0393 (old code), or S9339; (B) V POV 585.5, 585.6, V42.0, V45.1 (old code), V45.11, V45.12, or V56.\*; (C) V Procedure 38.95, 39.27, 39.42, 39.43, 39.53, 39.93 through 39.95, 54.98, or 55.6\*.

Qualified retinal evaluation definition: (1) diabetic retinal exam or (2) other eye exam. The following methods are qualifying for this measure: (1) dilated retinal evaluation by an optometrist or ophthalmologist, or (2) seven standard fields stereoscopic photos (ETDRS) evaluated by an optometrist or ophthalmologist, or (3) any photographic method formally validated to seven standard fields (ETDRS).

- Diabetic Retinal Exam: Any of the following during the Report Period: (1) Exam Code 03 Diabetic Eye Exam (dilated retinal examination or formally validated\* ETDRS photographic equivalent), (2) CPT 2022F Dilated retinal eye exam; 2024F Seven standard field stereoscopic photos with interpretation by an ophthalmologist or optometrist; 2026F Eye imaging formally validated\* to match the diagnosis from seven standard field stereoscopic photos; S0620 Routine ophthalmological examination including refraction; new patient; S0621 Routine ophthalmological examination including refraction; established patient; S3000 Diabetic indicator; retinal eye exam, dilated, bilateral.
- Other Eye Exam: (1) Non-DNKA (did not keep appointment) visits to ophthalmology, optometry or formally validated\* teleophthalmology retinal evaluation clinics or (2) non-DNKA visits to an optometrist or ophthalmologist. Searches for the following codes in the following order: Clinic Codes A2 (Diabetic Retinopathy)\*\*, 17, 18; Provider Code 24, 79, 08; CPT 67028, 67038 (old code), 67039, 67040, 92002, 92004, 92012, 92014; Procedure 95.02.

Diabetic foot exam definition: (1) Exam Code 28 Diabetic Foot Exam, Complete; (2) non-DNKA visit with a podiatrist (Provider Codes 33, 84 or 25), (3) non-DNKA visit to Podiatry Clinic (Clinic Code 65), or (4) CPT 2028F.

*Bilateral foot amputation definition:* CPT 27290.50 through 27295.50, 27590.50 through 27592.50, 27598.50, 27880.50 through 27882.50 (50 modifier indicates bilateral)

*Unilateral foot amputation definition:* Must have 2 separate occurrences for either CPT or Procedure codes on 2 different dates of service: (1) CPT 27290 through 27295, 27590 through 27592, 27598, 27880 through 27882, or (2) ICD Procedure codes 84.10, 84.13 through 84.19.

#### **Key Logic Changes from CRS Version 12.0**

- 1. Deleted POV code V72.0 from Other Eye Exam definition.
- 2. Deleted Clinic Code 64 from Other Eye Exam definition.

<sup>\*</sup>Validation study properly powered and controlled against the ETDRS gold standard.

<sup>\*\*</sup>Validated photographic (teleophthalmology) retinal surveillance.

- 3. Added codes 50384-7 and 69405-9 to LOINC taxonomy for Estimated GFR.
- 4. Added codes 11054-4, 13459-3, 14155-6, 16615-7, 16616-5, 43394-6, 44711-0, 44915-7, 50193-2, 53133-5, 56036-7 to LOINC taxonomy for LDL.
- 5. Added codes 13991-5, 2888-6, 40857-5, 50209-6, 51190-7, 53229-1, 53525-2 to LOINC taxonomy for Quantitative Urine Protein.

#### **Patient List Description**

List of diabetic patients with documented tests, if any.

#### **Measure Source**

Foot Exam: HP 2020 D-9

#### **Measure Past Performance and Long-Term Targets**

Target	Percent
HP 2020 goal for foot exam	74.8%

Previo	port Per us Year	Measu DEMC iod: J Period	INDIAN H an 01, 20 : Jan 01	Commun OSPITA 12 to , 201	nity Speci:	012 1, 2011		Page 9 **	
Diabetes Comprehensi	ve Care								
					CHG from PREV YR %				
Active Diabetic Pts	144		97			87			
# w/Comp Diabetes	1.0	6.0	-	1 0	. 5. 0	0	0 0		
Care # w/Alc done	10	6.9	1	1.0	+5.9	U	0.0	+6.9	
w/ or w/o result	92	63.9	70	72.2	-8.3	52	59.8	+4.1	
<pre># w/ BPs documented # w/Controlled BP</pre>	120	83.3	78	80.4			85.1	-1.7	
<130/80	28	19.4	20	20.6	-1.2	13	14.9	+4.5	
# w/ LDL done # w/ est GFR & quant UP assmt or	78	54.2	46	47.4	+6.7	23	26.4	+27.7	
w/ESRD # w/Retinal Evaluati		36.8	11	11.3	+25.5	6	6.9	+29.9	
-No Refusals	-	37.5	39	40.2	-2.7	44	50.6	-13.1	
Active Diabetic Pts	w/o								
Amputation	137		97			87			

```
# w/Diabetic Foot Exam
-No Refusals 20 14.6 18 18.6 -4.0 16 18.4 -3.8
```

Figure 2-4: Sample Summary Report, Diabetes Comprehensive Care Topic

```
***** CONFIDENTIAL PATIENT INFORMATION, COVERED BY THE PRIVACY ACT *****
                             November 25, 2012
  DU
                                                                    Page 11
         *** IHS 2012 Clinical Performance Measure Patient List ***
                            DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
                            Entire Patient List
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Diabetes Comprehensive Care: List of diabetic patients with documented tests,
if any.
PATIENT NAME
                      HRN
                             COMMUNITY
                                           SEX AGE
DENOMINATOR
                            NUMERATOR
PATIENT1, DEBORAH
                     000001 COMMUNITY #1 F 45
                            Alc: 02/28/12 6.6; BPs: 133/82 UNC; LDL: 10/28/12 119;
EYE: 01/07/12 Cl 18
PATIENT2, TARA
                       000002 COMMUNITY #1
                                           F 51
                            BP: <130/80: BPs: 118/61; ESRD: 03/03/12 90951; FOOT
AD
AMPUTATION
PATIENT3, BOBBIE
                       000003 COMMUNITY #1 F 52
                            Alc: 04/09/12 6.5; BPs: 138/66 UNC; GFR: 04/09/12 &
QUANT UP: 03/31/12 QUANT URINE PROTEIN; EYE: 03/30/12 Cl 18; FOOT EXAM: 01/07/12
Cl 65
```

Figure 2-5: Sample Patient List, Diabetes Comprehensive Care

## 2.2.3 Diabetes: Glycemic Control

#### **GPRA Measure Description, Poor Glycemic Control**

During FY 2012, achieve the target rate of 18.6% for the proportion of patients with diagnosed diabetes who have poor glycemic control (defined as A1c greater than (>) 9.5).

#### **GPRA Measure Description, Ideal Glycemic Control**

During FY 2012, achieve the target rate of 32.7% for the proportion of patients with diagnosed diabetes who have ideal glycemic control (defined as A1c less than (<) 7).

#### **Denominators**

All *User Population patients* diagnosed with diabetes prior to the report period.

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever. (GPRA Denominator)

Active Adult Diabetic patients, defined by meeting the following criteria: (1) who are age 19 or older at the beginning of the Report Period, (2) whose first ever DM diagnosis occurred prior to the Report Period; (3) who had at least two DM related visits ever; (4) at least one encounter with DM POV in a primary clinic with a primary provider during the Report Period; and (5) never have had a creatinine value greater than five.

#### **Numerators**

Number of patients with a Hemoglobin A1c documented during the Report Period, regardless of result.

*Poor Control*: Total of Poor and Very Poor Control: Patients with A1c greater than (>) 9.5. (GPRA Numerator)

*Very Poor Control*: Patients with A1c equal to or greater than (=>) 12.

*Poor Control*: Patients with A1c greater than (>) 9.5 and less than (<) 12.

Fair Control: Patients with A1c equal to or greater than (=>) 8 and less than or equal to (<=) 9.5.

Good Control: Patients with A1c equal to or greater than (=>) 7 and less than (<) 8.

*Ideal Control*: Patients with A1c less than (<) 7. (GPRA Numerator)

Without Result: Patients with A1c documented but no value.

#### **Logic Description**

*Diabetes definition*: First Purpose of Visit 250.00 through 250.93 recorded in the V POV file prior to the Report Period.

Hemoglobin A1c definition: Searches for most recent A1c test with a result during the Report Period. If more than one A1c test is found on the same day and/or the same visit and one test has a result and the other does not, the test with the result will be used. If an A1c test with a result is not found, CRS searches for the most recent A1c test without a result. Without result is defined as A1c documented but with no value.

CRS uses the following definitions:

Subject Defined	ject Defined		Taxonomy
Creatinine (for Active Adult Diabetic denominator)	CPT codes are not included since they do not store the result, which is used in this topic	Yes	DM AUDIT CREATININE TAX
Hemoglobin A1c	83036, 83037, 3044F-3046F, 3047F (old code) <b>Note</b> : CPT 3044F represents A1c less than(<)7 and will be included in the Ideal Control numerator.	Yes	DM AUDIT HGB A1C TAX

In the CPT Codes column, specific LOINC codes used CRS are located in the CRS Technical Manual.

## **Key Logic Changes from CRS Version 12.0**

Added codes 59826-8 and 62425-4 to LOINC taxonomy for Creatinine.

#### **Patient List Description**

List of diabetic patients with most recent A1c value, if any.

#### **Measure Source**

HEDIS; HP 2020 D-11, D-5

# **Measure Past Performance and Long-Term Targets Hemoglobin A1c Documented**

Performance	Percent
IHS FY 2011 Performance	83.0%
IHS FY 2010 Performance	82.0%
IHS FY 2009 Performance	80.0%
IHS FY 2008 Performance	79.0%
IHS FY 2007 Performance	79.0%
IHS FY 2006 Performance	79.0%
IHS FY 2005 Performance	78.0%
IHS FY 2004 Performance	77.0%
IHS FY 2003 Performance	75.0%
IHS FY 2002 Performance	73.0%
HP 2020 Goal	71.1%

#### **Poor Glycemic Control**

Performance	Percent
IHS FY 2011 Performance	19.1%
IHS FY 2010 Performance	18.0%
IHS FY 2009 Performance	18.0%
IHS FY 2008 Performance	17.0%
IHS FY 2007 Performance	16.0%
IHS FY 2006 Performance	16.0%
IHS FY 2005 Performance	15.0%
IHS FY 2004 Performance	17.0%
IHS FY 2003 Performance	17.0%
IHS FY 2002 Performance	18.0%

#### **Ideal Glycemic Control**

Performance	Percent
IHS FY 2011 Performance	31.9%
IHS FY 2010 Performance	32.0%
IHS FY 2009 Performance	31.0%
IHS FY 2008 Performance	32.0%
IHS FY 2007 Performance	31.0%
IHS FY 2006 Performance	31.0%
IHS FY 2005 Performance	30.0%
IHS FY 2004 Performance	27.0%
IHS FY 2003 Performance	28.0%
IHS FY 2002 Performance	25.0%
HP 2020 Goal	58.9%

```
DU November 25, 2012 Page 11

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000

Diabetes: Glycemic Control

REPORT % PREV YR % CHG from BASE % CHG from PERIOD PERIOD PREV YR % PERIOD BASE %

User Pop w/ DM DX
```

prior to report									
end date	229		202			180			
# w/Alc done w/									
or w/o result	95	41.5	72	35.6	+5.8	53	29.4	+12.0	
# w/A1c =>12	3	1.3	1	0.5	+0.8	3	1.7	-0.4	
# w/A1c >9.5									
and <12	15	6.6	3	1.5	+5.1	8	4.4	+2.1	
# w/A1c =>8									
and $= < 9.5$	12	5.2	19	9.4	-4.2	10	5.6	-0.3	
# w/Alc=>7									
and <8	13	5.7	16	7.9	-2.2	7	3.9	+1.8	
# w/A1c <7	38	16.6	33	16.3	+0.3	23	12.8	+3.8	
# w/A1c									
w/o Result	14	6.1	0	0.0	+6.1	2	1.1	+5.0	
m, o modulo		0.1	ŭ	0.0		_			
Active Diabetic Pts									
(GPRA)	144		97			87			
(CIIII)			<i>J</i> 1			0,			
# w/Alc done w/									
or w/o result	92	63.9	70	72.2	-8.3	52	59.8	+4.1	
# w/Alc	24	03.5	, 0	72.2	0.3	52	37.0		
> 9.5 (GPRA)	18	12.5	4	4.1	+8.4	11	12.6	-0.1	
# w/Alc =>12	3	2.1	1	1.0	+1.1	3	3.4	-1.4	
# W/Alc >9.5	3	2.1	_	1.0	TI.I	3	3.1	-1.4	
and < 12	15	10.4	3	3.1	+7.3	8	9.2	+1.2	
# w/A1c =>8	13	10.4	5	3.1	17.3	O	٧.٧	1 1 . 2	
and =<9.5	12	8.3	19	19.6	-11.3	10	11.5	-3.2	
# w/A1c=>7	12	0.3	19	19.0	-11.3	10	11.5	-3.2	
and <8	13	9.0	16	16.5	-7.5	7	8.0	+1.0	
# w/A1c <7	13	9.0	10	10.5	-7.5	,	0.0	+1.0	
	35	24.3	31	32.0	-7.7	22	25.3	-1.0	
(GPRA) # w/Alc	33	24.3	31	34.0	- / . /	22	43.3	-1.0	
	1.1	0.7	0	0 0	. 0 7	2	2.3	. 7 4	
w/o Result	14	9.7	U	0.0	+9.7	۷	2.3	+7.4	
Agtiro Adult Dishati									
Active Adult Diabetic	100		7.5			63			
Patients	102		75			63			
#/71 - day/									
# w/Alc done w/	D 1	co c		01 2	1.1 🗗	4.0	72.0	2 4	
or w/o result	71	69.6		81.3	-11.7	46	73.0	-3.4	
# w/A1c =>12	3	2.9	1	1.3	+1.6	3	4.8	-1.8	
# w/Alc >9.5	1.0	10 5	•	0 5	. 1.0. 1	_	11 1		
and <12	13	12.7	2	2.7	+10.1	7	11.1	+1.6	
# w/A1c =>8									
and =<9.5	11	10.8	18	24.0	-13.2	8	12.7	-1.9	
# w/Alc =>7									
and <8	10	9.8	12	16.0	-6.2	6	9.5	+0.3	
# w/A1c <7	28	27.5	28	37.3	-9.9	22	34.9	-7.5	
# w/A1c									
w/o Result	6	5.9	0	0.0	+5.9	0	0.0	+5.9	
w/o Result	6	5.9	0	0.0	+5.9	0	0.0	+5.9	

Figure 2-6: Sample Report, Diabetes: Glycemic Control Topic

```
***** CONFIDENTIAL PATIENT INFORMATION, COVERED BY THE PRIVACY ACT *****

DU November 25, 2012 Page 16

*** IHS 2012 Clinical Performance Measure Patient List ***

DEMO INDIAN HOSPITAL
```

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

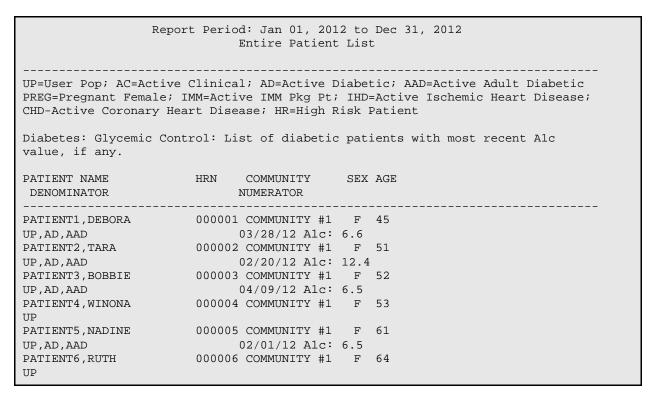


Figure 2-7: Sample Patient List, Diabetes: Glycemic Control

#### 2.2.4 Diabetes: Blood Pressure Control

#### **GPRA Measure Description**

During FY 2012, achieve the target rate of 38.7% for the proportion of patients with diagnosed diabetes who have achieved blood pressure control (defined as less than (<)130/80).

#### **Denominators**

All *User Population patients* diagnosed with diabetes prior to the Report Period.

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever. (GPRA Denominator)

Active Adult Diabetic patients, defined by meeting the following criteria: (1) who are age 19 or older at the beginning of the Report Period, (2) whose first ever DM diagnosis occurred prior to the Report Period; (3) who had at least two DM-related visits ever, (4) at least one encounter with DM POV in a primary clinic with a primary provider during the Report Period; and (5) never have had a creatinine value greater than five.

#### **Numerators**

Patients with BP documented during the report period.

Patients with controlled BP, defined as less than (<) 130/80, i.e., the mean systolic value is less than 130 and the mean diastolic value is less than 80 (GPRA Numerator).

Patients with BP that is not controlled.

#### **Logic Description**

*Diabetes definition*: First DM POV 250.00 through 250.93 recorded in the V POV file prior to the Report Period.

BP documented definition: CRS uses mean of last three BPs documented on non-ER visits during the Report Period. If three BPs are not available, uses mean of the last two non-ER BPs. If a visit contains more than one BP, the lowest BP will be used, defined as having the lowest systolic value. The mean Systolic value is calculated by adding the last three (or two) systolic values and dividing by three (or two). The mean Diastolic value is calculated by adding the diastolic values from the last three (or two) blood pressures and dividing by three (or two). If the systolic and diastolic values do not both meet the criteria for controlled, then the value is considered not controlled.

If CRS is not able to calculate a mean BP, it will search for CPT 0001F, 2000F, 3074F-3080F or POV V81.1 documented on a non-ER visit during the Report Period.

Controlled BP definition: CRS uses a mean, as described above where BP is less than (<)130/80. If the mean systolic and diastolic values do not both meet the criteria for controlled, then the value is considered not controlled.

BP documented and Controlled BP: If CRS is not able to calculate a mean BP from blood pressure measurements, it will search for the most recent of any of the following codes documented on non-ER visits during the Report Period: BP Documented: CPT 0001F or 2000F or POV V81.1; or Systolic: CPT 3074F, 3075F or 3077F with Diastolic: CPT 3078F, 3079F, or 3080F. The systolic and diastolic values do not have to be recorded on the same day. If there are multiple values on the same day, the CPT indicating the lowest value will be used. The following combination represents BP less than (<)130/80 and will be included in the Controlled BP numerator: CPT 3074F and 3078F. All other combinations will not be included in the Controlled BP numerator.

CRS uses the following definition:

Subject Defined	CPT Codes	LOINC Codes	Taxonomy
Creatinine (for Active Adult Diabetic denominator)	CPT codes are not included since they do not store the result, which is used in this topic	Yes	DM AUDIT CREATININE TAX

In the LOINC Codes column, specific LOINC codes by CRS are location in the *CRS Technical Manual*.

# **Key Logic Changes from CRS Version 12.0**

Added codes 59826-8 and 62425-4 to LOINC taxonomy for Creatinine.

# **Patient List Description**

List of diabetic patients with BP value, if any.

# **Measure Source**

HP 2020 D-7

# **Measure Past Performance and Long-Term Targets Controlled BP**

Performance	Percent
IHS FY 2011 Performance	37.8%
IHS FY 2010 Performance	38.0%
IHS FY 2009 Performance	37.0%
IHS FY 2008 Performance	38.0%
IHS FY 2007 Performance	39.0%
IHS FY 2006 Performance	37.0%
IHS FY 2005 Performance	37.0%
IHS FY 2004 Performance	35.0%
IHS FY 2003 Performance	37.0%
IHS FY 2002 Performance	36.1%
HP 2020 Goal	57.0%

### **BP Assessed**

Performance	Percent		
IHS FY 2011 Performance	87.9%		
IHS FY 2010 Performance	89.0%		

Performance	Percent
IHS FY 2009 Performance	88.0%
IHS FY 2008 Performance	89.0%
IHS FY 2005 Performance	89.0%

DU November 25, 2012 Page 13  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Diabetes: Blood Pres									
	REPORT	olo			CHG from PREV YR %				
User Pop w/ DM DX pr to report period			202			180			
# w/ BPs Documented # w/controlled BP	132	57.6	88	43.6	+14.1	84	46.7	+11.0	
< 130/80 # w/Not controlled	32	14.0	24	11.9	+2.1	18	10.0	+4.0	
BP BP	100	43.7	64	31.7	+12.0	66	36.7	+7.0	
Active Diabetic Pts (GPRA)	144		97			87			
<pre># w/ BPs Documented # w/Controlled BP &lt; 130/80</pre>	120	83.3	78	80.4	+2.9	74	85.1	-1.7	
(GPRA) # w/Not controlled	28	19.4	20	20.6	-1.2	13	14.9	+4.5	
BP BP	92	63.9	58	59.8	+4.1	61	70.1	-6.2	
Active Adult Diabeti Patients	.c 102		75			63			
# w/ BPs Documented # w/Controlled BP	82	80.4	61	81.3	-0.9	56	88.9	-8.5	
<pre></pre>	20	19.6	14	18.7	+0.9	8	12.7	+6.9	
BP BP	62	60.8	47	62.7	-1.9	48	76.2	-15.4	

Figure 2-8: Sample Report, Diabetes: Blood Pressure Control Topic

```
***** CONFIDENTIAL PATIENT INFORMATION, COVERED BY THE PRIVACY ACT *****

DU November 25, 2012 Page 23

*** IHS 2012 Clinical Performance Measure Patient List ***
```

DEMO INDIAN HOSPITAL Report Period: Jan 01, 2012 to Dec 31, 2012 Entire Patient List							
-	MM=Acti	ve IMM Pkg	Pt;	IHD=	cic; AAD=Active Adult Diabetic =Active Ischemic Heart Disease; Patient		
Diabetes: Blood Pressur any.	e Contr	ol: List o	f di	abeti	ic patients with BP value, if		
PATIENT NAME DENOMINATOR		COMMUNITY NUMERATOR		SEX	AGE		
PATIENT1, DEBORAH UP, AD, AAD		COMMUNITY 133/82 UNC		F	45		
PATIENT2,TARA UP,AD,AAD		COMMUNITY 3074F/3080			51		
PATIENT3,BOBBIE UP,AD,AAD		COMMUNITY 138/66 UNC		F	52		
PATIENT4, WINONA UP	000004	COMMUNITY	#1	F	53		
PATIENT5, NADINE UP, AD, AAD		COMMUNITY 159/86 UNC	#1	F	61		
PATIENT6, RUTH UP		COMMUNITY 139/74 UNC	#1	F	64		

Figure 2-9: Sample Patient List, Diabetes: Blood Pressure Control

# 2.2.5 Diabetes: LDL Assessment

### **GPRA Measure Description**

During FY 2012, achieve the target rate of 70.3% for the proportion of patients with diagnosed diabetes who are assessed for dyslipidemia (LDL cholesterol).

### **Denominators**

All *User Population patients* diagnosed with diabetes prior to the Report Period.

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever. (GPRA Denominator)

Active Adult Diabetic patients, defined by meeting the following criteria: (1) who are age 19 or older at the beginning of the Report Period, (2) whose first ever DM diagnosis occurred prior to the Report Period; (3) who had at least two DM related visits ever, (4) at least one encounter with DM POV in a primary clinic with a primary provider during the Report Period; and (5) never have had a creatinine value greater than five.

#### **Numerators**

Patients with LDL completed during the Report Period, regardless of result. (GPRA Numerator)

Patients with LDL results less than (<) 130.

- a. Patients with LDL results less than or equal to (<=) 100
- b. Patients with LDL results 101-129

### **Logic Description**

*Diabetes definition*: First DM POV 250.00 through 250.93 recorded in the V POV file prior to the Report Period.

LDL definition: Searches for most recent LDL test with a result during the Report Period. If more than one LDL test is found on the same day and/or the same visit and one test has a result and the other does not, the test with the result will be used. If an LDL test with a result is not found, CRS searches for the most recent LDL test without a result.

CRS uses the following to define the tests:

Subject Defined	CPT Codes	LOINC Codes	Taxonomy
Creatinine (for Active Adult Diabetic denominator)	CPT codes are not included since they do not store the result, which is used in this topic	Yes	DM AUDIT CREATININE TAX
LDL Done	80061, 83700, 83701, 83704, 83715 (old code), 83716 (old code), 83721, 3048F, 3049F, 3050F	Yes	DM AUDIT LDL CHOLESTEROL TAX
LDL less than (<)130	3048F, 3049F		Tests in above taxonomy with LDL less than (<)130
LDL equal to or less than (=<)100	3048F		Tests in above taxonomy with LDL equal to or less than (=<)100

In the LOINC Codes column, specific LOINC codes used by CRS are located in the CRS Technical Manual.

# **Key Logic Changes from CRS Version 12.0**

- 1. Added codes 59826-8 and 62425-4 to LOINC taxonomy for Creatinine.
- 2. Added codes 11054-4, 13459-3, 14155-6, 16615-7, 16616-5, 43394-6, 44711-0, 44915-7, 50193-2, 53133-5, 56036-7 to LOINC taxonomy for LDL.

# **Patient List Description**

List of diabetic patients with documented LDL cholesterol test, if any.

### **Measure Source**

HP 2010 12-15

# **Measure Past Performance and Long-Term Targets:**

Performance	Percent
IHS FY 2011 Performance	68.7%
IHS FY 2010 Performance	67.0%
IHS FY 2009 Performance	65.0%
IHS FY 2008 Performance	63.0%
IHS FY 2007 Performance	61.0%
IHS FY 2006 Performance	60.0%
IHS FY 2005 Performance	53.0%
IHS FY 2004 Performance	53.0%
IHS FY 2003 Performance	47.5%
IHS FY 2002 Performance	43.7%

November 25, 2012  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Diabetes: LDL Assessment  REPORT % PREV YR % CHG from BASE % CHG from PERIOD PERIOD PREV YR % PERIOD BASE %								
		25.3 16.2	31		+5.5 +0.8	15 8		
Active Diabetic Pts (GPRA)	144		97			87		

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

# w/ LDL done									
(GPRA)	78	54.2	46	47.4	+6.7	23	26.4	+27.7	
# w/LDL <130	54	37.5	38	39.2	-1.7	15	17.2	+20.3	
A. $\# \text{ w/LDL} = <100$	35	24.3	30	30.9	-6.6	8	9.2	+15.1	
B. # w/LDL 101-129	15	10.4	8	8.2	+2.2	7	8.0	+2.4	
Active Adult Diabetic									
Patients	102		75			63			
# w/ LDL done	60	58.8	43	57.3	+1.5	21	33.3	+25.5	
# w/LDL <130	41	40.2	35	46.7	-6.5	13	20.6	+19.6	
A. # w/LDL =<100	26	25.5	26	34.7	-9.2	8	12.7	+12.8	
B. # w/LDL 101-129	12	11.8	9	12.0	-0.2	5	7.9	+3.8	

Figure 2-10: Sample Report, Diabetes: LDL Assessment

***** CONFIDENTIAL PA	TIENT INFORMATION, COVERED BY THE PRIVACY ACT ***** November 25, 2012 Page 30						
*** IHS 2012 Clinical Performance Measure Patient List ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012							
	Entire Patient List						
PREG=Pregnant Female	re Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; Geart Disease; HR=High Risk Patient						
Diabetes: LDL Assessm cholesterol test, if	ment: List of diabetic patients with documented LDL any						
PATIENT NAME DENOMINATOR	HRN COMMUNITY SEX AGE NUMERATOR						
PATIENT1, DEBORAH UP, AD, AAD	000001 COMMUNITY #1 F 45 LDL: 03/28/12 119						
	000002 COMMUNITY #1 F 51 LDL: 02/20/12 86						
PATIENT3, BOBBIE UP, AD, AAD	000003 COMMUNITY #1 F 52						
PATIENT4, WINONA	000004 COMMUNITY #1 F 53						
PATIENT5, NADINE	000005 COMMUNITY #1 F 61						
UP,AD,AAD	LDL: 02/06/12 CPT 3048F LDL<100						
PATIENT6, RUTH	000006 COMMUNITY #1 F 64						
UP	LDL: 05/21/12 107						

Figure 2-11: Sample Patient List, Diabetes: LDL Assessment

# 2.2.6 Diabetes: Nephropathy Assessment

### **GPRA Measure Description**

During FY 2012, achieve the target rate of 57.8% for the proportion of patients with diagnosed diabetes who are assessed for nephropathy.

### **Denominators**

All *User Population patients* diagnosed with diabetes prior to the Report Period.

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever. (GPRA Denominator)

Active Adult Diabetic patients, defined by meeting the following criteria: (1) who are aged 19 or older at the beginning of the Report Period, (2) whose first ever DM diagnosis occurred prior to the Report Period; (3) who had at least two DM related visits ever, (4) at least one encounter with DM POV in a primary clinic with a primary provider during the Report Period; and (5) never have had a creatinine value greater than five.

#### **Numerator**

Patients with nephropathy assessment, defined as an estimated GFR with result and a quantitative urinary protein assessment during the Report Period or with evidence of diagnosis and/or treatment of ESRD at any time before the end of the Report Period. (GPRA Numerator)

## **Logic Description**

*Diabetes definition*: First DM Purpose of Visit 250.00 through 250.93 recorded in the V POV file prior to the Report period.

*Nephropathy assessment definition:* 

- Estimated GFR with result during the Report Period and Quantitative Urinary Protein Assessment during the Report Period, *or*
- ESRD diagnosis/treatment defined as any diagnosis ever.

CRS uses the following to define the tests/diagnoses:

Subject Defined	CPT Codes	LOINC Codes	Taxonomy
Creatinine (for Active Adult Diabetic Denominator)	CPT codes are not included since they do not store the result, which is used in this topic	Yes	DM AUDIT CREATININE TAX
Estimated GFR		Yes	BGP GPRA ESTIMATED GFR TAX
Quantitative Urinary Protein Assessment	<b>CPT</b> : 82042 through 82043, 84156	Yes	BGP QUANT URINE PROTEIN TAX Note: Be sure and check with your laboratory supervisor that the names you add to your taxonomy reflect quantitative test values
End Stage Renal Disease	V CPT: 36145, 36147, 36800, 36810, 36815, 36818, 36819, 36820, 36821, 36831 through 36833, 50300, 50320, 50340, 50360, 50365, 50370, 50380, 90951-90970 or old codes 90918 through 90925, 90935, 90937, 90939 (old code), 90940, 90945, 90947, 90989, 90993, 90997, 90999, 99512, G0257, G0308 through G0327 (old codes), G0392 (old code), G0393 (old code), or S9339 V POV: 585.5, 585.6, V42.0, V45.1 (old code), V45.11, V45.12, or V56* V Procedure: 38.95, 39.27, 39.42, 39.43, 39.53, 39.93-39.95, 54.98, or 55.6*		

In the LOINC Codes column, specific LOINC codes used by CRS are located in the CRS Technical Manual.

# **Key Logic Changes from CRS Version 12.0**

1. Added codes 59826-8 and 62425-4 to LOINC taxonomy for Creatinine.

- 2. Added codes 50384-7 and 69405-9 to LOINC taxonomy for Estimated GFR.
- 3. Added codes 13991-5, 2888-6, 40857-5, 50209-6, 51190-7, 53229-1, 53525-2 to LOINC taxonomy for Quantitative Urine Protein.

### **Patient List Description**

List of diabetic patients with nephropathy assessment, if any.

### **Measure Source**

HP 2010 5-11

# **Measure Past Performance and Long-Term Targets:**

Performance	Percent
IHS FY 2011 Performance	56.5%
IHS FY 2010 Performance	55.0%
IHS FY 2009 Performance	50.0%
IHS FY 2008 Performance	50.0%
IHS FY 2007 Performance (new baseline established; revised standards of care resulted in revised measure definition)	40.0%
IHS FY 2006 Performance (measure definition was different from current definition)	55.0%
IHS FY 2005 Performance (measure definition was different from current definition)	47.0%
IHS FY 2004 Performance (measure definition was different from current definition)	42.0%
IHS FY 2003 Performance (measure definition was different from current definition)	37.5%
IHS FY 2002 Performance (measure definition was different from current definition)	35.0%

```
DU
                             November 25, 2012
                                                                    Page 17
      *** IHS 2012 Selected Measures with Community Specified Report ***
                            DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
             Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Diabetes: Nephropathy Assessment
                    REPORT
                              % PREV YR
                                                                   % CHG from
                                            % CHG from BASE
                                 PERIOD
                                               PREV YR % PERIOD
                                                                      BASE %
                    PERIOD
User Pop w/ DM DX prior
to Report Period
                                      202
                                                            180
                       229
```

# w/ est GFR & quant UP assmt or w/ESRD	55	24.0	16	7.9	+16.1	8	4.4	+19.6
Active Diabetic Pts (GPRA)	144		97			87		
<pre># w/ est GFR &amp;   quant UP assmt or   w/ESRD (GPRA)</pre>	53	36.8	11	11.3	+25.5	6	6.9	+29.9
Active Adult Diabetic Patients	102		75			63		
# w/ est GFR & quant UP assmt or w/ESRD	41	40.2	6	8.0	+32.2	4	6.3	+33.8

Figure 2-12: Sample Report, Diabetes: Nephropathy Assessment

***** CONFIDENTIAL PATIENT INFORMATION, COVERED BY THE PRIVACY ACT ***** DU November 25, 2012 Page 37								
	*** IHS 2012 Clinical Performance Measure Patient List ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Entire Patient List							
-	e Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;							
CHD-Active Coronary H	eart Disease; HR=High Risk Patient							
Diabetes: Nephropathy assessment, if any.	Assessment: List of diabetic patients with nephropathy							
PATIENT NAME DENOMINATOR	HRN COMMUNITY SEX AGE NUMERATOR							
PATIENT1, DEBORAH UP, AD, AAD	000001 COMMUNITY #1 F 45							
PATIENT2, TARA UP, AD, AAD	000002 COMMUNITY #1 F 51							
PATIENT3, BOBBIE	000003 COMMUNITY #1 F 52							
UP,AD,AAD PROTEIN	GFR: 09/09/12 & QUANT UP: 03/31/12 QUANT URINE							
PATIENT4, WINONA UP	000004 COMMUNITY #1 F 53							
PATIENT5, NADINE	000005 COMMUNITY #1 F 61							
UP,AD,AAD	ESRD: 03/03/12 CPT 90967							
PATIENT6,RUTH UP	000006 COMMUNITY #1 F 64							
PATIENT7, DANIELLE	000007 COMMUNITY #1 F 79							
UP	ESRD: 11/01/12 POV V56.8							

Figure 2-13: Sample Patient List, Diabetes: Nephropathy Assessment

# 2.2.7 Diabetic Retinopathy

# **GPRA Measure Description**

During FY 2012, achieve the target rate of 54.8% for the proportion of patients with diagnosed diabetes who receive an annual retinal examination.

### **Denominators**

All *User Population patients* diagnosed with diabetes prior to the Report Period.

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever. (GPRA Denominator)

Active Adult Diabetic patients, defined by meeting the following criteria: (1) who are 19 or older at the beginning of the Report Period, (2) whose first ever DM diagnosis occurred prior to the Report Period; (3) who had at least two DM related visits ever, (4) at least one encounter with DM POV in a primary clinic with a primary provider during the Report Period; and (5) never have had a creatinine value greater than five.

#### **Numerators**

Patients receiving a qualified retinal evaluation during the Report Period.

**Note**: This numerator does not include refusals. (GPRA Numerator)

- a. Patients receiving diabetic retinal exam during the Report Period
- b. Patients receiving other eye exams during the Report Period
- c. Patients who refused a diabetic retinal exam during the Report Period.

### **Logic Description**

*Diabetes definition*: First DM Purpose of Visit 250.00 through 250.93 recorded in the V POV file prior to the Report Period.

Serum creatinine definition (used with Active Adult Diabetic denominator): Site-populated taxonomy DM AUDIT CREATININE TAX; or LOINC taxonomy (NOTE: CPT codes are not included since they do not store the result, which is used in this topic.).

Qualified retinal evaluation definition: (1) Diabetic retinal exam or (2) other eye exam, as shown below. The following methods are qualifying for this measure:

• Dilated retinal evaluation by an optometrist or ophthalmologist

- Seven standard fields stereoscopic photos (ETDRS) evaluated by an optometrist or ophthalmologist
- Any photographic method validated to seven standard fields (ETDRS).

CRS searches in the following order for:

# Diabetic Retinal Exam (any of the following during the report period)

Exam	CPT Codes	Other Codes
Diabetic Retinal Exam	2022F, 2024F, 2026F, S0620, S0621, S3000	VExam: 03 (dilated retinal examination or formally validated* photographic equivalent)

# Other Eye Exam (any of the following during the report period)

Exam	CPT Codes	Other Codes
Non-Did Not Keep Appointment (DNKA) visit to ophthalmology or optometry or formally validated* tele-ophthalmology retinal evaluation clinics		Clinic codes: A2 (Diabetic Retinopathy)**, 17, 18
Non-DNKA visit to an optometrist or ophthalmologist	67028, 67038 (old code), 67039, 67040, 92002, 92004, 92012, 92014	Provider Codes: 24, 79, 08 Procedure: 95.02
Refusal of a diabetic retinal exam. Refusals are only counted if the patient did not have a diabetic retinal exam or other eye exam. If a patient had both a diabetic retinal exam/other eye exam and a refusal, only the diabetic retinal exam/other eye exam will be counted.		Refusals Exam: 03

<sup>\*</sup>Validation study properly powered and controlled against the ETDRS gold standard.

# **Key Logic Changes from CRS Version 12.0**

- 1. Deleted POV code V72.0 from Other Eye Exam definition.
- 2. Deleted Clinic Code 64 from Other Eye Exam definition.
- 3. Added codes 59826-8 and 62425-4 to LOINC taxonomy for Creatinine.

<sup>\*\*</sup>Validated photographic (teleophthalmology) retinal surveillance.

# **Patient List Description**

List of diabetic patients with qualified retinal evaluation or refusal, if any.

### **Measure Source**

HP 2020 D-10

# **Measure Past Performance and Long-Term Targets:**

Performance	Percent
IHS FY 2011 Performance	54.8% (National rate)
IHS FY 2010 Performance	53.0% (National rate)
IHS FY 2009 Performance	51.0% (National rate)
IHS FY 2008 Performance	50.0% (National rate)
IHS FY 2007 Performance	49.0% (National rate)
IHS FY 2006 Performance	49.0% (National Rate) 52.0% (Designated Sites Rate)
IHS FY 2005 Performance	50.0% (National Rate) 50.0% (Designated Sites Rate)
IHS FY 2004 Performance	47.0% (National Rate) 55.0% (Designated Sites Rate)
IHS FY 2003 Performance	49.0%
IHS FY 2002 Performance	49.0%
HP 2020 Goal	58.7%

DU November 25, 2012 Page 19  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Diabetic Retinopathy	 Y							
	REPORT PERIOD	%	PREV YR PERIOD		CHG from PREV YR %			CHG from BASE %
User Pop w/ DM DX pi	rior							
to report period	229		202			180		
# w/Retinal Evaluat:	ion							
-No Refusals	65	28.4	47	23.3	+5.1	54	30.0	-1.6
A. # w/ DM Retinal exam	7	3.1	6	3.0	+0.1	6	3.3	-0.3
B. # w/Other  Eye Exams # w/Retinal Exam	58	25.3	41	20.3	+5.0	48	26.7	-1.3
Refusal	3	1.3	0	0.0	+1.3	0	0.0	+1.3

Active Diabetic Pts									
(GPRA)	117		95			87			
# w/Retinal Evaluation	<b>5</b> 4	44.6	2.0	41 1	. 2. 6	4.4	F0 6	F 0	
-No Refusals (GPRA)	54	44.6	39	41.1	+3.6	44	50.6	-5.9	
A. # w/ DM Retinal	7	5.8	_	6.3	0 5	_	6.9	-1.1	
exam B. # w/Other	7	5.8	б	6.3	-0.5	6	6.9	-1.1	
Eye Exams	17	38.8	22	34.7	+4.1	20	43.7	-4.8	
# w/Retinal Exam	4 /	30.0	33	34.7	44.1	30	43.7	-4.0	
Refusal	3	2.5	0	0.0	+2.5	0	0.0	+2.5	
Refusar	3	2.5	0	0.0	12.5	O	0.0	12.5	
Active Diabetic Pts									
(GPRA)	144		97			87			
# w/Retinal Evaluation									
-No Refusals (GPRA)	54	37.5	39	40.2	-2.7	44	50.6	-13.1	
A. # w/ DM Retinal									
exam	7	4.9	6	6.2	-1.3	6	6.9	-2.0	
B. # w/Other									
Eye Exams	47	32.6	33	34.0	-1.4	38	43.7	-11.0	
# w/Retinal Exam									
Refusal	3	2.1	0	0.0	+2.1	0	0.0	+2.1	
Active Adult Diabetic Patients	102		75			63			
Patients	102		/5			63			
# w/Retinal Evaluation									
-No Refusals	3.0	38.2	3.2	42.7	-4 4	30	61 9	-23.7	
A. # w/ DM Retinal	3,7	30.2	32	12.7	1.1	3,7	01.0	25.7	
exam	6	5.9	4	5.3	+0.5	6	9.5	-3.6	
B. # w/Other			_						
Eye Exams	33	32.4	28	37.3	-5.0	33	52.4	-20.0	
# w/Retinal Exam									
Refusal	2	2.0	0	0.0	+2.0	0	0.0	+2.0	

Figure 2-14: Sample Report, Diabetic Retinopathy

```
***** CONFIDENTIAL PATIENT INFORMATION, COVERED BY THE PRIVACY ACT *****
   DU
                             November 25, 2012
                                                                     Page 50
          *** IHS 2012 Clinical Performance Measure Patient List ***
                             DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
                             Entire Patient List
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Diabetic Retinopathy: List of diabetic patients with qualified retinal
evaluation or refusal, if any.
PATIENT NAME
                       HRN COMMUNITY
                                            SEX AGE
DENOMINATOR
                             NUMERATOR
```

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
PATIENT1, DEBORAH 000001 COMMUNITY #1
                                          F 45
UP, AD, AAD
                           01/07/12 Cl 18
                      000002 COMMUNITY #1 F 51
PATIENT2, TARA
UP,AD,AAD
PATIENT3, BOBBIE
                     000003 COMMUNITY #1
                                          F 52
UP, AD, AAD
                           06/30/12 Cl 18
PATIENT4, WINONA
                      000004 COMMUNITY #1 F 53
PATIENT5, NADINE
                     000005 COMMUNITY #1 F 61
UP,AD,AAD
                           05/22/12 Refused
PATIENT6, RUTH
                      000006 COMMUNITY #1 F 64
PATIENT7, JONELLE
                      000007 COMMUNITY #1 F 69
UP,AD,AAD
                           03/29/12 Diab Eye Ex
```

Figure 2-15: Sample Patient List, Diabetic Retinopathy

# 2.2.8 RAS Antagonist Use in Diabetic Patients

#### **Denominator**

Active Diabetic patients with HTN, defined as all Active Clinical patients diagnosed with diabetes and hypertension prior to the Report Period, AND at least two visits during the Report Period, AND 2 DM-related visits ever.

### **Numerators**

Patients not receiving a RAS Antagonist medication during the Report Period.

a. Patients with contraindication/previous adverse reaction to RAS Antagonist therapy.

### **Logic Description**

*Diabetes definition*: First Purpose of Visit 250.00 through 250.93 recorded in the V POV file prior to the Report Period.

Hypertension definition: Diagnosis (POV or problem list) 401.\* prior to the Report Period, and at least one hypertension POV during the Report Period.

### **RAS Antagonist Numerator Logic**

Renin Angiotensin System (RAS) Antagonist medication codes defined with medication taxonomy BGP PQA RASA MEDS.

ACEI medications are: Angiotensin Converting Enzyme Inhibitors (Benazepril, Captopril, Enalapril, Fosinopril, Lisinopril, Moexipril, Perindopril, Quinapril, Ramipril, Trandolopril).

Antihypertensive Combinations (Amlodipine-benazepril, Benazepril-hydrochlorothiazide, Captopril-hydrochlorothiazide, Enalapril-hydrochlorothiazide, Enalapril-hydrochlorothiazide, Enalapril-hydrochlorothiazide, Lisinopril-hydrochlorothiazide, Moexipril-hydrochlorothiazide, Quinapril-hydrochlorothiazide, Trandolapril-verapamil).

ARB medications are: Angiotensin II Inhibitors (Candesartan, Eprosartan, Irbesartan, Losartan, Olmesartan, Telmisartan, Valsartan).

Antihypertensive Combinations (Aliskiren-valsartan, Amlodipine-valsartan, Amlodipine-hydrochlorothiazide-valsartan, Amlodipine-olmesartan, Candesartan-hydrochlorothiazide, Eprosartan-hydrochlorothiazide, Irbesartan-hydrochlorothiazide, Losartan-hydrochlorothiazide, Olmesartan-amlodipine-hydrochlorothiazide, Olmesartan-hydrochlorothiazide, Telmisartan-amlodipine, Telmisartan-hydrochlorothiazide, Valsartan-hydrochlorothiazide).

Direct Renin Inhibitor medications are: Direct Renin Inhibitors (Aliskiren).

Direct Renin Inhibitor Combination Products (Aliskiren-amlodipine, Aliskiren-amlodipine-hydrochlorothiazide, Aliskiren-hydrochlorothiazide, Aliskiren-valsartan).

CRS uses the following codes to define contraindications to ACE inhibitors/ARBs.

Contraindication to RAS		
Antagonist		
(any of the codes occurring	CPT Codes	ICD and Other Codes
ever unless otherwise noted)		
Pregnancy		POV or Problem List: At least two visits
		during the Report Period with 640.03,
		640.83, 640.93, 641.03, 641.13, 641.23,
		641.33, 641.83, 641.93, 642.03, 642.13,
		642.23, 642.33, 642.43, 642.53 642.63,
		642.73, 642.93, 643.03, 643.13, 643.23,
		643.83, 643.93, 644.03, 644.13, 645.13,
		645.23, 646.03, 646.13, 646.23, 646.33,
		646.43, 646.53, 646.63, 646.73, 646.83,
		646.93, 647.03, 647.13, 647.23, 647.33,
		647.43, 647.53, 647.63, 647.83, 647.93,
		648.03, 648.13, 648.23, 648.33, 648.43,
		648.53, 648.63, 648.73, 648.83, 648.93,
		649.03, 649.13, 649.23, 649.33, 649.43,
		649.53, 649.63, 649.73, 651.03, 651.13,
		651.23, 651.33, 651.43, 651.53, 651.63,
		651.73, 651.83, 651.93, 652.03, 652.13,
		652.23, 652.33, 652.43, 652.53, 652.63,
		652.73, 652.83, 652.93, 653.03, 653.13,
		653.23, 653.33, 653.43, 653.53, 653.63,
		653.73, 653.83, 653.93, 654.03, 654.13,
		654.23, 654.33, 654.43, 654.53, 654.63,
		654.73, 654.83, 654.93, 655.03, 655.13,
		655.23, 655.33, 655.43, 655.53, 655.63,
		655.73, 655.83, 655.93, 656.03, 656.13,
		656.23, 656.33, 656.43, 656.53, 656.63,
		656.73, 656.83, 656.93, 657.03, 658.03,
		658.13, 658.23, 658.33, 658.43, 658.83,
		658.93, 659.03, 659.13, 659.23, 659.33, 659.43, 659.53, 659.63, 659.73, 659.83,
		659.93, 660.03, 660.13, 660.23, 660.33,
		660.43, 660.53, 660.63, 660.73, 660.83,
		660.93, 661.03, 661.13, 661.23, 661.33,
		661.43, 661.93, 662.03, 662.13, 662.23,
		662.33, 663.03, 663.13, 663.23, 663.33,
		663.43, 663.53, 663.63, 663.83, 663.93,
		665.03, 665.83, 665.93, 668.03, 668.13,
		668.23, 668.83, 668.93, 669.03, 669.13,
		669.23, 669.43, 669.83, 669.93, 671.03,
		671.13, 671.23, 671.33, 671.53, 671.83,
		671.93, 673.03, 673.13, 673.23, 673.33,
		673.83, 674.03, 674.53, 675.03, 675.13,
		010.00, 017.00, 017.00, 010.00, 010.10,

Contraindication to RAS Antagonist (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
		675.23, 675.83, 675.93, 676.03, 676.13, 676.23, 676.33, 676.43, 676.53, 676.63, 676.83, 676.93, 678.03, 678.13, 679.03, 679.13, V22.0 – V23.9, V28.81, V28.82, V28.89, V72.42, V89.01-V89.09), where the primary provider is not a CHR (Provider code 53). Pharmacy-only visits (clinic code 39) will not count toward these two visits. If the patient has more than two pregnancy-related visits during the Report Period, CRS will use the first two visits in the Report Period. The patient must not have a documented miscarriage or abortion (defined below) occurring after the second pregnancy POV.
	<b>Abortion:</b> Any of the following: 59100, 59120, 59130, 59151, 59840, 59841, 59850, 59851, 59852, 59856, 59857, S2260-S2267	<b>Abortion:</b> Any of the following POVs: 635*, 636*, or 637* <b>Procedures</b> : 69.01, 69.51, 74.91, 96.49
	<b>Miscarriage:</b> Any of the following: 59812, 59820, 59821, 59830	<b>Miscarriage:</b> Any of the following POVs: 630, 631, 632, 633*, or 634*
Breastfeeding		POV: V24.1 during the Report Period Patient Education: BF-BC, BF-BP, BF- CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF- M, BF-MK, or BF-N during the Report Period
Moderate or Severe Aortic Stenosis		<b>POV:</b> 395.0, 395.2, 396.0, 396.2, 396.8, 424.1, 425.1, or 747.22
NMI Refusal		Refusal: NMI (not medically indicated) refusal for any RAS Antagonist at least once during the Report Period

CRS uses the following codes to define adverse drug reactions/documented allergies to RAS Antagonists.

### Adverse Drug Reaction/Allergy to RAS Antagonists

### ICD and Other Codes

POV: 995.0-995.3 AND E942.6

Entry in ART (Patient Allergies File): "ace inhibitor", "ACEI", "Angiotensin Receptor Blocker" or "ARB"

Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "ace i\*", "ACEI", "Angiotensin Receptor Blocker" or "ARB"

## **Key Logic Changes from CRS Version 12.0**

- 1. Renamed topic to RAS Antagonist Use in Diabetic Patients.
- 2. Added RAS Antagonist medications to logic.
- 3. Updated POV codes for pregnancy definition to only include antepartum pregnancy codes.
- 4. Updated pregnancy definition to exclude visits where the primary provider is a CHR (Provider code 53).

### **Patient List Description**

List of diabetic patients with hypertension, with RAS Antagonist medication, contraindication, or ADR, if any.

### **Measure Source**

PQA (Pharmacy Quality Alliance)

# **Measure Past Performance and Long-Term Targets**

None

```
DU November 25, 2012 Page 24

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000

RAS Antagonist Use in Diabetic Patients

REPORT % PREV YR % CHG from BASE % CHG from
```

	PERIOD		PERIOD		PREV YR % PE	RIOD	E	BASE %	
Active Diabetic Pts w/ HTN	76		57			54			
# w/ no RAS Antagonis Rx or w/contra/									
ADR A. # w/contra/ADR	21	27.6	9	15.8	+11.8	6	11.1	+16.5	
w/% of Total	13	61.9	2	22.2	+39.7	2	33.3	+28.6	

Figure 2-16: Sample Report, ACEI/ARB Use in Diabetic Patients

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
ACEI/ARB Use in Diabetic Patients: List of diabetic patients with
hypertension, with RAS Antagonist medication, contraindication, or ADR, if any.
                    HRN COMMUNITY
PATIENT NAME
                                       SEX AGE
DENOMINATOR
                          NUMERATOR
PATIENT1, DEBORAH 000001 COMMUNITY #1 F 20
                           ACEI/ARB Contra pregnant
PATIENT2, TARA 000002 COMMUNITY #1 F 44
AD
                          06/05/12
PATIENT3, BOBBIE 000003 COMMUNITY #1 F 45
                          01/29/12
PATIENT4, WINONA 000004 COMMUNITY #1 F 57
                          ACEI/ARB Allergy: 05/05/12 ADR POV 995.2 + E942.6
PATIENTS, NADINE 000005 COMMUNITY #1 F 57
PATIENT6, RUTH 000006 COMMUNITY #1 F 61
                          09/22/12
PATIENT7, JONELLE 000007 COMMUNITY #1 M 25
                           06/01/12 ACEI/ARB Contra POV 425.1
AD
```

Figure 2-17: Sample Patient List: ACEI/ARB Use in Diabetic Patients

### 2.2.9 Diabetes: Access to Dental Services

### **Denominator**

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever.

#### **Numerators**

Patients with documented dental visit during the Report Period.

**Note**: This numerator does *not* include refusals.

Patients with documented dental exam refusal during the Report Period.

### **Logic Description**

*Diabetes definition:* First DM Purpose of Visit 250.00 through 250.93 recorded in the V POV file prior to the Report period.

Dental visit definition: For non-CHS dental visits, searches for V Dental ADA codes 0000 or 0190; VExam 30; or POV V72.2. For CHS dental visits, searches for any visit with an ADA code. CHS visit defined as Type code of C in Visit file.

*Refusal definition:* Non-CHS dental visit with refusal of ADA Code 0000 or 0190, or refusal of Exam 30. Refusals are only counted if the patient did not have a documented dental visit.

# **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of diabetic patients with documented dental visit or refusal, if any.

### **Measure Source**

HP 2020 D-8

# **Measure Past Performance and Long-Term Targets:**

Past Performance	Percent
IHS FY 2005 Performance	39.0%
IHS FY 2004 Performance	37.0%
IHS FY 2003 Performance	36.0%
IHS FY 2002 Performance	36.0%
HP 2020 Goal	61.2%

### **Performance Improvement Tip**

If your facility's dental services are paid for with CHS funds, ensure the final payment for each purchase order is posted and the CHS to PCC link is set to the "on" position. Having the CHS to PCC link on will enable the CHS data to be passed from CHS/MIS to PCC, where CRS can find it and include it in your CRS reporting.

```
DU November 25, 2012 Page 26

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000
```

Diabetes: Access to I	Dental S	ervice	 es						
	REPORT PERIOD	%	PREV YR PERIOD	%	CHG from 1		•	CHG from BASE %	
Active Diabetic Pts	144		97			87			
<pre># w/dental visit in   past yr-No Refusals # w/dental exam</pre>	17	11.8	20	20.6	-8.8	18	20.7	-8.9	
refusal	4	2.8	0	0.0	+2.8	0	0.0	+2.8	

Figure 2-18: Sample Report, Diabetes and Dental Access

UP-User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Diabetes: Access to Dental Services: List of diabetic patients and documented dental visit or refusal, if any. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT1, DEBORAH 000001 COMMUNITY #1 F 45 03/03/12 Refused ADA 0000 000002 COMMUNITY #1 F 51 PATIENT2, TARA AD PATIENT3, BOBBIE 000003 COMMUNITY #1 F 52 AD 01/06/12 ADA 0190 000004 COMMUNITY #1 F 61 PATIENT4, NADINE PATIENT5, SHERRY 000005 COMMUNITY #1 F 68 000006 COMMUNITY #1 F 69 PATIENT6, JONELLE 03/29/12 ADA 0000

Figure 2-19: Sample Patient List, Diabetes and Dental Access

# 2.3 Dental Measure Topics

### 2.3.1 Access to Dental Services

# **GPRA Measure Description**

During FY 2012, achieve the target rate of 26.9% for the proportion of patients who receive dental services.

### **Denominators**

All patients in the *User Population*. Broken down by age groups (0 through 5, 6 through 21, 22 through 34, 35 through 44, 45 through 54, 55 through 74, greater than (>)74). (GPRA Denominator)

#### **Numerators**

Patients with documented dental visit during the Report Period.

**Note**: This numerator does *not* include refusals. (GPRA Numerator)

Patients with documented dental exam refusal during the Report Period.

# **Logic Description**

Dental visit definition: For non-CHS dental visits, searches for V Dental ADA codes 0000 or 0190; VExam 30; or POV V72.2. For CHS dental visits, searches for any visit with an ADA code. CHS visit defined as Type code of C in Visit file.

*Refusal definition:* Non-CHS dental visit with refusal of ADA Code 0000 or 0190, or refusal of Exam 30. Refusals are only counted if the patient did not have a documented dental visit.

### **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients with documented dental visit or refusal and date.

#### **Measure Source**

HP 2020 OH-7

Measure	Past	Perfor	mance	and I	Lona-T	erm	Targets:

Performance	Percent
IHS FY 2011 Performance	26.9%
IHS FY 2010 Performance	25.0%
IHS FY 2009 Performance	25.0%
IHS FY 2008 Performance	25.0%
IHS FY 2007 Performance	25.0%
IHS FY 2006 Performance	23.0%
IHS FY 2005 Performance	24.0%
IHS FY 2004 Performance	24.0%
IHS FY 2003 Performance	25.0%
IHS FY 2002 Performance	24.9%
HP 2020 Goal	49.0%

# **Performance Improvement Tip**

If your facility's dental services are paid for with CHS funds, ensure the final payment for each purchase order is posted and the CHS to PCC link is set to the "on" position. Having the CHS to PCC link on will enable the CHS data to be passed from CHS/MIS to PCC, where CRS can find it and include it in your CRS reporting.

```
DU
                             November 25, 2012
                                                                      Page 28
       *** IHS 2012 Selected Measures with Community Specified Report ***
                             DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
              Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Access to Dental Services
                     REPORT
                                             % CHG from BASE
                                                                    % CHG from
                               % PREV YR
                     PERIOD
                                  PERIOD
                                                PREV YR % PERIOD
                                                                       BASE %
# User Pop
(GPRA)
                      2,896
                                    2,456
                                                            2,346
# w/dental visit in
past yr-No Refusals
                        252
                                       201
 (GPRA)
                             8.7
                                             8.2
                                                    +0.5
                                                              207
                                                                   8.8
                                                                            -0.1
# w/dental exam
refusal
                             0.2
                                             0.0
                                                     +0.2
                                                                   0.0
                                                                            +0.2
```

Figure 2-20: Sample Report, Access to Dental Services

```
DU November 25, 2012 Page 29

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000
```

Access to Dental Service	s (con	.'t)						
	Т	OTAL U	SER POP					
	0-5	6 01	_	Distri		EE 71	>74 yrs	
	0-5	0-21	22-34	35-44	45-54	55-74	>/4 yrs	
CURRENT REPORT PERIOD								
Total # User Pop		759	577	407	397	411	81	
<pre># w/dental visit in past Refusals (GPRA)</pre>		71	63	35	32	25	1	
<pre>Refusals (GPRA) % w/dental visit in past</pre>		. –	0.3	33	34	25	1	
Refusals (GPRA)		9.4	10.9	8.6	8.1	6.1	1.2	
<pre># w/dental exam refusal % w/dental exam refusal</pre>			0.0	0.0	0.5	3 0.7	0.0	
w/uencar exam rerusar	0.0	0.1	0.0	0.0	0.5	0.7	0.0	
PREVIOUS YEAR PERIOD								
Total # User Pop		704	517	332	284	292	56	
<pre># w/dental visit in past Refusals (GPRA)</pre>	yr-No 19	59	46	24	24	25	4	
% w/dental visit in past			40	24	24	45	4	
	5.3		8.9	7.2	8.5	8.6	7.1	
	_	_	•	•				
<pre># w/dental exam refusal % w/dental exam refusal</pre>					0.0	0.0	0.0	
w/ delical exam refusal	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
CHANGE FROM PREV YR %								
w/dental visit in past y								
Refusals (GPRA) w/dental exam refusal			+2.0 +0.0					
w/delical exam rerusal	+0.0	+U.1	+0.0	+0.0	+0.5	TU./	+0.0	
BASELINE REPORT PERIOD								
Total # User Pop		728	455	293	228	236	52	
<pre># w/dental visit in past Refusals (GPRA)</pre>	yr-No 17	70	39	31	27	20	3	
% w/dental visit in past			39	31	۷/	∠0	3	
Refusals (GPRA)	_	9.6	8.6	10.6	11.8	8.5	5.8	
<pre># w/dental exam refusal % w/dental exam refusal</pre>				0	0	0	0	
% w/uental exam refusal	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
CHANGE FROM BASE YR %								
w/dental visit in past y								
Refusals (GPRA) w/dental exam refusal		-0.3 +0.1		-2.0 +0.0				
w/dental exam refusal	+0.0	+0.1	+0.0	+0.0	+0.5	+0./	+0.0	

Figure 2-21: Sample Age Breakdown Report, Access to Dental Services

Figure 2-22: Sample Patient List, Access to Dental Services

### 2.3.2 Dental Sealants

### **GPRA Measure Description**

During FY 2012, achieve the target count of 276,893 sealants placed in American Indian and Alaska Native patients.

### **Denominator**

No denominator. This measure is a total count only, not a percentage.

### **Numerators**

For patients meeting the *User Population* definition, the total number of dental sealants during the report period.

**Note**: This numerator does not include refusals. (GPRA Numerator).

- a. Dental sealants in patients less than (<)12 years.
- b. Dental sealants in patients 12 through 18 years.
- c. Dental sealants in patients greater than (>)18 years.

Age breakouts are based on Healthy People 2010 age groups for dental sealants.

### **Logic Description**

Age of the patient is calculated at the beginning of the report period.

Sealants definition: V Dental ADA Code 1351 or V CPT Code D1351. Only two sealants per tooth will be counted during the Report Period. Each tooth is identified by the data element Operative Site in RPMS. If both ADA and CPT codes are found on the same visit, only the ADA will be counted.

Refusal definition: Refusal of ADA Code 1351 or refusal of CPT Code D1351. Refusals are only counted if a patient did not have a sealant during the Report Period. If a patient had both a sealant and a refusal, only the sealant will be counted. If a patient has multiple refusals, only one refusal will be counted.

### **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of patients who received or refused dental sealants during Report Period.

#### **Measure Source**

HP 2010 21-8

# **Measure Past Performance and Long-Term Targets:**

Performance	# of Sealants
IHS FY 2011 Performance	276,893
IHS FY 2010 Performance	275,459
IHS FY 2009 Performance	257,067
IHS FY 2008 Performance	241,207
IHS FY 2007 Performance	245,449
IHS FY 2006 Performance	246,645
IHS FY 2005 Performance	249,882
IHS FY 2004 Performance	230,295
	287,158
IHS FY 2003 Performance	232,182
IHS FY 2002 Performance	227,945
IHS FY 2001 Performance	212,612

For the IHS FY 2004 Performance, # of Sealants, please note this was reported by the National Patient Information Reporting System (NPIRS).

### **Performance Improvement Tip**

If your facility's dental visits are paid for with CHS funds, ensure the final payment for each purchase order is posted and the CHS to PCC link is set to the "on" position. Having the CHS to PCC link on will enable the CHS data to be passed from CHS/MIS to PCC, where CRS can find it and include it in your CRS reporting.

Re Previo	Selected Measu DEMO port Period: G us Year Period	ember 25, 2012 ares with Comm O INDIAN HOSPI Jan 01, 2012 t d: Jan 01, 200 Jan 01, 2000	unity Speci TAL o Dec 31, 2 11 to Dec 3	012 1, 2011	Page 30 ***
Dental Sealants					
	REPORT PERIOD	PREV YR PERIOD	CHG from PREV YR	·-	CHG from BASE
Total # of Sealants Documented (GPRA)	50	61	-11	81	-31
A. # Dental Sealants documented pts <12 yrs	35	26	+9	40	-5
B. # Dental Sealants documented pts 12-18 yrs	13	34	-21	40	-27
C. # Dental Sealants pts >18 yrs	documented 2	1	+1	1	+1
# refusals	3	0	+3	0	+3

Figure 2-23: Sample Report, Dental Sealants

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Dental Sealants: List of patients who received or refused dental sealants during Report period. PATIENT NAME HRN COMMUNITY
DENOMINATOR NUMERATOR SEX AGE PATIENT20, GEORGE 000020 COMMUNITY #1 M 5 4 sealants: 03/28/12 ADA 1351 (1); 03/28/12 ADA 1351 (1); 03/28/12 ADA 1351 (1); 03/28/12 ADA 1351 (1) PATIENT21, CODY 000021 COMMUNITY #1 M 7
UP 0 sealants: 03/03/12 0 sealants: 03/03/12 Refused ADA 1351 PATIENT50, DAWN 000050 COMMUNITY #2 F 4 3 sealants: 04/15/12 ADA 1351 (1); 05/19/12 ADA 1351 (1); 05/19/12 ADA 1351 (1) PATIENT51,JOY 000051 COMMUNITY #2 F 6

```
UP 2 sealants: 03/17/12 ADA 1351 (2)
PATIENT52,DONALD 000052 COMMUNITY #2 M 8
UP 1 sealants: 02/02/12 CPT D1351 (1)
```

Figure 2-24: Sample Patient List, Dental Sealants

# 2.3.3 Topical Fluoride

### **GPRA Measure Description**

During FY 2012, achieve the target count of 161,461 AI/AN patients who receive at least one topical fluoride application.

### **Denominator**

No denominator. This measure is a total count only, not a percentage.

#### **Numerators**

For patients meeting the *User Population* definition, the total number of patients with at least one topical fluoride treatment during the Report Period.

**Note**: This numerator does *not* include refusals. (GPRA Numerator)

For patients meeting the *User Population* definition, the total number of patients with a documented topical fluoride application refusal in past year.

For patients meeting the *User Population* definition, the total number of appropriate topical fluoride applications based on a maximum of four per patient per year.

For patients meeting the *User Population* definition, the total number of documented topical fluoride application refusals during past year.

### **Logic Description**

Topical fluoride application definition: (1) V Dental ADA Codes 1201 (old code), 1203, 1204, 1205 (old code), 1206, or 5986; (2) V CPT Codes D1201 (old code), D1203, D1204, D1205 (old code), D1206, or D5986; 3) V POV V07.31. A maximum of one application per patient per visit is allowed. A maximum of four topical fluoride applications are allowed per patient per year for the applications measure.

Refusal definition: Refusal of ADA Code 1201 (old code), 1203, 1204, 1205 (old code), 1206 or 5986, or refusal of CPT Code D1201 (old code), D1203, D1204, D1205 (old code), D1206, or D5986. Refusals are only counted if a patient did not have a topical fluoride application during the Report Period. If a patient had both an application and a refusal, only the application will be counted. If a patient has multiple refusals, only one refusal will be counted.

# **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients who received or refused at least one topical fluoride application during Report Period.

### **Measure Source**

Not Available

### **Measure Past Performance and Long-Term Targets:**

Performance	Number of Patients
IHS FY 2011 Performance	161,461
IHS FY 2010 Performance	145,181
IHS FY 2009 Performance	136,794
IHS FY 2008 Performance	120,754
IHS FY 2007 Performance	107,934
IHS FY 2006 Performance	95,439
IHS FY 2005 Performance	85,318
IHS FY 2005 Performance	113,324

For the IHS FY 2005 Performance, Number of Patients (113,324) is the number of applications.

## **Performance Improvement Tip**

If your facility's dental visits are paid for with CHS funds, ensure the final payment for each purchase order is posted and the CHS to PCC link is set to the "on" position. Having the CHS to PCC link on will enable the CHS data to be passed from CHS/MIS to PCC, where CRS can find it and include it in your CRS reporting.

```
DU November 25, 2012 Page 33

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011
```

	Baseline Period:	Jan 01, 200	00 to Dec 31,	2000	
Topical Fluoride					
	REPORT PERIOD	PREV YR PERIOD	CHG from PREV YR		CHG from BASE
Total # of patie Least 1 Topical -No Refusals (G	Fluoride App	26	+19	15	+30
# Patients w/Refusals	7	0	+7	0	+7
Total # of Topic Applications	al Fluoride 50	26	+24	15	+35
# Refusals	7	0	+7	0	+7

Figure 2-25: Sample Report, Topical Fluoride

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Topical Fluoride: List of patients who received or refused at least one topical fluoride application during Report period. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT20,GEORGE 000020 COMMUNITY #1 M 5 1 topical fluoride: 06/18/12 CPT D5986 PATIENT21,RYAN 000021 COMMUNITY #1 M 8 PATIENT22, MICHAEL 000022 COMMUNITY #1 M 9 0 topical fluoride: 03/03/12 Refused ADA 1201 0 topical fluoride: 03/03/12 Refused CPT D1203 PATIENT23, MARTY 000023 COMMUNITY #1 M 15 2 topical fluoride: 01/07/12 ADA 1204; 08/27/12 ADA 1204

Figure 2-26: Sample Patient List, Topical Fluoride

# 2.4 Immunization Measure Topics

### 2.4.1 Influenza

### **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 63.4% for the proportion of non-institutionalized adults aged 65 years and older who receive an influenza immunization.

#### **Denominators**

All Active Clinical patients. Broken down by age groups.

- a. Active Clinical patients younger than age 18.
- b. Active Clinical patients ages 18 through 49.
- c. Active Clinical patients ages 18 through 49 and considered high risk for influenza.
- d. Active Clinical patients ages 50 through 64.
- e. Active Clinical patients ages 65 and older. (GPRA Denominator)

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever.

All *User Population patients*. Broken down by age groups.

- a. User Population patients younger than age 18.
- b. User Population patients ages 18 through 49.
- c. User Population patients ages 18 through 49 and considered high risk for influenza.
- d. User Population patients ages 50 through 64.
- e. User Population patients ages 65 and older.

### **Numerators**

Patients with influenza vaccine documented during the report period or with a contraindication documented at any time before the end of the report period.

**Note**: The only refusals included in this numerator are not medically indicated (NMI) refusals. (GPRA Numerator)

a. Patients with a contraindication or a documented NMI refusal.

Patients with documented influenza refusal during the report period.

### **Logic Description**

Age of the patient is calculated at the beginning of the report period.

*Diabetes:* First DM POV 250.00 through 250.93 recorded in the V POV file prior to the Report period.

*Influenza definition:* Any of the following documented during the Report Period unless otherwise noted.

1. **Influenza immunization:** Any of the codes in the table below.

Immunization	CPT Codes	ICD and Other Codes
Influenza vaccine	90654-90662, 90724 (old code), G0008, G8108 (old code)	Immunization (CVX) Codes: 88-Influenza Virus Vaccine, NOS; 15 Inf Virus Vac SV; 16 Inf Virus Vac WV; 111 Inf Virus Vac Intranasal; 135 Inf High Dose Seasonal; 140 Inf Virus Vac SV Preservative Free; 141 Inf Virus Vac SV; 144 Inf Virus Vac SV Intradermal POV: V04.8 (old code), V04.81 NOT documented with 90663, 90664, 90666- 90668, 90470, G9141 or G9142, V06.6 NOT documented with 90663, 90664, 90666-90668, 90470, G9141 or G9142 ICD Procedure Code: 99.52

- 2. **Contraindication:** Any of the following documented at any time before the end of the Report Period, defined as: (A) Contraindication in the Immunization Package of "Egg Allergy" or "Anaphylaxis" or (B) PCC NMI Refusal.
- 3. **Refusal:** Any of the following during the Report Period: (A) Immunization codes 88, 111, 135, 140, 141, 144, 15, or 16, as documented in PCC Refusal File (i.e., REF), (B) CPT codes 90654 through 90662, 90724 (old code), G0008, G8108 (old code) as documented in PCC Refusal File (i.e., REF) or (C) Immunization Package as contraindication of "Patient Refusal."
- 4. **High Risk for Influenza:** Persons considered high risk for influenza are defined as those who have 2 or more visits in the past 3 years with a POV or Problem diagnosis of any of the following: HIV Infection (042, 042.0 through 044.9 (old codes)); Diabetes (250.00 through 250.93); Rheumatic Heart Disease (393.-398.99); Hypertensive Heart Disease (402.00 through 402.91); Hypertensive Heart/Renal Disease (404.00 through 404.93); Ischemic Heart Disease (410.00-414.9); Pulmonary Heart Disease (415.0 through 416.9); Other Endocardial Heart Disease (424.0 through 424.9); Cardiomyopathy (425.0 through 425.9); Congestive Heart Failure (428.0 through 428.9, 429.2); Chronic Bronchitis (491.0 through 491.9); Emphysema (492.0 through 492.8); Asthma (493.00 through 493.91); Bronchiectasis, CLD, COPD (494.0 through 496.); Pneumoconioses (500 through 505); Chronic Liver Disease (571.0 through 571.9); Nephrotic Syndrome (581.0 through 581.9); Renal Failure (585.6, 585.9); Transplant (996.80-996.89); Kidney Transplant (V42.0-V42.89); Chemotherapy (V58.1); Chemotherapy follow-up (V67.2).

### **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients with Influenza code or refusal, if any.

### **Measure Source**

HP 2020 IID-12.7

# Measure Past Performance and Long-Term Targets for Patients => 65 Vaccine Rate:

Performance	Percent
IHS FY 2011 Performance	63.4%
IHS FY 2010 Performance	62.0%
IHS FY 2009 Performance	59.0%
IHS FY 2008 Performance	62.0%
IHS FY 2007 Performance	59.0%
IHS FY 2006 Performance	58.0%
IHS FY 2005 Performance	59.0%
IHS FY 2004 Performance	54.0%
IHS FY 2003 Performance	51.0%
IHS FY 2002 Performance	51.4%
HP 2020 Goal	90.0%

# **Performance Improvement Tips**

- Providers should ask about and record off-site historical immunizations (IZ type, date received and location) on PCC forms. Data entry mnemonic: HIM
- Providers should document refusals; write "Refused" in Influenza Order box on PCC form. Data entry mnemonic: REF (Immunization, Value, Date Refused).

```
DU
                             November 25, 2012
                                                                    Page 35
       *** IHS 2012 Selected Measures with Community Specified Report ***
                             DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
             Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Influenza
                              % PREV YR
                                             % CHG from BASE
                    REPORT
                                                                   % CHG from
                    PERIOD
                                  PERIOD
                                               PREV YR % PERIOD
                                                                      BASE %
Active Clinical Pts 1,554
                                    1,209
                                                          1,101
```

Total # w/Flu vaccine/									
contra/NMI Refusal	194	12.5	115	9.5	+3.0	49	4.5	+8.0	
A. # w/ Contraind/ NMI	Ref								
w/ % of Total IZ	12	6.2	2	1.7	+4.4	0	0.0	+6.2	
# w/ Influenza									
Refusal	17	1.1	6	0.5	+0.6	0	0.0	+1.1	
Active Clinical Pts									
<18	442		416			435			
~10	112		410			133			
Total # w/Flu vaccine/									
contra/NMI Refusal	54	12.2	21	5.0	+7.2	6	1.4	+10.8	
A. # w/ Contraind/ NMI	Ref								
w/ % of Total IZ	3	5.6	0	0.0	+5.6	0	0.0	+5.6	
# w/ Influenza									
Refusal	6	1.4	0	0.0	+1.4	0	0.0	+1.4	
Astino Glimical Dec									
Active Clinical Pts 18-49	752		572			486			
10-49	752		572			400			
Total # w/Flu vaccine/									
	48	6.4	33	5.8	+0.6	14	2.9	+3.5	
A. # w/ Contraind/ NMI	Ref								
	3	6.3	2	6.1	+0.2	0	0.0	+6.3	
# w/ Influenza	_								
Refusal	3	0.4	0	0.0	+0.4	0	0.0	+0.4	
Active Clinical Pts									
18-49 high risk	166		109			69			
10 10 111911 11511	100		100			0,5			
Total # w/Flu vaccine/									
contra/NMI Refusal	25	15.1	25	22.9	-7.9	7	10.1	+4.9	
A. # w/ Contraind/ NMI									
w/ % of Total IZ	3	12.0	1	4.0	+8.0	0	0.0	+12.0	
# w/ Influenza	_	1 0	•	0 0	1 0	•	0 0	1 0	
Refusal	3	1.8	0	0.0	+1.8	0	0.0	+1.8	
Active Clinical Patient	- a								
ages 50-64	244		157			115			
ages so or	211		137			113			
Total # w/Flu									
vaccine/contra/									
NMI Refusal		24.2	37	23.6	+0.6	14	12.2	+12.0	
A. # w/ Contraind/ NMI									
Ref w/ % of	_	0 5	0	0 0	. 0 . 5	0	0 0	.0.5	
Total IZ # w/Influenza	5	8.5	0	0.0	+8.5	0	0.0	+8.5	
Refusal	3	1.2	5	3.2	-2.0	0	0.0	+1.2	
TOT UDU I	J	1.4		3.2	2.0	0	0.0	11.2	

Figure 2-27: Sample Report, Adult Immunizations: Influenza

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Influenza: List of patients with Influenza code or refusal, if any.

PATIENT NAME HRN COMMUNITY SEX AGE

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

DENOMINATOR	NUMERATOR	
PATIENT1, DEBORAH AD	000001 COMMUNITY #1 F 01/28/12 Imm 88	15
PATIENT2,CRYSTAL UP,AC	000002 COMMUNITY #1 F	24
PATIENT3, DEMETRIA UP, AC, HR	000003 COMMUNITY #1 F 02/25/12 Imm 140	35
PATIENT4, JADE UP	000004 COMMUNITY #1 F	50
PATIENT5,MARIE UP,AC,AD,HR	000005 COMMUNITY #1 F 01/21/12 NMI Refu	

Figure 2-28: Sample Patient List, Adult Immunization: Influenza

### 2.4.2 Adult Immunizations

### **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 87.5% for the proportion of adult patients age 65 years and older who receive a pneumococcal immunization.

### **Denominators**

Active Clinical patients ages 65 or older. (GPRA Denominator)

Active Clinical patients ages 18 through 64 and considered high risk for pneumococcal.

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever.

Active Clinical patients ages 18 through 64.

All *User Population patients* ages 65 and older at beginning of Report Period.

*User Population patients* ages 18 through 64 and considered high risk for pneumococcal.

User Population patients ages 18 through 64.

#### **Numerators**

Patients with Pneumococcal vaccine or contraindication documented at any time before the end of the Report Period.

**Note**: The only refusals included in this numerator are NMI refusals. (GPRA Numerator)

a. Patients with a contraindication or a documented NMI refusal.

Patients with documented Pneumococcal refusal during the Report Period.

Patients with Pneumococcal vaccine or contraindication documented ever and, if patient is older than 65 years, either a dose of pneumovax after the age of 65 or a dose of pneumovax in the past 5 years.

**Note**: The only refusals included in this numerator are NMI refusals. (GPRA Numerator)

Patients who have received 1 dose of Tdap ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals. (GPRA Numerator)

Patients who have received 1 dose of Tdap/Td in the past 10 years, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals. (GPRA Numerator)

### **Logic Description**

Age of the patient is calculated at the beginning of the Report period.

*Diabetes definition:* First DM POV 250.00250.93 recorded in the V POV file prior to the Report period.

*Pneumococcal Immunization definition:* Any of the following documented any time before the end of the Report Period unless otherwise noted.

1. **Pneumoccocal immunization:** Any of the codes in the table below.

Immunization	CPT Codes	ICD and Other Codes
Pneumoccocal	90669, 90670, 90732,	Immunization (CVX) Codes:
Vaccine	G0009, G8115 (old	33 - Pneumococcal Polysaccaride Vaccine;
	code)	100 - Pneumococcal Conjugate Vaccine;
		109 – Pneumo NOS; 133 – Pneumo
		Conjugate
		<b>POV:</b> V06.6; V03.82
		V Procedure: 99.55

2. **Pneumoccocal Contraindication:** (A) Contraindication in the Immunization Package of "Anaphylaxis" or (B) PCC NMI Refusal.

- 3. **Pneumoccocal Refusal:** Any of the following during the Report Period: (A) Immunization codes 33, 100, 109, or 133, as documented in PCC Refusal File (i.e., REF), (B) CPT codes 90669, 90670, 90732, G0009, G8115 (old code) as documented in PCC Refusal File (i.e. REF) or (C) Immunization Package as contraindication of "Patient Refusal."
- 4. **High Risk for Pneumococcal:** Persons considered high risk for pneumococcal are defined as those who have 2 or more visits in the past 3 years with a POV or Problem diagnosis of any of the following: HIV Infection (042, 042.0 through 043.9 (old codes), 044.9 (old code)); Diabetes (250.00 through 250.93); Chronic alcoholism (303.90, 303.91); Congestive Heart Failure (428.0-428.9, 429.2); Emphysema (492.0 through 492.8); Asthma (493.00 through 493.91); Bronchiectasis, CLD, COPD (494. Through 496.); Pneumoconioses (501.through 505.); Chronic Liver Disease (571.0 through 571.9); Nephrotic Syndrome (581.0-581.9); Renal Failure (585.6, 585.9); Injury to spleen (865.00 through 865.19); Transplant (996.80-996.89); Kidney Transplant (V42.0 through V42.89); Chemotherapy (V58.1); Chemotherapy follow-up (V67.2).

*Tdap/Td Immunization definition:* Any of the following documented during the applicable time frame.

1. **Tdap/Td immunization:** Any of the codes in the table below.

Immunization	CPT Codes	ICD and Other Codes
Tdap Vaccine	90715	Immunization (CVX) Codes:  115 – Tetanus toxoid, reduced diphtheria toxoid, and acellular pertussis vaccine, adsorbed
Td Vaccine	90714, 90718	Immunization (CVX) Codes: 9 – Tetanus and diphtheria toxoids, adsorbed, for adult use 113 – Tetanus and diphtheria toxoids, adsorbed, preservative free, for adult use POV: V06.5

2. **Tdap/Td Contraindication:** (A) Contraindication in the Immunization Package of "Anaphylaxis" or (B) PCC NMI Refusal.

# **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients equal to or greater than (=>)18 yrs or DM DX with IZ, evidence of disease, contraindication, or refusal, if any.

### **Measure Source**

HP 2020 IID-13.1

# **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance	85.5%
IHS FY 2010 Performance	84.0%
IHS FY 2009 Performance	82.0%
IHS FY 2008 Performance	82.0%
IHS FY 2007 Performance	79.0%
IHS FY 2006 Performance	74.0%
IHS FY 2005 Performance	69.0%
IHS FY 2004 Performance	69.0%
IHS FY 2003 Performance	65.0%
IHS FY 2002 Performance	64.0%
HP 2020 Goal for % of patients => 65	90.0%

# **Performance Improvement Tips**

- Providers should ask about and record off-site historical immunizations (IZ type, date received and location) on PCC forms. Data entry mnemonic: HIM
- Providers should document refusals; write "Refused" in Pneumo Vax Order box on PCC form. Data entry mnemonic: REF (Immunization, Value, Date Refused).

DU November 25, 2012 Page 41  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Adult Immunizations									
	REPORT PERIOD		PREV YR PERIOD		CHG from PREV YR %				
Active Clinical Pts ages 65 & older (GPRA)	116		64			65			
Total # w/Pneumovax/ contra/NMI Refusal (GPRA) A. # w/ Contraind/ N Ref w/ % of		43.1	44	68.8	-25.6	37	56.9	-13.8	
Total IZ	4	8.0	2	4.5	+3.5	0	0.0	+8.0	
<pre># w/Pneumovax Refusal</pre>	3	2.6	0	0.0	+2.6	0	0.0	+2.6	
Active Clinical Pts									

18-64 high risk	222		164			105			
Total # w/Pneumovax/ co	ntra/								
NMI Refusal	55	24.8	47	28.7	-3.9	39	37.1	-12.4	
A. # w/ Contra/ NMI Ref									
w/ % of Total IZ	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
# w/ Pneumovax									
Refusal	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
Active Diabetic Pts	144		97			87			
Total # w/up to date Pneumovax/contra/NMI Refusal A. # w/ Contraind/ NMI	56	38.9	49	50.5	-11.6	46	52.9	-14.0	
Ref w/ % of Total IZ # w/Pneumovax	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
Refusal	0	0.0	0	0.0	+0.0	0	0.0	+0.0	

Figure 2-29: Sample Report, Adult Immunization: Pneumovax

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Adult Immunizations: List of patients =>18 yrs or DM DX with IZ, evidence of disease, contraindication, or refusal, if any. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT1, DEBORAH 000001 COMMUNITY #1 F 18

UP, AC, HR TDAP/TD: 12/22/11 Imm 9 (past 10 yrs)

PATIENT2, TARA 000002 COMMUNITY #1 F 27

IDAC TDAP: 03/03/12 Imm 115 (ever): TDAP/T TDAP: 03/03/12 Imm 115 (ever); TDAP/TD: 03/03/12 UP,AC PATIENT3, BOBBIE 000003 COMMUNITY #1 F 41 UP,AC PATIENT4, NADINE 000004 COMMUNITY #1 F 55 UP, AC, HR, AD Pneumo: 03/27/10 Imm Pneumo: 03/27/10 Imm 33 (ever) (up-to-date); TDAP/TD: 03/27/10 Imm 9 (past 10 yrs) PATIENT5, SHERRY 000005 COMMUNITY #1 F 68 UP,AC,HR Pneumo: 02/03/12 Refused CPT 90669

Figure 2-30: Sample Patient List, Adult Immunization: Pneumovax

## 2.4.3 Childhood Immunizations

### **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 77.8% for the proportion of American Indian/Alaska Native children ages 19 through 35 months who have received the recommended immunizations.

#### **Denominators**

Active Clinical patients ages 19 through 35 months at end of Report Period.

User Population patients ages 19 through 35 months at end of Report Period.

*User Population patients active in the Immunization Package* who are 19 through 35 months at end of Report Period. (GPRA Denominator)

**Note:** Only values for the Current Period will be reported for this denominator since currently there is not a way to determine if a patient was active in the Immunization Package during the Previous Year or Baseline Periods.

### **Numerators**

Patients who have received the 4:3:1:3:3 combination (i.e., 4 DTaP, 3 Polio, 1 MMR, 3 HiB, 3 Hepatitis B), including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received the 4:3:1:3:3:1 combination (i.e., 4 DTaP, 3 Polio, 1 MMR, 3 HiB, 3 Hepatitis B, 1 Varicella), including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received the 4:3:1:3:3:1:4 combination (i.e., 4 DTaP, 3 Polio, 1 MMR, 3 HiB, 3 Hepatitis B, 1 Varicella, and 4 Pneumococcal), including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals. (GPRA Numerator)

Patients who have received four doses of DTaP ever, including contraindications.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received three doses of Polio ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received one dose of MMR ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received three doses of HiB ever, including contraindications.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received three doses of Hepatitis B vaccine ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received one dose of Varicella ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received four doses of Pneumococcal conjugate vaccine ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received two doses of Hepatitis A vaccine ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received two or three doses of Rotavirus vaccine ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received two doses of Influenza vaccine ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

For each of the above numerators, the following subnumerators are included:

a. Patients with either (1) evidence of the disease, (2) a contraindication, or (3) a documented NMI refusal

Patients with documented REF refusal in PCC or Parent or Patient refusal in the IZ program

**Immunization Program Numerator**: Patients who have received the 4:3:1:3:3 combination (i.e., 4 DTaP, 3 Polio, 1 MMR, 3 HiB, 3 Hepatitis B), *not* including refusals, contraindications, and patients with evidence of disease.

**Immunization Program Numerator**: Patients who have received the 4:3:1:3:3:1 combination (i.e., 4 DTaP, 3 Polio, 1 MMR, 3 HiB, 3 Hepatitis B, and 1 Varicella), *not* including refusals, contraindications, and patients with evidence of disease.

**Immunization Program Numerator**: Patients who have received the 4:3:1:3:3:1:4 combination (i.e., 4 DTaP, 3 Polio, 1 MMR, 3 HiB, 3 Hepatitis B, 1 Varicella, and 4 Pneumococcal), *not* including refusals, contraindications, and patients with evidence of disease.

# **Logic Description**

Age definition: Age of the patient is calculated at the beginning of the Report Period. Therefore the age range will be adjusted to 7 through 23 months, which makes the patient between the ages of 19 through 35 months at the end of the Report Period. Because IZ data comes from multiple sources, any IZ codes documented on dates within 10 days of each other will be considered as the same immunization.

Active Immunization Package Patients denominator definition: Same as User Pop definition except includes only patients flagged as active in the Immunization Package.

**Note:** Only values for the Current Period will be reported for this denominator since currently there is not a way to determine if a patient was active in the Immunization Package during the Previous Year or Baseline Periods.

Dosage and types of immunization definitions:

- Four doses of DTaP: (1) four DTaP/DTP/Tdap; (2) one DTaP/DTP/Tdap and three DT/td; (3) one DTaP/DTP/Tdap and three each of Diphtheria and Tetanus; (4) four DT and four Acellular Pertussis; (5) four Td and four Acellular Pertussis; or (6) four each of Diphtheria, Tetanus, and Acellular Pertussis.
- Three doses of Polio: (1) v OPV; (2) three IPV; or (3) combination of OPV and IPV totaling 3 doses.
- One dose of MMR: (1) MMR; (2) one M/R and one Mumps; (3) one R/M and one Measles; or (4) one each of Measles, Mumps, and Rubella.
- Three doses of Hep B
- Three doses of HIB
- One dose of Varicella
- Four doses of Pneumococcal
- Two doses of Hepatitis A
- Two or three doses of Rotavirus, depending on the vaccine administered
- Two doses of Influenza

Except for the Immunization Program Numerators, NMI refusals, evidence of disease, and contraindications for individual immunizations will also count toward meeting the definition, as defined below. Refusals will count toward meeting the definition for refusal numerators only.

**Note**: NMI refusals are not counted as refusals; rather, they are counted as contraindications.

- For immunizations that allow a different number of doses (e.g. 2 or 3 Rotavirus): To count toward the numerator with the smaller number of doses, all of the patient's vaccinations must be part of the smaller dose series. For example, for a patient to count toward the Rotavirus numerator with only 2 doses, all two doses must be included in the 2-dose series codes listed in the Rotavirus definition. A patient with a mix of 2-dose and 3-dose series codes will need 3 doses to count toward the numerator.
- Each immunization must be refused and documented separately. For example, if a
  patient has an NMI refusal for Rubella only, then there must be an immunization,
  contraindication, or separate NMI refusal for the Measles and Mumps
  immunizations.
- For immunizations where required number of doses is >1, only one NMI refusal is necessary to be counted in the numerator. For example, if there is a single NMI refusal for Hepatitis B, the patient will be included in the numerator.

- For immunizations where required number of doses is greater than (>)1, only one contraindication is necessary to be counted in the numerator. For example, if there is a single contraindication for HiB, the patient will be included in the numerator.
- Evidence of disease will be checked for at any time in the child's life (prior to the end of the Report Period.)
- To be counted in subnumerator A, a patient must meet the numerator definition and have a REF refusal in PCC or a Parent or Patient Refusal in the IZ program for any of the immunizations in the numerator. For example, if a patient refused Rubella only but had immunizations for Measles and Mumps, the patient would be included in subnumerator A.

For the separate numerator for REF refusal (Patient Refusal for Service) in PCC or a Parent or Patient refusal in the IZ program, all conditions shown below must be met:

- Each immunization must be refused and documented separately. For example, if a patient has an REF refusal for Rubella, then there also must be an immunization, contraindication, or separate REF refusal for Measles and Mumps.
- Where the required number of doses is greater than (>)1, only one REF refusal in PCC or one Parent or Patient refusal in the IZ program is necessary to be counted in the numerator. For example, for the 4 DTaP numerator, only one refusal is necessary to be counted in the refusal numerator.

Childhood immunization refusals are defined as Parent/Patient Refusal in Immunization package or PCC Refusal type REF or NMI for IZ codes:

Immunization	Immunization Codes for Refusals	CPT Codes for Refusals
DTaP	20, 50, 106, 107, 110, 120, 130, 132, 146	90696, 90698, 90700, 90721, 90723
DTP	1, 22, 102	90701, 90711 (old code), 90720
Tdap	115	90715
DT (Diphtheria & Tetanus)	28	90702
Td (Tetanus & Diphtheria)	9, 113	90714, 90718
Tetanus	35, 112	90703
Acellular Pertussis	11	
OPV	2, 89	90712
IPV	10, 89, 110, 120, 130, 132, 146	90696, 90698, 90711 (old code), 90713, 90723
MMR	3, 94	90707, 90710; M/R: 90708
M/R (Measles/ Rubella)	4	
R/M (Rubella/ Mumps)	38	90709 (old code)
Measles	5	90705
Mumps	7	90704

Immunization	Immunization Codes for Refusals	CPT Codes for Refusals
Rubella	6	90706
HiB	17, 22, 46-49, 50, 51, 102, 120, 132, 146	90645-90648, 90698, 90720- 90721, 90737 (old code), 90748
Hepatitis B	8, 42-45, 51, 102, 104, 110, 132, 146	90636, 90723, 90731 (old code), 90740, 90743-90748, G0010, Q3021 (old code), Q3023 (old code)
Varicella	21, 94	90710, 90716
Pneumococcal	33, 100, 109, 133	90669, 90670, 90732, G0009, G8115 (old code)
Hepatitis A	1, 52, 83, 84, 85, 104	90632-90634, 90636, 90730 (old code)
Rotavirus	74, 116, 119, 122	90680
Influenza	15, 16, 88, 111, 135, 140, 141	90654-90658, 90659 (old code), 90660-90662, 90724 (old code), G0008, G8108 (old code)

Childhood immunizations are defined in the following ways:

Immunization	CPT Codes	ICD and Other Codes NOTE: IZ Program Numerators Do Not Use POV, V Procedure, Evidence of Disease, Contraindication or Refusal Codes
DTaP	90696, 90698, 90700, 90721, 90723	Immunization (CVX) Codes: 20, 50, 106, 107, 110, 120, 130, 132, 146 POV: V06.1 Contraindications: Immunization Package contraindication of
DTP	90701, 90711 (old code), 90720	"Anaphylaxis."  Immunization (CVX) Codes: 1, 22, 102  POV: V06.1, V06.2, V06.3  V Procedure: 99.39
		Contraindications: Immunization Package contraindication of "Anaphylaxis."
Tdap	90715	Immunization (CVX) Codes: 115 Contraindications: Immunization Package contraindication of "Anaphylaxis."
DT (Diphtheria & Tetanus)	90702	Immunization (CVX) Codes: 28 POV: V06.5 Contraindications: Immunization Package contraindication of "Anaphylaxis."
Td (Tetanus & Diphtheria)	90714, 90718	Immunization (CVX) Codes: 9, 113 POV: V06.5 Contraindications: Immunization Package contraindication of "Anaphylaxis."

Immunization	CPT Codes	ICD and Other Codes NOTE: IZ Program Numerators Do Not Use POV, V Procedure, Evidence of Disease, Contraindication or Refusal Codes
Diphtheria	90719	POV: V03.5
		V Procedure: 99.36
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
Tetanus	90703	Immunization (CVX) Codes: 35, 112
		<b>POV:</b> V03.7
		V Procedure: 99.38
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
Acellular		Immunization (CVX) Codes: 11
Pertussis		<b>POV:</b> V03.6
		V Procedure: 99.37 (old code)
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
OPV	90712	Immunization (CVX) Codes: 2, 89
		Contraindications: POV 279, V08, 042, 200-202, 203.0, 203.1, 203.8, 204-208 or Immunization Package contraindication of "Anaphylaxis."
IPV	90696, 90698,	Immunization (CVX) Codes: 10, 89, 110, 120, 130, 132, 146
	90711 (old code),	<b>POV:</b> V04.0, V06.3
	90713, 90723	V Procedure: 99.41
		<b>Evidence of Disease:</b> POV or PCC Problem List (active or inactive) 730.70-730.79
		Contraindications: Immunization Package contraindication of "Anaphylaxis" or "Neomycin Allergy."
MMR	90707, 90710	Immunization (CVX) Codes: 3, 94
		<b>POV:</b> V06.4
		V Procedure: 99.48
		Contraindications: POV 279, V08, 042, 200-202, 203.0, 203.1, 203.8, 204-208; or Immunization Package contraindication of "Anaphylaxis," "Immune Deficiency," "Immune Deficient," or "Neomycin Allergy."
M/R (Measles/	90708	Immunization (CVX) Codes: 4
Rubella)		Contraindications: Immunization Package contraindication of "Anaphylaxis"
R/M (Rubella/	90709 (old code)	Immunization (CVX) Codes: 38
Mumps)		Contraindications: Immunization Package contraindication of "Anaphylaxis"

Immunization		ICD and Other Codes NOTE: IZ Program Numerators Do Not Use POV, V Procedure, Evidence of Disease, Contraindication or Refusal Codes
Measles	90705	Immunization (CVX) Codes: 5 POV: V04.2 V Procedure: 99.45 Evidence of Disease: POV or PCC Problem List (active or inactive)
		055*  Contraindications: Immunization Package contraindication of  "Anaphylaxis"
Mumps	90704	Immunization (CVX) Codes: 7 POV: V04.6 V Procedure: 99.46 Evidence of Disease: POV or PCC Problem List (active or inactive) 072*
Rubella	90706	Contraindications: Immunization Package contraindication of "Anaphylaxis"  Immunization (CVX) Codes: 6
		POV: V04.3 V Procedure: 99.47 Evidence of Disease: POV or PCC Problem List (active or inactive) 056*, 771.0 Contraindications: Immunization Package contraindication of "Anaphylaxis"
HiB	90645-90648, 90698, 90720- 90721, 90737 (old code), 90748	Immunization (CVX) Codes: 17, 22, 46-49, 50, 51, 102, 120, 132, 146 POV: V03.81 Contraindications: Immunization Package contraindication of "Anaphylaxis"
Hepatitis B	90636, 90723, 90731 (old code), 90740, 90743- 90748, G0010, Q3021, (old code) Q3023 (old code)	Immunization (CVX) Codes: 8, 42-45, 51, 102, 104, 110, 132, 146 Evidence of Disease: POV or PCC Problem List (active or inactive) V02.61, 070.2, 070.3 Contraindications: Immunization Package contraindication of "Anaphylaxis"
Varicella	90710, 90716	Immunization (CVX) Codes: 21, 94 POV: V05.4 Evidence of Disease: 1) POV or PCC Problem List (active or inactive) 052*, 053* or 2) 2) Immunization Package contraindication of "Hx of Chicken Pox" or "Immune." Contraindications: POV 279, V08, 042, 200-202, 203.0, 203.1, 203.8, 204-208; or Immunization Package contraindication of "Anaphylaxis," "Immune Deficiency," "Immune Deficient," or "Neomycin Allergy."
Pneumococcal	90669, 90670, 90732, G0009, G8115 (old code)	Immunization (CVX) Codes: 33, 100, 109, 133 POV: V06.6; V03.82 Contraindications: Immunization Package contraindication of "Anaphylaxis"

Immunization	CPT Codes	ICD and Other Codes NOTE: IZ Program Numerators Do Not Use POV, V Procedure, Evidence of Disease, Contraindication or Refusal Codes
Hepatitis A	90632-90634, 90636, 90730 (old code)	Immunization (CVX) Codes: 31, 52, 83, 84, 85, 104  Evidence of Disease: POV or PCC Problem List (active or inactive) 070.0, 070.1  Contraindications: Immunization Package contraindication of "Anaphylaxis"
Rotavirus – 2- dose series	90681	Immunization (CVX) Codes: 119 Contraindications: Immunization Package contraindication of "Anaphylaxis" or "Immune Deficiency"
Rotavirus – 3- dose series	90680	Immunization (CVX) Codes: 74, 116, 122 POV: V05.8 Contraindications: Immunization Package contraindication of "Anaphylaxis" or "Immune Deficiency"
Influenza	90654-90658, 90659 (old code), 90660-90662, 90724 (old code), G0008, G8108 (old code)	Immunization (CVX) Codes: 15, 16, 88, 111, 135, 140, 141, 144 POV: V04.8 (old code), V04.81, V06.6 V Procedure: 99.52 Contraindications: Immunization Package contraindication of "Egg Allergy" or "Anaphylaxis"

# **Key Logic Changes from CRS Version 12.0**

None

# **Patient List Description**

List of patients 19 through 35 months with IZ, if any. If a patient did not have all doses in a multiple dose vaccine, the IZ will not be listed. For example, if a patient only had two DTaP, no IZ will be listed for DTaP.

**Note 1:** Because age is calculated at the beginning of the Report Period, the patient's age on the list will be between 7 through 23 months.

Note 2: The order of the display for the immunizations is: 4
Dtap/Dtp;3 IPV/OPV;MMR;3 HIB;3 HEP;Vari;4
PNEUMO. A blank value in the Numerator column means the patient didn't meet the requirements for any of the immunizations. Another example is "MMR; vari;4
PNEUMO," which means the patient did not have 4
Dtap/Dtp, 3 IPV/OPV, 3 HIB and 3 Hep B immunizations.

#### **Measure Source**

CDC; HP 2020 IID-7, IID-8; HEDIS

# **Measure Past Performance and Long-Term Targets:**

Performance	Percent
IHS FY 2011 GPRA Performance Active Immunization Package 4:3:1:3:3:1:4 (rate for children age 19 through 35 months)	75.9%
IHS FY 2010 GPRA Performance Active Immunization Package 4:3:1:3:3:1 (rate for children age 19 through 35 months)	79.0%
IHS FY 2009 GPRA Performance Active Immunization Package 4:3:1:3:3 (rate for children age 19 through 35 months)	79.0%
IHS FY 2008 GPRA Performance Active Immunization Package 4:3:1:3:3 (rate for children age 19 through 35 months)	78.0%
IHS FY 2008 Non-GPRA Performance Active Clinical 4:3:1:3:3 (rate for children age 19 through 35 months)	68.0%
IHS FY 2007 GPRA Performance Active Immunization Package 4:3:1:3:3(rate for children age 19 through 35 months)	78.0%
IHS FY 2006 Performance (rate for children age 19 through 35 months)	80.0%
IHS FY 2005 Performance (rate for children age 19 through 35 months)	75.0%
IHS FY 2004 Performance(baseline rate for children age 19 through 35 months)	72.0%
IHS FY 2004 Performance(rate for children age 3 through 27 months)	81.0%
IHS FY 2003 Performance(rate for children age 3 through 27 months)	80.0%
IHS FY 2002 Performance(rate for children age 3 through 27 months)	80.0%
HP 2020 goal for % of children age 19 through 35 months with 4:3:1:3:3:4 vaccines	80.0%
HP 2020 goal for % of children age 19 through 35 months with each individual vaccine	90.0%

For the IHS FY 2006 Performance (rate for children 19 through 35 months), the Percent (80.0) please consider: All 2002 through 2006 rates reported on this table were reported by the Immunization Program from the quarterly immunization reports. Effective in 2007, CRS reports the rate and not the Immunization Program. The CRS rate is reported using the CRS Active Immunization Package denominator.

# **Performance Improvement Tips**

• Providers should ask about and record off-site historical immunizations (IZ type, date received and location) on PCC forms. Data entry mnemonic: HIM

• Providers should document refusals; write "Refused" in appropriate vaccine order box on PCC form. Data entry mnemonic: REF (Immunization, Value, Date Refused).

DU *** IHS 2012 Sel	ected		mber 25, 2		nity Speci:	fied Rep		age 51 **	
DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012									
Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 20000									
Basell	ne Pe	r10a: 	Jan UI, .		to Dec 31,	20000 			
Childhood Immunizations									
	PORT RIOD				CHG from PREV YR %				
Active Clinical Pts 19-35 months	56		39			55			
<pre># w/ 43133 combo   or w/ Dx/ Contraind/   NMI Refusal   A. # w/ Dx/Contraind/NM</pre>		19.6	3	7.7	+12.0	6	10.9	+8.7	
Ref w/ % of Total 43133 # w/ 43133		9.1	0	0.0	+9.1	0	0.0	+9.1	
refusal	2	3.6	0	0.0	+3.6	0	0.0	+3.6	
<pre># w/ 431331 combo   or w/ Dx/ Contraind/   NMI Refusal   A. # w/ Dx/Contraind/NM</pre>		16.1	3	7.7	+8.4	5	9.1	+7.0	
Ref w/ % of Total 431331 # w/ 431331	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
Refusal	1	1.8	0	0.0	+1.8	0	0.0	+1.8	
<pre># w/ 4313314 combo   or w/Dx/Contraind/   NMI Refusal A. # w/ Dx/Contraind/NM</pre>	3 I	5.4	0	0.0	+5.4	0	0.0	+5.4	
Ref w/ % of Total 4313314 # w/ 4313314	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
Refusal	2	3.6	0	0.0	+3.6	0	0.0	+3.6	
<pre># w/ 4 doses DTaP   or w/ Contraind/   NMI Refusal A. # w/ Contraind/NMI   Ref w/ % of</pre>	16	28.6	3	7.7	+20.9	9	16.4	+12.2	
Total DTaP # w/ DTap Refusal	1 6	6.3	0	0.0	+6.3 +10.7	0	0.0	+6.3 +10.7	

Figure 2-31: Sample Report, Childhood Immunizations

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Childhood Immunizations: List of patients 19-35 months with IZ, if any. If a patient did not have all doses in a multiple dose vaccine, the IZ will not be listed. For example, if a patient only had 2 DTaP, no IZ will be listed for DTaP. NOTE: Because age is calculated at the beginning of the Report Period, the patient's age on the list will be between 7-23 months. SEX AGE PATIENT NAME HRN COMMUNITY DENOMINATOR NUMERATOR PATIENT1, ANDREA 000001 COMMUNITY #1 F 0 UP,AC,IMM 4 DTaP/DTP; 3 Polio; MMR; 3 Hib; 3 Hep B; Vari; 2 Influenza PATIENT2, HEATHER 000002 COMMUNITY #1 F 1 UP,AC,IMM NMI DTaP/DTP; NMI Polio; 2 Hep A; 2 Influenza PATIENT3, TONYA 000003 COMMUNITY #1 F 1 UP,AC,IMM

O00004 COMMUNITY #1

UP,AC,IMM

PATIENT5,SCOTT

UP,AC,IMM

O00005 COMMUNITY

UP,AC,IMM M 0 3 Polio; MMR; 3 Hep B; Vari; NMI Rota 000005 COMMUNITY #1 M 0 3 Hib; 2 Hep A; 3 Rota; 2 Influenza

Figure 2-32: Sample Patient List, Childhood Immunizations

### 2.4.4 Adolescent Immunizations

#### **Denominators**

Active Clinical patients age 13. Broken down by gender where noted.

Active Clinical patients ages 13 through 17. Broken down by gender where noted.

#### **Numerators**

Patients who have received the 2:3:1 combination (i.e., two MMR, three Hepatitis B, one Varicella), including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patient who have received the 1:3:2:1 combination (i.e., one Td/Tdap, three Hepatitis B, two MMR, one Varicella), including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received the 1:1:3 combination (i.e., one Td/Tdap, one meningococcal, three HPV), including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI

refusals.

**Note**: This numerator is broken down by gender.

Patient who have received the 1:1 combination (i.e., one Td/Tdap, one meningococcal), including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received one dose of Tdap/Td ever, including contraindications and evidence of disease.

- a. Patients with (1) evidence of the disease, (2) a contraindication, or (3) a documented NMI refusal.
- b. Patients who have received one dose of Tdap ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received two doses of MMR ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received three doses of Hepatitis B ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received one dose of Varicella ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received one dose of meningococcal ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI refusals.

Patients who have received three doses of HPV ever, including contraindications and evidence of disease.

**Note**: The only refusals included in this numerator are NMI

refusals.

**Note**: This numerator is broken down by gender.

For each of the above numerators, the following subnumerators are included:

a. Patients with (1) evidence of the disease, (2) a contraindication, or (3) a documented NMI refusal.

Patients with documented REF refusal in PCC or Parent or Patient refusal in the IZ program.

# **Logic Description**

Age definition: Age of the patient is calculated at the beginning of the Report Period. Because IZ data comes from multiple sources, any IZ codes documented on dates within ten days of each other will be considered as the same immunization.

Dosage and types of immunization definitions:

- One dose of Td or Tdap
- Two doses of MMR: (1) two MMRs; (2) two M/R and two Mumps; (3) two R/M and two Measles; or (4) two each of Measles, Mumps, and Rubella
- Three doses of Hep B or two doses if documented with CPT 90743
- One dose of Varicella
- One dose of Meningococcal
- Three doses of HPV

Not Medically Indicated (NMI) refusals, evidence of disease and contraindications for individual immunizations will also count toward meeting the definition, as defined below. Refusals will count toward meeting the definition for refusal numerators only.

**Note**: NMI refusals are not counted as refusals; rather, they are counted as contraindications.

- Each immunization must be refused and documented separately. For example, if a patient has an NMI refusal for Rubella only, then there must be an immunization, contraindication, or separate refusal for the Measles and Mumps immunizations.
- For immunizations where required number of doses is greater than (>)1, only one NMI refusal is necessary to be counted in the numerator. For example, if there is a single NMI refusal for Hepatitis B, the patient will be included in the numerator.
- For immunizations where required number of doses is greater than (>)1, only one contraindication is necessary to be counted in the numerator. For example, if there is a single contraindication for HiB, the patient will be included in the numerator.
- Evidence of disease will be checked for at any time in the child's life (prior to the end of the Report Period).
- To be counted in subnumerator A, a patient must have evidence of disease, a contraindication, or an NMI refusal for any of the immunizations in the numerator. For example, if a patient was Rubella immune but had a Measles and Mumps immunization, the patient would be included in subnumerator A.

For the separate numerator for REF refusal (Patient Refusal for Service) in PCC or a Parent or Patient refusal in the IZ program, all conditions shown below must be met:

- Each immunization must be refused and documented separately. For example, if a patient has an REF refusal for Rubella, then there also must be an immunization, contraindication, or separate REF refusal for Measles and Mumps.
- Where the required number of doses is greater than (>)1, only one REF refusal in PCC or one Parent or Patient refusal in the IZ program is necessary to be counted in the numerator. For example, for the 4 DTaP numerator, only one refusal is necessary to be counted in the refusal numerator.

Adolescent immunizations are defined in the following ways:

Immunization	CPT Codes	ICD and Other Codes
MMR	90707, 90710	Immunization codes: 3, 94
		<b>POV:</b> V06.4
		V Procedure: 99.48
		Contraindications: POV 279, V08, 042, 200-202, 203.0, 203.1, 203.8, 204-208; or Immunization Package contraindication of "Anaphylaxis," "Immune Deficiency," "Immune Deficient," or "Neomycin Allergy."
		Refusals: Immunization codes 3, 94; CPT codes 90707, 90710
M/R (Measles/	90708	Immunization code: 4
Rubella)		Refusals: Immunization code 4; CPT code 90708
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."

Immunization	CPT Codes	ICD and Other Codes
R/M (Rubella/	90709 (old code)	Immunization code: 38
Mumps)		Refusals: Immunization code 38; CPT code 90709 (old code)
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
Measles	90705	Immunization code: 5
		<b>POV:</b> V04.2
		V Procedure: 99.45
		<b>Evidence of Disease:</b> POV or PCC Problem List (active or inactive) 055*
		Refusals: Immunization code 5; CPT code 90705
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
Mumps	90704	Immunization code: 7
		<b>POV:</b> V04.6
		V Procedure: 99.46
		<b>Evidence of Disease:</b> POV or PCC Problem List (active or inactive) 072*
		Refusals: Immunization code 7; CPT code 90704
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
Rubella	90706	Immunization code: 6
		<b>POV:</b> V04.3
		V Procedure: 99.47
		<b>Evidence of Disease:</b> POV or PCC Problem List (active or inactive) 056*, 771.0
		Refusals: Immunization code 6; CPT code 90706
		Contraindications: Immunization Package contraindication of "Anaphylaxis."
Hepatitis B	90736, 90723,	<b>Immunization codes:</b> 8, 42-45, 51, 102, 104, 110, 132, 146
	90731 (old code), 90740,	<b>Evidence of Disease:</b> POV or PCC Problem List (active or inactive) V02.61, 070.2, 070.3
	90743-90748, G0010, Q3021, Q3023	<b>Refusals:</b> Immunization codes 8, 42-45, 51, 102, 104, 110, 132, 146; CPT codes 90736, 90723, 90731 (old code), 90740, 90743-90748, G0010, Q3021, Q3023
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."

Immunization	CPT Codes	ICD and Other Codes
Varicella	90710, 90716	Immunization codes: 21, 94
		POV: V05.4
		<b>Evidence of Disease:</b> 1) POV or PCC Problem List (active or inactive) 052*, 053*; or 2) Immunization Package contraindication of "Hx of Chicken Pox" or "Immune."
		Refusals: Immunization codes 21, 94; CPT codes 90710, 90716
		Contraindications: POV 279, V08, 042, 200-202, 203.0, 203.1, 203.8, 204-208; or Immunization Package contraindication of "Anaphylaxis," "Immune Deficiency," "Immune Deficient," or "Neomycin Allergy.
Tdap	90715	Immunization code: 115
		Refusals: Immunization code 115; CPT code 90715
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
Td	90714, 90718	Immunization codes: 9, 113
		<b>POV:</b> V06.5
		Refusals: Immunization codes 9, 113; CPT codes 90714, 90718
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
Meningococcal	90733, 90734	Immunization codes: 32, 108, 114, 136, 147
		<b>Refusals:</b> Immunization codes 32, 108, 114, 136, 147; CPT codes 90733, 90734
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."
HPV	90649, 90650	Immunization codes: 62, 118, 137
		<b>Refusals:</b> Immunization codes 62, 118, 137; CPT codes 90649, 90650
		<b>Contraindications</b> : Immunization Package contraindication of "Anaphylaxis."

# **Key Logic Changes from CRS Version 12.0**

- 1. Added CVX code 147 to meningococcal and refusal definitions.
- 2. Added new measures for 1:1:3 (one Td/Tdap, one meningococcal, three HPV ) and 1:1 (one Td/Tdap, one meningococcal).
- 3. Changed HPV measures to include males.

# **Patient List Description**

List of patients 13 through 17 with IZ, if any. If a patient did not have all doses in a multiple dose vaccine, the IZ will not be listed. For example, if a patient only had two Hep B, no IZ will be listed for Hep B.

Note: An absent value in the Numerator column means the patient did not meet the requirements for any of the immunizations. An example for a female patient age 13 with a value of ";2 MMR" which means the patient did not have one Td/Tdap, three Hepatitis B, one Varicella, one Meningococcal, and three HPV immunizations.

### **Measure Source**

HEDIS, HP 2020 IID-11

## **Measure Past Performance and Long-Term Targets:**

Target	Percent
HP 2020 goal for each individual IZ: Tdap, Meningococcal, HPV	80.0%
HP 2020 goal for each individual IZ: varicella	90.0%

### **Performance Improvement Tips**

- Providers should ask about and record off-site historical immunizations (IZ type, date received and location) on PCC forms. Data entry mnemonic: HIM
- Providers should document refusals; write "Refused" in appropriate vaccine Order box on PCC form. Data entry mnemonic: REF (Immunization, Value, Date Refused).

DU November 25, 2012 Page 66  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Adolescent Immunizations	5								
	PORT	%	PREV YR PERIOD		CHG from BA			CHG from BASE %	
Active Clinical patients age 13	20		17			28			
<pre># w/2:3:1 Combo or w/ Dx/Contraind/ NMI Refusal A. # w/ Dx/ Contraind/ NMI Ref w/ % of Total</pre>	2	10.0	0	0.0	+10.0	0	0.0	+10.0	
2:3:1 # w/ 2:3:1	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
Refusal	4	20.0	0	0.0	+20.0	0	0.0	+20.0	

<pre># w/1:3:2:1 Combo or w/ Dx/Contraind/</pre>									
NMI Refusal A. # w/ Dx/ Contraind/ NMI Ref w/ % of	1	5.0	0	0.0	+5.0	0	0.0	+5.0	
Total 1:3:2:1 # w/ 1:3:2:1	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
Refusal	4	20.0	0	0.0	+20.0	0	0.0	+20.0	
<pre># w/1:1:3 Combo or w/   Dx/Contraind/   NMI Refusal A. # w/ Dx/ Contraind/</pre>	2	10.0	0	0.0	+10.0	0	0.0	+10.0	
NMI Ref w/ % of Total 1:1:3 # w/ 1:1:3	1	50.0	0	0.0	+50.0	0	0.0	+50.0	
Refusal	1	5.0	0	0.0	+5.0	0	0.0	+5.0	
Male Active Clinical Pts age 13	8		12			15			
<pre># w/1:1:3 Combo or w/ Dx/Contraind/ NMI Refusal A. # w/ Dx/ Contraind/ NMI Ref w/ % of Total</pre>	1	12.5	0	0.0	+12.5	0	0.0	+12.5	
1:1:3	1	100.0	0	0.0	+100.0	0	0.0	+100.0	
# w/ 1:1:3 Refusal	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
Female Active Clinical Pts age 13	12		6			13			
<pre># w/1:1:3 Combo or w/ Dx/Contraind/ NMI Refusal A. # w/ Dx/ Contraind/</pre>	1	8.3	0	0.0	+8.3	0	0.0	+8.3	
NMI Ref w/ % of Total 1:1:3	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
# w/ 1:1:3 Refusal	1	8.3	0	0.0	+8.3	0	0.0	+8.3	

Figure 2-33: Sample Report, Adolescent Immunizations

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Adolescent Immunizations: List of patients 13-17 with IZ, if any. If a patient did not have all doses in a multiple dose vaccine, the IZ will not be listed. For example, if a patient only had 2 Hep B, no IZ will be listed for Hep B.

PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR

PATIENT1,LINDA 000001 COMMUNITY #3 F 13

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
2 \text{ MMR}; 2 \text{ Hep B} + 90743
PATIENT2, SHERRY
                        000002 COMMUNITY #3 F 13
                              NMI Tdap; NMI MMR; NMI Hep B; NMI Vari
                        000022 COMMUNITY #4 F 13
PATIENT22, JESSICA
                             Ref MMR; 3 Hep B; Evid Vari
PATIENT23, SAMANTHA
                        000023 COMMUNITY #4 F 13
                              Td; 3 Hep B; NMI Meningococcal
PATIENT24, NINA
                        000024 COMMUNITY #4 F 13
                              Contra MMR; Contra Vari
PATIENT25, RHONDA
                        000025 COMMUNITY #4 F 13
                              Td; 3 HPV
```

Figure 2-34: Sample Patient List, Adolescent Immunizations

# 2.5 Childhood Diseases Group

# 2.5.1 Appropriate Treatment for Children with Upper Respiratory Infection

#### **Denominators**

Active Clinical patients who were ages three months through 18 years of age who were diagnosed with an *upper respiratory infection* during the period 6 months (182 days) prior to the report period through the first six months of the report period.

*User Population patients* who were ages three months through 18 years of age who were diagnosed with an *upper respiratory infection* during the period 6 months (182 days) prior to the report period through the first six months of the report period.

#### **Numerator**

Patients who were *not* prescribed an antibiotic on or within three days after diagnosis. In this measure, appropriate treatment is *not* to receive an antibiotic.

# **Logic Description**

Age is calculated as follows: Children three months as of six months (182 days) of the year prior to the Report Period to 18 years as of the first six months of the Report Period.

In order to be included in the denominator, *all* of the following conditions must be met:

1. Patient's diagnosis of an upper respiratory infection (URI) must have occurred at an outpatient visit. Upper Respiratory Infection defined as POV 460 or 465.\*. Outpatient visit defined as Service Category A, S, or O.

- 2. If outpatient visit was to Clinic Code 30 (Emergency Medicine), it must not have resulted in a hospitalization, defined as Service Category H, either on the same day or the next day with URI diagnosis.
- 3. Patient's visit must only have a diagnosis of URI. If any other diagnosis exists, the visit will be excluded.
- 4. The patient did not have a new or refill prescription for antibiotics within 30 days prior to the URI visit date.
- 5. The patient did not have an active prescription for antibiotics as of the URI visit date. "Active" prescription defined as:

Rx Days Supply greater than or equal to (>=) (URI Visit Date–Prescription Date)

If multiple visits exist that meet the above criteria, the first visit will be used.

Antibiotic medications defined with medication taxonomy BGP HEDIS ANTIBIOTIC MEDS or V Procedure 99.21. (Medications are: Amoxicillin, Amox/Clavulanate, Ampicillin, Azithromycin, Cefaclor, Cefadroxil hydrate, Cefazolin, Cefdinir, Cefixime, Cefditoren, Ceftibuten, Cefpodoxime proxetil, Cefprozil, Ceftriaxone, Cefuroxime, Cephalexin, Cephradine, Ciprofloxacin, Clindamycin, Dicloxacillin, Doxycycline, Erythromycin, Ery E-Succ/Sulfisoxazole, Gatifloxacin, Levofloxacin, Lomefloxacin, Loracarbef, Minocycline, Ofloxacin, Penicillin VK, Penicillin G, Sparfloxacin, Sulfisoxazole, Tetracycline, Trimethoprim, Trimethoprim-Sulfamethoxazol.) Medications must not have a comment of RETURNED TO STOCK.

### **Key Logic Changes from CRS Version 12.0**

Updated 6 months to be 182 days.

### **Patient List Description**

List of patients three months to 18 years of age with upper respiratory infection, with antibiotic prescription, if any.

### **Measure Source**

**HEDIS** 

### Measure Past Performance and Long-Term Targets

None

	DU					Novembe	r 25,	2012			Page	72	
ı		***	IHS	2012	Selected	Measures	with	Community	Specified	Report	***		

DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Appropriate Treatment fo	or Ch	nildren with	ı Upp	er Res	piratory In	Eectio	on (co	n't)
	PORT				CHG from BA			
Active Clinical 3 months w/Upper Respiratory Infection	38	yrs	36			30		
# w/o Antibiotic Rx	37	97.4	35	97.2	+0.1	27	90.0	+7.4
User Pop 3 months-18 yrs w/Upper Respiratory Infection	43		38			35		
# w/o Antibiotic Rx	42	97.7	37	97.4	+0.3	32	91.4	+6.2

Figure 2-35: Sample Report, Appropriate Treatment for Children with Upper Respiratory Infection

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Appropriate Treatment for Children with Upper Respiratory Infection: List of patients 3 months to 18 years with upper respiratory infection, with antibiotic prescription, if any. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT1, PAMELA 000001 COMMUNITY #3 F 3
IIP.AC MEETS MEASURE MEETS MEASURE UP,AC MEETS MEASURE PATIENT27,CODY 000027 COMMUNITY #4 M 4 MEETS MEASURE UP,AC UP,AC MEETS MEASURE PATIENT28,KAREN 000028 COMMUNITY #5 F 0 antibiotic injection: 01/06/12 DOES NOT MEET MEASURE UP,AC

Figure 2-36: Sample Patient List, Appropriate Treatment for Children with Upper Respiratory Infection

# 2.5.2 Appropriate Testing for Children with Pharyngitis

#### **Denominators**

Active Clinical patients who were ages 2 through 18 years who were diagnosed with pharyngitis and prescribed an antibiotic during the period six months (182 days) prior to the Report Period through the first six months of the Report Period.

*User Population patients* who were ages 2 through 18 years who were diagnosed with *pharyngitis* and prescribed an antibiotic during the period six months (182 days) prior to the Report Period through the first six months of the Report Period.

#### **Numerator**

Patients who received a Group A strep test.

### **Logic Description**

Age is calculated as follows: Children two years as of six months (182 days) of the year prior to the Report Period to 18 years as of the first six months of the Report Period.

In order to be included in the denominator, *all* of the following conditions must be met:

- 1. Patient's diagnosis of pharyngitis must have occurred at an outpatient visit. Pharyngitis defined as POV 462, 463, or 034.0. Outpatient visit defined as Service Category A, S, or O.
- 2. If outpatient visit was to Clinic Code 30 (Emergency Medicine), it must not have resulted in a hospitalization, defined as Service Category H, either on the same day or the next day with pharyngitis diagnosis.
- 3. Patient's visit must only have a diagnosis of pharyngitis. If any other diagnosis exists, the visit will be excluded.
- 4. The patient did not have a new or refill prescription for antibiotics within 30 days prior to the pharyngitis visit date.
- 5. The patient did not have an active prescription for antibiotics as of the pharyngitis visit date. "Active" prescription defined as:
- 6. Rx Days Supply greater than or equal to (>= )(URI Visit Date Prescription Date)
- 7. The patient filled a prescription for antibiotics on or within three days after the pharyngitis visit.

If multiple visits exist that meet the above criteria, the first visit will be used.

Antibiotic medications defined with medication taxonomy BGP HEDIS ANTIBIOTIC MEDS or V Procedure 99.21. (Medications are: Amoxicillin, Amox/Clavulanate, Ampicillin, Azithromycin, Cefaclor, Cefadroxil hydrate, Cefazolin, Cefdinir, Cefixime, Cefditoren, Ceftibuten, Cefpodoxime proxetil, Cefprozil, Ceftriaxone, Cefuroxime, Cephalexin, Cephradine, Ciprofloxacin, Clindamycin, Dicloxacillin, Doxycycline, Erythromycin, Ery E-Succ/Sulfisoxazole, Gatifloxacin, Levofloxacin, Lomefloxacin, Loracarbef, Minocycline, Ofloxacin, Penicillin VK, Penicillin G, Sparfloxacin, Sulfisoxazole, Tetracycline, Trimethoprim, Trimethoprim-Sulfamethoxazol.) Medications must not have a comment of RETURNED TO STOCK.

To be included in the numerator, a patient must have received a Group A Streptococcus test within the seven-day period beginning three days prior through three days after the Pharyngitis visit date.

*Group A Streptococcus* test defined as: CPT 87430 (by enzyme immunoassay), 87650-87652 (by nucleic acid), 87880 (by direct optical observation), 87081 (by throat culture), 3210F (Group A Strep Test); site-populated taxonomy BGP GROUP A STREP TESTS; and LOINC taxonomy.

## **Key Logic Changes from CRS Version 12.0**

- 1. Updated 6 months to be 182 days.
- 2. Added code 68954-7 to LOINC taxonomy for Group A Strep Test.

### **Patient List Description**

List of patients 2 through 18 years of age with pharyngitis and a Group A Strep test, if any.

### **Measure Source**

**HEDIS** 

### **Measure Past Performance and Long-Term Targets**

None

```
DU November 25, 2012 Page 75

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000

Appropriate Testing for Children with Pharyngitis (con't)

REPORT % PREV YR % CHG from BASE % CHG from
```

	PERIOD	PERIOD	PREV YR % PERIOD	BASE %
Active Clinical 2-18 Pharyngitis and Antibiotic Rx	yrs w/	5	8	
# w/Group A Strep Test	9 9	00.0 3	60.0 +30.0 2	25.0 +65.0
User Pop 2-18 yrs w/ Pharyngitis and Antibiotic Rx	11	7	10	
# w/Group A Strep Test	9 8	31.8 4	57.1 +24.7 2	20.0 +61.8

Figure 2-37: Sample Report, Appropriate Testing for Children with Pharyngitis

Figure 2-38: Sample Patient List, Appropriate Testing for Children with Pharyngitis

# 2.6 Cancer Related Measure Topics

# 2.6.1 Cancer Screening: Pap Smear Rates

### **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 59.5% for the proportion of female patients ages 21 through 64 without a documented history of hysterectomy who have had a Pap screen within the previous three years.

#### **Denominators**

*Female Active Clinical patients* ages 21 through 64 without documented history of Hysterectomy. (GPRA Denominator)

*Female User Population patients* ages 21 through 64 without a documented history of Hysterectomy.

#### **Numerators**

Patients with a Pap smear documented in the past three years.

**Note**: This numerator does *not* include refusals. (GPRA Denominator)

Patients with documented Pap smear refusal in past year.

# **Logic Description**

Age of the patient is calculated at the beginning of the report period. Patients must be at least 21 years of age at the beginning of the report period and less than 65 years of age as of the end of the report period.

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Hysterectomy	51925, 56308 (old code), 57540, 57545, 57550, 57555, 57556, 58150, 58152, 58200- 58294, 58548, 58550-58554, 58570-58573, 58951, 58953- 58954, 58956, 59135	V Procedure: 68.4-68.8 V POV: 618.5, V88.01, V88.03 Women's Health: Procedure called Hysterectomy.		

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Pap Smear	88141-88167, 88174-88175, G0123, G0124, G0141, G0143- G0145, G0147, G0148, P3000, P3001, Q0091	V Lab: PAP SMEAR POV: V67.01 Follow-up Vaginal Pap Smear V76.2 Screen Mal Neop- Cervix V72.32 Encounter for Pap Cervical Smear to Confirm Findings of Recent Normal Smear Following Initial Abnormal Smear V72.3 Gynecological Examination, Pap Cervical Smear as Part of General Gynecological Exam, Pelvic Exam (annual) (periodic) (old code, to be counted for visits prior to 10/1/04 only) V76.47 Vaginal Pap Smear for Post-Hysterectomy Patients 795.0*, 795.10-16, 795.19 V Procedure: 91.46 Women's Health: Procedure called Pap Smear and where the result does NOT have "ERROR/DISREGARD"	Yes	BGP PAP SMEAR TAX
Refusal (in past year)	Refusal of codes: 88141- 88167, 88174- 88175, G0123, G0124, G0141, G0143-G0145, G0147, G0148, P3000, P3001, Q0091	Refusals: Lab Test Value Pap Smear		

# **Key Logic Changes from CRS Version 12.0**

Added code 49034-2 to LOINC taxonomy for Pap Smear.

# **Patient List Description**

List of women 21 through 64 with documented Pap Smear or refusal, if any.

## **Measure Source**

HP 2020 C-15

# **Measure Past Performance and Long-Term Targets:**

Performance	Percent
IHS FY 2011 Performance	58.1%
IHS FY 2010 Performance	59.0%
IHS FY 2009 Performance	59.0%
IHS FY 2008 Performance	59.0%
IHS FY 2007 Performance	59.0%
IHS FY 2006 Performance	59.0%
IHS FY 2005 Performance	60.0%
IHS FY 2004 Performance	58.0%
IHS FY 2003 Performance	61.0%
IHS FY 2002 Performance	62.0%
HP 2020 Goal	93.0%

# **Performance Improvement Tips**

- Providers should ask about and record off-site tests (date received and location) on PCC forms. Data entry mnemonic: HPAP
- Providers should document refusals; write "Refused" in Pap Order box on PCC form. Data entry mnemonic: REF (Lab Test Value, Date Refused).

DU November 25, 2012 Page 77  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
	REPORT	%	PREV YR		CHG from PREV YR %			
Female Active Clinical 21-64 yrs (GPRA)	='		377			320		
# w/Pap Smear recorded w/in 3 years-No Refus	sals							
(GPRA)	202	40.4	179	47.5	-7.1	147	45.9	-5.5
# w/ Pap Smear Refusal	8	1.6	0	0.0	+1.6	0	0.0	+1.6
# Female User Pop 21-64 years	833		699			614		
<pre># w/Pap Smear recorded w/in 3 years -No Refusals # w/ Pap Smear</pre>		26.4	196	28.0	-1.6	159	25.9	+0.5

Refusal 8 1.0 0 0.0 +1.0 0 0.0 +1.0
-------------------------------------

Figure 2-39: Sample Report, Cancer Screening: Pap Smear Rates

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Cancer Screening: Pap Smear Rates: List of women 21-64 with documented Pap smear or refusal, if any.

PATIENT NAME HRN COMMUNITY SEX AGE
DENOMINATOR NUMERATOR

PATIENT1, EVELYN 000001 COMMUNITY #1 F 21
UP 05/05/11 POV 795.06
PATIENT2, MICHELLE 000002 COMMUNITY #1 F 22
UP, AC 05/31/12 Lab
PATIENT3, KAITLYN 000003 COMMUNITY #1 F 22
UP, AC 04/03/12 POV V67.01
PATIENT4, BRITNEY 000004 COMMUNITY #1 F 22
UP, AC 01/10/12 POV V72.3
PATIENT5, KATY 000005 COMMUNITY #1 F 22
UP, AC 05/08/11 CPT 88150

Figure 2-40: Sample Patient List, Cancer Screening: Pap Smear rates

# 2.6.2 Cancer Screening: Mammogram Rates

# **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 51.7% for the proportion of female patients ages 52 through 64 who have had mammography screening within the last two years.

#### **Denominators**

Female Active Clinical patients ages 52 through 64 without a documented history of bilateral mastectomy or two separate unilateral mastectomies. (GPRA Denominator)

Female Active Clinical patients ages 42 and older without a documented history of bilateral mastectomy or two separate unilateral mastectomies.

*Female User Population patients* ages 52 through 64 without a documented history of bilateral mastectomy or two separate unilateral mastectomies.

Female User Population patients ages 42 and older without a documented history of bilateral mastectomy or two separate unilateral mastectomies. (GPRA Developmental Denominator)

#### **Numerators**

All patients who had a Mammogram documented in the past two years.

**Note**: This numerator does *not* include refusals. (GPRA Numerator)

Patients with documented mammogram refusal in the past year

# **Logic Description**

Age of the patient is calculated at the beginning of the Report Period. For all denominators, patients must be at least the minimum age as of the beginning of the Report Period. For the 52 through 64 denominators, the patients must be less than 65 years of age as of the end of the Report Period.

Subject Defined	CPT Codes	ICD and Other Codes
Bilateral Mastectomy	19300.50-19307.50 or old code 19180, 19200, 19220 <b>OR</b> 19300-19307 w/modifier 09950 (50 and 09950 modifiers indicate bilateral) <b>OR</b> 19240, with modifier of 50 or 09950	V Procedure: 85.42, 85.44, 85.46, 85.48
Unilateral Mastectomy	Must have 2 separate occurrences on 2 different dates of service. 19300-19307, or old codes 19180, 19200, 19220, 19240	Must have 2 separate occurrences on 2 different dates of service. 85.41, 85.43, 85.45, 85.47
Mammogram	<b>V Rad or VCPT:</b> 77052-77059, 76090 (old code), 76091 (old code), 76092 (old code), G0206, G0204, G0202	POV: V76.11, V76.12, 793.80 Abnormal mammogram, unspecified; 793.81 Mammographic microcalcification; 793.89 Other abnormal findings on radiological exam of breast V Procedure: 87.36-87.37
		Women's Health: Mammogram Screening, Mammogram Dx Bilat, Mammogram Dx Unilat and where the mammogram result does NOT have "ERROR/DISREGARD"
Refusal (in past year)	<b>V Rad Mammogram for CPT:</b> 77052-77059, 76090 (old code), 76091 (old code), 76092 (old code), G0206, G0204, G0202	

# **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of women 42+ with mammogram/refusal, if any.

#### **Measure Source**

HP 2020 C-17

### **Measure Past Performance and Long-Term Targets:**

Performance	Percent
IHS FY 2011 Performance	49.8%
IHS FY 2010 Performance	48.0%
IHS FY 2009 Performance	45.0%
IHS FY 2008 Performance	45.0%
IHS FY 2007 Performance	43.0%
IHS FY 2006 Performance	41.0%
IHS FY 2005 Performance	41.0%
IHS FY 2004 Performance	40.0%
IHS FY 2003 Performance	40.0%
IHS FY 2002 Performance	42.0%
HP 2020 Goal	81.1%

# **Performance Improvement Tips**

- Providers should ask about and record off-site mammogram procedures (date received and location) on PCC forms. Data entry mnemonic: HRAD.
- Providers should document refusals; write "Refused" in Mammogram Order box on PCC form. Data entry mnemonic: REF (Mammogram, Procedure (CPT) Code, Date Refused).

```
DU
                             November 25, 2012
                                                                     Page 79
       *** IHS 2012 Selected Measures with Community Specified Report ***
                             DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
              Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Cancer Screening: Mammogram Rates (con't)
                     REPORT
                              % PREV YR
                                             % CHG from BASE
                                                                    % CHG from
                     PERIOD
                                  PERIOD
                                                PREV YR % PERIOD
                                                                       BASE %
Female Active Clinical
                         97
                                       60
52-64 (GPRA)
                                                              47
# w/Mammogram recorded w/in
 2 years-No Refusals
                         31 32.0
                                       22 36.7
                                                    -4.7
 (GPRA)
                                                              22 46.8
                                                                          -14.8
```

# w/ Mammogram Refusal	7	7.2	0	0.0	+7.2	0	0.0	+7.2	
# Female Active Clinica 42+ (GPRA Dev.)	al 293		188			163			
# w/Mammogram recorded w/in 2 years-No Refusa	als								
(GPRA Dev.) # w/ Mammogram	63	21.5	62	33.0	-11.5	54	33.1	-11.6	
Refusal	9	3.1	0	0.0	+3.1	0	0.0	+3.1	
# Female User Pop 52-64	175		122			102			
<pre># w/Mammogram recorded w/in 2 years-No</pre>									
Refusals # w/ Mammogram	34	19.4	26	21.3	-1.9	23	22.5	-3.1	
Refusal	7	4.0	0	0.0	+4.0	0	0.0	+4.0	
# Female User Pop 42+	513		380			333			
<pre># w/Mammogram recorded w/in 2 years-No</pre>									
Refusals # w/ Mammogram	67	13.1	69	18.2	-5.1	58	17.4	-4.4	
Refusal	9	1.8	0	0.0	+1.8	0	0.0	+1.8	

Figure 2-41: Sample Report, Cancer Screening: Mammogram rates

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Cancer Screening: Mammogram Rates: List of women 42+ with mammogram/refusal, if any. PATIENT NAME HRN COMMUNITY
DENOMINATOR NUMERATOR PATIENT1, CARLA 000001 COMMUNITY #1 F 43
UP, AC 10/01/11 CPT 77052
PATIENT2, CRYSTAL 000002 COMMUNITY #1 F 42 PATIENT2, CRYSTAL UP PATIENT3, ALEXA 000003 COMMUNITY #1 F 45 UP,AC 04/24/11 CPT 76090 PATIENT4,HANNAH 000004 COMMUNITY #1 F 42 000005 COMMUNITY #1 F 43 PATIENT5, MARTHA 000006 COMMUNITY #1 F 44 PATIENT6, TARA 01/15/12 Refused CPT G0206 UP,AC UP,AC 01/15/12 Refused CPT 0 PATIENT7,CAROL LYNN 000007 COMMUNITY #1 F 44 03/05/12 RAD 76092 UP,AC PATIENT8, MARY ANN 000008 COMMUNITY #1 F 52

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

PATIENT9, BARBARA 00000	COMMUNITY #1 F	52
UP,AC	04/22/12 CPT 77057	

Figure 2-42: Sample Patient List, Cancer Screening: Mammogram rates

# 2.6.3 Colorectal Cancer Screening

## **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 43.2% for the proportion of clinically appropriate patients ages 51 through 80 who have received colorectal screening.

#### **Denominators**

All *Active Clinical patients* ages 51 through 80 without a documented diagnosis of colorectal cancer or total colectomy. Broken down by gender. (GPRA Denominator)

All *User Population patients* ages 51 through 80 without any documented diagnosis of colorectal cancer or total colectomy.

#### **Numerators**

Patients who have had any CRC screening, defined as any of the following: (1) Fecal Occult Blood Test (FOBT) or Fecal Immunochemical Test (FIT) during the Report period; (2) flexible sigmoidoscopy or double contrast barium enema in the past five years; or (3) colonoscopy in the past 10 years.

**Note**: This numerator does *not* include refusals. (GPRA Numerator)

Patients with documented CRC screening refusal in the past year.

Patients with FOBT or FIT during the Report Period.

Patients with a flexible sigmoidoscopy or double contrast barium enema in the past five years or a colonoscopy in the past 10 years.

Patients with a flexible sigmoidoscopy in the past five years or a colonoscopy in the past 10 years.

Patients with a flexible sigmoidoscopy and double contrast barium enema in the past five years or a colonoscopy in the past 10 years.

## **Logic Description**

Age is calculated at the beginning of the Report Period.

#### **Denominator Exclusions**

Any diagnosis ever of one of the following:

- 1. **Colorectal Cancer:** POV: 153.\*, 154.0, 154.1, 197.5, V10.05; CPT G0213–G0215 (old codes), G0231 (old code).
- 2. **Total Colectomy:** CPT 44150 through 44151, 44152 (old code), 44153 (old code), 44155 through 44158, 44210 through 44212; V Procedure 45.8 (old code).

Colorectal cancer screening definition: The most recent of any of the following tests and procedures during applicable timeframes. CRS identifies the tests and procedures described in the numerators above with the following codes:

# Colorectal Cancer Screening (CRS looks for the most recent of any of the following during timeframes specified in numerator section above)

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Fecal Occult Blood lab test (FOBT) or Fecal Immuno- chemical Test (FIT)	82270, 82274, 89205 (old code), G0107 (old code), G0328, G0394 (old code)		Yes	BGP GPRA FOB TESTS
Flexible Sigmoidoscopy	45330-45345, G0104	V Procedure: 45.24		
Double contrast barium enema	VRad 74280, G0106, G0120			
Colonoscopy	44388 through 44394, 44397, 45355, 45378- 45387, 45391, 45392, G0105, G0121	<b>V POV</b> : V76.51 Colon screening <b>V Procedure</b> : 45.22, 45.23, 45.25, 45.42, 45.43		

## Refusal definition: Any of the following in the past year:

Subject Defined	CPT Codes	ICD and Other Codes	Taxonomy
Refusals	FOBT or FIT: 82270, 82274, 89205 (old code), G0107 (old code), G0328, or G0394 (old code) Flexible Sigmoidoscopy: 45330-45345, G0104 DCBE: 74280, G0106, G0120 Colonoscopy: 44388 through 44394, 44397, 45355, 45378 through 45387, 45391, 45392, G0105, G0121	Flexible Sigmoidoscopy V Procedure: 45.24, 45.42 Colonoscopy V Procedure: 45.22, 45.23, 45.25, 45.42, 45.43	V Lab Fecal Occult Blood Test

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of patients 51 through 80 with CRC screening or refusal, if any.

## **Measure Source**

HEDIS, HP 2020 C-16

## **Measure Past Performance and Long-Term Targets:**

Performance	Percent
IHS FY 2011 Performance	41.7%
IHS FY 2010 Performance	37.0%
IHS FY 2009 Performance	33.0%
IHS FY 2008 Performance	29.0%
IHS FY 2007 Performance	26.0%
IHS FY 2006 Performance	22.0%
HP 2020 Goal	70.5%

## **Performance Improvement Tip**

Providers should ask about and record off-site historical tests (test type, date received and location) on PCC forms. Data entry mnemonics: HBE (barium enema); HCOL (colonoscopy); HFOB (Fecal Occult Blood); HSIG (sigmoidoscopy). Providers should also enter as a refusal if the patient refuses the colorectal cancer screening. Refusals may be entered with the data entry mnemonic of REF (refusal).

DU November 25, 2012 Page 82  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011								
Bas	Baseline Period: Jan 01, 2000 to Dec 31, 2000							
Colorectal Cancer Sc	reening	(con't	.)					
	REPORT PERIOD	%	PREV YR PERIOD	%	CHG from PREV YR %			CHG from BASE %
AC Pts 51-80 w/o colorectal cancer or colectomy (GPRA)	total 316		195			152		
<pre># w/ CRC screening -No Refusals (GPRA) # w/ CRC Screening</pre>	64	20.3	49	25.1	-4.9	28	18.4	+1.8
Refusal	10	3.2	0	0.0	+3.2	0	0.0	+3.2
# w/FOBT/FIT during Report period	12	3.8	11	5.6	-1.8	0	0.0	+3.8
<pre># w/Flex Sig, DCBE,   or Colonoscopy</pre>	55	17.4	40	20.5	-3.1	28	18.4	-1.0
# w/Flex Sig or Colonoscopy	49	15.5	31	15.9	-0.4	20	13.2	+2.3
# w/Flex Sig & DCBE or Colonoscopy	46	14.6	29	14.9	-0.3	18	11.8	+2.7
Male Active Clinical 51-80	151		93			65		
<pre># w/ CRC screening -No Refusals # w/ CRC Screening</pre>	27	17.9	18	19.4	-1.5	9	13.8	+4.0
Refusal	5	3.3	0	0.0	+3.3	0	0.0	+3.3
# w/FOBT/FIT during Report period	7	4.6	3	3.2	+1.4	0	0.0	+4.6
# w/Flex Sig, DCBE, or Colonoscopy	22	14.6	15	16.1	-1.6	9	13.8	+0.7
# w/Flex Sig or Colonoscopy	20	13.2	14	15.1	-1.8	8	12.3	+0.9
# w/Flex Sig & DCBE or Colonoscopy	20	13.2	14	15.1	-1.8	8	12.3	+0.9

Figure 2-43: Sample Report, Colorectal Cancer Screening

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient

Colorectal Cancer Screening: List of patients 51-80 with CRC screening or
refusal, if any.

PATIENT NAME HRN COMMUNITY SEX AGE
DENOMINATOR NUMERATOR

```
PATIENT1, DANIELLE
                     000001 COMMUNITY #1 F 51
                          FOB: 08/19/12 CPT G0107
PATIENT2, MARIE
                     000002 COMMUNITY #1 F 51
UP,AC
                          COLO: 02/12/12 Refused CPT
PATIENT3, MARY ANN
                     000003 COMMUNITY #1 F 52
UP,AC
PATIENT4, BOBBIE
                     000004 COMMUNITY #1 F 52
UP,AC
                          BE: 01/25/12 RAD 74280
PATIENT5, WINONA
                     000005 COMMUNITY #1 F 53
UP,AC
PATIENT6, DARLENE 000006 COMMUNITY #1 F 54
UP,AC
                          SIG: 04/07/09
45.24; BE: 03/31/10 RAD 74280
PATIENT7, JOYCE 000007 COMMUNITY #1 F 57
                         COLO: 07/07/12 POV V76.51
```

Figure 2-44: Sample Patient List, Colorectal Cancer Screening

# 2.6.4 Comprehensive Cancer Screening

# **GPRA Measure Description**

Increase the proportion of patients ages 21 through 80 who received a comprehensive cancer screening.

#### **Denominators**

Active Clinical patients ages 21 through 80 who are eligible for cervical cancer, breast cancer, and/or colorectal cancer screening. (GPRA Developmental Denominator)

- a. Active Clinical female patients ages 21 through 80.
- b. Active Clinical male patients ages 51 through 80.

#### **Numerators**

Patients who have had all screenings for which they are eligible.

**Note**: This numerator does *not* include refusals. (GPRA Developmental Numerator)

- a. Female patients with cervical cancer, breast cancer, and/or colorectal cancer screening.
- b. Male patients with colorectal cancer screening.

## **Logic Description**

Age is calculated at the beginning of the Report Period.

Cervical Cancer Screening definition: To be eligible for this screening, patients must be female Active Clinical ages 21 through 64 and not have a documented history of hysterectomy. Patients must be at least 21 years of age at the beginning of the Report Period and less than 65 years of age as of the end of the Report Period. To be counted as having the screening, the patient must have had a Pap Smear documented in the past three years.

CRS identifies the tests and procedures described in the numerators above with the following codes:

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Hysterectomy	51925, 56308 (old code), 57540, 57545, 57550, 57555, 57556, 58150, 58152, 58200-58294, 58548, 58550-58554, 58951, 58953-58954, 58956, 59135	V Procedure: 68.4-68.8 V POV: 618.5, V88.01, V88.03 Women's Health: Procedure called Hysterectomy.		
Pap Smear	88141-88167, 88174-88175, G0123, G0124, G0141, G0143- G0145, G0147, G0148, P3000, P3001, Q0091	V Lab: PAP SMEAR POV: V67.01 Follow-up Vaginal Pap Smear V76.2 Screen Mal Neop-Cervix V72.32 Encounter for Pap Cervical Smear to Confirm Findings of Recent Normal Smear Following Initial Abnormal Smear V72.3 Gynecological Examination, Pap Cervical Smear as Part of General Gynecological Exam, Pelvic Exam (annual) (periodic) (old code, to be counted for visits prior to 10/1/04 only) V76.47 Vaginal Pap Smear for Post-Hysterectomy Patients 795.0*, 795.10-16, 795.19 V Procedure: 91.46 Women's Health: Procedure called Pap Smear	Yes	BGP PAP SMEAR TAX

Breast Cancer Screening definition: To be eligible for this screening, patients must be female Active Clinical ages 52 through 64 and not have a documented history ever of bilateral mastectomy or two separate unilateral mastectomies. Patients must be at least age 52 as of the beginning of the Report Period and must be less than 65 years of age as of the end of the Report Period. To be counted as having the screening, the patient must have had a Mammogram documented in the past two years.

CRS identifies the tests and procedures described in the numerators above with the following codes:

Subject Defined	CPT Codes	ICD and Other Codes
Bilateral Mastectomy	19300.50-19307.50 or old code 19180, 19200, 19220 <b>OR</b> 19300-19307 w/modifier 09950 (50 and 09950 modifiers indicate bilateral) <b>OR</b> 19240, with modifier of 50 or 09950	V Procedure: 85.42, 85.44, 85.46, 85.48
Unilateral Mastectomy	Must have 2 separate occurrences on 2 different dates of service. 19300-19307, or old codes 19180, 19200, 19220, 19240	Must have 2 separate occurrences on 2 different dates of service. 85.41, 85.43, 85.45, 85.47
Mammogram	V Rad or VCPT: 77052-77059, 76090 (old code), 76091 (old code), 76092 (old code), G0206, G0204, G0202	POV: V76.11, V76.12, 793.80 Abnormal mammogram, unspecified; 793.81 Mammographic microcalcification; 793.89 Other abnormal findings on radiological exam of breast
		V Procedure: 87.36-87.37
		Women's Health: Mammogram Screening, Mammogram Dx Bilat, Mammogram Dx Unilat and where the mammogram result does NOT have "ERROR/DISREGARD".

Colorectal cancer screening definition: To be eligible for this screening, patients must be Active Clinical ages 51 through 80 and not have a documented history ever of colorectal cancer or total colectomy. To be counted as having the screening, patients must have had any of the following: (1) FOBT or FIT during the Report Period; (2) flexible sigmoidoscopy or double contrast barium enema in the past 5 years; or (3) colonoscopy in the past 10 years.

The most recent of any of the following tests and procedures during applicable timeframes. CRS identifies the tests and procedures described in the numerators above with the following codes:

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Colorectal Cancer	G0213 through G0215, G0231	<b>V POV:</b> 153.*, 154.0, 154.1, 197.5, V10.05		
Total Colectomy	44150 through 44151, 44152 (old code), 44153 (old code), 44155 through 44158, 44210-44212	V Procedure: 45.8 (old code)		
Fecal Occult Blood lab test (FOBT) or Fecal Immuno- chemical Test (FIT)	82270, 82274, 89205 (old code), G0107 (old code), G0328, G0394 (old code)		Yes	BGP GPRA FOB TESTS
Flexible Sigmoidoscopy	45330 through 45345, G0104	V Procedure: 45.24		
Double contrast barium enema	VRad 74280, G0106, G0120			
Colonoscopy	44388 through 44394, 44397, 45355, 45378- 45387, 45391, 45392, G0105, G0121	V POV: V76.51 Colon screening V Procedure: 45.22, 45.23, 45.25, 45.42, 45.43		

# **Key Logic Changes from CRS Version 12.0**

Added code 49034-2 to LOINC taxonomy for Pap Smear.

## **Patient List Description**

List of patients 21 through 80 with comprehensive cancer screening, if any.

#### **Measure Source**

Not Available

## **Measure Past Performance and Long-Term Targets**

None

## **Performance Improvement Tip**

- Providers should ask about and record off-site Pap tests (date received and location) on PCC forms. Data entry mnemonic: HPAP
- Providers should ask about and record off-site mammogram procedures (date received and location) on PCC forms. Data entry mnemonic: HRAD.

 Providers should ask about and record off-site historical colorectal cancer tests (test type, date received and location) on PCC forms. Data entry mnemonics: HBE (barium enema); HCOL (colonoscopy); HFOB (Fecal Occult Blood); HSIG (sigmoidoscopy).

DU November 25, 2012 Page 87  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Comprehensive Cancer S	creeni	ng							
	EPORT ERIOD				CHG from PREV YR %			CHG from BASE %	
Active Clinical 21-80 (GPRA Dev.)	721		509			424			
# w/ Comprehensive Can Screening-No Refusals (GPRA Dev.)		31.3	195	38.3	-7.0	153	36.1	-4.7	
A. Female 21-80	570		416			359			
A. # Female w/all Screens	199	34.9	177	42.5	-7.6	144	40.1	-5.2	
B. Male 51-80	151		93			65			
B. # Male w/CRC Screen	27	17.9	18	19.4	-1.5	9	13.8	+4.0	

Figure 2-45: Sample Report, Comprehensive Cancer Screening

PATIENT6, HARRY	000006 COMMUNITY #1 M 56
AC,CRCS	CRCS: 04/07/08 Proc 45.24
PATIENT7, LARRY	000007 COMMUNITY #1 M 57
AC,CRCS	
PATIENT8, BARRY	000008 COMMUNITY #1 M 63
AC,CRCS	CRCS: 02/18/12 CPT 45330

Figure 2-46: Sample Patient List, Comprehensive Cancer Screening

# 2.6.5 Tobacco Use and Exposure Assessment

#### **Denominators**

Active Clinical patients ages five and older. Broken down by gender and age groups (5 through 13, 14 through 17, 18 through 24, 25 through 44, 45 through 64, and 65 and older), based on HP 2010 age groups.

All *pregnant female User Population patients* with no documented miscarriage or abortion.

All *User Population patients* ages five and older. Broken down by gender.

#### **Numerators**

Patients who have been screened for tobacco use during the Report Period.

Patients identified as current tobacco users during the Report Period, both smokers and smokeless users.

- a. Patients identified as current smokers during the Report Period.
- b. Patients identified as current smokeless tobacco users during the Report Period.

Patients identified as exposed to environmental tobacco smoke (ETS) (second-hand smoke) during the Report Period.

# **Logic Description**

Ages are calculated at beginning of Report Period.

For screening, an additional eight months is included for patients who were pregnant during the Report Period but who had their tobacco assessment prior to that.

CRS uses the following codes to define the denominators and numerators:

	la a .	
Subject Defined	CPT Codes	ICD and Other Codes
Pregnancy (At least two visits during the		<b>V POV:</b> 640.03, 640.83, 640.93, 641.03,
past 20 months, where the primary		641.13, 641.23, 641.33, 641.83, 641.93,
provider is not a CHR (Provider code		642.03, 642.13, 642.23, 642.33, 642.43,
53). Pharmacy-only visits (Clinic Code		642.53 642.63, 642.73, 642.93, 643.03,
39) will not count toward these two		643.13, 643.23, 643.83, 643.93, 644.03,
visits. If the patient has more than two		644.13, 645.13, 645.23, 646.03, 646.13,
pregnancy-related visits during the past		646.23, 646.33, 646.43, 646.53, 646.63,
20 months, CRS will use the first two		646.73, 646.83, 646.93, 647.03, 647.13,
visits in the 20-month period. The		647.23, 647.33, 647.43, 647.53, 647.63,
patient must not have a documented		647.83, 647.93, 648.03, 648.13, 648.23,
miscarriage or abortion occurring after		648.33, 648.43, 648.53, 648.63,
the second pregnancy-related visit. In		648.73, 648.83, 648.93, 649.03, 649.13,
addition, the patient must have at least		649.23, 649.33, 649.43, 649.53, 649.63,
one pregnancy-related visit occurring		649.73, 651.03, 651.13, 651.23, 651.33,
during the reporting period.) An		651.43, 651.53, 651.63, 651.73, 651.83,
additional 8 months is included for		651.93, 652.03, 652.13, 652.23, 652.33,
patients who were pregnant during the		652.43, 652.53, 652.63, 652.73,
Report period but who had their tobacco		652.83, 652.93, 653.03, 653.13, 653.23,
assessment prior to that.		653.33, 653.43, 653.53, 653.63, 653.73,
		653.83, 653.93, 654.03, 654.13, 654.23,
		654.33, 654.43, 654.53, 654.63, 654.73,
		654.83, 654.93, 655.03, 655.13, 655.23,
		655.33, 655.43, 655.53, 655.63, 655.73,
		655.83, 655.93, 656.03, 656.13, 656.23, 656.33, 656.43, 656.53, 656.63, 656.73,
		656.83, 656.93, 657.03, 658.03, 658.13,
		658.23, 658.33, 658.43, 658.83, 658.93,
		659.03, 659.13, 659.23, 659.33, 659.43,
		659.53, 659.63, 659.73, 659.83, 659.93,
		660.03, 660.13, 660.23, 660.33, 660.43,
		660.53, 660.63, 660.73, 660.83, 660.93,
		661.03, 661.13, 661.23, 661.33, 661.43,
		661.93, 662.03, 662.13, 662.23, 662.33,
		663.03, 663.13, 663.23, 663.33, 663.43,
		663.53, 663.63, 663.83, 663.93, 665.03,
		665.83, 665.93, 668.03, 668.13, 668.23,
		668.83, 668.93, 669.03, 669.13, 669.23,
		669.43, 669.83, 669.93, 671.03, 671.13,
		671.23, 671.33, 671.53, 671.83, 671.93,
		673.03, 673.13, 673.23, 673.33, 673.83,
		674.03, 674.53, 675.03, 675.13, 675.23,
		675.83, 675.93, 676.03, 676.13, 676.23,
		676.33, 676.43, 676.53, 676.63, 676.83,
		676.93, 678.03, 678.13, 679.03, 679.13,
		V22.0 – V23.9, V28.81, V28.82, V28.89,
		V72.42, V89.01-V89.09
Miscarriage (after second pregnancy	59812, 59820, 59821, 59830	<b>V POV:</b> 630, 631, 632, 633*, 634*
POV in past 20 months)		

Subject Defined	CPT Codes	ICD and Other Codes
Abortion (after second pregnancy POV in past 20 months)	59100, 59120, 59130, 59136, 59150, 59151, 59840, 59841, 59850, 59851, 59852, 59855, 59856, 59857, S2260-S2267	V POV: 635*, 636* 637* Procedure: 69.01, 69.51, 74.91, 96.49
Screened for Tobacco Use (time frame for pregnant patients is past 20 months)	D1320, 99406, 99407, G0375 (old code), G0376 (old code), G8453 (old code), G8455-G8457 (old codes), G8402 (old code), 1034F (Current Tobacco Smoker), 1035F (Current Smokeless Tobacco User), 1036F (Current Tobacco Non-User), 1000F (Tobacco Use Assessed)	V POV or current Active Problem List: 305.1, 305.1* (old codes), 649.00-649.04, V15.82  Patient Education codes: "TO-", "-TO", "-SHS", 305.1, 305.1* (old codes), 649.00-649.04, V15.82, D1320, 99406, 99407, G0375 (old code), G0376 (old code), 1034F, 1035F, 1036F, 1000F, G8455-G8457 (old codes), G8402 (old code), or G8453 (old code)  Dental code: 1320
Tobacco Users (time frame for pregnant patients is past 20 months)	99406, 99407, G0375 (old code), G0376 (old code), 1034F (Current Tobacco Smoker), 1035F (Current Smokeless Tobacco User), G8455 (old code), G8456 (old code), G8453 (old code)	V POV or current Active Problem List: 305.1, 305.10-305.12 (old codes), or 649.00-649.04  Dental code: 1320
Current Smokers (time frame for pregnant patients is past 20 months)	99406, 99407, G0375 (old code), G0376 (old code), 1034F (Current Tobacco Smoker), G8455 (old code), G8402 (old code), G8453 (old code)	V POV or current Active Problem List: 305.1, 305.10-305.12 (old codes), or 649.00-649.04  Dental code: 1320
Current Smokeless (time frame for pregnant patients is past 20 months)	1035F (Current Smokeless Tobacco User), G8456 (old code)	

For numerator definitions, all existing national Tobacco, TOBACCO (SMOKING), TOBACCO (SMOKELESS-CHEWING/DIP), and TOBACCO (EXPOSURE) Health Factors are listed below with the numerator to which they apply.

Health Factor	Numerator
Ceremonial	Screened (does NOT count as Smoker)
Cessation-Smokeless	Screened; Tobacco Users; Smokeless User
Cessation-Smoker	Screened; Tobacco Users; Smoker
Current Smokeless	Screened; Tobacco Users; Smokeless User
Current Smoker	Screened; Tobacco Users; Smoker
Current Smoker, status unknown	Screened; Tobacco Users; Smoker
Current smoker, every day	Screened; Tobacco Users; Smoker
Current smoker, some day	Screened; Tobacco Users; Smoker

Health Factor	Numerator
Non-Tobacco User	Screened
Previous Smokeless	Screened
Previous (Former) Smokeless	Screened
Previous Smoker	Screened
Previous (Former) Smoker	Screened
Smoke Free Home	Screened
Smoker In Home	Screened; ETS
Current Smoker & Smokeless	Screened; Tobacco Users; Smoker; Smokeless User
Exposure To Environmental Tobacco Smoke	Screened; ETS

# **Key Logic Changes from CRS Version 12.0**

- 1. Updated POV codes for pregnancy definition to only include antepartum pregnancy codes.
- 2. Updated pregnancy definition to exclude visits where the primary provider is a CHR (Provider code 53).

## **Patient List Description**

List of patients five and older with documented tobacco screening, if any.

## **Measure Source**

HP 2020 TU-1.1 Cigarette smoking 18 and older; TU-1.2 Smokeless tobacco use 18 and older; TU-11 Exposure to ETS-nonsmokers three and older

# **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance (Screening)	62.0%
IHS FY 2010 Performance (Screening)	60.0%
IHS FY 2009 Performance (Screening)	57.0%
IHS FY 2008 Performance (Screening)	54.0%
IHS FY 2005 Performance (Screening)	34.0%
IHS FY 2004 Performance (Screening)	27.0%

Performance	Percent
IHS FY 2008 Performance (Tobacco Users)	29.0%
HP 2020 Goals: TU-1.1 (Cigarette smoking 18 and older): 12%; TU-1.2 (Smokeless tobacco use 18 and older): 0.3%; TU-11 (Exposure to ETS-non smokers 18 and older): 68%	

DU *** IHS 2012 Sel	.ected	d Measu	ember 25, ares with	Commu		fied Rep		age 90 **		
Report Period: Jan 01, 2012 to Dec 31, 2012 Previous Year Period: Jan 01, 2011 to Dec 31, 2011 Baseline Period: Jan 01, 2000 to Dec 31, 2000										
Tobacco Use and Exposure Assessment (con't)										
	PORT				CHG from PREV YR %			CHG from BASE %		
% PREV YR % CHG f PE					m PREV YR %	PERIOD		BASE %		
# Active Clinical Pts => 5	.,357		1,031			911				
# w/Tobacco Screening		46.0	426	41.3	+4.7	328	36.0	+10.0		
<pre># Tobacco Users w/ % of   Total Screened A. # Smokers w/ % of</pre>		47.1	165	38.7	+8.4	130	39.6	+7.5		
Total Tobacco Users B. # Smokeless Tobacco	277	94.2	164	99.4	-5.2	130	100.0	-5.8		
Users w/ % of Total Tobacco Users # exposed to ETS/		9.9	5	3.0	+6.8	3	2.3	+7.6		
smoker in home w/ % of Total Screened	4	0.6	2	0.5	+0.2	1	0.3	+0.3		
# Male Active Clinical ages => 5	570		430			374				
# w/Tobacco Screening # Tobacco Users w/ % of		40.4	152	35.3	+5.0	128	34.2	+6.1		
# lobaced users w/ % of Total Screened A. # Smokers w/ % of		59.1	69	45.4	+13.7	59	46.1	+13.0		
Total Tobacco Users B. # Smokeless Tobacco	124	91.2	69	100.0	-8.8	59	100.0	-8.8		
Users w/ % of Total Tobacco Users # exposed to ETS/	22	16.2	2	2.9	+13.3	3	5.1	+11.1		
smoker in home w/ % of Total Screened	1	0.4	0	0.0	+0.4	1	0.8	-0.3		
# Female Active Clinica ages => 5	1 787		601			537				
# w/Tobacco Screening	394	50.1	274	45.6	+4.5	200	37.2	+12.8		
<pre># Tobacco Users w/ % of Total Screened A. # Smokers w/ % of</pre>	158	40.1	96	35.0	+5.1	71	35.5	+4.6		
Total Tobacco Users	153	96.8	95	99.0	-2.1	71	100.0	-3.2		

B. # Smokeless Tobacco Users w/ % of Total								
Tobacco Users	7	4.4	3	3.1	+1.3	0	0.0	+4.4
<pre># exposed to ETS/ smoker in home w/ % of</pre>								
Total Screened	3	0.8	2	0.7	+0.0	0	0.0	+0.8

Figure 2-47: Sample Report, Tobacco Use Assessment Tobacco Use and Exposure Assessment

DU *** IHS 2012 Sele	ected		s with			cified Re	Page 95 port ***
	t Peri	od: Jan	01, 20	12 to D	ec 31,		
Previous Y				, 2011 2000 to			
Baselli						., 2000 	
Tobacco Use and Exposure	e Asse	ssment	(con't)				
	TOTAL	ACTIVE		AL POPU Distri			
	5-13	14-17				65 and	older
CURRENT REPORT PERIOD							
# Active Clinical		74					
<pre># w/Tobacco Screening % w/Tobacco Screening</pre>				243 54.2			
• W/ TODACCO SCIENTING	5.0	23.7	37.0	J4.4	33.0	11.0	
# Tobacco Users	3	8	46	118	104	15	
% Tobacco Users w/ % of		40.1	45.4	40.6	<b>.</b>	00.4	
Total Screened	30.0	42.1	45.1	48.6	52.3	29.4	
# Smokers % Smokers w/ % of	2	8	43	108	102	14	
Total Tobacco Users	66.7	100.0	93.5	91.5	98.1	93.3	
# Smokeless % Smokeless w/ % of	1	0	3	15	8	2	
Total Tobacco Users	33.3	0.0	6.5	12.7	7.7	13.3	
# ETS/Smk Home	0	0	0	3	1	0	
% ETS/Smk Home w/ % of Total Screened	0 0	0 0	0 0	1.2	0.5	0 0	
Total Screened	0.0	0.0	0.0	1.2	0.5	0.0	
PREVIOUS YEAR PERIOD							
# Active Clinical							
<pre># w/Tobacco Screening % w/Tobacco Screening</pre>	6 3	22.6	87 51.8				
	0.5	22.0	31.0	13.3	33.0	00.5	
# Tobacco Users		5	41	60	50	9	
% Tobacco Users w/ % of Total Screened		35.7	47.1	40.8	39.1	23.1	
# Smokers % Smokers w/ % of	0	5	40	60	50	9	
Total Tobacco Users	0.0	100.0	97.6	100.0	100.0	100.0	
# Smokeless	0	0	1	3	1	0	

% Smokeless w/ % of Total Tobacco Users	0.0	0.0	2.4	5.0	2.0	0.0	
# ETS/Smk Home	0	0	0	2	0	0	
% ETS/Smk Home w/ % of Total Screened	0.0	0.0	0.0	1.4	0.0	0.0	
22202	2.0				3.0	3.0	
CHANGE FROM PREV YR %							
# w/Tobacco Screening	-0.4	+3.1	+5.8	+8.7	-0.1	-17.0	
Tobacco Users	+30.0	+6.4	-2.0	+7.7	+13.2	+6.3	
Smokers	+66.7	+0.0	-4.1	-8.5	-1.9	-6.7	
Smokeless	+33.3	+0.0	+4.1	+7.7	+5.7	+13.3	
ETS	+0.0	+0.0	+0.0	-0.1	+0.5	+0.0	

Figure 2-48: Sample Age Breakdown Report, Tobacco Use Assessment

UP-User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Tobacco Use and Exposure Assessment: List of patients 5 and older with documented tobacco screening, if any. HRN COMMUNITY SEX AGE PATIENT NAME DENOMINATOR NUMERATOR PATIENT1, CHESTER 000001 COMMUNITY #1 M 7 UP,AC 01/10/12 SCREEN PATIENT2, JUAN 000002 COMMUNITY #1 M 19 PATIENT3, BEN 000003 COMMUNITY #1 M 22 PATIENT4, MARY 000004 COMMUNITY #1 F 35 UP,AC,PREG 04/10/12 SCREEN, 04/10/12 USER, 04/10/12 SMOKELESS PATIENTS, HARRY B 000005 COMMUNITY #1 M 13 03/15/12 SCREEN PATIENT6, EMERSON 000006 COMMUNITY #1 M 15 UP.AC 05/21/12 SCREEN, 05/21/11 USER, 05/21/12 SMOKER, 05/21/12 ETS PATIENT7, EUGENE JAY 000007 COMMUNITY #1 M 29 PATIENT8, ROGER 000008 COMMUNITY #1 M 31 01/21/12 SCREEN, 01/21/12 USER, 01/21/12 SMOKER UP,AC 000009 COMMUNITY #1 M 42 PATIENT9, ANDREW

Figure 2-49: Sample Patient List, Tobacco Use Assessment

### 2.6.6 Tobacco Cessation

### **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 30.0% for the proportion of tobacco-using patients who receive tobacco cessation intervention.

#### **Denominators**

Active Clinical patients identified as current tobacco users prior to the Report Period. Broken down by gender and age groups (less than (<)12, 12 through 17, 18 and older). (GPRA Denominator)

*User Population patients* identified as *current tobacco users* prior to the report period. Broken down by gender.

#### **Numerators**

Patients who have received tobacco cessation counseling or received a prescription for a smoking cessation aid during the Report Period.

**Note**: This numerator does *not* include refusals. (GPRA Numerator)

Patients who refused tobacco cessation counseling during the Report Period.

Patients identified during the Report Period as having quit their tobacco use.

Patients who have received tobacco cessation counseling, received a prescription for a smoking cessation aid, or who quit their tobacco use during the Report Period.

**Note**: This numerator does *not* include refusals.

# **Logic Description**

Age is calculated at the beginning of the Report Period.

Subject Defined	ICD and Other Codes
Tobacco Users (documented prior to the Report Period)	Tobacco Health Factors (looks at the last documented health factor in the Tobacco, TOBACCO (SMOKING) and TOBACCO (SMOKELESS—CHEWING/DIP) categories): Current Smoker, Current Smokeless, Current Smoker and Smokeless, Cessation-Smoker, Cessation-Smoker, Cessation-Smoker, Smoker, Cessation-Smoker, Cessation-Smoker, Current Smoker, Smoke

Subject Defined	ICD and Other Codes
Tobacco Cessation Counseling (documented during the Report Period)	Patient education codes containing: "TO-", "-TO", "-SHS", 305.1, 305.1* (old codes), 649.00-649.04, D1320, 99406, 99407, G0375 (old code), G0376 (old code), 4000F, G8402 (old code) or G8453 (old code)
	Dental code: 1320
	Clinic code: 94 (tobacco cessation clinic)
	<b>CPT code:</b> D1320, 99406, 99407, G0375 (old code), G0376 (old code), 4000F, G8402 (old code) or G8453 (old code)
Prescription for Tobacco Cessation Aid (documented	<b>Taxonomy:</b> Medication in the site-populated BGP CMS SMOKING CESSATION MEDS taxonomy
during the Report Period)	<b>Medication Name:</b> Any medication with name containing "NICOTINE PATCH", "NICOTINE POLACRILEX", "NICOTINE INHALER", or "NICOTINE NASAL SPRAY"
	CPT Code: 4001F
Quit Tobacco User (documented during the Report Period)	V POV or current Active Problem List: 305.13 Tobacco use in remission (old code) or V15.82
	Health Factors documented during the Report Period (looks at the last documented health factor): Previous Smoker, Previous Smokeless, Previous (Former) Smoker, Previous (Former) Smokeless.

## **Tobacco Cessation Counseling Refusal Definition**

Documented refusal of patient education code containing "TO-", "-TO", or "-SHS" or CPT code D1320, 99406, 99407, G0375 (old code), G0376 (old code), 4000F, G8402 (old code) or G8453 (old code). Refusals will only be counted if a patient did not receive counseling or a prescription for tobacco cessation aid.

# **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of tobacco users with tobacco cessation intervention, if any, or who have quit tobacco use.

## **Measure Source**

Smoking Cessation Attempts: HP 2020 TU-4; Smoking Cessation Counseling: HP 2020 TU-10

# Measure Past Performance and Long-Term Targets

Performance	Percent	
IHS FY 2011 Performance	29.4%	

Performance	Percent
IHS FY 2010 Performance	25.0%
IHS FY 2009 Performance	24.0%
IHS FY 2008 Performance	21.0%
IHS FY 2007 Performance	16.0%
IHS FY 2006 Performance	12.0%
HP 2020 goal for increasing smoking cessation attempts for adult smokers	80.0%

DU *** IHS 2012	Selected	Measu		Commu		fied Rep		age 101 **					
D.e.	Dave		INDIAN H			010							
Report Period: Jan 01, 2012 to Dec 31, 2012 Previous Year Period: Jan 01, 2011 to Dec 31, 2011													
Baseline Period: Jan 01, 2000 to Dec 31, 2000													
Tobacco Cessation (con't)													
					CHG from								
	PERIOD		PERIOD		PREV YR %	PERIOD		BASE %					
Active Clinical Toba	ICCO												
Users (GPRA)	301		236			182							
# w/tobacco cessation		ling											
or Rx for cessation Refusals (GPRA)		17 9	46	19 5	-1 6	48	26 4	-8.4					
# w/refusal of	71	11.9	40	19.5	-1.0	10	20.1	-0.1					
7.1	8	2.7	0	0.0	+2.7	0	0.0	+2.7					
counseling # who quit	13	4.3		1.3		1	0.5	+3.8					
# w/ cessation couns	seling,												
cessation aid, or q	ruit 💮												
-No Refusals	66	21.9	48	20.3	+1.6	49	26.9	-5.0					
Male Active Clinical													
Tobacco Users			117			94							
# w/tobacco cessation		ling											
or RX for cessation	-												
Refusals	29	20.7	20	17.1	+3.6	25	26.6	-5.9					
# w/refusal of	0	1 1	0	0 0	. 1 4	0	0 0	. 1 4					
counseling		1.4		0.0			0.0						
<pre># who quit # w/ cessation couns</pre>	_	3.0	1	0.9	+2./	Τ	1.1	+2.5					
cessation aid, or o													
-No Refusals	-	24.3	21	17.9	+6.3	26	27.7	-3.4					
1.0 1.02 0.001.0	31	,	21	,	. 0 . 3	20	,	5.1					
Female Active Clinic	al												
Tobacco Users	161		119			88							
# w/tobacco cessatio	n counce	ling											
or RX for cessation		11119											
Refusals	-	15.5	26	21.8	-6.3	23	26.1	-10.6					
# w/refusal of													

counseling	6	3.7	0	0.0	+3.7	0	0.0	+3.7
# who quit	8	5.0	2	1.7	+3.3	0	0.0	+5.0
# w/ cessation cour cessation aid, or								
-No Refusals	32	19.9	27	22.7	-2.8	23	26.1	-6.3

Figure 2-50: Sample Report, Tobacco Cessation

Tobacco Cessation (con't)				
ACTIVE CL	INICA	L TOBACCO USERS		
	<12	Age Distribution 12-17	=>18	
CURRENT REPORT PERIOD Active Clin Tobacco Users	0	6	295	
<pre># w/tobacco cessation counseling   or Rx for cessation aid   -No Refusals % w/ tobacco cessation counseling</pre>	0	0	54	
or Rx for cessation aid -No Refusals	0.0	0.0	18.3	
# w/refusal of counseling	0	0	8	
% w/refusal of counseling	0.0	0.0	2.7	
# who quit % who quit	0.0	1 16.7	12 4.1	
<pre># w/tobacco cessation counseling,   or Rx for cessation aid or quit   -No Refusals % w/ tobacco cessation counseling,   or Rx for cessation aid or quit</pre>	0	1	65	
-No Refusals	0.0	16.7	22.	
PREVIOUS YEAR PERIOD Active Clin Tobacco Users	1	4	231	
# w/tobacco cessation counseling or Rx for cessation aid -No Refusals % w/tobacco cessation counseling	0	0	46	
or Rx for cessation aid -No Refusals	0.0	0.0	19.9	
<pre># w/refusal of   counseling % w/refusal of</pre>	0	0	0	
counseling	0.0	0.0	0.0	
# who quit % who quit	0.0	0	3 1.3	

# w/tobacco cessation counseling	,			
Rx for cessation aid or quit				
-No Refusals	0	0	48	
% w/ tobacco cessation counseling	3,			
Rx for cessation aid or quit				
-No Refusals	0.0	0.0	20.8	
avanat they bear up a				
CHANGE FROM PREV YR %				
w/tobacco cessation counseling				
or Rx for cessation aid				
-No Refusals	+0.0	+0.0	-1.6	
w/refusal of				
counseling	+0.0	+0.0	+2.7	
who quit	+0.0	+16.7	+2.8	
<pre>w/tobacco cessation counseling,</pre>				
Rx for cessation aid or quit				
-No Refusals	+0.0	+16.7	+1.3	

Figure 2-51: Sample Age Breakdown Report, Tobacco Cessation

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Tobacco Cessation: List of tobacco users with tobacco cessation intervention, if any, or who have quit tobacco use. HRN COMMUNITY SEX AGE PATIENT NAME DENOMINATOR NUMERATOR PATIENT1, BRITNEY 000001 COMMUNITY #1 F 22 UP,AC COUNSEL/RX: 06/10/12 CPT G0375 PATIENT2, LORETTA 000002 COMMUNITY #1 F 22 UP,AC COUNSEL/RX: 01/13/12 305.1-DP PATIENT3, HALEY 000003 COMMUNITY #1 F 25 COUNSEL/RX: 02/19/12 TO-LA UP,AC PATIENT4, ANGEL 000004 COMMUNITY #1 F 30 UP,AC COUNSEL/RX: 03/05/12 CPT 4000F PATIENTS, JOYCE 000005 COMMUNITY #1 F 31 PATIENT6, ESTHER 000006 COMMUNITY #1 F 32 UP, AC QUIT: PREVIOUS (FORMER) SMOKER 05/31/12 COUNSEL/RX: 03/05/12 CESSATION MED - NICOTINE 14MG TRANSDERMAL PATCH
PATIENT7, SARAH 000007 COMMUNITY #1 F 33 UP,AC PATIENT8, PAULA 000008 COMMUNITY #1 F 34 UP,AC COUNSEL/RX: 03/17/12 TO-QT

Figure 2-52: Sample Patient List Tobacco Cessation

# 2.7 Behavioral Health Related Performance Measure Topics

# 2.7.1 Alcohol Screening (FAS Prevention)

## **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 58.7% for the proportion of female patients ages 15 to 44 who receive screening for alcohol use.

#### **Denominators**

Female Active Clinical patients ages 15 to 44. (GPRA Denominator)

Female User Population patients ages 15 to 44.

#### **Numerators**

Patients screened for alcohol use, had an alcohol-related diagnosis or procedure, or received alcohol-related patient education during the report period.

**Note**: This numerator does *not* include refusals. (GPRA Numerator)

- a. Patients with alcohol screening during the report period.
- b. Patients with alcohol-related diagnosis or procedure during the report period
- c. Patients with alcohol-related patient education during the report period.
- d. Patients with documented alcohol screening refusal in past year.

## **Logic Description**

Ages are calculated at beginning of Report Period.

Alcohol screening definition: Any of the following during the Report Period: (a) Alcohol Screening Exam, any CAGE Health Factor, or Screening Diagnosis; (b) Alcohol-related diagnosis in POV, Current PCC or BHS Problem List; (c) Alcohol-related procedure; or (d) Patient education.

Subject Defined	ICD and Other Codes
Alcohol Screening	PCC Exam Code: 35
	<b>CPT code:</b> 99408, 99409, G0396, G0397, H0049, H0050, 3016F
	Any CAGE Health Factor
	<b>V POV:</b> V11.3 (history of alcoholism), V79.1 (screening for alcoholism)
	BHS Problem Code: 29.1 (Screening for Alcoholism)
	V Measurement in PCC or BHS: AUDT, AUDC, or CRFT

Subject Defined	ICD and Other Codes
Alcohol-related Diagnosis	<b>V POV, Current PCC or BHS Problem List:</b> 303.*, 305.0*, 291.*, 357.5*
	<b>BHS POV</b> : 10, 27, 29
Alcohol-related Procedure	<b>V Procedure:</b> 94.46, 94.53, 94.61-94.63, 94.67-94.69
Alcohol-related Education	<b>Patient Education codes:</b> "AOD-" or "-AOD", "CD-" or "-CD" (old codes), or containing V11.3, V79.1, 303.*, 305.0*, 291.* 357.5*, 99408, 99409, G0396, G0397, H0049, or H0050, or 3016F

Alcohol screening may be documented with either an exam code or the CAGE health factor in PCC or BHS. BHS problem codes can also currently be used.

Refusal definition: Refusal of PCC Exam Code 35 in the past year

# **Recommended Brief Screening Tool**

Single Alcohol Screening Question (SASQ) (below).

For Women:

When was the last time you had more than four drinks in one day?

For Men:

When was the last time you had more than five drinks in one day?

Any time in the past three months is a positive screen; further evaluation indicated. Provider should note the screening tool used was the SASQ in the COMMENT section of the Exam Code.

#### Alcohol Health Factors

The existing Health Factors for alcohol screening are based on the CAGE questionnaire, which asks the following four questions:

- 1. Have you ever felt the need to Cut down on your drinking?
- 2. Have people Annoyed you by criticizing your drinking?
- 3. Have you ever felt bad or **G**uilty about your drinking?
- 4. Have you ever needed an **E**ye opener the first thing in the morning to steady your nerves or get rid of a hangover?
- 5. Based on how many YES answers are received, document Health Factor:
  - HF-CAGE 0/4 (all "No" answers)

- HF–CAGE 1/4
- HF-CAGE 2/4
- HF-CAGE 3/4
- HF-CAGE 4/4

#### Optional values:

- Level/Severity: Mild, Moderate, or Severe
- Quantity: # of drinks daily

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of female patients with documented alcohol screening or refusal, if any.

#### **Measure Source**

HP 2010 16-17a

## **Measure Past Performance and Long-term Targets**

Performance	Percent
IHS FY 2011 Performance	57.8%
IHS FY 2010 Performance	55.0%
IHS FY 2009 Performance	52.0%
IHS FY 2008 Performance	47.0%
IHS FY 2007 Performance	41.0%
IHS FY 2006 Performance	28.0%
IHS FY 2005 Performance	11.0%
IHS FY 2004 Performance	7.0%

```
DU November 25, 2012 Page 114

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000

Alcohol Screening (FAS Prevention)

REPORT % PREV YR % CHG from BASE % CHG from PERIOD PERIOD PREV YR % PERIOD BASE %

Female Active Clinical
```

ages 15-44 (GPRA)	434		348			304			
<pre># w/ alcohol screening/ Dx/Proc/Pt Ed</pre>									
-No Refusals (GPRA) A. w/alcohol	50	11.5	2	0.6	+10.9	1	0.3	+11.2	
screening B. # w/alcohol related	43	9.9	1	0.3	+9.6	0	0.0	+9.9	
Dx or procedure C. # w/alcohol related	3	0.7	1	0.3	+0.4	1	0.3	+0.4	
patient education # w/alcohol screening	10	2.3	0	0.0	+2.3	0	0.0	+2.3	
refusal	3	0.7	0	0.0	+0.7	0	0.0	+0.7	
Female User Population									
ages 15-44	725		636			588			
<pre># w/ alcohol screening/ Proc/Pt Ed</pre>	Dx/								
-No Refusals A. # w/alcohol	54	7.4	2	0.3	+7.1	2	0.3	+7.1	
screening B. # w/alcohol related	46	6.3	1	0.2	+6.2	0	0.0	+6.3	
Dx or procedure C. # w/alcohol related	4	0.6	1	0.2	+0.4	2	0.3	+0.2	
patient education # w/alcohol screening	11	1.5	0	0.0	+1.5	0	0.0	+1.5	
refusal	3	0.4	0	0.0	+0.4	0	0.0	+0.4	

Figure 2-53: Sample Report, Alcohol Screening (FAS Prevention)

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Alcohol Screening (FAS Prevention): List of female patients with documented alcohol screening or refusal, if any. PATIENT NAME DENOMINATOR PATIENT NAME HRN COMMUNITY NUMERATOR PATIENT1, CHRISTINE S 000001 COMMUNITY #1 F 15 PATIENT2, RITA A 000002 COMMUNITY #1 F 15 UP,AC SCREEN: 03/06/12 POV V11.3 PATIENT3, DIANE L 000003 COMMUNITY #1 F 15 SCREEN: 02/02/12 Refused Ex 35 PATIENT4, ALICIA 000004 COMMUNITY #1 F 15 UP,AC PATIENT5, MELISSA 000005 COMMUNITY #1 F 16 UP,AC PT ED: 02/13/12 99408-P PATIENT6, LISA MARIE 000006 COMMUNITY #1 F 16 SCREEN: 10/13/12 HF CAGE 1/4 UP.AC PATIENT7, RUTH NELLIE 000007 COMMUNITY #1 F 16 PATIENT8, ALISHA DAWN 000008 COMMUNITY #1 F 16

UP, AC SCREEN: 03/03/12 CPT 3016F

Figure 2-54: Sample Patient List, Alcohol Screening (FAS Prevention)

# 2.7.2 Alcohol Screening and Brief Intervention (ASBI) in the ER

#### **Denominators**

Number of visits for *Active Clinical Plus BH patients* age 15 through 34 seen in the ER for injury during the report period. Broken down by gender and age groups (15 through 24 and 25 through 34).

Number of visits for *Active Clinical Plus BH patients* age 15 through 34 seen in the ER for injury and screened positive for hazardous alcohol use during the report period. Broken down by gender and age groups (15 through 24 and 25 through 34).

Number of visits for *User Population patients* age 15 through 34 seen in the ER for injury during the report period. Broken down by gender and age groups (15 through 24 and 25 through 34).

Number of visits for *User Population patients* age 15 through 34 seen in the ER for injury and screened positive for hazardous alcohol use during the report period. Broken down by gender and age groups (15 through 24 and 25 through 34).

#### **Numerators**

Number of visits where patients were screened in the ER for hazardous alcohol use.

a. Number of visits where patients were screened positive.

Number of visits where patients were provided a brief negotiated interview (BNI) at or within seven days of the ER visit.

- a. Number of visits where patients were provided a BNI at the ER visit.
- b. Number of visits where patients were provided a BNI not at the ER visit but within 7 days of the ER visit.

## **Logic Description**

Age of the patient is calculated as of the beginning of the Report Period.

Emergency room visit definition: Clinic Code 30.

Multiple visits definition: If a patient has multiple ER visits for injury during the Report Period, each visit will be counted in the denominator. For the screening numerator, each ER visit with injury at which the patient was screened for hazardous alcohol use will be counted. For the positive alcohol use screen numerator, each ER visit with injury at which the patient screened positive for hazardous alcohol use will be counted. For the BNI numerators, each visit where the patient was either provided a BNI at the ER or within seven days of the ER visit will be counted. An example of this logic is shown below.

	Denom	Scrn	Pos Scrn	BNI Num	
ER Visit w/Injury	/ Count	Num	Num Count	Count	
******	******	******	******	*****	
John Doe, 07/17/0	9, Screened Pos	sitive at	ER, BNI at	ER	
John Doe, 09/01/0	9, Screened Pos	sitive at	ER, No BNI		
John Doe, 11/15/0	9, No Screen				
******	******	******	******	*****	
COUNTS:	3	2	2	1	

CRS uses the following codes:

Subject Defined	ICD and Other Codes
Injury	V POV (primary or secondary): 800.0–999.9 or E800.0–E989.
ER Screening for	Any conducted during an ER visit.
Hazardous Alcohol	PCC Exam Code: 35
Use	Any Alcohol Health Factor (i.e., CAGE)
	V POV: V79.1 Screening for Alcoholism
	<b>CPT:</b> G0396, G0397, H0049, 99408, 99409, 3016F
	V Measurement in PCC: AUDT, AUDC, or CRFT
Positive Screen for	Any of the following for the screening conducted during an ER visit:
Hazardous Alcohol	PCC Exam Code: 35 Alcohol Screening result of "Positive"
Use	Health Factor: CAGE result of 1/4, 2/4, 3/4 or 4/4
	<b>CPT:</b> G0396, G0397, 99408, 99409
	<b>V Measurement Result in PCC:</b> AUDT result of equal to or greater than (=>) 8, AUDC result of equal to or greater than (=>) 4 for men and equal to or greater than (=>)3 for women, CRFT result of 2-6
BNI	Any of the following documented at the ER visit or within seven days of the ER visit at a face-to-face visit, which excludes chart reviews and telecommunication visits:
	<b>CPT:</b> G0396, G0397, H0050, 99408, 99409
	Patient Education Code: AOD-BNI or containing G0396, G0397, H0050, 99408, or 99409

# **Recommended Brief Screening Tool**

SASQ (below).

For Women:

When was the last time you had more than four drinks in one day?

For Men:

When was the last time you had more than five drinks in one day?

Any time in the past three months is a positive screen; further evaluation indicated. Provider should note the screening tool used was the SASQ in the COMMENT section of the Exam Code.

#### Alcohol Health Factors

The existing Health Factors for alcohol screening are based on the CAGE questionnaire, which asks the following four questions:

- 1. Have you ever felt the need to Cut down on your drinking?
- 2. Have people Annoyed you by criticizing your drinking?
- 3. Have you ever felt bad or **G**uilty about your drinking?
- 4. Have you ever needed an **E**ye opener the first thing in the morning to steady your nerves or get rid of a hangover?

Based on how many YES answers are received, document Health Factor:

- HF-CAGE 0/4 (all No answers)
- HF–CAGE 1/4
- HF-CAGE 2/4
- HF-CAGE 3/4
- HF–CAGE 4/4

### Optional values:

- Level/Severity: Mild, Moderate, or Severe
- Quantity: number of drinks daily

## **Key Logic Changes from CRS Version 12.0**

Changed denominator to Active Clinical Plus Behavioral Health.

#### **Patient List Description**

List of visits for patients seen in the ER for an injury, with screening for hazardous alcohol use, results of screen and BNI, if any.

# **Measure Source**

None

# **Measure Past Performance and Long-Term Targets**

None

DU November 25, 2012 Page 117  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000  Alcohol Screening and Brief Intervention (ASBI) in the ER											
REPORT % PREV YR % CHG from BASE % CHG from PERIOD PREV YR % PERIOD BASE %											
# ER Injury Visits for AC+BH Pts 15-34	34		34			32					
# Visits w/ ER Hazardous Alcohol Screening A. # Visits w/Positive Screen	20	58.8 44.1			+58.8						
# ER Injury Visits for Male AC+BH Pts 15-34	13		19			20					
# Visits w/ ER Hazardous Alcohol Screening A. # Visits w/Positive Screen		61.5	0		+61.5						
# ER Injury Visits for Female AC+BH Pts 15-34	21	30.0	15		.500	12		.30,0			
# Visits w/ ER Hazardous Alcohol Screening A. # Visits w/Positive Screen		57.1	0								
# of ER Injury Visits for AC+BH Pts 15-24	18	17.0	16	0.0	117.0	21	0.0	117.0			
# Visits w/ ER Hazardous Alcohol Screening A. # Visits w/Positive Screen	11	61.1	0	0.0	+61.1	0	0.0	+61.1			
# ER Injury Visit for											

AC+BH Pts 25-34	16		18			11			
<pre># Visits w/ ER Hazardous Alcohol Screening A. # Visits w/Positive</pre>		56.3	0	0.0	+56.3	0	0.0	+56.3	
Screen	6	37.5	0	0.0	+37.5	0	0.0	+37.5	

Figure 2-55: Sample Report, Alcohol Screening and Brief Intervention (ASBI) in the ER

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Alcohol Screening and Brief Intervention (ASBI) in the ER: List of visits
for patients seen in the ER for an injury, with screening for hazardous
alcohol use, results of screen and BNI, if any.
 DENOMINATOR HRN
PATIENT NAME
                                    COMMUNITY
                                                    SEX AGE
                                  NUMERATOR
PATIENT1, DARLENE S 000001 COMMUNITY #1 F 33
UP, AC+BH ER 1) 02/02/12 POV 816.0
PATIENT2, RITA A 000002 COMMUNITY #1 F 33
UP, AC+BH ER 1) 07/12/12 POV 875.0
PATIENT3, DIANE L 000003 COMMUNITY #1 F 15
UP, AC+BH ER 1) 09/08/12 POV 815.0
PATIENT4, ALICIA 000004 COMMUNITY #1 F 18
                             ER 1) 02/02/12 POV 816.02, SCREEN: Neg/No Res CPT 3016F
                               ER 1) 07/12/12 POV 875.0, SCREEN: Pos Ex 35, BNI: No
                               ER 1) 09/08/12 POV 815.00, SCREEN: None
UP ER 1) 04/20/12 POV 959.7
PATIENT5, MELISSA 000005 COMMUNITY #1 F 16
                               ER 1) 04/20/12 POV 959.7, SCREEN: Neg/No Res CPT H0049
UP,AC+BH
PATIENT6, LISA MARIE 000006 COMMUNITY #1 F 20
                                ER 1) 12/16/12 POV 873.42, SCREEN: None; ER 2) 12/18/12
POV 800.10, SCREEN: Pos Ex 35, BNI: 12/18/12 Yes ER AOD-BNI
```

Figure 2-56: Sample Patient List, Alcohol Screening and Brief Intervention (ASBI) in the ER

# 2.7.3 Intimate Partner (Domestic) Violence Screening

### **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 55.3% for the proportion of female patients ages 15 to 40 who receive screening for domestic violence.

#### **Denominators**

Female Active Clinical patients ages 13 and older.

Female Active Clinical patients ages 15 through 40. (GPRA Denominator)

Female User Population patients ages 13 and older.

#### **Numerators**

Patients screened for intimate partner (domestic) violence at any time during the Report Period.

**Note**: This numerator does *not* include refusals. (GPRA Numerator)

- a. Patients with documented IPV/DV exam
- b. Patients with IPV/DV related diagnosis
- c. Patients provided with education or counseling about IPV/DV
- d. Patients with documented refusal in past year of an IPV/DV exam or IPV/DV-related education.

## **Logic Description**

Age of the patient is calculated at the beginning of the report period. CRS uses the following codes to define numerators.

Subject Defined	CPT Codes	ICD and Other Codes
IPV/DV Screening		V Exam: Code 34
		BHS Exam: IPV/DV
IPV/DV Diagnosis		V POV or current PCC or BHS Problem List: 995.80-995.83, 995.85, V15.41, V15.42, V15.49
		BHS POV: 43.*, 44.*
IPV/DV Education		<b>Patient education codes:</b> "DV-" or "-DV", 995.80-83, 995.85, V15.41, V15.42, or V15.49
IPV/DV Counseling		<b>V POV:</b> V61.11
Refusals		V Exam: Code 34 BHS IPV/DV exam Patient education codes containing "DV-" or "-DV"

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of female patients 13 and older with documented IPV/DV screening or refusal, if any.

### **Measure Source**

HP 2010 15-34

# **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance	55.3%
IHS FY 2010 Performance	53.0%
IHS FY 2009 Performance	48.0%
IHS FY 2008 Performance	42.0%
IHS FY 2007 Performance	36.0%
IHS FY 2006 Performance	28.0%
IHS FY 2005 Performance	13.0%
IHS FY 2004 Performance	4.0%

DU November 25, 2012 Page 128  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011								
Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Intimate Partner (Domestic) Violence Screening (con't)								
	PORT		PREV YR PERIOD		CHG from PREV YR %			CHG from BASE %
# Female Active Clinical ages 13 and older	712		519			460		
# w/IPV/DV	, 12		319			100		
Screening -No Refusals A. # w/documented	13	1.8	1	0.2	+1.6	0	0.0	+1.8
IPV/DV exam  B. # w/ IPV/DV related	8	1.1	0	0.0	+1.1	0	0.0	+1.1
diagnosis C. # provided DV	4	0.6	0	0.0	+0.6	0	0.0	+0.6
education # w/ IPV/DV	4	0.6	1	0.2	+0.4	0	0.0	+0.6
refusal	3	0.4	0	0.0	+0.4	0	0.0	+0.4
# Female Active Clinical ages 15-40 (GPRA)	380		311			267		
<pre># w/IPV/DV screening -No Refusals (GPRA)</pre>	11	2.9	1	0.3	+2.6	0	0.0	+2.9
A. # w/ documented IPV/DV exam	6	1.6	_			-	0.0	+1.6
B. # w/ IPV/DV related diagnosis	3	0.8	0	0.0	+0.8	0	0.0	+0.8
C. # provided DV education	4	1.1	1	0.3	+0.7	0	0.0	+1.1

# w/ IPV/DV refusal	2	0.5	0	0.0	+0.5	0	0.0	+0.5
# Female User Pop 13 and older	1,218		1,005			917		
# w/IPV/DV Screening								
-No Refusals	13	1.1	1	0.1	+1.0	1	0.1	+1.0
A. # w/ documented								
IPV/DV exam	8	0.7	0	0.0	+0.7	0	0.0	+0.7
B. # w/ IPV/DV related	d							
diagnosis	4	0.3	0	0.0	+0.3	1	0.1	+0.2
C. # provided DV								
education	4	0.3	1	0.1	+0.2	0	0.0	+0.3
# w/ IPV/DV								
refusal	3	0.2	0	0.0	+0.2	0	0.0	+0.2

Figure 2-57: Sample Report, Intimate Partner (Domestic) Violence Screening

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Intimate Partner (Domestic) Violence Screening: List of female patients 13 and older with documented IPV/DV screening or refusal, if any. HRN COMMUNITY PATIENT NAME SEX AGE DENOMINATOR NUMERATOR \_\_\_\_\_\_ PATIENT1, ELVIRA 000001 COMMUNITY #1 F 13
UP 03/18/12 Refused Ex 34
PATIENT2, SHARON KAY 000002 COMMUNITY #1 F 14 PATIENT3, KRISTINA 000003 COMMUNITY #1 F 15 PATIENT4, RITA 000004 COMMUNITY #1 F 15
UP.AC EXAM: 05/06/12 Ex 34 PATIENT5, DIANE LOUISE 000005 COMMUNITY #1 F 15 UP EXAM: 02/24/12 Ex 34 PATIENT6,ALICE LILA 000006 COMMUNITY #1 F 15 EXAM: 02/24/12 Ex 34

Figure 2-58: Sample Patient List, Intimate Partner (Domestic) Violence Screening

# 2.7.4 Depression Screening

## **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 56.5% for the proportion of adults ages 18 and older who receive annual screening for depression.

#### **Denominators**

Active Clinical patients ages 18 and older. Broken down by gender. (GPRA Denominator)

a. Active Clinical patients ages 65 and older. Broken down by gender.

User Population patients ages 18 and older. Broken down by gender.

b. User Population patients ages 65 and older. Broken down by gender.

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes prior to the Report Period, and at least two visits during the Report Period, and two DM-related visits ever. Broken down by gender.

Active IHD patients, defined as all Active Clinical patients diagnosed with ischemic heart disease (IHD) prior to the Report Period, and at least two visits during the Report Period, and two IHD-related visits ever. Broken down by gender.

#### **Numerators**

Patients screened for depression or diagnosed with a mood disorder at any time during the Report Period.

**Note**: This numerator does not include refusals. (GPRA Numerator)

- a. Patients screened for depression during the Report Period.
- b. Patients with a diagnosis of a mood disorder during the Report Period.
- c. Patients with documented depression screening refusal in past year.
- d. Patients with depression-related education or refusal of education in past year.

**Note:** Depression-related patient education does not count toward the GPRA numerator and is included as a separate numerator only.

### **Logic Description**

Age is calculated at beginning of the Report Period.

CRS uses the following codes and taxonomies to define the denominator and numerators.

Subject Defined	ICD and Other Codes
Diabetes	<b>V POV:</b> 250.00–250.93
Ischemic Heart Disease	<b>V POV:</b> 410.0–412.*, 414.0–414.9, 429.2

Subject Defined	ICD and Other Codes				
Depression Screening	V Exam: Exam Code 36				
	<b>V POV:</b> V79.0				
	<b>CPT</b> : 1220F				
	BHS Problem Code: 14.1 (Screening for Depression)				
	V Measurement in PCC or BHS: PHQ2 or PHQ9				
Mood Disorders	At least 2 visits in PCC or BHS for: Major Depressive Disorder, Dysthymic Disorder, Depressive Disorder NOS, Bipolar I or II Disorder, Cyclothymic Disorder, Bipolar Disorder NOS, Mood Disorder Due to a General Medical Condition, Substance-induced Mood Disorder, or Mood Disorder NOS.  V POV: 296.*, 291.89, 292.84, 293.83, 300.4, 301.13, or 311  BHS POV: 14, 15				
Depression-related Patient Education (does not count	Documented education of any of the following during the Report Period:				
toward GPRA numerator)	Patient education codes: containing "DEP-" (depression), 296.2* or 296.3*, "BH-" (behavioral and social health), 290319, 995.5*, or 995.80–995.85, "SB-" (suicidal behavior) or 300.9, or "PDEP-" (postpartum depression) or 648.44.				
Screening Refusals	V Exam: Exam Code 36, in past year				
Refusal of Depression- related Patient Education	Documented refusal of any of the following during the Report Period:				
(does not count toward GPRA numerator)	Patient education codes: containing "DEP-" (depression), "BH-" (behavioral and social health), "SB-" (suicidal behavior), or "PDEP-" (postpartum depression).				

# **Recommended Brief Screening Tool**

A sample of a Patient Health Questionnaire (PHQ-2 Scaled Version) appears below.

Over the past two weeks, how often have you been bothered by any of the following problems?

- 1. Little interest or pleasure in doing things
  - Not at all Value: 0
  - Several days Value: 1
  - More than half the days Value: 2
  - Nearly every day Value: 3
- 2. Feeling down, depressed, or hopeless
  - Not at all Value: 0
  - Several days Value: 1
  - More than half the days Value: 2

• Nearly every day Value: 3

Total Possible PHQ-2 Score: Range: 0-6

0–2: Negative

3–6: Positive; further evaluation indicated

Provider should note the screening tool used was the PHQ-2 Scaled in the COMMENT section of the Exam Code.

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of patients with documented depression screening or refusal/diagnosed with mood disorder, if any.

#### **Measure Source**

USPSTF (US Preventive Services Task Force), HP 2010 developmental indicator 18 through 6.

## **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance	56.5%
IHS FY 2010 Performance	52.0%
IHS FY 2009 Performance	44.0%
IHS FY 2008 Performance	35.0%
IHS FY 2007 Performance	24.0%
IHS FY 2006 Performance	15.0%

```
DU
                                                               Page 130
                          November 25, 2012
      *** IHS 2012 Selected Measures with Community Specified Report ***
                          DEMO INDIAN HOSPITAL
                Report Period: Jan 01, 2012 to Dec 31, 2012
            Previous Year Period: Jan 01, 2011 to Dec 31, 2011
               Baseline Period: Jan 01, 2000 to Dec 31, 2000
Depression Screening (con't)
                   REPORT % PREV YR
                                         % CHG from BASE % CHG from
                                           PREV YR % PERIOD
                                                                BASE %
                   PERIOD
                             PERIOD
Active Clinical Pts
                  1,112
                                   793
=>18 (GPRA)
                                                        666
# w/Depression screening
```

or Mood Disorder DX-No Refusals (GPRA)	81	7.3	42	5.3	+2.0	17	2.6	+4.7
A. # screened for								
depression B. # w/mood disorder	39	3.5	0	0.0	+3.5	0	0.0	+3.5
DX # w/depression	43	3.9	42	5.3	-1.4	17	2.6	+1.3
screening refusal	5	0.4	0	0.0	+0.4	0	0.0	+0.4
<pre># w/depression education   or refusal</pre>	11	1.0	3	0.4	+0.6	0	0.0	+1.0
Male Active Clinical Pts >=18	148		308			250		
# w/ Depression screening or Mood Disorder DX-No	3							
Refusals A. # screened for	25	5.6	7	2.3	+3.3	1	0.4	+5.2
depression B. # w/Mood Disorder	14	3.1	0	0.0	+3.1	0	0.0	+3.1
DX	11	2.5	7	2.3	+0.2	1	0.4	+2.1
# with depression screening refusal	3	0.7	0	0.0	+0.7	0	0.0	+0.7
<pre># w/depression education or refusal</pre>	3	0.7	1	0.3	+0.3	0	0.0	+0.7
Female Active Clinical								
Pts >=18	564		485			416		
# w/ Depression screening	3							
or Mood Disorder DX-No Refusals	56	8.4	35	7.2	+1.2	16	3.8	+4.6
A. # screened for depression	25	3.8	0	0.0	+3.8	0	0.0	+3.8
B. # w/Mood Disorder	32	4.8	35	7.2	-2.4	16	3.8	+1.0
# with depression								
<pre>screening refusal # w/depression education</pre>	2	0.3	0	0.0	+0.3	0	0.0	+0.3
or refusal	8	1.2	2	0.4	+0.8	0	0.0	+1.2
A. Active Clinical Pts => 65	116		64			65		
			04			0.5		
# w/ Depression screening or Mood Disorder DX-No								
Refusals A. # screened for	9	7.8	6	9.4	-1.6	2	3.1	+4.7
depression	3	2.6	0	0.0	+2.6	0	0.0	+2.6
B. # w/mood disorder DX	6	5.2	6	9.4	-4.2	2	3.1	+2.1
<pre># with depression screening refusal</pre>	1	0.9	0	0.0	+0.9	0	0.0	+0.9
<pre># w/depression education   or refusal</pre>	2	1.7	2	3.1	-1.4	0	0.0	+1.7

Figure 2-59: Sample Report, Depression Screening

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Depression Screening: List of patients with documented depression screening or refusal/diagnosed with mood disorder, if any. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR \_\_\_\_\_\_ PATIENT55, LORETTA LYNN 000055 COMMUNITY #1 F 78 PATIENT56, TINA MARIE 000056 COMMUNITY #1 F 78
UP, AC, AD, IHD SCREEN: 05/22/12 Meas PHQ9
PATIENT57, DANIELLE 000057 COMMUNITY #1 F 79
UP, AC PT ED: 02/06/12 296.20-DP UP,AC
PATIENT58,LESLIE ANN
UP,AC
SCREEN: 04/15/12 POV V79.0
PATIENT59,DONNA SUE
UP,AC
SCREEN: 01/15/12 POV V79.0
SCREEN: 01/15/12 POV V79.0 PATIENT60, TAYLOR OLIVIA 000060 COMMUNITY #1 F 87 PATIENT61, DENNIS GERALD 000061 COMMUNITY #1 M 18 PT ED: 02/01/12 296.20-DP PATIENT62, JOSHUA DALE 000062 COMMUNITY #1 M 18 UP,AC

Figure 2-60: Sample Patient List, Depression Screening

# 2.7.5 Antidepressant Medication Management

#### **Denominators**

As of the 120th day of the Report Period, *Active Clinical Plus BH patients* 18 years of age and older who were diagnosed with a new episode of depression and treated with antidepressant medication in the past year.

As of the 120th day of the Report Period, *User Population patients* 18 years of age and older who were diagnosed with a new episode of depression and treated with antidepressant medication in the past year.

#### **Numerators**

*Optimal Practitioner Contacts:* Patients with at least three mental health visits with a non-mental health or mental health provider within 12 weeks (84 days) after diagnosis, two of which must be face-to-face visits and one of which must be with a prescribing provider.

Effective Acute Phase Treatment: Patients who filled a sufficient number of separate prescriptions/refills of antidepressant medication for continuous treatment of at least 84 days (12 weeks).

Effective Continuation Phase Treatment: Patients who filled a sufficient number of separate prescriptions/refills of antidepressant medication treatment to provide continuous treatment for at least 180 days (6 months).

## **Logic Description**

Age is calculated at the beginning of the report period. To be included in the denominator, patient must meet *both* of the following conditions:

- 1. One of the following from the 121st day of the year prior to the Report Period to the 120th day of the Report Period:
  - a. One visit in any setting with major depression DX (see list of codes below) as primary POV.
  - b. Two outpatient visits occurring on different dates of service with secondary POV of major depression.
  - c. An inpatient visit with secondary POV of major depression.

For example, if Report Period is July 1, 2011 through June 30, 2012, the patient must have one of the three scenarios above during 11/1/2010 through 10/29/2011.

Major depression is defined as POV 296.2\*, 296.3\*, 298.0, 300.4, 309.1, 311. The Index Episode Start Date is date of the patient's earliest visit during this period. For inpatient visits, the discharge date will be used.

2. Filled a prescription for an antidepressant medication (see list of medications below) within 30 days before the Index Episode Start Date or 14 days on or after that date. In V Medication, Date Discontinued must not be equal to the prescription (i.e., visit) date. The Index Prescription Date is the date of the earliest prescription for antidepressant medication filled during that time period.

#### **Denominator Exclusions**

- 1. Patients who have had any diagnosis of depression within the previous 120 days (four months) of the Index Episode Start Date. The POVs to be checked for prior depressive episodes is more comprehensive and include the following: POV 296.2\*-296.9\*, 298.0, 300.4, 309.0, 309.1, 309.28, 311, or
- 2. Patients who had a new or refill prescription for antidepressant medication (see the list of medications below) within 90 days (3 months) prior to the Index Prescription Date are excluded as they do not represent new treatment episodes, or

3. Patients who had an acute mental health or substance abuse inpatient stay during the 245 days after the Index Episode Start Date treatment period. Acute mental health stays are defined as Service Category of H and primary POV 290\*, 293\* through 302\*, 306\* through 316\*. Substance abuse inpatient stays are defined as Service Category of H and primary POV 291\* through 292\*, 303\* through 305\* or primary POV 960\* through 979\* and secondary POV of 291\* through 292\*, 303\* through 305\*.

Optimal Practitioner Contacts Numerator

Patient must have one of the following:

- 1. Three face-to-face follow-up outpatient, non-ER visits (clinic code not equal to 30) or intermediate treatment with either a non-mental-health or mental health provider within 84 days after the Index Episode Start Date, *or*...
- 2. Two face-to-face outpatient, non-ER visits (clinic code not equal to 30) and one telephone visit (Service Category T), with either a non-mental-health or mental health provider within 84 days after the Index Episode Start Date.

For either option, one of the visits must be to a prescribing provider, defined as Provider Codes 00, 08, 11, 16 through 18, 21, 24 through 25, 30, 33, 41, 44 through 45, 47, 49, 64, 67 through 68, 70 through 83, 85 through 86, A1, A9, or B1 through B6.

**Note**: If patient was diagnosed with two secondary diagnoses of depression, the second visit may be counted toward the numerator.

Outpatient mental health provider visits are defined as BHS or PCC visit with primary provider code of 06, 12, 19, 48, 49, 50, 62, 63, 81, or 92 through 96, and:

- a. (1) Service category A, S, or O, and (2A) CPT 90801, 90802, 90804 through 90819, 90821 through 90824, 90826 through 90829, 90845, 90847, 90849, 90853, 90857, 90862, 90870, 90871 (old code), 90875, 90876, 99384 through 99387, 99394 through 99397, 99401 through 99404, G0155, G0176, G0177, H0002, H0004, H0031, H0034, H0036, H0037, H0039, H0040, H2000, H2010, H2011, H2013–H2020, M0064, S9484, S9485 or (2B) POV 290\*, 293\*–302\*, 306\*–316, or
- b. (1) Service category of A, S, or O and (2A) Location of Encounter = Home (as designated in Site Parameters) or (2B) Clinic Code = 11, or
- c. Service category of T.

**Outpatient non-mental-health provider visits** are defined as BHS or PCC visits with:

- a. (1) Service category A, S, or O, a (2) CPT 90801, 90802, 90804 through 90819, 90821 through 90824, 90826–90829, 90845, 90847, 90849, 90853, 90857, 90862, 90870, 90871 (old code), 90875, 90876, G0155, G0176, G0177, H0002, H0004, H0031, H0034, H0036, H0037, H0039, H0040, H2000, H2010, H2011, H2013 through H2020, M0064, S9484, S9485, or...
- b. (1) Service category A, S, O, or T or (2) Location of Encounter = Home (as designated in Site Parameters) or (3A) clinic code 11 and (3B) POV 290\*, 293\* through 302\*, 306\* through 316\*, or...
- c. (1) Service category A, S, or O, and (2) CPT 99384 through 99387, 99394 through 99397, 99401 through 99404 and (3) POV 290\*, 293\* through 302\*, 306\* through 316\*.

## Effective Acute Phase Treatment Numerator

For all antidepressant medication prescriptions filled (see list of medications below) within 114 days of the Index Prescription Date, from V Medication CRS counts the days prescribed (i.e., treatment days) from the Index Prescription Date until a total of 84 treatment days has been established. If the patient had a total gap exceeding 30 days or if the patient does not have 84 treatment days within the 114-day time frame, the patient is not included in the numerator.

**Note:** If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

#### **Example of Patient Included in Numerator:**

- First RX is Index Rx Date: 11/1/2011, # Days Prescribed=30
- Rx covers patient through 12/1/2011
- Second RX: 12/15/2011, # Days Prescribed=30
- Gap #1 = (12/15/2011-12/1/2011) = 14 days
- Rx covers patient through 1/14/2012
- Third RX: 1/10/2012, # Days Prescribed=30
- No gap days
- Rx covers patient through 2/13/2012
- Index Rx Date 11/1/2011 + 114 days = 2/23/2012

• Patient's 84th treatment day occurs on 2/7/2012, which is less than or equal to ( $\leq$ ) 2/23/2012 and # gap days of 14 is less than 30

#### **Example of Patient Not Included in Numerator:**

- First Rx is Index Rx Date: 11/1/2011, # Days Prescribed=30
- Rx covers patient through 12/1/2011
- Second Rx: 12/15/2011, # Days Prescribed=30
- Gap #1 = (12/15/2011-12/1/2011) = 14 days
- Rx covers patient through 1/14/2012
- Third Rx: 2/01/2012, # Days Prescribed=30
- Gap #2 = (2/01/2012 through 1/14/2012) = 18, total # gap days = 32, so patient is not included in the numerator

Effective Continuation Phase Treatment Numerator

For all antidepressant medication prescriptions (see list of medications below) filled within 231 days of the Index Prescription Date, CRS counts the days prescribed (i.e., treatment days) (from V Medication) from the Index Prescription Date until a total of 180 treatment days has been established. If the patient had a total gap exceeding 51 days or if the patient does not have 180 treatment days within the 231 day time frame, the patient is not included in the numerator.

**Note:** If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

Antidepressant medications defined with medication taxonomy BGP HEDIS ANTIDEPRESSANT MEDS. (Medications are: Tricyclic antidepressants (TCA) and other cyclic antidepressants, Selective serotonin reuptake inhibitors (SSRI), Monoamine oxidase inhibitors (MAOI), Serotonin-norepinepherine reuptake inhibitors (SNRI), and other antidepressants.) Medications must not have a comment of RETURNED TO STOCK.

#### **Key Logic Changes from CRS Version 12.0**

Changed denominator to Active Clinical Plus Behavioral Health.

## **Patient List Description**

List of patients with new depression DX and optimal practitioner contact (OPC), acute phase treatment (APT) and continuation phase treatment (CONPT), if any.

## **Measure Source**

HEDIS, HP 2010 18-9b

## Measure Past Performance and Long-Term Targets

None

DU November 25, 2012 Page 141  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000										
Antidepressant Medication	on Ma	nageme	ent (con't	)						
REPORT % PREV YR % CHG from BASE % CHG from PERIOD PREV YR % PERIOD BASE %										
AC+BH Pts =>18 w/new depression DX and antidepressant meds	17		6			2				
<pre># w/3 outpt mental health visits within 12 weeks # w/12 week treatment</pre>	5	29.4	1	16.7	+12.7	0	0.0	+29.4		
meds	9	52.9	4	66.7	-13.7	0	0.0	+52.9		
# w/180 day treatment meds	4	23.5	3	50.0	-26.5	0	0.0	+23.5		
User Pop Pts =>18 w/new depression DX and antidepressant meds	18		7			3				
# w/3 outpt mental health visits within 12 weeks	health visits within 12 weeks 5 27.8 1 14.3 +13.5 0 0.0 +27.8									
<pre># w/12 week treatment   meds # w/180 day treatment</pre>	9	50.0	_		-7.1	0	0.0			
meds	4	22.2	3	42.9	-20.6	0	0.0	+22.2		

Figure 2-61: Sample Report, Antidepressant Medication Management

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

```
Antidepressant Medication Management: List of patients with new depression DX
and optimal practitioner contact (OPC), acute phase treatment (APT) and
continuation phase treatment (CONPT), if any.
PATTENT NAME
                      HRN
                             COMMUNITY
                                         SEX AGE
DENOMINATOR
                            NUMERATOR
PATIENT1, MICHELLE D 000001 COMMUNITY #1 F 22
UP,AC+BH
                            IESD: 06/06/11; NOT OPC; NOT APT: DAYS=60, GAP=1; NOT
CONPT: DAYS=60, GAP=1
PATIENT2, PAULA KAY 000002 COMMUNITY #1 F 34
UP,AC+BH
                            IESD: 10/29/11; NOT OPC; NOT APT: DAYS=68, GAP=28;
CONPT
PATIENT3,RHONDA SUE 000003 COMMUNITY #1 F 35
                            IESD: 04/21/12; NOT OPC; NOT APT: DAYS=74, GAP=0; NOT
CONPT: DAYS=74, GAP=0
PATIENT4, KATHLEEN 000004 COMMUNITY #1 F 38
UP,AC+BH
                            IESD: 11/15/11; NOT OPC; APT; CONPT
```

Figure 2-62: Sample Patient List, Antidepressant Medication Management

# 2.8 Cardiovascular Disease Related Measure Topics

## 2.8.1 Obesity Assessment

#### **Denominators**

Active Clinical patients ages 2 through 74. Broken down by gender and age groups (2 through 5, 6 through 11, 12 through 19, 20 through 24, 25 through 34, 35 through 44, 45 through 54, 55 through 74).

All *User Population patients* ages 2 through 74. Broken down by gender.

#### **Numerators**

Patients for whom a Body Mass Index (BMI) could be calculated.

**Note**: This numerator does *not* include refusals.

- 1. For those with a BMI calculated, those considered overweight but not obese using BMI and standard tables
- 2. For those with a BMI calculated, those considered obese using BMI and standard tables
- 3. Total of overweight and obese

Patients with documented refusal in past year.

## **Logic Description**

Age is calculated at beginning of the Report Period.

BMI calculation definition: CRS calculates BMI at the time the report is run, using NHANES II. For age 18 and under, a height and weight must be taken on the same day any time during the Report Period. For 19 through 50, height and weight must be recorded within last five years, not required to be on the same day. For over 50, height and weight within last two years, not required to be recorded on same day. Overweight but not obese is defined as BMI of 25 through 29 for adults 19 and older. Obese is defined as BMI of 30 or more for adults 19 and older. For ages 2-18, definitions are based on standard tables. Refusals include REF, NMI, and UAS (unable to screen) and must be documented during the past year. For ages 18 and under, both the height and weight must be refused on the same visit at any time during the past year. For ages 19 and older, the height and weight must be refused during the past year and are not required to be on the same visit.

Patients whose BMI either is greater or less than the Data Check Limit range shown in the BMI Standard Reference Data Table in PCC will not be included in the report counts for Overweight or Obese.

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of patients with current BMI, if any.

#### **Measure Source**

HP 2020: NWS-9 Obesity in Adults 20+, NWS-10.1 (Obesity in Children 2-5), NWS-10.2 Overweight or Obesity in Children 6-11, NWS-10.3 Overweight or Obesity in Adolescents 12-19, NWS-10.4 Overweight or Obesity in Children 2-19

#### Measure Past Performance and Long-Term Targets

Performance	Percent
Assessed as Obese–IHS FY 2011 Performance	46.9%
Assessed as Obese–IHS FY 2010 Performance	47.0%
Assessed as Obese–IHS FY 2009 Performance	47.0%
Assessed as Obese–IHS FY 2008 Performance	46.0%
BMI Measured–IHS FY 2011 Performance	78.0%
BMI Measured–IHS FY 2010 Performance	76.0%
BMI Measured–IHS FY 2009 Performance	75.0%
BMI Measured–IHS FY 2008 Performance	74.0%

Performance	Percent
BMI Measured– FY 2005 Performance	64.0%
BMI Measured–IHS FY 2004 Performance	60.0%
HP 2020 Goal: Obesity in Adults 20+ (NWS-9)	30.6%
HP 2020 Goal: Overweight or Obesity in Children 2–5 (NWS-10.1)	9.6%
HP 2020 Goal: Overweight or Obesity in Children 6–11 (NWS-10.2)	15.7%
HP 2020 Goal: Overweight or Obesity in Adolescents 12–19 (NWS-10.3)	16.1%
HP 2020 Goal: Overweight or Obesity in Children 2–19 (NWS-10.4)	14.6%

# **Performance Improvement Tips**

- 1. A Body Mass Index report can be run from your PCC Management Reports menu. This report can be run for all patients or for a specific template of patients that has been pre-defined with a QMan search. The BMI report will provide you with patient height, weight, date weight taken, BMI and NHANES percentile.
- 2. Recent guidelines indicate that height for adults must be taken at least once every five years, rather than once after age 18. Your BMI rates may be lower than anticipated because of height data that is over five years old.
- 3. If height and weight measurements are being recorded as cm/kg vs. in/lbs ensure providers are *noting* they are cm/kg *and* that data entry is entering the measurements correctly in PCC, as shown below.
  - Use mnemonics of CHT and KWT (vs. HT and WT), or
  - Add "c" after height value and "k" after weight value (e.g. 100c, 50k)

DU November 25, 2012 Page 143  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Obesity Assessment (con't)									
	REPORT PERIOD				CHG from PREV YR %				
Active Clinical Pts ages 2-74	1,400		1,096			982			
# w/BMI calculated -No Refusals A. # Overweight w/	880	62.9	824	75.2	-12.3	712	72.5	-9.6	
% of Total BMI B. # Obese w/	242	27.5	237	28.8	-1.3	191	26.8	+0.7	
% of Total BMI	372	42.3	339	41.1	+1.1	267	37.5	+4.8	

C. # Overweight/Obese w	/								
% of Total BMI	614	69.8	576	69.9	-0.1	458	64.3	+5.4	
# w/BMI refusal									
(No BMI)	4	0.3	0	0.0	+0.3	0	0.0	+0.3	
Male Active Clinical	F 0 F		465			41.0			
Pts 2-74	595		465			410			
# w/BMI calculated									
-No Refusals	341	57.3	331	71.2	-13.9	283	69.0	-11.7	
A. # Overweight w/	311	37.3	331	,	13.5	203	03.0	11.	
% of Total BMI	103	30.2	98	29.6	+0.6	73	25.8	+4.4	
B. # Obese w/									
% of Total BMI	155	45.5	141	42.6	+2.9	117	41.3	+4.1	
<pre>C. #Overweight/Obese w/</pre>									
% of Total BMI	258	75.7	239	72.2	+3.5	190	67.1	+8.5	
# w/BMI refusal									
(no BMI)	2	0.3	0	0.0	+0.3	0	0.0	+0.3	
Female Active Clinical									
Pts 2-74	805		631			572			
PLS Z-74	603		031			372			
# w/BMI calculated									
-No Refusals	539	67.0	493	78.1	-11.2	429	75.0	-8.0	
A. # Overweight w/									
% of Total BMI	139	25.8	139	28.2	-2.4	118	27.5	-1.7	
B. # Obese w/									
% of Total BMI	217	40.3	198	40.2	+0.1	150	35.0	+5.3	
<pre>C. #Overweight/Obese w/</pre>									
% of Total BMI	356	66.0	337	68.4	-2.3	268	62.5	+3.6	
# w/BMI refusal	•	0.0	_	0 0	0.0	_	0.0		
(No BMI)	2	0.2	0	0.0	+0.2	0	0.0	+0.2	

Figure 2-63: Sample Report, Obesity Assessment

Obesity Assessment (cor	ı't)								
	TOTAL	ACTIVE		AL POPU Distri					
	2-5	6-11	_			35-44	45-54	55-74	
CURRENT REPORT PERIOD Total # Active Clin	109	112	157	133	233	215	216	225	
# w/BMI calculated -No Refusals	52	44	89	117	183	146	128	121	
% w/BMI calculated									
-No Refusals	47.7		56.7	88.0	78.5	67.9	59.3	53.8	
# A. Overweight % A. Overweight w/	9	10	21	33	44	39	38	48	
% Total BMI	17.3		23.6			26.7			
# B. Obese % B. Obese w/	7	13	28	39	86	86	61	52	
% of Total BMI	13.5	29.5	31.5	33.3	47.0	58.9	47.7	43.0	
# C. Overweight or Obese	16	23	49	72	130	125	99	100	

% C. Overweight or Ok	oese w/								
% Total BMI	30.8	52.3	55.1	61.5	71.0	85.6	77.3	82.6	
# w/BMI refusal	-	0	0	0	0	1	1	1	
(No BMI) % w/BMI refusal	1	0	0	0	0	1	1	1	
(No BMI)	1.9	0.0	0.0	0.0	0.0	0.7	0.8	0.8	
(NO BMI)	1.9	0.0	0.0	0.0	0.0	0.7	0.0	0.0	
PREVIOUS YEAR PERIOD									
Total # Active Clin	111	120	137	128	172	151	140	137	
# w/BMI calculated									
-No Refusals	49	56	88	114	155	129	113	120	
% w/BMI calculated									
-No Refusals	44.1	46.7	64.2	89.1	90.1	85.4	80.7	87.6	
II 7 O	7	11	20	2.0	4.77	2.2	2.6	4.5	
# A. Overweight % A. Overweight w/	7	11	20	38	47	33	36	45	
% Total BMI	14.3	19.6	22.7	33.3	30.3	25.6	31.9	37.5	
6 TOTAL BINI	14.5	17.0	22.7	33.3	30.3	23.0	31.7	37.3	
# B. Obese	14	14	26	35	65	77	56	52	
% B. Obese w/									
% of Total BMI	28.6	25.0	29.5	30.7	41.9	59.7	49.6	43.3	
# C. Overweight									
or Obese	21	25	46	73	112	110	92	97	
% C. Overweight or Ob % Total BMI		44.6	52.3	64.0	72.3	05 0	01.4	00.0	
% Total BMI	42.9	44.6	52.3	64.0	12.3	85.3	81.4	80.8	
# w/BMI refusal									
(No BMI)	0	0	0	0	0	0	0	0	
% w/BMI refusal	ŭ	ŭ	ŭ	J	J	J	J	J	
(No BMI)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
CHANGE FROM PREV YR	8								
w/BMI calculated									
-No Refusals	+3.6	-7.4			-11.6				
A. Overweight B. Obese	+3.0 -15.1	+3.1 +4.5	+0.9 +1.9		-6.3 +5.1	+1.1	-2.2 -1.9	+2.2 -0.4	
C. Overweight	-15.1	+4.5	+1.9	+2.6	+5.1	-0.8	-1.9	-0.4	
or Obese	-12.1	+7.6	+2.8	-2.5	-1.2	+0.3	-4.1	+1.8	
w/BMI refusal	12.1	17.0	12.0	۷.5	1.2	10.5	7.1	11.0	
(No BMI)	+1.9	+0.0	+0.0	+0.0	+0.0	+0.7	+0.8	+0.8	

Figure 2-64: Sample Report, Age Breakout, Obesity Assessment

Figure 2-65: Sample Patient List, Obesity Assessment

# 2.8.2 Childhood Weight Control

## **GPRA Description**

During FY 2012, achieve the tentative long-term target rate of 24% for the proportion of children with a BMI of 95% or higher.

#### **Denominators**

Active Clinical patients aged 2 through 5 for whom a BMI could be calculated. Broken down by gender and age groups (2, 3, 4, 5).

#### **Numerators**

Patients with BMI in the 85th to 94th percentile.

Patients with a BMI at or above the 95th percentile.

Patients with a BMI at or above the 85th percentile.

## **Logic Description**

BMI calculation definition: All patients for whom a BMI could be calculated and who are between the ages of two and five at the beginning of the Report Period and who do not turn age six during the Report Period are included in this measure. Age in the age groups is calculated based on the date of the most current BMI found. For example, a patient may be two years of age at the beginning of the time period, but is three years old at the time of the most current BMI found. That patient will fall into the age three group. CRS looks for the most recent BMI in the Report Period. CRS calculates BMI at the time the report is run using NHANES II. A height and weight must be taken on the same day any time during the Report Period. The BMI values for this measure are reported differently than in Obesity Assessment since this age group is children ages 2 through 5, whose BMI values are age-dependent. The BMI values are categorized as Overweight for patients with a BMI in the 85th to 94th percentile and Obese for patients with a BMI at or above the 95th percentile.

Patients whose BMI either is greater or less than the Data Check Limit range shown below will not be included in the report counts for Overweight or Obese.

#### **BMI Standard Reference Data**

Low-High Ages		BMI >= (OVERWT)	BMI >= (OBESE)		Data Check Limits BMI <
2-2	MALE	17.7	18.7	36.8	7.2
2-2	FEMALE	17.5	18.6	37.0	7.1
3-3	MALE	17.1	18.0	35.6	7.1
3-3	FEMALE	17.0	18.1	35.4	6.8
4-4	MALE	16.8	17.8	36.2	7.0
4-4	FEMALE	16.7	18.1	36.0	6.9
5-5	MALE	16.9	18.1	36.0	6.9
5-5	FEMALE	16.9	18.5	39.2	6.8

## **Key Logic Changes from CRS Version 12.0**

None

#### **Patient List Description**

List of patients ages 2 through 5, with current BMI.

#### **Measure Source**

CDC, National Center for Health Statistics, HP 2020 NWS-10.1

# **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance	24.1%
IHS FY 2010 Performance	25.0%
IHS FY 2009 Performance	25.0%
IHS FY 2008 Performance	24.0%
IHS FY 2007 Performance	24.0%
IHS FY 2006 Performance	24.0%
HP 2020 Goal	9.6%

DU *** IHS 2012	Selected		mber 25, ires with		nity Speci:	fied Rep		age 156 **		
DEMO INDIAN HOSPITAL										
Report Period: Jan 01, 2012 to Dec 31, 2012 Previous Year Period: Jan 01, 2011 to Dec 31, 2011										
Baseline Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000										
Childhood Weight Control (con't)										
	REPORT PERIOD		PREV YR PERIOD		CHG from PREV YR %					
Active Clinical Pts										
2-5 w/BMI	44		39			40				
# w/BMI 85-94%	7	15.9	5	12.8	+3.1 -11.7	10	25.0			
# w/BMI =>95%								-1.1		
# w/BMI =>85%	12	27.3	14	35.9	-8.6	15	37.5	-10.2		
Active Clinical Pts										
Age 2	2		8			5				
# w/BMI 85-94%	1	50.0	0	0.0	+50.0	1	20.0	+30.0		
# w/BMI =>95%	0	0.0			-25.0					
# w/BMI =>85%	1	50.0	2	25.0	+25.0	1	20.0	+30.0		
Active Clinical Pts										
Age 3	23		15			8				
# w/BMI 85-94%	2	8.7	2	13.3	-4.6	3	37.5	-28.8		
# w/BMI =>95%	3	13.0	3	20.0	-7.0	2	25.0	-12.0		
# w/BMI =>85%	5	21.7	5	33.3	-11.6	5	62.5	-40.8		
Active Clinical Pts										
Age 4	12		10			17				
# w/BMI 85-94%	1	8.3	2	20.0	-11.7	3	17.6	-9.3		
# w/BMI =>95%		8.3	2	20.0	-11.7	2	11.8	-3.4		
# w/BMI =>85%	2	16.7	4	40.0	-23.3	5	29.4	-12.7		
Active Clinical Pts										
Age 5	7		6			10				

# w/BMI 85-94%	3 42	.9 1	16.7	+26.2	3	30.0	+12.9
# w/BMI =>95%	1 14	.3 2	33.3	-19.0	1	10.0	+4.3
# w/BMI =>85%	4 57	.1 3	50.0	+7.1	4	40.0	+17.1

Figure 2-66: Sample Report, Childhood Weight Control

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Childhood Weight Control: List of patients ages 2-5, with current BMI.
                        HRN COMMUNITY
PATIENT NAME
                                                   SEX AGE
 DENOMINATOR
                             NUMERATOR
PATIENT1, MELISSA ANN 000001 COMMUNITY #1 F 4
AC Age at BMI: 4; 08/20/
PATIENT2,RANDY 000002 COMMUNITY #1 M 2
AC Age at BMI: 2; 05/06/
PATIENT3,PAUL BARRY 000003 COMMUNITY #1 M 2
AC Age at BMI: 2; 08/05/
PATIENT4,TYLER 000004 COMMUNITY #1 M 4
                                  Age at BMI: 4; 08/20/12 16.03
                                  Age at BMI: 2; 05/06/12 17.96 [OVERWEIGHT]
                                  Age at BMI: 2; 08/05/12 19.87 [OBESE]
                                  Age at BMI: 4; 02/19/12 15.67
AC Age at BMI: 4; 02/19 PATIENT5, SAMUEL III 000005 COMMUNITY #1 M 5
                                  Age at BMI: 5; 11/29/12 19.07 [OBESE]
AC Age at BM1: 5; 11/29 PATIENT21, JOSEPHINE 000021 COMMUNITY #2 F 4
                        Age at BMI: 4; 05/30/12 15.71
```

Figure 2-67: Sample Patient List, Childhood Weight Control

## 2.8.3 Nutrition and Exercise Education for At Risk Patients

#### **Denominators**

Active Clinical patients ages six and older considered overweight (including obese). Broken down by gender.

a. Active Clinical patients ages 6 and older *considered obese*. Broken down by gender and age groups (6 through 11, 12 through 19, 20 through 39, 40 through 59, 60 years plus).

Active Diabetic patients, defined as all Active Clinical patients diagnosed with diabetes at least one year prior to the end of the Report Period, and at least two visits in the past year, and two diabetes-related visits ever.

#### **Numerators**

Patients provided with medical nutrition therapy during the Report Period.

Patients provided specific nutrition education during the Report Period.

Patients provided specific exercise education during the Report Period.

Patients provided with other related exercise and nutrition (lifestyle) education.

## **Logic Description**

Age of the patient is calculated at beginning of Report Period.

*Diabetes:* First DM Purpose of Visit 250.00 through 250.93 recorded in the V POV file prior to the Report period.

*Overweight*: Ages 19 and older, BMI equal to or greater than (=>) 25. Overweight is defined as including both obese and overweight categories calculated by BMI.

Obese: Ages 19 and older, BMI equal to or greater than (=>) 30. For ages 18 and under, the definition is based on standard tables. CRS calculates BMI at the time the report is run, using NHANES II. For 18 and under, a height and weight must be taken on the same day any time in the year prior to the end of the Report Period. For 19 through 50, height and weight must be recorded within last five years, not required to be on the same day. For over 50, height and weight within last two years; not required to be recorded on same day.

CRS uses any of the following codes to define the numerators.

Subject Defined	CPT Codes	ICD and Other Codes
Medical nutrition therapy	97802-97804, G0270, G0271	Primary or secondary provider codes: 07, 29 Clinic codes: 67 (dietary) or 36 (WIC)
Nutrition education		V POV: V65.3 dietary surveillance and counseling Patient education codes: ending "-N" (nutrition), "-MNT" (medical nutrition therapy), (or old code "-DT" (diet)) or containing V65.3, 97802-97804, G0270, or G0271.
Exercise education		V POV: V65.41 exercise counseling Patient education codes: ending "-EX" (exercise) or containing V65.41.
Related exercise and nutrition education	S9449, S9451, S9452, S9470	Patient education codes: ending "-LA" (lifestyle adaptation) or containing "OBS-" (obesity) or 278.00 or 278.01, S9449, S9451, S9452, or S9470.

## **Key Logic Changes from CRS Version 12.0**

Added CPT codes S9449, S9451, S9452, S9470 to Related Exercise and Nutrition Education definition.

# **Patient List Description**

A list of at risk patients with education, if any.

## **Measure Source**

HP 2010 19-17

# **Measure Past Performance and Long-Term Targets for Diabetic Education**

Performance	Percent
HP 1997 data	42.0%

DU November 25, 2012 Page 160  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000										
Nutrition and Exercis	Nutrition and Exercise Education for At Risk Patient									
	REPORT PERIOD	%	PREV YR PERIOD		CHG from PREV YR %			CHG from BASE %		
# Overweight Active (	Clinical									
patients =>6			555			442				
# w/medical nutrition	•									
therapy		7.4	23	4.1	+3.2	27	6.1	+1.2		
# specific nutrition										
education provided		13.9		14.2			17.6			
# w/exercise educ	34	5.7	28	5.0	+0.6	35	7.9	-2.2		
# w/ other exec or nutrition educ	75	12.5	59	10.6	+1.9	24	5.4	+7.1		
# Male Overweight Act										
Clinical pts =>6	251		230			182				
# w/medical nutrition	ı									
therapy		7.2	8	3.5	+3.7	10	5.5	+1.7		
# specific nutrition										
education provided		14.3		13.9			15.4	-1.0		
# w/exercise educ	16	6.4	12	5.2	+1.2	16	8.8	-2.4		
# w/ other exec	11	16 2	2.2	0 6	16.0	11	6 0	.10.2		
or nutrition educ	41	10.3	22	9.6	+6.8	11	6.0	+10.3		
# Female Overweight A	Active									
Clinical pts =>6			325			260				
# w/medical nutrition	2									
therapy		7.5	15	4.6	+2.9	17	6.5	+1.0		
# specific nutrition		, . 5	13	1.0	, 2. )	± /	0.5	. 1.0		
education provided		13.5	47	14.5	-0.9	50	19.2	-5.7		

# w/exercise educ	18	5.2	16	4.9	+0.3	19	7.3	-2.1
<pre># w/ other exec or nutrition educ</pre>	34	9.8	37	11.4	-1.6	13	5.0	+4.8

Figure 2-68: Sample Report, Nutrition and Exercise Education for At Risk Patients

Nutrition and Exercise Educa	tion for A	At Risk Pa	atient (c	on't)					
TOTAL O	TOTAL OBESE ACTIVE CLINICAL POPULATION  Age Distribution								
# Obese Active Clinical	6-11	_	20-39	40-59	=>60				
CURRENT REPORT PERIOD									
<pre># Obese Active Clinical # w/medical nutrition</pre>	13	28	167	125	32				
therapy % w/medical nutrition	0	2	15	10	3				
therapy	0.0	7.1	9.0	8.0	9.4				
# # w/specific nutrition edu	cation 0	2	22	20	7				
<pre>provided % # w/specific nutrition edu</pre>	•	3	22	28	7				
provided	0.0	10.7	13.2	22.4	21.9				
<pre># w/exercise educ % w/exercise educ</pre>	0.0	1 3.6	8 4.8	14 11.2	5 15.6				
	0.0	3.0	1.0	11.2	13.0				
<pre># w/other exec or nutrition educ</pre>	0	3	18	16	7				
<pre>% w/other exec or nutrition educ</pre>	0.0	10.7	10.8	12.8	21.9				
PREVIOUS YEAR PERIOD									
# Obese Active Clinical	14	26	137	116	32				
<pre># w/medical nutrition   therapy</pre>	0	3	8	3	2				
% w/medical nutrition therapy	0.0	11.5	5.8	2.6	6.3				
# # w/specific nutrition edu	cation								
provided	0	2	19	22	7				
<pre>% # w/specific nutrition edu provided</pre>	0.0	7.7	13.9	19.0	21.9				
# w/exercise educ	0	0	4	14	4				
% w/exercise educ	0.0	0.0	2.9	12.1	12.5				
# w/other exec or nutrition educ	0	2	13	23	3				
% w/other exec or									
nutrition educ	0.0	7.7	9.5	19.8	9.4				
CHANGE FROM PREV YR % medical nutrition									
therapy	+0.0 +0.0	-4.4	+3.1 -0.7	+5.4	+3.1				
Spec nutr ed w/exercise educ	+0.0	+3.0 +3.6	-0.7 +1.9	+3.4	+0.0 +3.1				
w/other exec or									

|--|

Figure 2-69: Sample Age Breakout Report, Nutrition and Exercise Education for At Risk Patients

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Nutrition and Exercise Education for At Risk Patients: List of at risk patients, with education if any. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR \_\_\_\_\_\_ PATIENT1, SANDRA KAY

AC-OW, AC-OB

PATIENT2, CAITLYN

AC-OW

PATIENT3, BRITNEY

AC-OW, AC-OB

PATIENT4, LORETTA

AC-OW, AC-OB

PATIENT5, HALEY

AC-OW AC-OB

O00001 COMMUNITY #1 F 21

D00002 COMMUNITY #1 F 22

MNT: 03/04/12 Prv 29

NUTR: 05/07/12 HTN-N S

D00005 COMMUNITY #1 F 25 NUTR: 03/15/12 UTI-N SN NUTR: 05/07/12 HTN-N SN; EXER ED: 05/07/12 HTN-EX AC-OW, AC-OB PATIENT6, BRITTANY 000006 COMMUNITY #1 F 25 AC-OW, AC-OB EXER ED: 01/15/12 278.00-EX; LIFE: 01/15/12 278.00-EX

Figure 2-70: Sample Patient List, Nutrition, and Exercise Education for At Risk Patients

# 2.8.4 Physical Activity Assessment

#### **Denominators**

Active Clinical patients ages 5 and older. Broken down by gender and age groups (5 through 11, 12 through 19, 20 through 24, 25 through 34, 35 through 44, 45 through 54, 55 through 74, greater than (>)75).

Numerator 1 (Active Clinical Patients assessed for physical activity during the Report Period). Broken down by gender and age groups (5 through 11, 12 through 19, 20 through 24, 25 through 34, 35 through 44, 45 through 54, 55 through 74, greater than (>)75).

User Population patients ages 5 and older. Broken down by gender.

Numerator 1 (User Population Patients assessed for physical activity during the Report Period). Broken down by gender.

#### **Numerators**

Patients assessed for physical activity during the Report Period.

Patients from Numerator 1 who have received exercise education following their physical activity assessment.

## **Logic Description**

Age of the patient is calculated at beginning of Report Period.

CRS uses any of the following codes to define the numerators.

Subject Defined	ICD and Other Codes
Physical Activity Assessment	<b>Health Factors</b> : Any health factor for category Activity Level documented during the Report Period.
Exercise education	V POV: V65.41 exercise counseling
	Patient education codes: ending "-EX" (exercise) or containing V65.41.

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of patients with physical activity assessment and any exercise education.

DU November 25, 2012 Page 171  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Physical Activity As	sessment							
	REPORT PERIOD				CHG from PREV YR %			CHG from BASE %
Active Clinical Pts 5 and older	1,357		1,031			911		
<pre># w/ physical activi assessment # w/ exercise educ</pre>	19	1.4	0	0.0	+1.4	0	0.0	+1.4
<pre>w/ % of physical ac assessment</pre>	-	21.1	0	0.0	+21.1	0	0.0	+21.1
Male Active Clinical =>5	570		430			374		
# w/ physical activi	ty							

assessment 7 # w/ exercise educ	1.2	0	0.0	+1.2	0	0.0	+1.2	
<pre>w/ % of physical activity assessment 1</pre>	14.3	0	0.0	+14.3	0	0.0	+14.3	
Female Active Clinical =>5 787		601			537			
<pre># w/ physical activity assessment 12 # w/ exercise educ w/ % of physical activity</pre>	1.5	0	0.0	+1.5	0	0.0	+1.5	
assessment 3	25.0	0	0.0	+25.0	0	0.0	+25.0	
User Pop ages 5 and older 2,592		2,142			2,025			
# w/ exercise educ	0.7	0	0.0	+0.7	0	0.0	+0.7	
<pre>w/ % of physical activity assessment 4</pre>	21.1	0	0.0	+21.1	0	0.0	+21.1	
Male User Pop Pts =>5 1,211		988			945			
# w/ exercise educ	0.6	0	0.0	+0.6	0	0.0	+0.6	
<pre>w/ % of physical activity assessment 1</pre>	14.3	0	0.0	+14.3	0	0.0	+14.3	
Female User Pop Pts =>5 1,381		1,154			1,080			
# w/ exercise educ	0.9	0	0.0	+0.9	0	0.0	+0.9	
<pre>w/ % of physical activity assessment 3</pre>	25.0	0	0.0	+25.0	0	0.0	+25.0	

Figure 2-71: Sample Report, Physical Activity Assessment

Physical Activity Assessment (con't)									
	TOTAL	ACTIVE		AL5 AND Distri	_				
	5-11	12-19	_			45-54	55-74	>74 yrs	
CURRENT REPORT PERIOD	120	1 - 7	122	222	015	216	225	4.6	
Total # AC Pts =>5 # w/ physical activity	132	15/	133	233	215	216	225	46	
assessment % w/ physical activity	2	6	3	1	2	0	3	2	
assessment	1.5	3.8	2.3	0.4	0.9	0.0	1.3	4.3	
# w/ exercise educ w/ % of physical activit	У								

assessment	1	2	1	0	0	0	0	0	
% w/ exercise educ w/									
% of physical activit	_								
assessment	50.0	33.3	33.3	0.0	0.0	0.0	0.0	0.0	
PREVIOUS YEAR PERIOD									
Total # AC Pts =>5	141	137	128	172	151	140	137	25	
# w/ physical activity									
assessment	0	0	0	0	0	0	0	0	
% w/ physical activity									
assessment	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
# w/ exercise educ w/									
% of physical activit	ГУ								
assessment	0	0	0	0	0	0	0	0	
% w/ exercise educ w/									
% of physical activit	-								
assessment	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
CHANGE FROM PREV YR %									
# w/ physical activity									
assessment	±1 E	±2 0	+2.3	+0 4	+0 0	+0.0	+1.3	+4.3	
w/ exercise educ w/	T1.3	+3.0	<b>⊤∠.</b> 3	TU.4	+0.9	+0.0	TI.3	⊤ <b>1.</b> 3	
% of physical activit	- 37								
assessment	-	+33 3	+33 3	+0 0	+0 0	+0 0	+0 0	+0 0	
abbebbillette	. 50.0	, 55.5	, 55.5	. 0 . 0		10.0			

Figure 2-72: Sample Age Breakout Report, Physical Activity Assessment

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Physical Activity Assessment: List of patients with physical activity assessment and any exercise education. PATIENT NAME HRN COMMUNITY
DENOMINATOR PATIENT NAME SEX AGE PATIENT1, MISTY DAWN 000001 COMMUNITY #1 F 5 PHYS ACT: 08/08/12 VERY ACTIVE; EXER ED: 08/08/12 OBS-UP,AC PATIENT2, RITA ANN 000002 COMMUNITY #1 F 15 UP,AC PHYS ACT: 03/06/12 SOME ACTIVITY; EXER ED: 03/06/12 TO-EX PATIENT3, RHONDA SUE 000003 COMMUNITY #1 F 22
UP, AC PHYS ACT: 04/02/12 ACT
PATIENT4, MARY 000004 COMMUNITY #1 F 28 PHYS ACT: 04/02/12 ACTIVE; EXER ED: 04/02/12 V65.41 UP,AC PHYS ACT: 12/12/12 SOME ACTIVITY; PATIENT5, JOSEPH HENRY 000005 COMMUNITY #1 M 12 PHYS ACT: 08/02/12 SOME ACTIVITY; UP,AC PHYS ACT: 08/02/12 SO 000006 COMMUNITY #1 M 17 PATIENT6, BOB PHYS ACT: 05/05/12 INACTIVE; EXER ED: 05/05/12 OBS-EX UP,AC

Figure 2-73: Sample Patient List, Physical Activity Assessment

# 2.8.5 Comprehensive Health Screening

#### **Denominators**

Active Clinical patients ages 2 and older.

Active Clinical patients ages 12 to 75.

Active Clinical patients ages 18 and older.

Female Active Clinical patients ages 15 through 40.

Active Clinical patients ages 5 and older.

Active Clinical patients ages 2 through 74.

Active Clinical patients ages 20 and over.

Active Clinical patients ages 5 and older.

#### **Numerators**

ALL Comprehensive Health Screening: Patients with Comprehensive Health Screening for which they are eligible, defined as having alcohol, depression, and Intimate Partner Violence/Domestic Violence (IPV/DV) screening, BMI calculated, and tobacco use, BP, and physical activity assessed.

**Note**: This does *not* include refusals.

Comprehensive Health Screening: Patients with Comprehensive Health Screening minus physical activity assessment for which they are eligible, defined as having alcohol, depression, and IPV/DV screening, BMI calculated, and tobacco use and BP assessed.

**Note**: This does *not* include physical activity assessment and does *not* include refusals.

Alcohol Screening: Patients screened for alcohol use or had an alcohol-related diagnosis or procedure during the Report Period.

**Note**: This numerator does *not* include refusals or alcohol-related patient education.

Depression Screening: Patients screened for depression or diagnosed with a mood disorder at any time during the Report Period.

**Note**: This numerator does *not* include refusals.

IPV/DV Screening: Patients screened for IPV/DV at any time during the Report Period.

**Note**: This numerator does *not* include refusals.

Tobacco Use Assessed: Patients who have been screened for tobacco use during the Report period.

BMI Available: Patients for whom a BMI could be calculated.

**Note**: This numerator does *not* include refusals.

BP Assessed: Patients with BP value documented at least twice in prior two years.

Physical Activity Assessed: Patients assessed for physical activity during the Report Period.

## **Logic Description**

Age of the patient is calculated at beginning of Report Period.

Alcohol screening definition: Any of the following during the Report Period: (a) Alcohol Screening Exam, any CAGE Health Factor, or Screening Diagnosis; (b) Alcohol-related diagnosis in POV, Current PCC or BHS Problem List; (c) Alcohol-related procedure; or (d) Patient education.

Subject Defined	ICD and Other Codes
Alcohol Screening	PCC Exam Code: 35
	<b>CPT code:</b> 99408, 99409, G0396, G0397, H0049, H0050, 3016F
	Any CAGE Health Factor
	V POV: V11.3 (history of alcoholism), V79.1 (screening for
	alcoholism)
	BHS Problem Code: 29.1 (Screening for Alcoholism)
	V Measurement in PCC or BHS: AUDT, AUDC, or CRFT
Alcohol-related	V POV, Current PCC or BHS Problem List: 303.*, 305.0*,
Diagnosis	291.*, 357.5*
	BHS POV: 10, 27, 29
Alcohol-related Procedure	<b>V Procedure:</b> 94.46, 94.53, 94.61-94.63, 94.67-94.69

Alcohol screening may be documented with either an exam code or the CAGE health factor in PCC or BHS. BHS problem codes can also currently be used.

Depression screening definition: CRS uses the following codes to define the numerator.

Subject Defined	ICD and Other Codes
Depression Screening	V Exam: Exam Code 36
	<b>V POV:</b> V79.0
	<b>CPT:</b> 1220F
	BHS Problem Code: 14.1 (Screening for Depression)
	V Measurement in PCC or BHS: PHQ2 or PHQ9
Mood Disorders	At least two visits in PCC or BHS for: Major Depressive Disorder, Dysthymic Disorder, Depressive Disorder NOS, Bipolar I or II Disorder, Cyclothymic Disorder, Bipolar Disorder NOS, Mood Disorder Due to a General Medical Condition, Substance-induced Mood Disorder, or Mood Disorder NOS.  V POV: 296.*, 291.89, 292.84, 293.83, 300.4, 301.13, or 311 BHS POV: 14, 15

IPV/DV screening definition: CRS uses the following codes to define the numerator.

Subject Defined	ICD and Other Codes
IPV/DV Screening	V Exam: Code 34
	BHS Exam: IPV/DV
IPV/DV Diagnosis	<b>V POV or current PCC or BHS Problem List:</b> 995.80-995.83, 995.85, V15.41, V15.42, V15.49 <b>BHS POV:</b> 43.*, 44.*
IPV/DV Education	<b>Patient education codes:</b> "DV-" or "-DV", 995.80-83, 995.85, V15.41, V15.42, or V15.49
IPV/DV Counseling	<b>V POV:</b> V61.11

Tobacco screening definition: CRS uses the following codes to define the numerator.

Subject Defined	CPT Codes	ICD and Other Codes
Screened for Tobacco Use	D1320, 99406, 99407, G0375 (old code), G0376 (old code), G8455-G8457 (old codes), G8402 (old code), G8453 (old code), 1034F (Current Tobacco Smoker), 1035F (Current Smokeless Tobacco User), 1036F (Current Tobacco Non-User), 1000F (Tobacco Use Assessed)	V POV or current Active Problem List: 305.1, 305.1* (old codes), 649.00-649.04, V15.82 Patient Education codes: "TO-", "-TO", "-SHS", 305.1, 305.1* (old codes), 649.00-649.04, V15.82, D1320, 99406, 99407, G0375 (old code), G0376 (old code), 1034F, 1035F, 1036F, 1000F, G8455-G8457 (old codes), G8402 (old code), or G8453 (old code) Dental code: 1320 Health Factor categories: Tobacco, TOBACCO (SMOKING), TOBACCO (SMOKING), TOBACCO (SMOKELESS – CHEWING/DIP), or TOBACCO (EXPOSURE)

BMI calculation definition: CRS calculates BMI at the time the report is run, using NHANES II. For 18 and under, a height and weight must be taken on the same day any time during the report period. For 19 through 50, height and weight must be recorded within last five years, not required to be on the same day. For over 50, height and weight within last two years, not required to be recorded on same day.

Blood pressure definition: CRS uses mean of last three Blood Pressures documented on non-ER visits in the past two years. If three BPs are not available, uses mean of last two non-ER BPs. If a visit contains more than one BP, the lowest BP will be used, defined as having the lowest systolic value. The mean Systolic value is calculated by adding the last three (or two) systolic values and dividing by three (or two). The mean Diastolic value is calculated by adding the diastolic values from the last three (or two) blood pressures and dividing by three (or two). If the systolic and diastolic values do not both meet the current category, then the value that is least controlled determines the category.

If CRS is not able to calculate a mean BP, it will search for CPT 0001F, 2000F, 3074F through 3080F or POV V81.1 documented on a non-ER visit during the Report Period.

Physical Activity Assessment definition: CRS uses the following codes to define the numerator.

Subject Defined	ICD and Other Codes
Physical Activity	Health Factors: Any health factor for category Activity Level
Assessment	documented during the Report Period.

# **Key Logic Changes from CRS Version 12.0**

None

# **Patient List Description**

List of patients with assessments received, if any.

DU *** IHS 2012	Selected	Measu		Commur		fied Repo		age 181 **	
DEMO INDIAN HOSPITAL Report Period: Jan 01, 2012 to Dec 31, 2012 Previous Year Period: Jan 01, 2011 to Dec 31, 2011 Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Comprehensive Health	Screenin								
					CHG from PREV YR %				
Active Clinical ages 2 and older			1,121			1,007			
<pre># w/ Comprehensive H    Screening-No    Refusals # w/ Comprehensive H    Screening-No Refusa</pre>	56 ealth	3.9	39	3.5	+0.4	40	4.0	-0.1	
or Phys Activity		4.6	46	4.1	+0.5	53	5.3	-0.6	
Active Clinical ages 12-75	1,180		867			753			
<pre># w/ alcohol screeni Dx/Proc/-No Refusal or Pt Ed</pre>	s	8.1	12	1.4	+6.7	3	0.4	+7.7	
Active Clinical => 18	1,112		793			666			
# w/ Depression scre or Mood Disorder Dx No Refusals	:-	7.3	42	5.3	+2.0	17	2.6	+4.7	
# Female Active Clinical ages 15-40	380		311			267			
# w/IPV/DV screening No Refusals		2.9	1	0.3	+2.6	0	0.0	+2.9	
# Active Clinical Pts =>5	1,357		1,031			911			

640 8 478 74.7 -14.5
911

Figure 2-74: Sample Report, Comprehensive Health Screening

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Comprehensive Health Screening: List of patients with assessments received, if any. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT1,SANDRA KAY 000001 COMMUNITY #1 F 15 ALL COMP HEALTH: ALC: 03/06/12 POV V11.3; IPV: 03/06/12 Ex 34; TOB: 09/05/12 NEVER SMOKED; BMI: 17.49; PHYS ACT: 03/06/12 SOME ACTIVITY PATIENT2, CAITLYN 000002 COMMUNITY #1 F 16 PATIENT3, BRITNEY 000003 COMMUNITY #1 F 16 TOB: 10/26/12 CESSATION-SMOKER PATIENT4, LORETTA 000004 COMMUNITY #1 F 17 ALC: 10/14/12 HF CAGE 1/4 PATIENT5, HALEY 000005 COMMUNITY #1 F 18 BMI: 19.79; BP: 125/67 PATIENT6, BRITTANY 000006 COMMUNITY #1 F 19 ALC: 10/30/12 CPT G0397; TOB: 08/11/12 CURRENT SMOKER, STATUS UNKNOWN; BMI: 21.01

Figure 2-75: Sample Patient List, Comprehensive Health Screening

## 2.8.6 Cardiovascular Disease and Cholesterol Screening

#### **Denominators**

Active Clinical patients ages 23 and older. Broken down by gender.

User Population patients ages 23 and older. Broken down by gender.

Active IHD patients, defined as all Active Clinical patients diagnosed with ischemic heart disease (IHD) prior to the Report Period, and at least two visits during the Report Period, and two IHD-related visits ever. Broken down by gender.

#### **Numerators**

Patients with documented blood total cholesterol screening any time in the past five years.

a. Patients with high total cholesterol levels, defined as equal to or greater than (=>) 240

Patients with LDL completed in the past five years, regardless of result.

- a. Patients with LDL less than or equal to (<=)100
- b. Patients with LDL 101 through 130
- c. Patients with LDL 131 through 160
- d. Patients with LDL greater than (>)160

## **Logic Description**

Age is calculated at the beginning of the Report Period.

CRS uses the following codes to define the IHD denominator.

Subject Defined	ICD and Other Codes
Ischemic Heart Disease	<b>V POV</b> : 410.0-412.*, 414.0-414.9, 429.2

Total Cholesterol definition: Searches for most recent cholesterol test with a result during the Report Period. If more than one cholesterol test is found on the same day and/or the same visit and one test has a result and the other does not, the test with the result will be used. If a cholesterol test with a result is not found, CRS searches for the most recent cholesterol test without a result.

LDL Cholesterol definition: Searches for most recent LDL test with a result during the Report Period. If more than one LDL test is found on the same day and/or the same visit and one test has a result and the other does not, the test with the result will be used. If an LDL test with a result is not found, CRS searches for the most recent LDL test without a result.

CRS uses the following codes to define LDL and total cholesterol.

Subject Defined	CPT Codes	LOINC Codes	Taxonomy
LDL	80061, 83700, 83701, 83704, 83715 (old code), 83716 (old code), 83721, 3048F, 3049F, 3050F	Yes	DM AUDIT LDL CHOLESTEROL TAX
	For numerator LDL equal to or less than (=<)100, CPT 3048F will count as meeting the measure.		
Total Cholesterol	82465	Yes	DM AUDIT CHOLESTEROL TAX

## **Key Logic Changes from CRS Version 12.0**

- 1. Added codes 11054-4, 13459-3, 14155-6, 16615-7, 16616-5, 43394-6, 44711-0, 44915-7, 50193-2, 53133-5, 56036-7 to LOINC taxonomy for LDL.
- 2. Added code 9342-7 to LOINC taxonomy for Total Cholesterol.

## **Patient List Description**

List of patients with cholesterol or LDL value, if any.

#### **Measure Source**

HP 2020 HDS-6, HDS-7

#### Measure Past Performance and Long-Term Targets

Performance	Percent
IHS FY 2006 Performance (blood total cholesterol screening)	48.0%
IHS FY 2005 Performance (blood total cholesterol screening)	43.0%
HP 1998 baseline	67.0%
HP 2020 goal for adults who have had blood cholesterol checked (HDS-6)	82.1%
HP 2020 goal for adults with high cholesterol (HDS-7)	13.5%

```
DU November 25, 2012 Page 185

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000
```

Cardiovascular Disease	and C	holest	erol Scre	enina				
				J	_			
	REPORT	%	PREV YR PERIOD	%	CHG from PREV YR %		%	CHG from BASE %
Active Clinical Pts => 23	986		676			569		
# w/ Total Cholesterol screen w/in 5 yrs A. # w/ High Chol =>24 w/ % of Total Chol	248	25.2	217	32.1	-6.9	201	35.3	-10.2
Screen # w/LDL done	21	8.5	23	10.6	-2.1	28	13.9	-5.5
in past 5 yrs A. # w/LDL =<100	251	25.5	185	27.4	-1.9	114	20.0	+5.4
w/ % of Total LDL Screen B. # w/LDL 101-130	108	43.0	95	51.4	-8.3	46	40.4	+2.7
<pre>w/ % of Total LDL Screen C. # w/LDL 131-160</pre>	73	29.1	44	23.8	+5.3	35	30.7	-1.6
<pre>w/ % of Total LDL Screen D. # w/LDL &gt;160</pre>	25	10.0	25	13.5	-3.6	13	11.4	-1.4
w/ % of Total LDL Screen	15	6.0	9	4.9	+1.1	10	8.8	-2.8
Male Active Clinical Pts =>23	408		272			220		
<pre># w/ Total Cholestero:     screen w/in 5 yrs A. # w/ High Chol =&gt;24     w/ % of Total Chol</pre>	106	26.0	97	35.7	-9.7	85	38.6	-12.7
Screen # w/LDL done	11	10.4	14	14.4	-4.1	8	9.4	+1.0
in past 5 yrs A. # w/LDL =<100	115	28.2	91	33.5	-5.3	59	26.8	+1.4
<pre>w/ % of Total LDL Screen B. # w/LDL 101-130</pre>	53	46.1	45	49.5	-3.4	23	39.0	+7.1
<pre>w/ % of Total LDL Screen C. # w/LDL 131-160</pre>	25	21.7	18	19.8	+2.0	18	30.5	-8.8
<pre>w/ % of Total LDL Screen D. # w/LDL &gt;160</pre>	8	7.0	12	13.2	-6.2	5	8.5	-1.5
w/ % of Total LDL Screen	10	8.7	8	8.8	-0.1	4	6.8	+1.9

Figure 2-76: Sample Report, CVD and Cholesterol Screening

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

```
Cardiovascular Disease and Cholesterol Screening: List of patients with
cholesterol or LDL value if any.
PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR
PATIENT100, JASON AARON 000100 COMMUNITY #1 M 46
PATIENT101, JOHN THOMAS 000101 COMMUNITY #1 M 47
PATIENT102, DAKOTA CHEY 000102 COMMUNITY #1 M 47
PATIENT103, TRAVIS CLINT 000103 COMMUNITY #1 M 47
                           CHOL 04/13/12 210
PATIENT104, TRACY MITCHE 000104 COMMUNITY #1 M 47
UP, AC, IHD
                            CHOL 03/15/12 167; LDL 08/15/12 105
PATIENT105, RUSSELL DALE 000105 COMMUNITY #1 M 48
                           LDL 04/01/12 CPT 3048F
PATIENT106, CURTIS DWAYN 000106 COMMUNITY #1 M 49
UP,AC CHOL 03/04/09 139; LDL 06/04/10 68 PATIENT107,RONALD 000107 COMMUNITY #1 M 49
UP,AC
        CHOL 01/07/08 213; LDL 08/01/11 122
```

Figure 2-77: Sample Patient List, CVD and Cholesterol Screening

#### 2.8.7 Cardiovascular Disease and Blood Pressure Control

#### **Denominators**

All Active Clinical patients ages 20 and over. Broken down by gender.

All *User Population patients* ages 20 and older. Broken down by gender.

Active IHD patients, defined as all Active Clinical patients diagnosed with IHD prior to the Report Period, and at least two visits during the Report Period, and two IHD-related visits ever. Broken down by gender.

#### **Numerators**

Patients with Blood Pressure value documented at least twice in prior two years.

- a. Patients with normal BP, defined as < 120/80, i.e., the mean systolic value is less than (<) 120 *and* the mean diastolic value is less than (<) 80.
- b. Patients with Pre Hypertension I BP, defined as equal to or greater than (=>) 120/80 and less than (<) 130/80, i.e., the mean systolic value is equal to or greater than (=>) 120 and less than (<) 130 *and* the mean diastolic value is equal to 80.
- c. Patients with Pre Hypertension II BP, defined as equal or greater than (=>) 130/80 and less than (<)140/90, i.e., the mean systolic value is equal to or greater than (=>) 130 and less than (<) 140 *and* the mean diastolic value is equal to or greater than (=>) 80 and less than (<) 90.

- d. Patients with Stage 1 Hypertension BP, defined as equal to or greater than (=>) 140/90 and less than (<)160/100, i.e., the mean systolic value is equal to or greater than (=>) 140 and less than (<) 160 *and* the mean diastolic value is equal to or greater than (=>) 90 and less than (<) 100.
- e. Patients with Stage 2 Hypertension BP, defined as equal to or greater than (=>) 160/100, i.e., the mean systolic value is equal to or greater than (=>) 160 and the mean diastolic value is equal to or greater than (=>) 100.

## **Logic Description**

Age of the patient is calculated at beginning of the Report Period.

Blood pressure definition: CRS uses mean of last three Blood Pressures documented on non-ER visits in the past two years. If three BPs are not available, uses mean of last two non-ER BPs. If a visit contains more than one BP, the lowest BP will be used, defined as having the lowest systolic value. The mean Systolic value is calculated by adding the last three (or two) systolic values and dividing by three (or two). The mean Diastolic value is calculated by adding the diastolic values from the last three (or two) blood pressures and dividing by three (or two). If the systolic and diastolic values do not both meet the current category, then the value that is least controlled determines the category.

For the BP documented numerator only, if CRS is not able to calculate a mean BP, it will search for CPT 0001F, 2000F, 3074F through 3080F or POV V81.1 documented on a non-ER visit during the Report Period.

CRS uses the following codes to define the IHD numerator.

Subject Defined	ICD and Other Codes
Ischemic Heart Disease	<b>V POV</b> : 410.0-412.*, 414.0-414.9, 429.2

## **Key Logic Changes from CRS Version 12.0**

None

# **Patient List Description**

List of Patients equal to or greater than (=>) 20 or who have IHD with BP value, if any.

#### **Measure Source**

HP 2020 HDS-5

# **Measure Past Performance and Long-Term Targets**

Measure	Percent
HP 2020 goal for adults with high blood pressure (140/90)	26.9%

DU November 25, 2012 Page 196  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011													
				1 to Dec 3: to Dec 31,									
Cardiovascular Disease and	Blood I	Pressure C	ontro	1									
REPORT PERIOI				CHG from PREV YR %									
Active Clinical Patients ages 20 and older 1,068	3	753			640								
# w/ BPs documented w/in 2 yrs 643 A. # w/Normal BP w/ %	8 60.2	557	74.0	-13.8	478	74.7	-14.5						
of Total Screened 128	19.9	134	24.1	-4.2	121	25.3	-5.4						
B. # w/Pre HTN I BP w/ % of Total Screened 107 C. # w/Pre HTN II BP w/ %		115	20.6	-4.0	83	17.4	-0.7						
of Total Screened 148 D. # w/Stage 1 HTN BP w/	23.0	114	20.5	+2.6	105	22.0	+1.1						
% of Total Screened 173 E. # w/Stage 2 HTN BP w/ %	26.9	150	26.9	+0.0	130	27.2	-0.3						
of Total Screened 37		39	7.0	-1.2	39	8.2	-2.4						
Male Active Clinical Patients ages 20 and older 432 293 241													
# w/ BPs documented	F2 F	202	60.3	15.0	1 7 7	72.4	20.0						
w/in 2 yrs 231 A. # w/Normal BP w/ %						73.4							
of Total Screened 8 B. # w/Pre HTN I BP w/ %						12.4							
of Total Screened 27 C. # w/Pre HTN II BP w/ %					22								
of Total Screened 64 D. # w/Stage 1 HTN BP w/													
% of Total Screened 89 E. # w/Stage 2 HTN BP w/ %				-0.4		35.6							
of Total Screened 16		17	8.4	-1.4	25	14.1	-7.2						
Female Active Clinical Pati ages 20 and older 636		460			399								
# w/ BPs documented w/in 2 yrs 412 A. # w/Normal BP w/ %	2 64.8	354	77.0	-12.2	301	75.4	-10.7						
of Total Screened 120	29.1	111	31.4	-2.2	99	32.9	-3.8						

80	19.4	78	22.0	-2.6	61	20.3	-0.8
84	20.4	68	19.2	+1.2	60	19.9	+0.5
84	20.4	71	20.1	+0.3	67	22.3	-1.9
용							
21	5.1	22	6.2	-1.1	14	4.7	+0.4
	84 84 %	84 20.4 84 20.4 %	84 20.4 68 84 20.4 71 %	84 20.4 68 19.2 84 20.4 71 20.1 %	84 20.4 68 19.2 +1.2 84 20.4 71 20.1 +0.3 %	84 20.4 68 19.2 +1.2 60 84 20.4 71 20.1 +0.3 67 %	84 20.4 68 19.2 +1.2 60 19.9 84 20.4 71 20.1 +0.3 67 22.3

Figure 2-78: Sample Report, CVD and Blood Pressure Control

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Cardiovascular Disease and Blood Pressure Control: List of Patients => 20 or who have IHD with BP value, if any. DENOMINATOR HRN PATIENT NAME COMMUNITY SEX AGE NUMERATOR PATIENT1, SANDRA KAY 000001 COMMUNITY #1 F 21 UP,AC PATIENT2, EVELYN 000002 COMMUNITY #1 F 21 /3080F UP /308UF
PATIENT3, MICHELLE 000003 COMMUNITY #1 F 22 UP,AC 125/67 PRE HTN 1
PATIENT4,CAITLYN 000004 COMMUNITY #1 F 22
UP,AC,IHD 131/67 PRE HTN 2
PATIENT5,BRITNEY JANE 000005 COMMUNITY #1 F 22 UP,AC 125/67 PRE HTN 1 UP,AC \$102/56\$ NORMAL PATIENT6,KATHRYN ANNE 000006 COMMUNITY #1  $$\tt F$$  22102/56 NORMAL UP,AC 161/90 STG 2 HTN
PATIENT7,RHONDA 000007 COMMUNITY #1 F 22 153/85 STG 1 HTN UP,AC

Figure 2-79: Sample Patient List, CVD and Blood Pressure Control

## 2.8.8 Controlling High Blood Pressure

#### **Denominator**

Active Clinical patients ages 18 through 85 diagnosed with hypertension and no documented history of ESRD. Broken down by gender and age groups (18 through 45 and 46 through 85).

#### **Numerators**

Number of patients with Blood Pressure value documented during the Report Period.

f. Patients with *normal blood pressure*, defined as less then (<) 120/80; that is, the mean systolic value is less than (<) 120 and the mean diastolic value is less than (<) 80.

- g. Patients with *Pre Hypertension I BP*, defined as equal to or greater than (=>) 120/80 and less than (<) 130/80, that is, the mean systolic value is equal to or greater than (=>) 120 and less than (<) 130 *and* the mean diastolic value is equal to 80.
- h. Patients with *Pre Hypertension II BP*, defined as equal to or greater than (=>) 130/80 and less than (<)140/90; that is, the mean systolic value is equal to or greater than (=>) 130 and less than (<) 140 *and* the mean diastolic value is equal to or greater than (=>) 80 and less than (<) 90.
- i. Patients with *Stage 1 Hypertension* Blood Pressure (BP), defined as equal to or greater than (=>) 140/90 and less than (<)160/100; that is, the mean systolic value is equal to or greater than (=>) 140 and less than (<) 160 and the mean diastolic value is equal to or greater than (=>) 90 and less than (<) 100.
- j. Patients with *Stage 2 Hypertension BP*, defined as equal to or greater than (=>) 160/100; that is, the mean systolic value is equal to or greater than (=>) 160 *and* the mean diastolic value is equal to or greater than (=>) 100.

#### **Logic Description**

Age of the patient is calculated at beginning of the Report Period.

Blood pressure definition: CRS uses mean of last three BPs documented on non-ER visits during the Report Period. If three BPs are not available, uses mean of last two non-ER BPs. If a visit contains more than one BP, the lowest BP will be used, defined as having the lowest systolic value. The mean Systolic value is calculated by adding the last three (or two) systolic values and dividing by three (or two). The mean Diastolic value is calculated by adding the diastolic values from the last three (or two) blood pressures and dividing by three (or two). If the systolic and diastolic values do not both meet the current category, then the value that is least controlled determines the category.

For the BP documented numerator only, if CRS is not able to calculate a mean BP, it will search for CPT 0001F, 2000F, 3074F through 3080F or POV V81.1 documented on non-ER visit during the Report Period.

CRS uses the following codes to define ESRD and hypertension.

Subject Defined	CPT Codes	ICD and Other Codes
ESRD	36145, 36147, 36800, 36810, 36815, 36818, 36819, 36820, 36821, 36831 through 36833, 50300, 50320, 50340, 50360, 50365, 50370, 50380, 90951 through 90970 or old codes 90918-90925, 90935, 90937, 90939 (old code), 90940, 90945, 90947, 90989, 90993, 90997, 90999, 99512, G0257, G0308- G0327 (old codes), G0392 (old code), G0393 (old code), or S9339	<b>V POV</b> : 585.5, 585.6, V42.0, V45.1, (old code), V45.11, V45.12, or V56.* <b>V Procedure</b> : 38.95, 39.27, 39.42, 39.43, 39.53, 39.93-39.95, 54.98, or 55.6*
Hypertension		V POV or Problem List Prior to the Report Period and at Least One Hypertension POV during Report Period: 401.*

# **Key Logic Changes from CRS Version 12.0**

None

# **Patient List Description**

List of patients with hypertension and BP value, if any.

#### **Measure Source**

HP 2020 HDS-5, HDS-12

## **Measure Past Performance and Long-Term Targets**

Measure	Percent
HP 2020 goal for adults with high blood pressure (140/90)	26.9%
HP 2020 goal for adults with high blood pressure and whose blood pressure is controlled	61.2%

```
DU November 25, 2012 Page 200

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000

Controlling High Blood Pressure
```

REP PER		%	PREV YR PERIOD	%	CHG from PREV YR %		%	CHG from BASE %
Active Clinical Pts 18-85 w/HTN dx	108		101			91		
# w/ BPs								
documented A. # w/Normal BP w/ %	96	88.9	92	91.1	-2.2	85	93.4	-4.5
of Total Screened B. # w/Pre HTN I BP w/ %	5	5.2	6	6.5	-1.3	3	3.5	+1.7
of Total Screened C. # w/Pre HTN II BP w/	8	8.3	13	14.1	-5.8	8	9.4	-1.1
% of Total Screened D. # w/Stage 1 HTN BP w/	23	24.0	17	18.5	+5.5	19	22.4	+1.6
% of Total Screened	36	37.5	41	44.6	-7.1	42	49.4	-11.9
E. # w/Stage 2 HTN BP w/ % of Total Screened		10.4	15	16.3	-5.9	13	15.3	-4.9
A. Active Clinical Pts 18-45 w/HTN dx	23		19			13		
# w/ BPs								
documented A. # w/Normal BP w/ %	17	73.9	16	84.2	-10.3	11	84.6	-10.7
of Total Screened  B. # w/Pre HTN I BP w/ %		11.8	2	12.5	-0.7	0	0.0	+11.8
of Total Screened	1	5.9	1	6.3	-0.4	1	9.1	-3.2
C. # w/Pre HTN II BP w/ % of Total Screened	3	17.6	2	12.5	+5.1	2	18.2	-0.5
D. # w/Stage 1 HTN BP w/ % of Total Screened	7	41.2	6	37.5	+3.7	7	63.6	-22.5
E. # w/Stage 2 HTN BP w/ % of Total Screened	2	11.8	5	31.3	-19.5	1	9.1	+2.7
B. Active Clinical Pts								
46-85 w/HTN dx	85		82			78		
# w/ BPs documented	79	92.9	76	92.7	+0.3	74	94.9	-1.9
A. # w/Normal BP w/ % of Total Screened	3	3.8	4	5.3	-1.5	3	4.1	-0.3
B. # w/Pre HTN I BP w/ % of Total Screened	7	8.9	12	15.8	-6.9	7	9.5	-0.6
C. # w/Pre HTN II BP w/ % of Total Screened	20	25.3	15	19.7	+5.6	17	23.0	+2.3
D. # w/Stage 1 HTN BP w/								
% of Total Screened E. # w/Stage 2 HTN BP w/	29	36.7	35	46.1	-9.3	35	47.3	-10.6
% of Total Screened	8	10.1	10	13.2	-3.0	12	16.2	-6.1

Figure 2-80: Sample Report, Controlling High Blood Pressure

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
Controlling High Blood Pressure: List of patients with hypertension and BP value, if any.

PATIENT NAME HRN COMMUNITY SEX AGE
DENOMINATOR NUMERATOR

PATIENT1,STELLA LYNN 000001 COMMUNITY #1 F 46
HTN PT 156/82 STG 1 HTN
PATIENT2,TARA 000002 COMMUNITY #1 F 51
HTN PT 201/87 STG 2 HTN
PATIENT3,BOBBIE 000003 COMMUNITY #1 F 52
HTN PT 3074F/
PATIENT4,DARLENE 000004 COMMUNITY #1 F 54
HTN PT 139/73 PRE HTN 2
PATIENT5,NADINE 000005 COMMUNITY #1 F 61
HTN PT 159/86 STG 1 HTN
```

Figure 2-81: Sample Patient List, Controlling High Blood Pressure

# 2.8.9 Comprehensive CVD-Related Assessment

#### **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 40.6% for the proportion of atrisk patients who have a comprehensive assessment.

#### **Denominators**

Active IHD patients ages 22 and older, defined as all Active Clinical patients diagnosed with IHD prior to the Report Period, and at least two visits during the Report Period, and two IHD-related visits ever. (GPRA Denominator)

- a. Active IHD patients ages 22 and older who are not Active Diabetic
- b. Active IHD patients ages 22 and older who are Active Diabetic

#### **Numerators**

*BP Assessed:* Patients with Blood Pressure value documented at least twice in prior two years.

LDL Assessed: Patients with LDL completed in past five years, regardless of result.

*Tobacco Use Assessed:* Patients who have been screened for tobacco use during the Current Report period.

BMI Available: Patients for whom a BMI could be calculated.

**Note**: This numerator does *not* include refusals.

*Lifestyle Counseling:* Patients who have received any lifestyle adaptation counseling, including medical nutrition therapy, or nutrition, exercise or other lifestyle education during the Report Period.

Patients with *comprehensive CVD assessment*, defined as having BP, LDL, and tobacco use assessed, BMI calculated, and lifestyle counseling.

**Note**: This does *not* include depression screening and *does not include refusals of BMI*. (GPRA Numerator)

*Refusal of BMI:* Patients who refused a height or weight measurement and for whom a BMI could not be calculated.

Depression Screening: Patients screened for depression or diagnosed with a mood disorder at any time during the Report Period.

**Note**: This numerator does *not* include refusals.

# **Logic Description**

Age of the patient is calculated at beginning of the Report Period.

Diabetes defined as: Diagnosed with diabetes (first POV in V POV with 250.00 through 250.93) prior to the Current Report Period, and at least two visits during the Current Report Period, and two DM-related visits ever. Patients not meeting these criteria are considered non-diabetics.

IHD diagnosis defined as: 410.0 through 412.\*, 414.0 through 414.9, 428.\* or 429.2 recorded in the V POV file.

Blood pressure definition: Having a minimum of two BPs documented on non-ER visits during the Report Period in past two years. If CRS does not find two BPs, it will search for CPT 0001F, 2000F, 3074F through 3080F or POV V81.1 documented on non-ER visit during the past two years.

LDL definition: Finds the most recent test done in the last five years, regardless of the results of the measurement.

*BMI definition*: CRS calculates when the report is run, using NHANES II. For 19 through 50, height and weight must be recorded within last five years, not required to be on the same day. For over 50, height and weight within last two years; not required to be recorded on same day.

*BMI Refusal definition:* Refusals of a height and/or weight measurement include REF, NMI, and UAS and must be documented during the past year. For ages 19 and older, the height and the weight must be refused during the past year and are not required to be on the same visit.

CRS uses the following codes and taxonomies to define the numerators.

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
LDL - Finds the most recent test done in the last 5 years, regardless of the results of the measurement.	80061, 83700, 83701, 83704, 83715 (old code), 83716 (old code), 83721, 3048F, 3049F, 3050F		Yes	DM AUDIT LDL CHOLESTEROL TAX
Tobacco Screening	D1320, 99406, 99407, G0375 (old code), G0376 (old code), 1034F, 1035F, 1036F, 1000F, G8455- G8457 (old codes), G8402 (old code) or G8453 (old code)	Any health factor for category Tobacco, TOBACCO (SMOKING), TOBACCO (SMOKELESS – CHEWING/DIP), or TOBACCO (EXPOSURE) (see table on next page) V POV or current Active Problem List: 305.1, 305.1* (old codes), 649.00-649.04, V15.82 Patient education codes: containing "TO-", "-TO", "-SHS", 305.1, 305.1* (old codes), 649.00-649.04, V15.82, D1320, 99406, 99407, G0375 (old code), G0376 (old code), 1034F, 1035F, 1036F, 1000F, G8455- G8457 (old codes), G8402 (old code) or G8453 (old code) Dental code: 1320		
Medical Nutrition Therapy	97802-97804, G0270, G0271	Primary or secondary provider codes: 07, 29, 97, 99 Clinic codes: 67 (dietary) or 36 (WIC)		
Nutrition Education		V POV: V65.3 dietary surveillance and counseling Patient education codes: ending "-N" (nutrition) or "-MNT" (medical nutrition therapy) (or old code "-DT" (diet)) or containing V65.3.		

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Exercise Education		V POV: V65.41 exercise counseling Patient education codes: ending "-EX" (exercise) or containing V65.41.		
Related Exercise and Nutrition Education		Patient education codes: ending "-LA" (lifestyle adaptation) or containing "OBS-" (obesity) or 278.00 or 278.01.		
Depression Screening		V Exam: Exam Code 36 V POV: V79.0 CPT: 1220F BHS Problem Code: 14.1 (Screening for Depression) V Measurement in PCC or BH: PHQ2 or PHQ9		
Mood Disorders		At least 2 visits in PCC or BHS for: Major Depressive Disorder, Dysthymic Disorder, Depressive Disorder NOS, Bipolar I or II Disorder, Cyclothymic Disorder, Bipolar Disorder NOS, Mood Disorder Due to a General Medical Condition, Substance-induced Mood Disorder, or Mood Disorder NOS (see codes below).  V POV: 296.*, 291.89, 292.84, 293.83, 300.4, 301.13, or 311 BHS POV: 14, 15		

All existing national Tobacco Health Factors listed below are counted as tobacco screening.

Health Factor
Ceremonial
Cessation-Smokeless
Cessation-Smoker
Current Smokeless
Current Smoker
Current Smoker, status unknown
Current smoker, every day
Current smoker, some day

Health Factor
Non-Tobacco User
Previous Smokeless
Previous (Former) Smokeless
Previous Smoker
Previous (Former) Smoker
Smoke Free Home
Smoker In Home
Current Smoker & Smokeless
Exposure To Environmental Tobacco Smoke

# **Key Logic Changes from CRS Version 12.0**

Added codes 11054-4, 13459-3, 14155-6, 16615-7, 16616-5, 43394-6, 44711-0, 44915-7, 50193-2, 53133-5, 56036-7 to LOINC taxonomy for LDL.

## **Patient List Description**

List of patients with assessments received, if any.

#### **Measure Source**

Not Available

# **Measure Past Performance Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance (Comprehensive CVD Assessment)	39.8%
IHS FY 2010 Performance (Comprehensive CVD Assessment)	35.0%
IHS FY 2009 Performance (Comprehensive CVD Assessment)	32.0%
IHS FY 2008 Performance (Comprehensive CVD Assessment)	30.0%
IHS FY 2007 Performance (Comprehensive CVD Assessment)	30.0%
IHS FY 2011 Performance (BP Assessed)	97.2%
IHS FY 2010 Performance (BP Assessed)	98.0%
IHS FY 2009 Performance (BP Assessed)	97.0%
IHS FY 2008 Performance (BP Assessed)	98.0%
IHS FY 2011 Performance (LDL Assessed)	92.9%
IHS FY 2010 Performance (LDL Assessed)	92.0%
IHS FY 2009 Performance (LDL Assessed)	91.0%
IHS FY 2008 Performance (LDL Assessed)	90.0%
IHS FY 2011 Performance (Tobacco Assessed)	84.2%
IHS FY 2010 Performance (Tobacco Assessed)	84.0%

Performance	Percent
IHS FY 2009 Performance (Tobacco Assessed)	83.0%
IHS FY 2008 Performance (Tobacco Assessed)	79.0%
IHS FY 2011 Performance (BMI Assessed)	97.2%
IHS FY 2010 Performance (BMI Assessed)	98.0%
IHS FY 2008 Performance (BMI Assessed or Refused)	85.0%
IHS FY 2011 Performance (Lifestyle Counseling)	45.3%
IHS FY 2010 Performance (Lifestyle Counseling)	41.0%
IHS FY 2009 Performance (Lifestyle Counseling)	39.0%
IHS FY 2008 Performance (Lifestyle Counseling)	38.0%
IHS FY 2011 Performance (Depression Screen)	75.7%
IHS FY 2010 Performance (Depression Screen)	72.0%
IHS FY 2009 Performance (Depression Screen)	62.0%
IHS FY 2008 Performance (Depression Screen)	53.0%

*** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000  Comprehensive CVD-Related Assessment  REPORT	DU the Type 2012 G			ember 25,			C' 1 D		age 207	
Previous Year Period: Jan 01, 2011 to Dec 31, 2011 Baseline Period: Jan 01, 2000 to Dec 31, 2000  Comprehensive CVD-Related Assessment  REPORT										
# W/ BPs documented w/in 2 yrs 72 93.5 45 100.0 -6.5 36 100.0 -6.5 # w/ LDL done in past 5 yrs 60 77.9 38 84.4 -6.5 30 83.3 -5.4 # w/Tobacco Screening w/in 1 yr 66 85.7 38 84.4 +1.3 27 75.0 +10.7 # w/BMI calculated -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7 # w/ Ifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3 # w/ BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX										
Comprehensive CVD-Related Assessment  REPORT										
REPORT PERIOD PREV YR % CHG from BASE % PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % CHG from ALL from BASE % CHG from BASE % CHG from	Base	line Pe	riod:	Jan 01,	2000 1	to Dec 31,	2000			
REPORT PERIOD PREV YR % CHG from BASE % PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % STATE OF THE PREV YR % PERIOD BASE % CHG from ALL from BASE % CHG from BASE % CHG from										
Active IHD Pts 22+ (GPRA) 77 45 36  # w/ BPs documented w/in 2 yrs 72 93.5 45 100.0 -6.5 36 100.0 -6.5 # w/ LDL done in past 5 yrs 60 77.9 38 84.4 -6.5 30 83.3 -5.4 # w/Tobacco Screening w/in 1 yr 66 85.7 38 84.4 +1.3 27 75.0 +10.7 # w/BMI calculated -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7 # w/ lifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3 # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6 # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX	Comprehensive CVD-Rela	ated As	sessme	ent						
Active IHD Pts 22+ (GPRA) 77 45 36  # w/ BPs documented w/in 2 yrs 72 93.5 45 100.0 -6.5 36 100.0 -6.5 # w/ LDL done in past 5 yrs 60 77.9 38 84.4 -6.5 30 83.3 -5.4 # w/Tobacco Screening w/in 1 yr 66 85.7 38 84.4 +1.3 27 75.0 +10.7 # w/BMI calculated -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7 # w/ lifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3 # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6 # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX		REPORT	%	PREV YR	%	CHG from	BASE	ક	CHG from	
(GPRA) 77 45 36  # w/ BPs documented w/in 2 yrs 72 93.5 45 100.0 -6.5 36 100.0 -6.5  # w/ LDL done in past 5 yrs 60 77.9 38 84.4 -6.5 30 83.3 -5.4  # w/Tobacco Screening w/in 1 yr 66 85.7 38 84.4 +1.3 27 75.0 +10.7  # w/BMI calculated -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7  # w/ lifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3  # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6  # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6  # w/ Depression screening or Mood Disorder DX		PERIOD		PERIOD		PREV YR %	PERIOD		BASE %	
(GPRA) 77 45 36  # w/ BPs documented w/in 2 yrs 72 93.5 45 100.0 -6.5 36 100.0 -6.5  # w/ LDL done in past 5 yrs 60 77.9 38 84.4 -6.5 30 83.3 -5.4  # w/Tobacco Screening w/in 1 yr 66 85.7 38 84.4 +1.3 27 75.0 +10.7  # w/BMI calculated -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7  # w/ lifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3  # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6  # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6  # w/ Depression screening or Mood Disorder DX										
# w/ BPs documented w/in 2 yrs 72 93.5 45 100.0 -6.5 36 100.0 -6.5 # w/ LDL done in past 5 yrs 60 77.9 38 84.4 -6.5 30 83.3 -5.4 # w/Tobacco Screening w/in 1 yr 66 85.7 38 84.4 +1.3 27 75.0 +10.7 # w/BMI calculated -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7 # w/ lifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3 # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6 # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX				4.5			2.5			
<pre>w/in 2 yrs</pre>	(GPRA)	/ /		45			36			
# w/ LDL done in     past 5 yrs 60 77.9 38 84.4 -6.5 30 83.3 -5.4  # w/Tobacco Screening     w/in 1 yr 66 85.7 38 84.4 +1.3 27 75.0 +10.7  # w/BMI calculated     -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7  # w/ lifestyle     educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3  # w/ BP, LDL, tobacco,     BMI and life counseling     -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6  # w/BMI refusal     (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6  # w/ Depression screening     or Mood Disorder DX	# w/ BPs documented									
<pre>past 5 yrs</pre>	-	72	93.5	45	100.0	-6.5	36	100.0	-6.5	
# w/Tobacco Screening w/in 1 yr 66 85.7 38 84.4 +1.3 27 75.0 +10.7 # w/BMI calculated -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7 # w/ lifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3 # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6 # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX										
<pre>w/in 1 yr</pre>	1 1		77.9	38	84.4	-6.5	30	83.3	-5.4	
<pre># w/BMI calculated -No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7 # w/ lifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3 # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6 # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX</pre>			95 7	3.0	Ω/ /	<b>⊥1</b> 2	27	75 0	±10 7	
-No Refusals 72 93.5 44 97.8 -4.3 35 97.2 -3.7  # w/ lifestyle educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3  # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6  # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6  # w/ Depression screening or Mood Disorder DX	_	00	03.7	30	01.1	+1.3	21	73.0	+10.7	
educ w/in 1 yr 43 55.8 22 48.9 +7.0 22 61.1 -5.3  # w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6  # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6  # w/ Depression screening or Mood Disorder DX	,	72	93.5	44	97.8	-4.3	35	97.2	-3.7	
<pre># w/ BP, LDL, tobacco, BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6 # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX</pre>	# w/ lifestyle									
BMI and life counseling -No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6 # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX			55.8	22	48.9	+7.0	22	61.1	-5.3	
-No Refusals (GPRA) 35 45.5 19 42.2 +3.2 14 38.9 +6.6 # w/BMI refusal (No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX										
<pre># w/BMI refusal   (No BMI)</pre>										
(No BMI) 2 2.6 0 0.0 +2.6 0 0.0 +2.6 # w/ Depression screening or Mood Disorder DX		35	45.5	19	42.2	+3.2	14	38.9	+6.6	
# w/ Depression screening or Mood Disorder DX	" "/ =	2	2 6	0	0 0	+2 6	0	0 0	+2 6	
or Mood Disorder DX	,	_	2.0	U	0.0	+2.0	U	0.0	+2.0	
-No Refusals 20 26.0 4 8.9 +17.1 2 5.6 +20.4	_									
	-No Refusals	20	26.0	4	8.9	+17.1	2	5.6	+20.4	
A. Active IHD Pts 22+										
and are NOT Active	and are NOT Active									

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

Diabetic	41		20			17			
# w/ BPs documented									
w/in 2 yrs	36	87.8	20	100.0	-12.2	17	100.0	-12.2	
# w/LDL done									
in past 5 yrs	28	68.3	17	85.0	-16.7	13	76.5	-8.2	
# w/Tobacco Screening									
w/in 1 yr	33	80.5	15	75.0	+5.5	13	76.5	+4.0	
# w/BMI calculated									
-No Refusals	38	92.7	20	100.0	-7.3	16	94.1	-1.4	
# w/ lifestyle									
educ w/in 1 yr	24	58.5	7	35.0	+23.5	7	41.2	+17.4	
# w/ BP, LDL, tobacco,									
BMI and life counseling									
-No Refusals	19	46.3	6	30.0	+16.3	4	23.5	+22.8	
# w/BMI refusal									
(No BMI)	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
# w/ Depression screening	g,								
or Mood Disorder DX									
-No Refusals	13	31.7	1	5.0	+26.7	1	5.9	+25.8	

Figure 2-82: Sample Report, Comprehensive CVD-Related Assessment

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Comprehensive CVD-Related Assessment: List of patients with assessments received, if any. HRN COMMUNITY SEX AGE PATIENT NAME DENOMINATOR NUMERATOR PATIENT1, CAITLYN 000001 COMMUNITY #1 F 22 ALL: BP: 131/67 PRE STG 1; LDL: 06/08/12; TOB: 07/25/12 NEVER SMOKED; BMI: 25.4; LIFE: 08/15/012 UTI-N SN; DEP: 05/03/12 Meas PHO9 PATIENT2, CARLA 000002 COMMUNITY #1 F 40 BP: 112/66 NORMAL; TOB: 08/26/12 NEVER SMOKED; BMI: IHD 33.7 PATIENT3, JENNY 000003 COMMUNITY #1 F 47 BP: 3074F/; TOB: 11/01/12 D1320; BMI: 39.5; LIFE: 03/03/12 Prv 97; DEP: 11/01/12 CPT 1220F PATIENT4, SHERRY 000004 COMMUNITY #1 F 68 IHD,AD ALL: BP: 150/82 STG 1 HTN; LDL: 09/13/12; TOB: 12/30/12 NEVER SMOKED; BMI: 26.8; LIFE: 10/19/12 PM-LA PATIENT5, PAULINE 000005 COMMUNITY #1 F 70 BP: 149/72 STG 1 HTN; LDL: 10/24/12; TOB: 10/24/12 CURRENT SMOKER, STATUS UNKNOWN; BMI: 37.5 PATIENT6, TINA MARIE 000006 COMMUNITY #1 F 78 BP: 3077F/; TOB: 01/27/12 G8402; BMI: 43.4; DEP: IHD, AD 09/11/12 Meas PHQ2

Figure 2-83: Sample Patient List: Comprehensive CVD-Related Assessment

# 2.8.10 Appropriate Medication Therapy after a Heart Attack

#### **Denominator**

Active Clinical patients aged 35 and older discharged for an AMI during the first 51 weeks of the Report Period and were not readmitted for any diagnosis within seven days of discharge. Broken down by gender.

#### **Numerators**

Patients with active prescription for or who have a contraindication/previous adverse reaction to *beta-blockers*.

Note: This numerator does not include refusals.

Patients with active prescription for or who have a contraindication/previous adverse reaction to ASA (aspirin) or other anti-platelet agent.

**Note**: This numerator does *not* include refusals.

Patients with active prescription for or who have a contraindication/ previous adverse reaction to *ACEIs/ARBs*.

**Note**: This numerator does *not* include refusals.

Patients with active prescription for or who have a contraindication/ previous adverse reaction to *statins*.

**Note**: This numerator does *not* include refusals.

Also included for the numerators above are subnumerators:

- a. Patients with active prescription for the specified medication
- Patients with contraindication/previous adverse reaction to the specified medication

Patients with documented refusal of the specified medication

Patients with active prescriptions for *all post-AMI medications* (i.e., beta-blocker, ASA/anti-platelet, ACEI/ARB, and statin), and/or who have a contraindication/previous adverse reaction.

**Note**: This numerator does *not* include refusals.

## **Logic Description**

Age is calculated at the beginning of the Report Period.

Acute Myocardial Infarction (AMI) definition: POV 410.\*1 (i.e., first eligible episode of an AMI) with Service Category H. If patient has more than one episode of AMI during the first 51 weeks of the Report Period, CRS will include only the first discharge.

#### **Denominator Exclusions**

Patients meeting any of the following conditions will be excluded from the denominator.

- 1. Patients with Discharge Type of Irregular (AMA), Transferred, or contains "Death."
- 2. Patients readmitted for any diagnosis within seven days of discharge.
- 3. Patients with a Diagnosis Modifier of C (Consider), D (Doubtful), M (Maybe, Possible, Perhaps), O (Rule Out), P (Probable), R (Resolved), S (Suspect, Suspicious), or T (Status Post).
- 4. Patients with a Provider Narrative beginning with "Consider"; "Doubtful"; "Maybe"; "Possible"; "Perhaps"; "Rule Out"; "R/O"; "Probable"; "Resolved"; "Suspect"; "Suspicious"; or "Status Post."

#### Numerator Logic

In the logic below, "ever" is defined as anytime through the end of the Report Period.

To be included in the numerators, a patient must meet one of the three conditions below:

- 1. An active prescription (not discontinued as of [discharge date plus (+) 7 days] and does not have a comment of RETURNED TO STOCK) that was prescribed prior to admission, during the inpatient stay, or within seven days after discharge. "Active" prescription defined as: Days Prescribed greater then (>) ((Discharge Date plus (+) 7 days) Order Date); *or*
- 2. A refusal of the medication at least once during hospital stay through seven days after discharge date; or...
- 3. Have a contraindication/previous adverse reaction to the indicated medication.

Refusals and contraindications/previous adverse drug reactions (ADR)/allergies are only counted if a patient did not have a prescription for the indicated medication. Patients without a prescription who have a refusal and/or contraindication/ADR/allergy will be counted in subnumerators B–C. Because a patient may have both a refusal and a contraindication/ADR/allergy, the subnumerator totals of A–C may not add up the to the numerator total.

**Note:** If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

#### **Beta-Blocker Numerator Logic**

Beta-blocker medication codes defined with medication taxonomy BGP HEDIS BETA BLOCKER MEDS. (Medications are: Noncardioselective Beta Blockers: Carteolol, Carvedilol, Labetalol, Nadolol, Penbutolol, Pindolol, Propranolol, Timolol, Sotalol; Cardioselective Beta Blockers: Acebutolol, Atenolol, Betaxolol, Bisoprolol, Metoprolol, Nebivolol; and Antihypertensive Combinations: Atenolol-chlorthalidone, Bendroflumethiazide-nadolol, Bisoprolol-hydrochlorothiazide, Hydrochlorothiazide-metoprolol, and Hydrochlorothiazide-propranolol.)

Refusal of beta-blocker: REF refusal of any beta-blocker medication in site-populated medication taxonomy BGP HEDIS BETA BLOCKER MEDS at least once during hospital stay through seven days after discharge date.

CRS uses the following codes to define contraindications to beta-blockers.

Contraindication to Beta- Blockers (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
Asthma		<b>POV:</b> 2 diagnoses of 493* on different visit dates
Hypotension		POV: 1 diagnosis of 458*
Heart Block greater than (>)1 Degree		<b>POV:</b> 1 diagnosis of 426.0, 426.12, 426.13, 426.2, 426.3, 426.4, 426.51, 426.52, 426.53, 426.54, or 426.7
Sinus Bradycardia		POV: 1 diagnosis of 427.81
COPD		<b>POV:</b> 2 diagnoses on different visit dates of 491.2*, 496, or 506.4, or a combination of any of these codes, such as 1 visit with 491.20 and 1 with 496
NMI Refusal	G8011 (old code) at least once during hospital stay through 7 days after discharge date	Refusal: NMI (not medically indicated) refusal for any beta-blocker at least once during hospital stay through 7 days after discharge date

CRS uses the following codes to define adverse drug reactions/documented allergies to beta-blockers.

## Adverse Drug Reaction/Allergy to Beta-Blcokers

ICD and Other Codes
<b>POV:</b> 995.0-995.3 AND E942.0
Entry in ART (Patient Allergies File): "beta block*"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "beta block*", "bblock*" or "b block*"

## ASA (aspirin)/Other Anti-Platelet Numerator Logic

ASA medication codes defined with medication taxonomy DM AUDIT ASPIRIN DRUGS.

Other anti-platelet medication codes defined with medication taxonomy site-populated DM AUDIT ANTI-PLATELET DRUGS taxonomy.

Refusal of ASA/other anti-platelet: REF refusal of any ASA or anti-platelet medication in site-populated medication taxonomies DM AUDIT ASPIRIN DRUGS or BGP ANTI-PLATELET DRUGS at least once during hospital stay through seven days after discharge date.

CRS uses the following codes to define contraindications to ASA/other anti-platelets.

Contraindication to ASA/Other Anti-Platelets (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
Active prescription for Warfarin/Coumadin at time of arrival or prescribed at discharge		Site-Populated Drug Taxonomy: BGP CMS WARFARIN MEDS
Hemorrhage		<b>POV</b> : 459.0
NMI Refusal	G8008 (old code) at least once during hospital stay through 7 days after discharge date	Refusal: NMI (not medically indicated) refusal for any aspirin at least once during hospital stay through 7 days after discharge date

CRS uses the following codes to define adverse drug reactions/documented allergies to ASA/other anti-platelets.

## Adverse Drug Reaction/Allergy to ASA/Other Anti-Platelets

ICD and Other Codes
<b>POV</b> : 995.0-995.3 AND E935.3
Entry in ART (Patient Allergies File): "aspirin"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "ASA" or "aspirin"

## **ACEI/ARB Numerator Logic**

Ace Inhibitor (ACEI) medication codes defined with medication taxonomy BGP HEDIS ACEI MEDS. ACEI medications are: Angiotensin Converting Enzyme Inhibitors (Benazepril, Captopril, Enalapril, Fosinopril, Lisinopril, Moexipril, Perindopril, Quinapril, Ramipril, Trandolopril).

Antihypertensive Combinations (Amlodipine-benazepril, Benazepril-hydrochlorothiazide, Captopril-hydrochlorothiazide, Enalapril-hydrochlorothiazide, Fosinopril-hydrochlorothiazide, Hydrochlorothiazide-lisinopril, Hydrochlorothiazide-moexipril, Hydrochlorothiazide-quinapril, Trandolapril-verapamil).

*Refusal of ACEI:* REF refusal of any ACE inhibitor medication in site-populated medication taxonomy BGP HEDIS ACEI MEDS at least once during hospital stay through seven days after discharge date.

CRS uses the following codes to define contraindications to ACE inhibitors.

Contraindication to ACE Inhibitors (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
Pregnancy		See below for definition
Breastfeeding		POV: V24.1 during the Report Period Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF- MK, or BF-N during the Report Period
Moderate or Severe Aortic Stenosis		<b>POV:</b> 395.0, 395.2, 396.0, 396.2, 396.8, 424.1, 425.1, or 747.22
NMI Refusal		Refusal: NMI (not medically indicated) refusal for any ACE inhibitor at least once during hospital stay through 7 days after discharge date

CRS uses the following codes to define adverse drug reactions/documented allergies to ACE inhibitors.

## Adverse Drug Reaction/ Allergy to ACE Inhibitors

ICD and Other Codes
<b>POV:</b> 995.0-995.3 AND E942.6
<b>Entry in ART (Patient Allergies File):</b> "ace inhibitor" or "ACEI"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "ace i*" or "ACEI"

ARB (Angiotensin Receptor Blocker) medication codes defined with medication taxonomy BGP HEDIS ARB MEDS. ARB medications: Angiotensin II Inhibitors (Azilsartan, Candesartan, Eprosartan, Irbesartan, Losartan, Olmesartan, Telmisartan, Valsartan.)

Antihypertensive Combinations (Aliskiren-Amlodipine-hydrochlorothiazide, Aliskiren-valsartan, Amlodipine-hydrochlorothiazide-olmesartan, Amlodipine-hydrochlorothiazide-valsartan, Amlodipine-olmesartan, Amlodipine-Telmisartan, Candesartan-hydrochlorothiazide, Eprosartan-hydrochlorothiazide, Hydrochlorothiazide-Irbesartan, Hydrochlorothiazide-Losartan, Hydrochlorothiazide-olmesartan, Hydrochlorothiazide-Valsartan).

*Refusal of ARB:* REF refusal of any ARB medication in site-populated medication taxonomy BGP HEDIS ARB MEDS at least once during hospital stay through seven days after discharge date.

CRS uses the following codes to define contraindications to ARBs.

Contraindication to ARBs (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
Pregnancy		See below for definition
Breastfeeding		POV: V24.1 during the Report Period
		Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF-MK, or BF-N during the Report Period
Moderate or Severe Aortic Stenosis		<b>POV:</b> 395.0, 395.2, 396.0, 396.2, 396.8, 424.1, 425.1, or 747.22
NMI Refusal		Refusal: NMI refusal for any ARB at least once during hospital stay through 7 days after discharge date

CRS uses the following codes to define adverse drug reactions/documented allergies to ARBs.

## Adverse Drug Reaction/Allergy to ARBs

ICD and Other Codes
<b>POV:</b> 995.0-995.3 AND E942.6
Entry in ART (Patient Allergies File): "Angiotensin Receptor Blocker" or "ARB"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "Angiotensin Receptor Blocker" or "ARB"

## **Statins Numerator Logic**

Statin medication codes defined with medication taxonomy BGP PQA STATIN MEDS. Statin medications: Atorvostatin (Lipitor), Fluvastatin (Lescol), Lovastatin (Altocor, Altoprev, Mevacor), Pravastatin (Pravachol), Pitavastatin (Livalo), Simvastatin (Zocor), Rosuvastatin (Crestor).

Statin Combination Products: Advicor, Caduet, PraviGard Pac, Vytorin.

*Refusal of Statin:* REF refusal of any statin medication in site-populated medication taxonomy BGP PQA STATIN MEDS at least once during hospital stay through seven days after discharge date.

CRS uses the following codes to define contraindications to statins.

Contraindication to Statins (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
Pregnancy		See below for definition
Breastfeeding		POV: V24.1 during the Report Period
		Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF-MK, or BF-N during the Report Period
Acute Alcoholic Hepatitis		POV: 571.1 during the Report Period
NMI Refusal		<b>Refusal:</b> NMI refusal for any statin at least once during hospital stay through 7 days after discharge date

CRS uses the following codes to define adverse drug reactions/documented allergies to statins.

## Adverse Drug Reaction/Allergy to Statins

#### ICD and Other Codes

Site-Populated Lab Taxonomy or LOINC Taxonomy: DM AUDIT ALT TAX, with ALT and/or AST > 3x the Upper Limit of Normal (ULN) (i.e., Reference High) on 2 or more consecutive visits during the Report Period

Site-Populated Lab Taxonomy or LOINC Taxonomy: BGP CREATINE KINASE TAX, with Creatine Kinase (CK) levels > 10x ULN or CK > 10,000 IU/L during the Report Period

**POV:** Myopathy/Myalgia, defined as any of the following during the Report Period: 359.0-359.9, 729.1, 710.5, or 074.1

**POV:** 995.0-995.3 AND E942.9

Entry in ART (Patient Allergies File): "statin" or "statins"

Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "Statin" or "Statins"

\	<b>POV or Problem List:</b> At least two visits during the Report Period with 640.03, 640.83, 640.93, 641.03, 641.13, 641.23, 641.33, 641.83, 641.93, 642.03, 642.13, 642.23, 642.33, 642.43, 642.53 642.63, 642.73, 642.93, 643.03, 643.13, 643.23, 643.83, 643.93, 644.03, 644.13, 645.43, 645.23, 646.33, 646.43			
\	with 640.03, 640.83, 640.93, 641.03, 641.13, 641.23, 641.33, 641.83, 641.93, 642.03, 642.13, 642.23, 642.33, 642.43, 642.53 642.63, 642.73, 642.93, 643.03, 643.13, 643.23, 643.83, 643.93, 644.03,			
	642.73, 642.93, 643.03, 643.13, 643.23, 643.83, 643.93, 644.03,			
6				
	644 40 645 40 645 00 646 00 646 40 646 00 646 00 646 40			
	644.13, 645.13, 645.23, 646.03, 646.13, 646.23, 646.33, 646.43,			
	646.53, 646.63, 646.73, 646.83, 646.93, 647.03, 647.13, 647.23,			
	647.33, 647.43, 647.53, 647.63, 647.83, 647.93, 648.03, 648.13,			
	648.23, 648.33, 648.43, 648.53, 648.63, 648.73, 648.83, 648.93,			
	649.03, 649.13, 649.23, 649.33, 649.43, 649.53, 649.63, 649.73,			
	651.03, 651.13, 651.23, 651.33, 651.43, 651.53, 651.63, 651.73,			
	651.83, 651.93, 652.03, 652.13, 652.23, 652.33, 652.43, 652.53, 652.63, 652.73, 652.83, 652.93, 653.03, 653.13, 653.23, 653.33,			
	653.43, 653.53, 653.63, 653.73, 653.83, 653.93, 654.03, 654.13,			
	654.23, 654.33, 654.43, 654.53, 654.63, 654.73, 654.83, 654.93,			
	655.03, 655.13, 655.23, 655.33, 655.43, 655.53, 655.63, 655.73,			
	655.83, 655.93, 656.03, 656.13, 656.23, 656.33, 656.43, 656.53,			
	656.63, 656.73, 656.83, 656.93, 657.03, 658.03, 658.13, 658.23,			
	658.33, 658.43, 658.83, 658.93, 659.03, 659.13, 659.23, 659.33,			
	659.43, 659.53, 659.63, 659.73, 659.83, 659.93, 660.03, 660.13,			
	660.23, 660.33, 660.43, 660.53, 660.63, 660.73, 660.83, 660.93,			
	661.03, 661.13, 661.23, 661.33, 661.43, 661.93, 662.03, 662.13,			
	662.23, 662.33, 663.03, 663.13, 663.23, 663.33, 663.43, 663.53,			
	663.63, 663.83, 663.93, 665.03, 665.83, 665.93, 668.03, 668.13,			
	668.23, 668.83, 668.93, 669.03, 669.13, 669.23, 669.43, 669.83,			
	669.93, 671.03, 671.13, 671.23, 671.33, 671.53, 671.83, 671.93,			
	673.03, 673.13, 673.23, 673.33, 673.83, 674.03, 674.53, 675.03,			
	675.13, 675.23, 675.83, 675.93, 676.03, 676.13, 676.23, 676.33,			
	676.43, 676.53, 676.63, 676.83, 676.93, 678.03, 678.13, 679.03,			
	679.13, V22.0 – V23.9, V28.81, V28.82, V28.89, V72.42, V89.01- V89.09, where the primary provider is not a CHR (Provider code 53),			
	and with no documented miscarriage or abortion (defined below)			
	occurring after the second pregnancy POV. Pharmacy-only visits			
	(clinic code 39) will not count toward these two visits. If the patient			
	has more than two pregnancy-related visits during the Report Period,			
	CRS will use the first two visits in the Report Period.			
Abortion (	CPTs: 59100, 59120, 59130, 59136, 59150, 59151, 59840, 59841,			
	59850, 59851, 59852, 59855, 59856, 59857, S2260-S2267			
	<b>POVs:</b> 635*, 636*, or 637*			
	<b>Procedures</b> : 69.01, 69.51, 74.91, 96.49			
Miscarriage (	CPTs: 59812, 59820, 59821, 59830			
	POVs: 630, 631, 632, 633*, or 634*			

# **All Medications Numerator Logic**

To be included in this numerator, a patient must have a prescription, refusal, or a contraindication for *all* of the four medication classes (i.e., beta-blocker, ASA/other anti-platelet, ACEI/ARB, *and* statin).

#### **Key Logic Changes from CRS Version 12.0**

- 1. Updated POV codes for pregnancy definition to only include antepartum pregnancy codes.
- 2. Updated pregnancy definition to exclude visits where the primary provider is a CHR (Provider code 53).
- 3. Added code 48134-1 to LOINC taxonomy for ALT.
- 4. Added codes 12187-1, 12189-7, 13969-1, 15048-2, 15049-0, 20569-0, 2152-7, 2154-3, 2155-0, 2158-4, 32673-6, 33547-1, 38482-6, 49129-0, 49136-5, 49551-5, 50757-4, 9642-0, 9643-8 to LOINC taxonomy for Creatine Kinase.
- 5. Replaced BGP HEDIS STATIN MEDS with BGP PQA STATIN MEDS.
- 6. Updated BGP HEDIS ARB MEDS medications to include Azilsartan, Aliskiren-Amlodipine-hydrochlorothiazide, Amlodipine-hydrochlorothiazide-olmesartan, and Amlodipine-Telmisartan.
- 7. Updated BGP PQA STATIN MEDS medications to include Altoprev and Pitavastatin.

#### **Patient List Description**

List of patients with AMI, with appropriate medication therapy, if any.

#### **Measure Source**

American Heart Association/American College of Cardiology Guidelines for the Treatment of AMI.

#### **Measure Past Performance and Long-Term Targets**

None

```
DU
                             November 25, 2012
                                                                     Page 216
       *** IHS 2012 Selected Measures with Community Specified Report ***
                             DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
             Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Appropriate Medication Therapy after a Heart Attack
                   REPORT
                                 PREV YR
                                            % CHG from BASE
                                                                   % CHG from
                    PERIOD
                                  PERIOD
                                                PREV YR % PERIOD
                                                                       BASE %
Active Clinical Pts 35+
hospitalized for AMI
                        71
                                        0
                                                               0
```

# w/beta-blocker								
Rx/contra/ADR -No Refusals	27	38.0	0	0.0	+38.0	0	0.0	+38.0
A. # w/beta-blocker			Ü			Ü		
Rx w/ % of Total B. # w/contra/ADR	5	18.5	0	0.0	+18.5	0	0.0	+18.5
w/ % of Total	22	81.5	0	0.0	+81.5	0	0.0	+81.5
<pre># w/ beta-blocker   refusal</pre>	2	2.8	0	0.0	+2.8	0	0.0	+2.8
# w/ASA Rx/contra/ADR								
-No Refusals A. # w/ASA	9	12.7	0	0.0	+12.7	0	0.0	+12.7
Rx w/% of Total	3	33.3	0	0.0	+33.3	0	0.0	+33.3
B. # w/contra/ADR w/ % of Total	6	66.7	0	0.0	+66.7	0	0.0	+66.7
# w/ ASA refusal	3	4.2	0	0.0	+4.2	0	0.0	+4.2
# w/ACEI/ARB								
Rx/contra/ADR								
-No Refusals A. # w/ACEI/ARB	19	26.8	0	0.0	+26.8	0	0.0	+26.8
Rx w/% of Total	4	21.1	0	0.0	+21.1	0	0.0	+21.1
B. # w/contra/ADR w/ % of Total	15	78.9	0	0.0	+78.9	0	0.0	+78.9
# w/ ACEI/ARB			Ü			Ü		. 70.9
refusal	2	2.8	0	0.0	+2.8	0	0.0	+2.8
# w/statin								
Rx/contra/ADR -No Refusals	17	23.9	0	0.0	+23.9	0	0.0	+23.9
A. # w/statin	_	20.4	0	0 0	. 20 4	0	0 0	. 20 4
Rx w/% of Total B. # w/contra/ADR	5	29.4	0	0.0	+29.4	0	0.0	+29.4
w/ % of Total # w/ Statin	12	70.6	0	0.0	+70.6	0	0.0	+70.6
Refusal	2	2.8	0	0.0	+2.8	0	0.0	+2.8
# w/Rx/contra/ADR of ALL								
meds-No Refusals	4	5.6	0	0.0	+5.6	0	0.0	+5.6

Figure 2-84: Sample Report, Appropriate Medication Therapy after a Heart Attack

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Appropriate Medication Therapy after a Heart Attack: List of patients with AMI, with appropriate medication therapy, if any.

PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR

PATIENT1,CECELIA 000001 COMMUNITY #1 F 37
AC BETA: 06/30/12 Contra 2/3 heart block POV 426.3
PATIENT2,KATHLEEN 000002 COMMUNITY #1 F 38
AC ACEI/ARB: Contra pregnant; STATIN: Contra pregnant

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
PATIENT3, KIMBERLY A 000003 COMMUNITY #1 F 49

AC ASA: 12/16/11 CLOPIDOGREL BISULFATE 75MG TAB;

ACEI/ARB: 01/14/12 Contra BF-HC; STATIN: 01/14/12 Contra BF-HC

PATIENT4, TIMOTHY JOHN 000004 COMMUNITY #1 M 57

AC ACEI/ARB: 06/01/12 Contra NMI CAPTOPRIL 25MG TABS

PATIENT5, FELIPE 000005 COMMUNITY #1 M 57

AC

PATIENT6, JAMES DALTON 000006 COMMUNITY #1 M 77

AC ALL MEDS: BETA: 07/23/12 Contra CPT G8011; ASA:

07/23/12 Contra CPT G8008; ACEI/ARB: 07/27/10 Contra POV 396.0; STATIN: 06/05/12

SIMVASTATIN 40MG TAB
```

Figure 2-85: Sample Patient List: Appropriate Medication Therapy after a Heart Attack

# 2.8.11 Persistence of Appropriate Medication Therapy after a Heart Attack

#### **Denominator**

Active Clinical patients 35 and older diagnosed with an AMI six months prior to the Report Period through the first six months of the Report Period. Broken down by gender.

#### **Numerators**

Patients with a 135-day course of treatment with beta-blockers, or who have a contraindication/previous adverse reaction to beta-blocker therapy.

**Note**: This numerator does *not* include refusals.

Patients with a 135-day course of treatment with ASA (aspirin) or other anti-platelet agent or who have a contraindication/previous adverse reaction to ASA/anti-platelet therapy.

**Note**: This numerator does *not* include refusals.

Patients with a 135-day course of treatment with ACEIs/ARBs or who have a contraindication/previous adverse reaction to ACEI/ARB therapy.

**Note**: This numerator does *not* include refusals.

Patients with a 135-day course of treatment with statins or who have a contraindication/previous adverse reaction to statin therapy.

**Note**: This numerator does *not* include refusals.

Also included for the numerators above are subnumerators:

- a. Patients with active prescription for the specified medication
- b. Patients with contraindication/previous adverse reaction to the specified medication

Patients with documented refusal of the specified medication

Patients with a 135-day course of treatment for all post-AMI medications (i.e., beta-blocker, ASA/anti-platelet, ACEI/ARB, and statin) following first discharge date or visit date, including previous active prescriptions; and/or who have a contraindication/previous adverse reaction.

**Note**: This numerator does *not* include refusals.

## **Logic Description**

Age is calculated at the beginning of the Report Period.

Acute Myocardial Infarction (AMI) definition: POV 410.0\* through 410.9\* or 412. AMI diagnosis may be made at an inpatient or outpatient visit but must occur between six months prior to beginning of Report Period through first six months of the Report Period. Inpatient visit defined as Service Category of H (Hospitalization). If patient has more than one episode of AMI during the timeframe, CRS will include only the first hospital discharge or ambulatory visit.

#### **Denominator Exclusions**

Patients meeting any of the following conditions will be excluded from the denominator.

- If inpatient visit, patients with Discharge Type of Irregular (AMA), Transferred, or contains "Death."
- Patients with a Diagnosis Modifier of C (Consider), D (Doubtful), M (Maybe, Possible, Perhaps), O (Rule Out), P (Probable), R (Resolved), S (Suspect, Suspicious), or T (Status Post).
- Patients with a Provider Narrative beginning with "Consider," "Doubtful,"
   "Maybe," "Possible," "Perhaps," "Rule Out," "R/O," "Probable," "Resolved,"
   "Suspect," "Suspicious," or "Status Post."

#### **Numerator Logic**

In the logic below, "ever" is defined as anytime through the end of the Report Period.

To be included in the numerators, a patient must meet one of the three conditions below.

- 1. A total days' supply greater than or equal to (>=) 135 days in the 180 days following discharge date for inpatient visits or visit date for ambulatory visits. Medications must not have a comment of RETURNED TO STOCK. Prior active prescriptions can be included if the treatment days fall within the 180 days following discharge/visit date. Prior active prescription defined as most recent prescription (see codes below) prior to admission/visit date with the number of days supply equal to or greater than the discharge/visit date minus the prescription date; *or*
- 2. A refusal of the medication at least once at time of diagnosis through the 180 days after AMI; *or*
- 3. Have a contraindication/previous adverse reaction to the indicated medication.
- 4. Refusals and contraindications/previous ADR/allergies are only counted if a patient did not have a prescription for the indicated medication. Patients without a prescription who have a refusal and/or contraindication/ADR/allergy will be counted in subnumerators B–C. Because a patient may have both a refusal and a contraindication/ADR/allergy, the sub-numerator totals of A–C may not add up the to the numerator total.

**Note:** If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

Example of patient included in the beta-blocker numerator who has prior active prescription:

- Admission Date: 2/1/2012, Discharge Date: 2/15/2012
- Must have 135 days prescribed by 8/13/2012 (Discharge Date+180)
- Prior Beta-Blocker Rx Date: 1/15/2012
- # Days Prescribed: 60 (treats patient through 3/15/2012)
- Discharge Date minus Rx Date: 2/15/2012 through 1/15/2012 = 31, 60 is greater than or equal to (>=) 31, prescription is considered Prior Active Rx
- 3/15/2012 is between 2/15 and 8/13/2012, thus remainder of Prior Active Rx can be counted toward 180-day treatment period

- # Remaining Days Prescribed from Prior Active Rx:
- (60-(Discharge Date-Prior Rx Date) = 60-(2/15/2012-1/15/2012) = 60-31 = 29
- Rx #2: 4/1/2012, # Days Prescribed: 90
- Rx #3: 7/10/2012, #Days Prescribed: 90
- Total Days Supply Prescribed between 2/15 and 8/13/2012: 29+90+90=209

#### **Beta-Blocker Numerator Logic**

Beta-blocker medication codes defined with medication taxonomy BGP HEDIS BETA BLOCKER MEDS. (Medications are: Noncardioselective Beta Blockers: Carteolol, Carvedilol, Labetalol, Nadolol, Penbutolol, Pindolol, Propranolol, Timolol, Sotalol; Cardioselective Beta Blockers: Acebutolol, Atenolol, Betaxolol, Bisoprolol, Metoprolol, Nebivolol; and Antihypertensive Combinations: Atenolol-chlorthalidone, Bendroflumethiazide-nadolol, Bisoprolol-hydrochlorothiazide, Hydrochlorothiazide-metoprolol and Hydrochlorothiazide-propranolol.)

*Refusal of beta-blocker:* REF refusal of any beta-blocker medication in site-populated medication taxonomy BGP HEDIS BETA BLOCKER MEDS at least once during the period admission/visit date through the 180 days after discharge/visit date.

CRS uses the following codes to define contraindications to beta-blockers.

Contraindication to Beta- Blockers (any of the codes occurring ever, unless otherwise noted)	CPT Codes	ICD and Other Codes
Asthma		<b>POV:</b> 2 diagnoses of 493* on different visit dates
Hypotension		POV: 1 diagnosis of 458*
Heart Block >1 Degree		<b>POV:</b> 1 diagnosis of 426.0, 426.12, 426.13, 426.2, 426.3, 426.4, 426.51, 426.52, 426.53, 426.54, or 426.7
Sinus Bradycardia		POV: 1 diagnosis of 427.81
COPD		<b>POV:</b> 2 diagnoses on different visit dates of 491.2*, 496, or 506.4, or a combination of any of these codes, such as 1 visit with 491.20 and 1 with 496
NMI Refusal	G8011 (old code) at least once during the period admission/visit date through the 180 days after discharge/visit date	Refusal: NMI refusal for any beta-blocker at least once during the period admission/visit date through the 180 days after discharge/visit date

CRS uses the following codes to define adverse drug reactions/documented allergies to beta-blockers.

#### Adverse Drug Reaction/Allergy to Beta-Blockers

ICD and Other Codes
<b>POV:</b> 995.0-995.3 AND E942.0
Entry in ART (Patient Allergies File): "beta block*"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "beta block*", "bblock*" or "b block*"

## ASA (Aspirin)/Other Anti-Platelet Numerator Logic

ASA medication codes defined with medication taxonomy DM AUDIT ASPIRIN DRUGS.

Other anti-platelet medication codes defined with medication taxonomy site-populated BGP ANTI-PLATELET DRUGS taxonomy.

Refusal of ASA/other anti-platelet: REF refusal of any ASA or anti-platelet medication in site-populated medication taxonomies DM AUDIT ASPIRIN DRUGS or DM AUDIT ANTI-PLATELET DRUGS at least once during the period admission/visit date through the 180 days after discharge/visit date.

CRS uses the following codes to define contraindications to ASA/other anti-platelets.

Contraindication to ASA/Other Anti-Platelets (any of the codes occurring ever, unless otherwise noted)		ICD and Other Codes
Active prescription for Warfarin/Coumadin during the period admission/visit date through the 180 days after discharge/visit date		Site-Populated Drug Taxonomy: BGP CMS WARFARIN MEDS
Hemorrhage		<b>POV</b> : 459.0
NMI Refusal	G8008 (old code) at least once during the period admission/visit date through the 180 days after discharge/visit date	Refusal: NMI (not medically indicated) refusal for any aspirin/other anti-platelet at least once during the period admission/visit date through the 180 days after discharge/visit date

CRS uses the following codes to define adverse drug reactions/documented allergies to ASA/other anti-platelets.

## Adverse Drug Reaction/Allergy to ASA/Other Anti-Platelets

ICD and Other Codes
<b>POV:</b> 995.0-995.3 AND E935.3
Entry in ART (Patient Allergies File): "aspirin"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "ASA" or "aspirin"

#### **ACEI/ARB Numerator Logic**

Ace Inhibitor (ACEI) medication codes defined with medication taxonomy BGP HEDIS ACEI MEDS. ACEI medications are: Angiotensin Converting Enzyme Inhibitors (Benazepril, Captopril, Enalapril, Fosinopril, Lisinopril, Moexipril, Perindopril, Quinapril, Ramipril, Trandolopril).

Antihypertensive Combinations (Amlodipine-benazepril, Benazepril-hydrochlorothiazide, Captopril-hydrochlorothiazide, Enalapril-hydrochlorothiazide, Fosinopril-hydrochlorothiazide, Hydrochlorothiazide-lisinopril, Hydrochlorothiazide-moexipril, Hydrochlorothiazide-quinapril, Trandolapril-verapamil).

Refusal of ACEI: REF refusal of any ACE Inhibitor medication in site-populated medication taxonomy BGP HEDIS ACEI MEDS at least once during the period admission/visit date through the 180 days after discharge/visit date.

CRS uses the following codes to define contraindications to ACE inhibitors.

Contraindication to ACE Inhibitors (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
Pregnancy		See below for definition
Breastfeeding		<b>POV:</b> V24.1 during the period admission/visit date through the 180 days after discharge/visit date
		Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF-MK, or BF-N during the period admission/visit date through the 180 days after discharge/visit date
Moderate or Severe Aortic Stenosis		<b>POV:</b> 395.0, 395.2, 396.0, 396.2, 396.8, 424.1, 425.1, or 747.22
NMI Refusal		Refusal: NMI refusal for any ACE inhibitor at least once during the period admission/visit date through the 180 days after discharge/visit date

CRS uses the following codes to define adverse drug reactions/documented allergies to ACE inhibitors.

## **Adverse Drug Reaction/Allergy to ACE Inhibitors**

ICD and Other Codes
<b>POV:</b> 995.0-995.3 AND E942.6
Entry in ART (Patient Allergies File): "ace inhibitor" or "ACEI"
Contained within or Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "ace i*" or "ACEI"

ARB (Angiotensin Receptor Blocker) medication codes defined with medication taxonomy BGP HEDIS ARB MEDS. ARB medications are: Angiotensin II Inhibitors (Azilsartan, Candesartan, Eprosartan, Irbesartan, Losartan, Olmesartan, Telmisartan, Valsartan.).

Antihypertensive Combinations (Aliskiren-Amlodipine-hydrochlorothiazide, Aliskiren-valsartan, Amlodipine-hydrochlorothiazide-olmesartan, Amlodipine-hydrochlorothiazide-valsartan, Amlodipine-olmesartan, Amlodipine-Telmisartan, Candesartan-hydrochlorothiazide, Eprosartan-hydrochlorothiazide, Hydrochlorothiazide-Irbesartan, Hydrochlorothiazide-Losartan, Hydrochlorothiazide-olmesartan, Hydrochlorothiazide-Valsartan).

Refusal of ARB: REF refusal of any ARB medication in site-populated medication taxonomy BGP HEDIS ARB MEDS at least once during the period admission/visit date through the 180 days after discharge/visit date.

CRS uses the following codes to define contraindications to ARBs.

Contraindication to ARBs (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
Pregnancy		See below for definition
Breastfeeding		<b>POV:</b> V24.1 during the period admission/visit date through the 180 days after discharge/visit date
		Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF-MK, or BF-N during the period admission/visit date through the 180 days after discharge/visit date
Moderate or Severe Aortic Stenosis		<b>POV:</b> 395.0, 395.2, 396.0, 396.2, 396.8, 424.1, 425.1, or 747.22

Contraindication to ARBs (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
NMI Refusal		<b>Refusal:</b> NMI refusal for any ARB at least once during the period admission/visit date through the 180 days after discharge/visit date

CRS uses the following codes to define adverse drug reactions/documented allergies to ARBs.

## Adverse Drug Reaction/Allergy to ARBs

ICD and Other Codes
<b>POV:</b> 995.0-995.3 AND E942.6
Entry in ART (Patient Allergies File): "Angiotensin Receptor Blocker" or "ARB"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "Angiotensin Receptor Blocker" or "ARB"

# **Statins Numerator Logic**

Statin medication codes defined with medication taxonomy BGP PQA STATIN MEDS. Statin medications: Atorvostatin (Lipitor), Fluvastatin (Lescol), Lovastatin (Altocor, Altoprev, Mevacor), Pravastatin (Pravachol), Pitavastatin (Livalo), Simvastatin (Zocor), Rosuvastatin (Crestor).

Statin Combination Products: Advicor, Caduet, PraviGard Pac, Vytorin.

*Refusal of Statin:* REF refusal of any statin medication in site-populated medication taxonomy BGP PQA STATIN MEDS at least once during admission/visit date through the 180 days after discharge/visit date.

CRS uses the following codes to define contraindications to statins.

(a	ontraindication to Statins ny of the codes occurring ver, unless otherwise noted)	CPT Codes	ICD and Other Codes
Pr	egnancy		See below for definition

Contraindication to Statins (any of the codes occurring ever, unless otherwise noted)	CPT Codes	ICD and Other Codes
Breastfeeding		<b>POV:</b> V24.1 during the period admission/visit date through the 180 days after discharge/visit date
		Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF-MK, or BF-N during the period admission/visit date through the 180 days after discharge/visit date
Acute Alcoholic Hepatitis		POV: 571.1 during the period admission/visit date through the 180 days after discharge/visit date
NMI Refusal		Refusal: NMI refusal for any statin at least once during the period admission/visit date through the 180 days after discharge/visit date

CRS uses the following codes to define adverse drug reactions/documented allergies to statins.

# **Adverse Drug Reaction/Allergy to Statins**

•	
ICD and Other Codes	
	LT TAX, with ALT and/or
	TINE KINASE TAX, with els > 10x ULN or CK > 10,000 mission/visit date through the
	defined as any of the d admission/visit date through rge/visit date: 359.0–359.9,
<b>POV:</b> 995.0–995.3 AND E	942.9
Entry in ART (Patient AI "statins"	lergies File): "statin" or
1	in Provider Narrative for V14.8: "Statin" or "Statins"

	<b>POV or Problem List:</b> At least two visits during the Report Period with 640.03, 640.83, 640.93, 641.03, 641.13, 641.23, 641.33, 641.83, 641.93, 642.03, 642.13, 642.23, 642.33, 642.43, 642.53 642.63,
\	with 640.03, 640.83, 640.93, 641.03, 641.13, 641.23, 641.33, 641.83, 641.93, 642.03, 642.13, 642.23, 642.33, 642.43, 642.53 642.63,
	642.73, 642.93, 643.03, 643.13, 643.23, 643.83, 643.93, 644.03,
	644.13, 645.13, 645.23, 646.03, 646.13, 646.23, 646.33, 646.43,
	646.53, 646.63, 646.73, 646.83, 646.93, 647.03, 647.13, 647.23,
	647.33, 647.43, 647.53, 647.63, 647.83, 647.93, 648.03, 648.13,
	648.23, 648.33, 648.43, 648.53, 648.63, 648.73, 648.83, 648.93,
	649.03, 649.13, 649.23, 649.33, 649.43, 649.53, 649.63, 649.73,
	651.03, 651.13, 651.23, 651.33, 651.43, 651.53, 651.63, 651.73,
	651.83, 651.93, 652.03, 652.13, 652.23, 652.33, 652.43, 652.53, 652.63, 652.73, 652.83, 652.93, 653.03, 653.13, 653.23, 653.33,
	653.43, 653.53, 653.63, 653.73, 653.83, 653.93, 654.03, 654.13,
	654.23, 654.33, 654.43, 654.53, 654.63, 654.73, 654.83, 654.93,
	655.03, 655.13, 655.23, 655.33, 655.43, 655.53, 655.63, 655.73,
	655.83, 655.93, 656.03, 656.13, 656.23, 656.33, 656.43, 656.53,
	656.63, 656.73, 656.83, 656.93, 657.03, 658.03, 658.13, 658.23,
	658.33, 658.43, 658.83, 658.93, 659.03, 659.13, 659.23, 659.33,
	659.43, 659.53, 659.63, 659.73, 659.83, 659.93, 660.03, 660.13,
(	660.23, 660.33, 660.43, 660.53, 660.63, 660.73, 660.83, 660.93,
	661.03, 661.13, 661.23, 661.33, 661.43, 661.93, 662.03, 662.13,
	662.23, 662.33, 663.03, 663.13, 663.23, 663.33, 663.43, 663.53,
	663.63, 663.83, 663.93, 665.03, 665.83, 665.93, 668.03, 668.13,
	668.23, 668.83, 668.93, 669.03, 669.13, 669.23, 669.43, 669.83,
	669.93, 671.03, 671.13, 671.23, 671.33, 671.53, 671.83, 671.93,
	673.03, 673.13, 673.23, 673.33, 673.83, 674.03, 674.53, 675.03,
	675.13, 675.23, 675.83, 675.93, 676.03, 676.13, 676.23, 676.33,
	676.43, 676.53, 676.63, 676.83, 676.93, 678.03, 678.13, 679.03,
	679.13, V22.0 – V23.9, V28.81, V28.82, V28.89, V72.42, V89.01- V89.09, where the primary provider is not a CHR (Provider code 53),
	and with no documented miscarriage or abortion (defined below)
	occurring after the second pregnancy POV. Pharmacy-only visits
	(clinic code 39) will not count toward these two visits. If the patient
	has more than two pregnancy-related visits during the Report Period,
	CRS will use the first two visits in the Report Period.
Abortion	CPTs: 59100, 59120, 59130, 59136, 59150, 59151, 59840, 59841,
	59850, 59851, 59852, 59855, 59856, 59857, S2260-S2267
	<b>POVs:</b> 635*, 636*, or 637*
	<b>Procedures</b> : 69.01, 69.51, 74.91, 96.49
Miscarriage	CPTs: 59812, 59820, 59821, 59830
	POVs: 630, 631, 632, 633*, or 634*

# **All Medications Numerator Logic**

To be included in this numerator, a patient must have a prescription, refusal, or a contraindication for *all* of the four medication classes (i.e., beta-blocker, ASA/other anti-platelet, ACEI/ARB, *and* statin).

#### **Key Logic Changes from CRS Version 12.0**

- 1. Updated POV codes for pregnancy definition to only include antepartum pregnancy codes.
- 2. Updated pregnancy definition to exclude visits where the primary provider is a CHR (Provider code 53).
- 3. Added code 48134-1 to LOINC taxonomy for ALT.
- 4. Added codes 12187-1, 12189-7, 13969-1, 15048-2, 15049-0, 20569-0, 2152-7, 2154-3, 2155-0, 2158-4, 32673-6, 33547-1, 38482-6, 49129-0, 49136-5, 49551-5, 50757-4, 9642-0, 9643-8 to LOINC taxonomy for Creatine Kinase.
- 5. Replaced BGP HEDIS STATIN MEDS with BGP PQA STATIN MEDS.
- 6. Updated BGP HEDIS ARB MEDS medications to include Azilsartan, Aliskiren-Amlodipine-hydrochlorothiazide, Amlodipine-hydrochlorothiazide-olmesartan, and Amlodipine-Telmisartan.
- 7. Updated BGP PQA STATIN MEDS medications to include Altoprev and Pitavastatin.

#### **Patient List Description**

List of patients with AMI, with persistent medication therapy, if any.

#### **Measure Source**

American Heart Association/American College of Cardiology Guidelines for the Treatment of AMI.

#### **Measure Past Performance and Long-Term Targets**

None

```
DU
                              November 25, 2012
                                                                      Page 228
       *** IHS 2012 Selected Measures with Community Specified Report ***
                             DEMO INDIAN HOSPITAL
                  Report Period: Jan 01, 2012 to Dec 31, 2012
              Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                 Baseline Period: Jan 01, 2000 to Dec 31, 2000
Persistence of Appropriate Medication Therapy after a Heart Attack
                    REPORT
                                  PREV YR
                                             % CHG from BASE
                                                                    % CHG from
                    PERIOD
                                  PERIOD
                                                 PREV YR % PERIOD
                                                                        BASE %
Active Clinical Pts 35+
w/ AMI DX
                                         4
                                                                4
                         61
```

# w/135-day beta-block	er								
Rx/contra/ADR									
-No Refusals	23	37.7	2	50.0	-12.3	3	75.0	-37.3	
A. $\#$ w/135-day beta bl	ocker								
Rx w/ % of Total	3	13.0	2	100.0	-87.0	2	66.7	-53.6	
B. # w/contra/ADR									
w/ % of Total	20	87.0	0	0.0	+87.0	1	33.3	+53.6	
# w/ beta-blocker									
refusal	1	1.6	0	0.0	+1.6	0	0.0	+1.6	
# w/135-day ASA									
Rx/contra/ADR									
-No Refusals	5	8.2	0	0.0	+8.2	2	50.0	-41.8	
A. # w/135-day ASA	_		_			_			
Rx w/% of Total	1	20.0	0	0.0	+20.0	2	100.0	-80.0	
B. # w/contra/ADR	_		_			_			
w/% of Total	4	80.0	0	0.0	+80.0	0	0.0	+80.0	
# w/ ASA refusal	2	3.3	0	0.0	+3.3	0		+3.3	
# W/ Mon Iclasai		3.3	Ü	0.0	13.3	O	0.0	, 3.3	
# w/135-day ACEI/ARB									
Rx/contra/ADR									
-No Refusals	13	21.3	1	25.0	-3.7	1	25.0	-3.7	
A. # w/135-day ACEI/AR		21.5	_	23.0	5.7	_	23.0	3.7	
Rx w/% of Total	1	7.7	1	100.0	-92.3	1	100.0	-92.3	
B. # w/contra/ADR	_	, . ,	_	100.0	72.3	_	100.0	22.3	
w/ % of Total	12	92.3	0	0.0	+92.3	0	0.0	+92.3	
# w/ ACEI/ARB		22.3	Ü	0.0	1,72.5	O	0.0	1,02.3	
refusal	1	1.6	0	0.0	+1.6	0	0.0	+1.6	
Terusar		1.0	U	0.0	+1.0	U	0.0	+1.0	
# w/135-day statin									
Rx/contra/ADR									
-No Refusals	6	9.8	2	50.0	-40.2	2	50.0	-40.2	
A. # w/135-day statin	U	٥.٥	Z	50.0	10.2	2	50.0	40.2	
Rx w/% of Total	2	33.3	2	100.0	-66.7	2	100.0	-66.7	
B. # w/contra/ADR	۷	33.3	Z	100.0	-00.7	۷	100.0	-00.7	
w/% of Total	4	66.7	0	0.0	+66.7	0	0.0	+66.7	
# w/ Statin refusal	2	3.3	0	0.0	+3.3	0	0.0	+3.3	
# w/ Statin relusar	Z	3.3	U	0.0	+3.3	U	0.0	+3.3	
# w/Rx/contra/ADR of A	тт								
# W/RX/CONTRA/ADR OF A	<u>л</u> гг	3.3	0	0.0	+3.3	1	25.0	-21.7	
meds-NO Relusals		3.3	U	0.0	тэ.э		∠5.0	-21.7	

Figure 2-86: Sample Report, Persistence of Appropriate Medication Therapy after a Heart Attack

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Persistence of Appropriate Medication Therapy after a Heart Attack: List of patients with AMI, with persistent medication therapy, if any

PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR

PATIENT1,RHONDA 000001 COMMUNITY #1 F 35
AC ALL MEDS: BETA: 03/07/10 03/13/10 Contra 2 POV asthma; ASA: 05/23/12 Contra NMI ASPIRIN 325MG CAP; ACEI/ARB: 07/01/12 ADR Problem List 995.0 ACEI; STATIN: 07/01/12 ADR creat kinase of 5000

```
PATIENT2, KATHLEEN 000002 COMMUNITY #1 F 38

AC BETA: 06/02/12 ADR POV V14.8

PATIENT3, KIMBERLY A 000003 COMMUNITY #1 F 49

AC BETA: 03/01/12 Contra 2/3 heart block POV 426.12;

ACEI/ARB: Contra pregnant; STATIN: Contra pregnant

PATIENT4, TIMOTHY 000004 COMMUNITY #1 M 57

AC ACEI/ARB: 06/15/12 Contra POV V24.1; STATIN: 06/15/12

Contra POV V24.1

PATIENT5, JOSHUA 000005 COMMUNITY #1 M 63

AC ACEI/ARB: 02/03/12 Contra Aortic POV 395.0
```

Figure 2-87: Sample Patient List: Persistence of Appropriate Medication Therapy after a Heart Attack

# 2.8.12 Appropriate Medication Therapy in High Risk Patients

#### **Denominators**

Active IHD patients ages 22 and older; defined as all Active Clinical patients diagnosed with IHD prior to the Report Period, and at least two visits during the Report Period, and two IHD-related visits ever.

- Active IHD patients ages 22 and older who are not Active Diabetic.
- Active IHD patients ages 22 and older who are Active Diabetic

#### **Numerators**

Patients with a 180-day course of treatment with *beta-blockers* during the Report Period, or who have a contraindication/previous adverse reaction to beta-blocker therapy.

**Note**: This numerator does *not* include refusals.

Patients with a 180-day course of treatment with ASA (aspirin) or other anti-platelet agent during the Report Period, or who have a contraindication/previous adverse reaction to ASA/anti-platelet therapy.

**Note**: This numerator does *not* include refusals.

Patients with a 180-day course of treatment with *ACEIs/ARBs* during the Report Period, or who have a contraindication/previous adverse reaction to ACEI/ARB therapy.

**Note**: This numerator does *not* include refusals.

Patients with a 180-day course of treatment with *statins* during the Report Period, or who have a contraindication/previous adverse reaction to statin therapy.

**Note**: This numerator does *not* include refusals.

Also included for the numerators above are subnumerators:

- a. Patients with active prescription for the specified medication
- Patients with contraindication/previous adverse reaction to the specified medication

Patients with documented refusal of the specified medication

Patients with a 180-day course of treatment for *all medications* (i.e., beta-blocker, aspirin/anti-platelet, ACEI/ARB, *and* statin) during the Report Period, and/or who have a contraindication/previous adverse reaction.

**Note**: This numerator does *not* include refusals.

## **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

IHD diagnosis defined as: 410.0 through 412.\*, 414.0 through 414.9, or 429.2 recorded in the V POV file.

Diabetes defined as: Diagnosed with diabetes (first POV in V POV with 250.00 through 250.93) prior to the Current Report Period, and at least two visits during the Current Report period, and two DM-related visits ever. Patients not meeting these criteria are considered non-diabetics.

Numerator Logic

In the logic below, "ever" is defined as anytime through the end of the Report Period.

To be included in the numerators, a patient must meet one of the three conditions below:

- 1. Prescription(s) for the indicated medication with a total days supply of 180 days or more during the Report Period. Medications must not have a comment of RETURNED TO STOCK; *or*
- 2. A refusal of the medication during the Report Period; or
- 3. Have a contraindication/previous adverse reaction to the indicated medication

Refusals and contraindications/previous ADR/allergies are only counted if a patient did not have a prescription for the indicated medication. Patients without a prescription who have a refusal and/or contraindication/ADR/ allergy will be counted in sub-numerators B–C. Because a patient may have both a refusal and a contraindication/ADR/allergy, the sub-numerator totals of A–C may not add up the to the numerator total.

For prescriptions, the days supply requirement may be met with a single prescription or from a combination of prescriptions for the indicated medication that were filled during the Report Period and prescriptions filled prior to the Report Period but which are still active (i.e., prior active prescription). Prior active prescriptions can be included if the treatment days fall within the Report Period. Prior active prescription defined as most recent prescription for the indicated medication (see codes below) prior to Report Period Start Date with the number of days supply equal to or greater than the Report Period Start Date minus the prescription date.

**Note:** If a prescription for a medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

Example of patient included in the beta-blocker numerator with prior active prescription:

- Report Period: 07/01/2011 through 06/30/2012
- Must have 180 days supply of indicated medication 6/30/2012 (end of Report Period)
- Prior Beta-Blocker Rx Date: 06/01/2011
- # Days Prescribed: 60 (treats patient through 07/31/2011)
- Report Period Start Date minus Rx Date: 07/01/2011-06/01/2011 = 30; 60 (#Days Prescribed) is greater than or equal to (>=) 30, prescription is considered Prior Active Rx
- 07/31/2011 is between the Report Period of 07/01/2011 and 06/30/2012, thus remainder of Prior Active Rx can be counted toward 180-days supply
- # Remaining Days Prescribed from Prior Active Rx:
- (# Days Prescribed-(Report Period Start Date-Prior Rx Date) = 60-(07/01/2011-06/01/2011) = 60-30 = 30
- Rx #2: 08/05/2011, # Days Prescribed: 90
- Rx #3: 11/10/2011, #Days Prescribed: 90
- Total Days Supply Prescribed between 07/01/2011 and 06/30/2012, including prior active prescription: 30+90+90=210

## **Beta-Blocker Numerator Logic**

Beta-blocker medication codes defined with medication taxonomy BGP HEDIS BETA BLOCKER MEDS. Medications are: Noncardioselective Beta Blockers: Carteolol, Carvedilol, Labetalol, Nadolol, Penbutolol, Pindolol, Propranolol, Timolol, Sotalol; Cardioselective Beta Blockers: Acebutolol, Atenolol, Betaxolol, Bisoprolol, Metoprolol, Nebivolol; and Antihypertensive Combinations: Atenolol-chlorthalidone, Bendroflumethiazide-nadolol, Bisoprolol-hydrochlorothiazide, Hydrochlorothiazide-metoprolol, and Hydrochlorothiazide-propranolol.

*Refusal of beta-blocker:* REF refusal of any beta-blocker medication in site-populated medication taxonomy BGP HEDIS BETA BLOCKER MEDS at least once during the Report Period.

CRS uses the following codes to define contraindications to beta-blockers.

Contraindication to Beta- Blockers (any of the codes occurring ever, unless otherwise noted)	CPT Codes	ICD and Other Codes
Asthma		<b>POV</b> : 2 diagnoses of 493* on different visit dates
Hypotension		POV: 1 diagnosis of 458*
Heart Block >1 Degree		<b>POV</b> : 1 diagnosis of 426.0, 426.12, 426.13, 426.2, 426.3, 426.4, 426.51, 426.52, 426.53, 426.54, or 426.7
Sinus Bradycardia		POV: 1 diagnosis of 427.81
COPD		<b>POV</b> : 2 diagnoses on different visit dates of 491.2*, 496, or 506.4, or a combination of any of these codes, such as 1 visit with 491.20 and 1 with 496
NMI Refusal	G8011 (old code) at least once during the Report Period	Refusal: NMI refusal for any beta-blocker at least once during the Report Period

CRS uses the following codes to define adverse drug reactions/documented allergies to beta-blockers.

# Adverse Drug Reaction/Allergy to Beta-Blockers

ICD and Other Codes			
<b>POV</b> : 995.0-995.3 AND E942.0			
Entry in ART (Patient Allergies File): "beta block*"			
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "beta block*", "bblock*" or "b block*"			

## ASA (aspirin)/Other Anti-Platelet Numerator Logic

ASA medication codes defined with medication taxonomy DM AUDIT ASPIRIN DRUGS.

Other anti-platelet medication codes defined with medication taxonomy site-populated BGP ANTI-PLATELET DRUGS taxonomy.

Refusal of ASA/other anti-platelet: REF refusal of any ASA or anti-platelet medication in site-populated medication taxonomies DM AUDIT ASPIRIN DRUGS or BGP ANTI-PLATELET DRUGS at least once during the Report Period.

CRS uses the following codes to define contraindications to ASA/other anti-platelets.

Contraindication to ASA/Other Anti-Platelets (any of the codes occurring ever, unless otherwise noted)		ICD and Other Codes	
180-day course of treatment for Warfarin/Coumadin during the Report Period		Site-Populated Drug Taxonomy: BGP CMS WARFARIN MEDS	
Hemorrhage		<b>POV</b> : 459.0	
NMI Refusal	G8008 (old code) at least once during the Report Period	Refusal: NMI (not medically indicated) refusal for any aspirin at least once during the Report Period	

CRS uses the following codes to define adverse drug reactions/documented allergies to ASA/other anti-platelets.

# Adverse Drug Reaction/Allergy to ASA/Other Anti-Platelets

ICD and Other Codes			
<b>POV</b> : 995.0-995.3 AND E935.3			
Entry in ART (Patient Allergies File): "aspirin"			
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "ASA" or "aspirin"			

# **ACEI/ARB Numerator Logic**

Ace Inhibitor (ACEI) medication codes defined with medication taxonomy BGP HEDIS ACEI MEDS. ACEI medications are: Angiotensin Converting Enzyme Inhibitors (Benazepril, Captopril, Enalapril, Fosinopril, Lisinopril, Moexipril, Perindopril, Quinapril, Ramipril, Trandolopril.)

Antihypertensive Combinations: (Amlodipine-benazepril, Benazepril-hydrochlorothiazide, Captopril-hydrochlorothiazide, Enalapril-hydrochlorothiazide, Fosinopril-hydrochlorothiazide, Hydrochlorothiazide-lisinopril, Hydrochlorothiazide-moexipril, Hydrochlorothiazide-quinapril, Trandolapril-verapamil.)

*Refusal of ACEI:* REF refusal of any ACE Inhibitor medication in site-populated medication taxonomy BGP HEDIS ACEI MEDS at least during the Report Period.

CRS uses the following codes to define contraindications to ACE inhibitors.

Contraindication to ACE Inhibitors (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes
Pregnancy		See below for definition
Breastfeeding		POV: V24.1 during the Report Period Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF- MK, or BF-N during the Report Period
Moderate or Severe Aortic Stenosis		<b>POV:</b> 395.0, 395.2, 396.0, 396.2, 396.8, 424.1, 425.1, or 747.22
NMI Refusal		<b>Refusal:</b> NMI refusal for any ACE inhibitor at least once during the Report Period

CRS uses the following codes to define adverse drug reactions/documented allergies to ACE inhibitors.

# **Adverse Drug Reaction/Allergy to ACE Inhibitors**

ICD and Other Codes
<b>POV</b> : 995.0-995.3 AND E942.6
<b>Entry in ART (Patient Allergies File)</b> : "ace inhibitor" or "ACEI"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "ace i*" or "ACEI"

ARB (Angiotensin Receptor Blocker) medication codes defined with medication taxonomy BGP HEDIS ARB MEDS. ARB medications are: Angiotensin II Inhibitors (Azilsartan, Candesartan, Eprosartan, Irbesartan, Losartan, Olmesartan, Telmisartan, Valsartan.)

Antihypertensive Combinations (Aliskiren-Amlodipine-hydrochlorothiazide, Aliskiren-valsartan, Amlodipine-hydrochlorothiazide-olmesartan, Amlodipine-hydrochlorothiazide-valsartan, Amlodipine-olmesartan, Amlodipine-Telmisartan, Candesartan-hydrochlorothiazide, Eprosartan-hydrochlorothiazide, Hydrochlorothiazide-Irbesartan, Hydrochlorothiazide-Losartan, Hydrochlorothiazide-olmesartan, Hydrochlorothiazide-Valsartan).

*Refusal of ARB:* REF refusal of any ARB medication in site-populated medication taxonomy BGP HEDIS ARB MEDS at least once during the Report Period.

CRS uses the following codes to define contraindications to ARBs.

Contraindication to ARBs (any of the codes occurring ever unless otherwise noted)	CPT Codes	ICD and Other Codes	
Pregnancy		See below for definition	
Breastfeeding		POV: V24.1 during the Report Period Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF- MK, or BF-N during the Report Period	
Moderate or Severe Aortic Stenosis		<b>POV:</b> 395.0, 395.2, 396.0, 396.2, 396.8, 424.1, 425.1, or 747.22	
NMI Refusal		Refusal: NMI (not medically indicated) refusal for any ARB at least once during the Report Period	

CRS uses the following codes to define adverse drug reactions/documented allergies to ARBs.

## Adverse Drug Reaction/Allergy to ARBs

ICD and Other Codes
<b>POV</b> : 995.0-995.3 AND E942.6
Entry in ART (Patient Allergies File): "Angiotensin Receptor Blocker" or "ARB"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "Angiotensin Receptor Blocker" or "ARB"

## **Statins Numerator Logic**

Statin medication codes defined with medication taxonomy BGP PQA STATIN MEDS. Statin medications are: Atorvostatin (Lipitor), Fluvastatin (Lescol), Lovastatin (Altocor, Altoprev, Mevacor), Pravastatin (Pravachol), Pitavastatin (Livalo), Simvastatin (Zocor), Rosuvastatin (Crestor).

Statin Combination Products: Advicor, Caduet, PraviGard Pac, Vytori.

*Refusal of Statin*: REF refusal of any statin medication in site-populated medication taxonomy BGP PQA STATIN MEDS at least once during the Report Period.

CRS uses the following codes to define contraindications to statins.

Contraindication to ACE Inhibitors (any of the codes occurring ever, unless otherwise noted)	CPT Codes	ICD and Other Codes
Pregnancy		See below for definition
Breastfeeding		POV: V24.1 during the Report Period
		Patient Education: BF-BC, BF-BP, BF-CS, BF-EQ, BF-FU, BF-HC, BF-ON, BF-M, BF-MK, or BF-N during the Report Period
Acute Alcoholic Hepatitis		POV: 571.1 during the Report Period
NMI Refusal		Refusal: NMI refusal for any statin at least once during the Report Period

CRS uses the following codes to define adverse drug reactions/documented allergies to statins.

# **Adverse Drug Reaction/Allergy to Statins**

ICD and Other Codes
Site-Populated Lab Taxonomy or LOINC Taxonomy: DM AUDIT ALT TAX, with ALT and/or AST > 3x the Upper Limit of Normal (ULN) (i.e., Reference High) on 2 or more consecutive visits during the Report Period
Site-Populated Lab Taxonomy or LOINC Taxonomy: BGP CREATINE KINASE TAX, with Creatine Kinase (CK) levels > 10x ULN or CK > 10,000 IU/L during the Report Period
<b>POV</b> : Myopathy/Myalgia, defined as any of the following during the Report Period: 359.0-359.9, 729.1, 710.5, or 074.1
<b>POV</b> : 995.0-995.3 AND E942.9
Entry in ART (Patient Allergies File): "statin" or "statins"
Entry in Problem List or in Provider Narrative for any POV 995.0-995.3 or V14.8: "Statin" or "Statins"

Subject Defined	ICD and CPT Codes				
Pregnancy	POV or Problem List: At least two visits during the Report Period				
	with 640.03, 640.83, 640.93, 641.03, 641.13, 641.23, 641.33, 641.83,				
	641.93, 642.03, 642.13, 642.23, 642.33, 642.43, 642.53 642.63,				
	642.73, 642.93, 643.03, 643.13, 643.23, 643.83, 643.93, 644.03,				
	644.13, 645.13, 645.23, 646.03, 646.13, 646.23, 646.33, 646.43,				
	646.53, 646.63, 646.73, 646.83, 646.93, 647.03, 647.13, 647.23,				
	647.33, 647.43, 647.53, 647.63, 647.83, 647.93, 648.03, 648.13,				
	648.23, 648.33, 648.43, 648.53, 648.63, 648.73, 648.83, 648.93,				
	649.03, 649.13, 649.23, 649.33, 649.43, 649.53, 649.63, 649.73,				
	651.03, 651.13, 651.23, 651.33, 651.43, 651.53, 651.63, 651.73,				
	651.83, 651.93, 652.03, 652.13, 652.23, 652.33, 652.43, 652.53,				
	652.63, 652.73, 652.83, 652.93, 653.03, 653.13, 653.23, 653.33, 653.43, 653.53, 653.63, 653.73, 653.83, 653.93, 654.03, 654.13,				
	654.23, 654.33, 654.43, 654.53, 654.63, 654.73, 654.83, 654.93,				
	655.03, 655.13, 655.23, 655.33, 655.43, 655.53, 655.63, 655.73,				
	655.83, 655.93, 656.03, 656.13, 656.23, 656.33, 656.43, 656.53,				
	656.63, 656.73, 656.83, 656.93, 657.03, 658.03, 658.13, 658.23,				
	658.33, 658.43, 658.83, 658.93, 659.03, 659.13, 659.23, 659.33,				
	659.43, 659.53, 659.63, 659.73, 659.83, 659.93, 660.03, 660.13,				
	660.23, 660.33, 660.43, 660.53, 660.63, 660.73, 660.83, 660.93,				
	661.03, 661.13, 661.23, 661.33, 661.43, 661.93, 662.03, 662.13,				
	662.23, 662.33, 663.03, 663.13, 663.23, 663.33, 663.43, 663.53,				
	663.63, 663.83, 663.93, 665.03, 665.83, 665.93, 668.03, 668.13,				
	668.23, 668.83, 668.93, 669.03, 669.13, 669.23, 669.43, 669.83,				
	669.93, 671.03, 671.13, 671.23, 671.33, 671.53, 671.83, 671.93,				
	673.03, 673.13, 673.23, 673.33, 673.83, 674.03, 674.53, 675.03,				
	675.13, 675.23, 675.83, 675.93, 676.03, 676.13, 676.23, 676.33,				
	676.43, 676.53, 676.63, 676.83, 676.93, 678.03, 678.13, 679.03,				
	679.13, V22.0 – V23.9, V28.81, V28.82, V28.89, V72.42, V89.01-				
	V89.09, where the primary provider is not a CHR (Provider code 53),				
	and with no documented miscarriage or abortion (defined below)				
	occurring after the second pregnancy POV. Pharmacy-only visits				
	(clinic code 39) will not count toward these two visits. If the patient				
	has more than two pregnancy-related visits during the Report Period,				
	CRS will use the first two visits in the Report Period.				
Abortion	<b>CPTs:</b> 59100, 59120, 59130, 59136, 59150, 59151, 59840, 59841,				
	59850, 59851, 59852, 59855, 59856, 59857, S2260-S2267				
	<b>POVs:</b> 635*, 636*, or 637*				
	<b>Procedures</b> : 69.01, 69.51, 74.91, 96.49				
Miscarriage	<b>CPTs:</b> 59812, 59820, 59821, 59830				
	<b>POVs:</b> 630, 631, 632, 633*, or 634*				

# **All Medications Numerator Logic**

To be included in this numerator, a patient must have a prescription, refusal, or a contraindication for *all* of the four medication classes (i.e., beta-blocker, ASA/other anti-platelet, ACEI/ARB, *and* statin).

# **Key Logic Changes from CRS Version 12.0**

- 1. Updated POV codes for pregnancy definition to only include antepartum pregnancy codes.
- 2. Updated pregnancy definition to exclude visits where the primary provider is a CHR (Provider code 53).
- 3. Added code 48134-1 to LOINC taxonomy for ALT.
- 4. Added codes 12187-1, 12189-7, 13969-1, 15048-2, 15049-0, 20569-0, 2152-7, 2154-3, 2155-0, 2158-4, 32673-6, 33547-1, 38482-6, 49129-0, 49136-5, 49551-5, 50757-4, 9642-0, 9643-8 to LOINC taxonomy for Creatine Kinase.
- 5. Replaced BGP HEDIS STATIN MEDS with BGP PQA STATIN MEDS.
- 6. Updated BGP HEDIS ARB MEDS medications to include Azilsartan, Aliskiren-Amlodipine-hydrochlorothiazide, Amlodipine-hydrochlorothiazide-olmesartan, and Amlodipine-Telmisartan.
- 7. Updated BGP PQA STATIN MEDS medications to include Altoprev and Pitavastatin.

## **Patient List Description**

List of IHD patients 22 plus (+) with 180-day medication therapy during the Report Period, if any.

## **Measure Source**

American Heart Association/American College of Cardiology Guidelines

## Measure Past Performance and Long-Term Targets

None

, ·					Page 241
R <sub>f</sub>	eport Period:	Jan 01, 2012 to	Dec 31, 20	012	
Previo	ous Year Period	d: Jan 01, 201	1 to Dec 3	1, 2011	
Bas	seline Period:	Jan 01, 2000	to Dec 31,	2000	
Appropriate Medication Therapy in High Risk Patients					
	REPORT % PERIOD	PREV YR % PERIOD	CHG from PREV YR %		% CHG from BASE %
Active IHD pts 22+	59	38		30	
# w/180 day beta-blocker					

Rx/contra/ADR									
-No Refusals	32	54.2	22	57.9	-3.7	14	46.7	+7.6	
A. $\#$ w/180 day beta-bloc	cker								
Rx w/% of Total	18	56.3	14	63.6	-7.4	11	78.6	-22.3	
B: # w/contra/ADR									
w/ % of Total	14	43.8	8	36.4	+7.4	3	21.4	+22.3	
# w/ beta-blocker									
refusal	1	1.7	0	0.0	+1.7	0	0.0	+1.7	
# w/180 day ASA									
Rx/contra/ADR									
-No Refusals	22	37.3	21	55.3	-18.0	23	76.7	-39.4	
A. # w/180 day ASA	22	37.3	21	33.3	-10.0	23	70.7	-39.4	
Rx w/% of Total	17	77.3	18	85.7	-8.4	18	78.3	-1.0	
B. # w/contra/ADR	Τ,	, , , ,	10	03.7	0.1	10	70.5	1.0	
w/% of Total	5	22.7	3	14.3	+8.4	5	21.7	+1.0	
# w/ ASA refusal	1	1.7	0	0.0	+1.7	0	0.0	+1.7	
" W/ TISTI TSTABAT	_		ŭ	0.0		ŭ	0.0	, _ ,	
# w/180 day ACEI/ARB									
Rx/contra/ADR									
-No Refusals	29	49.2	15	39.5	+9.7	18	60.0	-10.8	
A. # w/180 day ACEI/ARB									
Rx w/% of Total	26	89.7	14	93.3	-3.7	17	94.4	-4.8	
B. # w/contra/ADR									
w/ % of Total	3	10.3	1	6.7	+3.7	1	5.6	+4.8	
# w/ ACEI/ARB									
refusal	1	1.7	0	0.0	+1.7	0	0.0	+1.7	
# w/180 day statin									
Rx/contra/ADR	2.0	<b>50</b> 6					46 -		
-No Refusals	30	50.8	22	57.9	-7.0	14	46.7	+4.2	
A. # w/180 day statin	26	06 5	0.0	00 0	4 0	1.4	100 0	12.2	
Rx w/% of Total	26	86.7	20	90.9	-4.2	14	100.0	-13.3	
B. # w/contra/ADR	1	12.2	2	9.1	. 4 . 2	0	0 0	.12 2	
<pre>w/ % of Total # w/ Statin refusal</pre>	4 1	13.3	2	0.0	+4.2 +1.7	0	0.0	+13.3	
# W/ Statin relusar	Т	1./	U	0.0	+1./	U	0.0	+1./	
# w/180 day Rx/contra/AI	OR /								
of ALL meds	,,,								
-No Refusals	16	27.1	8	21.1	+6.1	6	20.0	+7.1	
1101 40410								.,,-	

Figure 2-88: Sample Report, Appropriate Medication Therapy in High Risk Patients

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Appropriate Medication Therapy in High Risk Patients: List of IHD patients 22+ with 180-day medication therapy during the Report Period, if any.

PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR

\_\_\_\_\_\_

PATIENT1, CAITLYN 000001 COMMUNITY #1 F 22

IHD BETA: 09/11/12 Refused METOPROLOL TARTRATE 50MG TAB; ASA: 09/11/12 Refused ASPIRIN 325MG E.C. TAB; ACEI/ARB: 09/11/12 Refused CAPTOPRIL 25MG TABS; STATIN: 09/11/12 Refused ATORVASTATIN 10MG TAB (ICP) PATIENT2, CARLA 000002 COMMUNITY #1 F 40

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
IHD

PATIENT3,GENEVA 000003 COMMUNITY #1 F 47

JACKSON,SHERRY LADAWN 100939 BRAGGS F 68

IHD,AD ACEI/ARB: (268 TOTAL DAYS); STATIN: (319 TOTAL DAYS)

PATIENT4,SHERRY LISA 000004 COMMUNITY #1 F 68

IHD BETA: 09/12/12 Contra hypotension POV 458.9; ASA:
aspirin Contra total days WARFARIN: 372; STATIN: (328 TOTAL DAYS)

PATIENT5,PAULINE 000005 COMMUNITY #1 F 70

IHD,AD ALL MEDS; BETA: (305 TOTAL DAYS); ASA: (291 TOTAL DAYS); ACEI/ARB: (405 TOTAL DAYS); STATIN: (305 TOTAL DAYS)
```

Figure 2-89: Sample Patient List: Appropriate Medication Therapy in High Risk Patients

# 2.8.13 Stroke and Stroke Rehabilitation: Anticoagulant Therapy Prescribed for Atrial Fibrillation at Discharge

## **Denominator**

Number of visits for *User Population patients* ages 18 and older who were hospitalized during the Report Period with ischemic stroke or transient ischemic attack (TIA) with documented permanent, persistent, or paroxysmal atrial fibrillation.

#### Numerators

Number of visits where patients received a prescription for anticoagulant at discharge

Number of visits where patients refused anticoagulant therapy

Number of visits where patients did not receive anticoagulation therapy

# **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

CRS uses the following codes to define ischemic stroke or transient ischemic attack with atrial fibrillation.

Subject Defined	ICD and Other Codes
Ischemic Stroke or TIA with Atrial Fibrillation (Non-CHS inpatient visit - Type not equal to C and Service Category=H)	<b>V POV:</b> 433.01, 433.11, 433.21, 433.31, 433.81, 433.91, 434.01, 434.11, 434.91, 435.0, 435.1, 435.2, 435.3, 435.8, or 435.9 AND 427.31 (atrial fibrillation)
The patient must be admitted to the hospital during the report period with a condition described here but the discharge may occur after the report period.	

Anticoagulant Therapy: Patient must meet one of the conditions below to be counted as receiving anticoagulant therapy. For all prescriptions, medications must not have a comment of RETURNED TO STOCK.

1. Active prescription for Warfarin, aspirin, or other anti-platelet as of discharge date. "Active" prescription defined as:

Rx Days Supply greater than or equal to (>=) (Discharge Date - Prescription Date), where the prescription has not been discontinued as of the discharge date.

2. Prescription for Warfarin, aspirin, or other anti-platelet on discharge date.

*Warfarin Medication:* Any medication in site-populated BGP CMS WARFARIN MEDS taxonomy.

Aspirin Medication: Any medication in site-populated DM AUDIT ASPIRIN DRUGS taxonomy.

Other Anti-Platelet/Anticoagulant Medication: Any medication in the site-populated BGP ANTI-PLATELET DRUGS taxonomy, any medication with VA Drug Class BL700.

*Refusal of Anticoagulant Therapy*: Refusal of any of the following documented on discharge date:

- 1. Any medication in site-populated taxonomies BGP CMS WARFARIN MEDS, DM AUDIT ASPIRIN DRUGS, or BGP ANTI-PLATELET DRUGS; or
- 2. Any medication with VA Drug Class BL700.

*No Anticoagulant Therapy:* Patients who did not have an active prescription for anticoagulant therapy at time of discharge and did not receive or refuse anticoagulant therapy at discharge.

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of patients with stroke/TIA and atrial fibrillation with anticoagulant therapy, if any.

#### **Measure Source**

None

# Measure Past Performance and Long-Term Targets

None

```
DU
                         November 25, 2012
                                                           Page 248
      *** IHS 2012 Selected Measures with Community Specified Report ***
                         DEMO INDIAN HOSPITAL
               Report Period: Jan 01, 2012 to Dec 31, 2012
           Previous Year Period: Jan 01, 2011 to Dec 31, 2011
             Baseline Period: Jan 01, 2000 to Dec 31, 2000
Stroke and Stroke Rehabilitation: Anticoagulant Therapy Prescribed for Atrial
Fibrillation at Discharge
                 REPORT % PREV YR % CHG from BASE % CHG from
                                        PREV YR % PERIOD
                 PERIOD
                          PERIOD
                                                           BASE %
# Stroke/TIA w/ Atrial
Fib Visits for User
Pop Pts 18+
                     17
# Visits w/
Anticoagulant Rx 5 29.4 0 0.0 +29.4 0 0.0 +29.4
# Visits w/
                     1 5.9
                                  0 0.0 +5.9
Refusal
                                                    0.0
                                                               +5.9
# Visits w/ No
Anticoaqulant
Therapy
                     11 64.7
                                  0 0.0 +64.7 0 0.0
                                                               +64.7
```

Figure 2-90: Sample Report, Stroke and Stroke Rehabilitation: Anticoagulant Therapy Prescribed for Atrial Fibrillation at Discharge

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Stroke and Stroke Rehabilitation: Anticoagulant Therapy Prescribed for Atrial
Fibrillation at Discharge: List of patients with stroke/TIA and atrial
fibrillation with anticoagulant therapy, if any.
                    HRN COMMUNITY
PATIENT NAME
                                         SEX AGE
DENOMINATOR
                          NUMERATOR
______
PATIENT1, SHERRY 000001 COMMUNITY #1 F 38
                       Visit: 1) 04/01/12 POV 433.81 + POV 427.31 THERAPY:
UP
NOT MET: NO THERAPY
PATIENT2, CODY JACK 000002 COMMUNITY #1 M 31
                            Visit: 1) 05/01/12 POV 433.81 + POV 427.31 THERAPY:
05/01/12 MET: WARF; 2) 09/01/12 POV 433.21 + POV 427.31 THERAPY: NOT MET: NO
THERAPY; 3) 10/15/12 POV 434.01 + POV 427.31 THERAPY: 10/15/12 MET: ASA
PATIENT3, TIMOTHY ALLEN 000003 COMMUNITY #1 M 33
                            Visit: 1) 04/01/12 POV 433.21 + POV 427.31 THERAPY:
NOT MET: NO THERAPY
PATIENT4, TRACE 000004 COMMUNITY #1 M 37
                            Visit: 1) 06/01/12 POV 434.01 + POV 427.31 THERAPY:
NOT MET: NO THERAPY
```

Figure 2-91: Sample Patient List: Stroke and Stroke Rehabilitation: Anticoagulant Therapy Prescribed for Atrial Fibrillation at Discharge

# 2.8.14 Cholesterol Management for Patients with Cardiovascular Conditions

#### **Denominators**

Active Clinical patients ages 18 to 75 who, during the first ten months of the year prior to the beginning of the Report Period, were diagnosed with AMI, coronary artery bypass graft (CABG), or percutaneous coronary interventions (PCI) or who were diagnosed with IVD during the Report Period and the year prior to the Report Period. Broken down by gender.

*User Population patients* ages 18 to 75 who, during the first 10 months of the year prior to the beginning of the Report period, were diagnosed with AMI, coronary artery bypass graft (CABG), or percutaneous coronary interventions (PCI) *or* who were diagnosed with IVD during the Report Period and the year prior to the Report Period. Broken down by gender.

#### **Numerators**

Patients with LDL completed during the Report Period, regardless of result.

- a. Patients with LDL less than or equal to (<=)100, completed during the Report Period.
- b. Patients with LDL 101 through 130, completed during the Report Period.
- c. Patients with LDL greater than (>)130, completed during the Report Period.

# **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

Searches for most recent LDL test with a result during the Report Period. If more than one LDL test is found on the same day and/or the same visit and one test has a result and the other does not, the test with the result will be used. If an LDL test with a result is not found, CRS searches for the most recent LDL test without a result. For numerator LDL equal to or less than (=<)100, CPT 3048F will count as meeting the measure.

CRS uses the following codes to define the denominator and numerators.

Subject Defined	CPT Codes		LOINC Codes	Taxonomy
AMI		V POV: 410.*0, 410.*1		

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
PCI	92980, 92982, 92995, G0290	V Procedure: 00.66, 36.01 (old code), 36.02 (old code), 36.05, (old code), or 36.06- 36.07		
CABG	33510-33514, 33516–33519, 33521–33523, 33533–33536, S2205-S2209	V POV: V45.81 V Procedure: 36.1*, 36.2		
IVD		V POV: 411.*, 413.*, 414.0*, 414.2, 414.8, 414.9, 429.2, 433.*-434.*, 440.1, 440.2*, 440.4, 444.*, or 445.*		
LDL	80061, 83700, 83701, 83704, 83715 (old code), 83716 (old code), 83721, 3048F, 3049F, 3050F		Yes	DM AUDIT LDL CHOLESTEROL TAX

# **Key Logic Changes from CRS Version 12.0**

Added codes 11054-4, 13459-3, 14155-6, 16615-7, 16616-5, 43394-6, 44711-0, 44915-7, 50193-2, 53133-5, 56036-7 to LOINC taxonomy for LDL.

# **Patient List Description**

List of patients with AMI, CABG, PCI, or IVD w/LDL value, if any.

## **Measure Source**

**HEDIS** 

# **Measure Past Performance and Long-Term Targets**

None

```
DU
                             November 25, 2012
                                                                     Page 250
       *** IHS 2012 Selected Measures with Community Specified Report ***
                             DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
              Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Cholesterol Management for Patients with Cardiovascular Conditions
                    REPORT
                                  PREV YR
                                              % CHG from BASE
                                                                    % CHG from
                     PERIOD
                                  PERIOD
                                                PREV YR % PERIOD
                                                                       BASE %
```

Active Clinical pts 18 with DX of AMI, CABG,	-75								
PCI, or IVD	42		28			18			
<pre># w/LDL done A. # w/LDL &lt;=100 w/% of Total</pre>	38	90.5	21	75.0	+15.5	9	50.0	+40.5	
Screened B. # w/LDL 101-130 w/% of Total	14	36.8	12	57.1	-20.3	3	33.3	+3.5	
Screened C. # w/LDL >130 w/% of Total	5	13.2	3	14.3	-1.1	2	22.2	-9.1	
Screened	5	13.2	4	19.0	-5.9	4	44.4	-31.3	
Male Active Clinical p									
18-75 with DX of AMI, PCI, or IVD	CABG 22		16			10			
<pre># w/LDL done A. # w/LDL &lt;=100 w/% of Total</pre>	20	90.9	11	68.8	+22.2	4	40.0	+50.9	
Screened B. # w/LDL 101-130 w/% of Total	5	25.0	4	36.4	-11.4	1	25.0	+0.0	
Screened C. # w/LDL >130	2	10.0	3	27.3	-17.3	1	25.0	-15.0	
w/% of Total Screened	4	20.0	2	18.2	+1.8	2	50.0	-30.0	
Female Active Clinical 18-75 with DX of AMI,									
PCI, or IVD	20		12			8			
<pre># w/LDL done A. # w/LDL &lt;=100 w/% of Total</pre>	18	90.0	10	83.3	+6.7	5	62.5	+27.5	
Screened B. # w/LDL 101-130	9	50.0	8	80.0	-30.0	2	40.0	+10.0	
<pre>w/% of Total Screened C. # w/LDL &gt;130</pre>	3	16.7	0	0.0	+16.7	1	20.0	-3.3	
w/% of Total Screened	1	5.6	2	20.0	-14.4	2	40.0	-34.4	

Figure 2-92: Sample Report, Cholesterol Management for Patients with Cardiovascular Conditions

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Cholesterol Management for Patients with Cardiovascular Conditions: List of patients with AMI, CABG, PCI, or IVD w/LDL value, if any.

PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
PATIENT1, SHERRY
                    000001 COMMUNITY #1 F 68
UP,AC
                            07/15/12 LDL: CPT 3048F
PATIENT2, CODY JACK
                      000002 COMMUNITY #1 M 41
UP,AC
PATIENT3, TIMOTHY ALLEN 000003 COMMUNITY #1 M 43
UP,AC
                            10/17/12 LDL: 136
PATIENT4, TRACE
                      000004 COMMUNITY #1 M 47
PATIENT5, KENNETH
                      000005 COMMUNITY #1 M 60
                            08/06/12 LDL: 108
UP,AC
```

Figure 2-93: Sample Patient List: Cholesterol Management for Patients with Cardiovascular Conditions

# 2.8.15 Heart Failure and Evaluation of LVS Function

### **Denominator**

Active Clinical patients ages 18 or older discharged with heart failure during the Report Period.

#### **Numerators**

Patients whose LVS function was evaluated before arrival, during hospitalization, or is planned for after discharge.

# **Logic Description**

Age of the patient is calculated as of the hospital admission date.

Denominator exclusions are defined as any of the following:

- 1. Patients receiving comfort measures only (i.e., patients who received palliative care and usual interventions were not received because a medical decision was made to limit care).
- 2. Patients with a Discharge Type of Transferred or Irregular or containing "Death."
- 3. Patients who had a left ventricular assistive device (LVAD) or heart transplant procedure during hospitalization.

CRS uses the following codes to define the denominator and numerators.

#### **Denominator Exclusions**

Subject Defined	CPT Codes	ICD and Other Codes
Comfort Measures		V POV: V66.7 (Encounter for palliative care) documented during hospital stay
LVAD/Heart Transplant		<b>V Procedure</b> : 33.6, 37.41, 37.51–37.54, 37.61–37.66, 37.68 documented during hospital stay

# **Denominator Definition**

CPT Codes	ICD and Other Codes
	V POV (Primary Diagnosis only): 398.91, 402.01, 402.11, 402.91, 404.01, 404.03, 404.11, 404.13, 404.91, 404.93, 428.0, 428.1, 428.20, 428.21, 428.22, 428.23, 428.30, 428.31, 428.32, 428.33, 428.40, 428.41, 428.42, 428.43, 428.9, 429.1, or 997.1 and with Service Category H (hospitalization). NOTE: If a patient has multiple admissions matching these criteria during the Report Period, the earliest admission will be used.
	CPT Codes

# Numerator Definition (Evaluation of LVS Function): Any of the codes listed below

Subject Defined	CPT Codes	ICD and Other Codes
Ejection Fraction (ordered or documented anytime one year prior to discharge date)	78414, 78468, 78472, 78473, 78480, 78481, 78483, 78494, 93303, 93304, 93307, 93308, 93312, 93314–93318, 93350, 93543, 93555	V Measurement: "CEF" V Procedure: 88.53, 88.54
RCIS Order for Cardiovascular Disorders Referral (ordered during the hospital stay but no later than the hospital discharge date)		ICD Diagnostic Category: "Cardiovascular Disorders" AND one of the following: CPT Categories: "Evaluation and/or Management," "Non-surgical Procedures" or "Diagnostic Imaging"
Other Procedures (documented anytime one year prior to discharge date)		Echocardiogram: V Procedure 88.72, 37.28, 00.24; Nuclear Medicine Test: V Procedure 92.2*; Cardiac Catheterization with a Left Ventriculogram: V Procedure 37.22, 37.23, 88.53, 88.54

# **Key Logic Changes from CRS Version 12.0**

None

# **Patient List Description**

List of Active Clinical heart failure patients 18 plus (+) who received evaluation of LVS function, if any.

## **Measure Source**

CMS HF-2

## Measure Past Performance and Long-Term Targets

None

```
DU
                           November 25, 2012
                                                                Page 255
      *** IHS 2012 Selected Measures with Community Specified Report ***
                           DEMO INDIAN HOSPITAL
                Report Period: Jan 01, 2012 to Dec 31, 2012
            Previous Year Period: Jan 01, 2011 to Dec 31, 2011
              Baseline Period: Jan 01, 2000 to Dec 31, 2000
Heart Failure and Evaluation of LVS Function
                  REPORT
                              PREV YR
                                         % CHG from BASE
                                                              % CHG from
                   PERIOD
                               PERIOD
                                            PREV YR % PERIOD
                                                                 BASE %
AC 18+ w/Heart
Failure Dx
                      44
                                     2
Patients w/Eval
of LVS Function
                      14 31.8
                                     0 0.0 +31.8
                                                           0
                                                             0.0
                                                                    +31.8
```

Figure 2-94: Sample Report, Heart Failure and Evaluation of LVS Function

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Heart Failure and Evaluation of LVS Function: List of Active Clinical heart failure patients 18+ who received evaluation of LVS function, if any. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR 000164 COMMUNITY #1 F 36 PATIENT1, JOAN Admission: 06/01/12 LVS: NOT DOCUMENTED PATIENT2, SARAH 000127 COMMUNITY #1 F 35 Admission: 06/01/12 LVS: 06/03/11 Proc 88.72 000151 COMMUNITY #1 M 36 PATIENT3, JOHN Admission: 05/01/12 LVS: 05/01/12 Meas CEF 40 PATIENT4, ROGER 000125 COMMUNITY #1 M 47 Admission: 06/01/12 LVS: NOT DOCUMENTED AC PATIENT5, DANIEL 000129 COMMUNITY #1 M 57 Admission: 06/01/12 LVS: 06/01/12 CPT 78468

Figure 2-95: Sample Patient List: Heart Failure and Evaluation of LVS Function

# 2.9 STD-Related Measure Topics

# 2.9.1 HIV Screening

## **GPRA Measure Description**

During FY 2012, achieve the tentative target rate of 81.8% for the proportion of pregnant patients who are screened for HIV.

#### **Denominators**

All pregnant Active Clinical female User Population patients with no documented miscarriage or abortion and with no recorded HIV diagnosis ever (GPRA Denominator).

*User Population patients* ages 13 through 64 with no recorded HIV diagnosis prior to the Report Period. (GPRA Developmental Denominator).

#### **Numerators**

Patients who were screened for HIV during the past 20 months.

**Note**: This numerator does *not* include refusals. (GPRA Numerator).

Patients with documented HIV screening refusal during the past 20 months.

Patients who were screened for HIV during the Report Period.

**Note**: This numerator does *not* include refusals. (GPRA Developmental Numerator)

Patients with documented HIV screening refusal during the Report Period.

No denominator. This measure is a total count only, not a percentage. Number of HIV screens provided to User Population patients during the report period, where the patient was not diagnosed with HIV any time prior to the screen.

**Note**: This numerator does not include refusals. (GPRA Developmental Numerator)

# **Logic Description**

Age of the patient is calculated at the beginning of the Report period.

Pregnancy definition: At least two visits during the past 20 months from the end of the Report Period, where the primary provider is not a CHR (Provider code 53). Pharmacy-only visits (Clinic Code 39) will not count toward these two visits. If the patient has more than two pregnancy-related visits during the past 20 months, CRS will use the first two visits in the 20-month period. The patient must not have a documented miscarriage or abortion occurring after the second pregnancy-related visit. In addition, the patient must have at least one pregnancy-related visit occurring during the reporting period. The time period is extended to include patients who were pregnant during the Report Period but whose initial diagnosis (and HIV test) were documented prior to Report Period.

*HIV Screening definition*: For the number of HIV screens provided to User Population patients numerator (count only), a maximum of one HIV screen per patient per day will be counted.

- **Note 1:** The time frame for both screening and refusals for the pregnant patients denominator is anytime during the past 20 months and for User Population patients 13–64 is anytime during the Report Period.
- **Note 2:** Refusals are allowed during the past 20 months for pregnant patients (vs. only during the Report Period) in the event the patient is at the end of her pregnancy at the beginning of the Report Period and refused the HIV test earlier in her pregnancy during the previous year

CRS uses the following codes and taxonomies to define the denominator and numerators.

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Pregnancy		V POV: 640.03, 640.83, 640.93, 641.03,		
(at least 2 visits in		641.13, 641.23, 641.33, 641.83, 641.93,		
past 20 months		642.03, 642.13, 642.23, 642.33, 642.43,		
with 1 during the		642.53 642.63, 642.73, 642.93, 643.03,		
Report Period)		643.13, 643.23, 643.83, 643.93, 644.03,		
		644.13, 645.13, 645.23, 646.03, 646.13,		
		646.23, 646.33, 646.43, 646.53, 646.63,		
		646.73, 646.83, 646.93, 647.03, 647.13,		
		647.23, 647.33, 647.43, 647.53, 647.63,		
		647.83, 647.93, 648.03, 648.13, 648.23,		
		648.33, 648.43, 648.53, 648.63,		
		648.73, 648.83, 648.93, 649.03, 649.13,		
		649.23, 649.33, 649.43, 649.53, 649.63,		
		649.73, 651.03, 651.13, 651.23, 651.33,		
		651.43, 651.53, 651.63, 651.73, 651.83,		
		651.93, 652.03, 652.13, 652.23, 652.33,		
		652.43, 652.53, 652.63, 652.73,		
		652.83, 652.93, 653.03, 653.13, 653.23,		
		653.33, 653.43, 653.53, 653.63, 653.73,		
		653.83, 653.93, 654.03, 654.13, 654.23,		
		654.33, 654.43, 654.53, 654.63, 654.73,		
		654.83, 654.93, 655.03, 655.13, 655.23,		
		655.33, 655.43, 655.53, 655.63, 655.73,		
		655.83, 655.93, 656.03, 656.13, 656.23,		
		656.33, 656.43, 656.53, 656.63, 656.73,		
		656.83, 656.93, 657.03, 658.03, 658.13,		
		658.23, 658.33, 658.43, 658.83, 658.93,		
		659.03, 659.13, 659.23, 659.33, 659.43,		
		659.53, 659.63, 659.73, 659.83, 659.93,		
		660.03, 660.13, 660.23, 660.33, 660.43,		
		660.53, 660.63, 660.73, 660.83, 660.93,		
		661.03, 661.13, 661.23, 661.33, 661.43,		
		661.93, 662.03, 662.13, 662.23, 662.33,		
		663.03, 663.13, 663.23, 663.33, 663.43,		
		663.53, 663.63, 663.83, 663.93, 665.03,		
		665.83, 665.93, 668.03, 668.13, 668.23,		
		668.83, 668.93, 669.03, 669.13, 669.23, 669.43, 669.83, 669.93, 671.03, 671.13,		
		671.23, 671.33, 671.53, 671.83, 671.93,		
		673.03, 673.13, 673.23, 673.33, 673.83,		
		674.03, 674.53, 675.03, 675.13, 675.23,		
		675.83, 675.93, 676.03, 676.13, 676.23,		
		676.33, 676.43, 676.53, 676.63, 676.83,		
		676.93, 678.03, 678.13, 679.03, 679.13,		
		V22.0 – V23.9, V28.81, V28.82, V28.89,		
		V72.42, V89.01-V89.09		

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Miscarriage (after second pregnancy POV in past 20 months)	59812, 59820, 59821, 59830	<b>V POV</b> : 630, 631, 632, 633*, 634*		
Abortion (after second pregnancy POV in past 20 months)	59100, 59120, 59130, 59136, 59150, 59151, 59840, 59841, 59850, 59851, 59852, 59855, 59856, 59857, S2260—S2267	V POV: 635*, 636* 637* V Procedure: 69.01, 69.51, 74.91, 96.49.		
HIV Diagnosis (documented anytime prior to the end of the Report Period)		<b>V POV or Problem List</b> : 042, 042.0–044.9 (old codes), 079.53, V08, or 795.71		
HIV Screening	86689, 86701- 86703, 87390, 87391, 87534- 87539		Yes	BGP HIV TEST TAX
Refusal of HIV lab test in past 20 months				BGP HIV TEST TAX

# **Key Logic Changes from CRS Version 12.0**

- 1. Updated POV codes for pregnancy definition to only include antepartum pregnancy codes.
- 2. Updated pregnancy definition to exclude visits where the primary provider is a CHR (Provider code 53).
- 3. Added codes 49580-4, 49718-0, 49890-7, 49905-3, 50624-6, 50790-5, 53379-4, 53825-6, 53923-9, 54086-4, 57182-8, 57974-8, 57975-5, 58900-2, 59052-1, 59419-2, 62456-9, 62469-2, 68961-2, 69353-1, 69354-9 to LOINC taxonomy for HIV Screening.

## **Patient List Description**

List of pregnant patients or User Population patients with documented HIV test or refusal, if any.

#### **Measure Source**

HP 2020 HIV-14.3

# **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance	80.0%
IHS FY 2010 Performance	78.0%
IHS FY 2009 Performance	76.0%
IHS FY 2008 Performance	75.0%
IHS FY 2007 Performance	74.0%
IHS FY 2006 Performance	65.0%
IHS FY 2005 Performance	54.0%
HP 2020 Goal	74.1%

DU *** IHS 2012	Selected		ember 25, ares with		nity Specif	fied Repo		ge 256 *	
_			INDIAN H			110			
	-				Dec 31, 20 1 to Dec 31				
					to Dec 31,	•			
HIV Screening									
	REPORT PERIOD				CHG from PREV YR %				
Pregnant AC Pts w/ HIV ever (GPRA)	no 39		38			32			
# w/HIV screening -No Refusals									
(GPRA)	15	38.5	6	15.8	+22.7	0	0.0	+38.5	
<pre># w/HIV screening refusal</pre>	1	2.6	0	0.0	+2.6	0	0.0	+2.6	
User Pop Pts 13-64 w/ no HIV									
(GPRA Dev.)	2,024		1,663			1,519			
# w/HIV screening -No Refusals									
(GPRA Dev.) # w/HIV screening	46	2.3	21	1.3	+1.0	0	0.0	+2.3	
refusal	4	0.2	0	0.0	+0.2	0	0.0	+0.2	
# HIV screens for U	_	ts							
w/ no prior HIV-No (GPRA Dev.)	51		21		+30	0		+51	

Figure 2-96: Sample Report, HIV Screening

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

```
HIV Screening: List of pregnant patients or User Population patients with documented HIV test or refusal, if any.

PATIENT NAME HRN COMMUNITY SEX AGE

DENOMINATOR NUMERATOR

PATIENT1, HELEN MARY 000001 COMMUNITY #1 F 12

UP 03/31/12 Lab; Screen Count: 1

PATIENT2, CECELIA 000002 COMMUNITY #1 F 19

UP

PATIENT15, BRENDA G 000015 COMMUNITY #2 F 30

UP 03/14/12 CPT 87534; 02/14/12 CPT 86689; Screen Count: 2

PATIENT16, ALYSHA 000016 COMMUNITY #2 F 33

UP, AC PREG 08/25/12 Lab; Screen Count: 1
```

Figure 2-97: Sample Patient List, HIV Screening

# 2.9.2 HIV Quality of Care

### **Denominator**

All *User Population patients* ages 13 and older with at least two direct care visits (i.e., not Contract/CHS) with HIV diagnosis during the Report Period, including one HIV diagnosis in last six months.

#### **Numerators**

Patients who received CD4 test only (without HIV viral load) during the Report Period

Patients who received HIV viral load only (without CD4) during the Report Period

Patients who received both CD4 and HIV viral load during the Report Period

Total patients receiving any test

## **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

CRS uses the following codes and taxonomies to define the denominator and numerators.

Subject Defined	CPI COMPS		LOINC Codes	Taxonomy
HIV		042, 042.0-044.9		
		(old codes), 079.53,		
		V08, 795.71		

Subject Defined	CPT COMPS	LOINC Codes	Taxonomy
CD4	86359, 86360 86361	Yes	BGP CD4 TAX
HIV Viral Load	87536, 87539	Yes	BGP HIV VIRAL LOAD TAX

# **Key Logic Changes from CRS Version 12.0**

- 1. Added codes 40898-9, 40900-3, 43946-3, 43947-1, 43953-9, 43955-4, 43963-8, 43965-3, 43970-3, 44057-8, 44059-4, 47016-1, 51300-2, 51302-8, 51303-6, 51307-7, 51308-5, 51312-7, 51313-5, 63450-1, 51304-4, 58920-0, 60457-9 to LOINC taxonomy for CD4.
- 2. Deleted codes 51866-2, 53379-4, 54086-4, 55277-8, 56888-1, 57974-8, 57975-5, 57976-3, 57977-1, 57978-9 and added codes 41143-9, 22356-0, 16976-3, 16978-9, 16979-7, 9665-1, 22357-8, 43008-2, 48346-1, 22358-6 to LOINC taxonomy for Viral Load.

## **Patient List Description**

List of patients 13 and older diagnosed with HIV, with CD4 test, if any.

## **Measure Source**

HP 2010 developmental measure 13–13a Viral Load Testing

# **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS 2020 goal for viral load testing	Nearly 100%
IHS 2020 baseline for CD4 testing	Nearly 100%

DU November 25, 2012 Page 258  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
HIV Quality of Care	REPORT PERIOD	%	PREV YR PERIOD	%	CHG from BASE PREV YR % PERI		CHG from BASE %		
User Pop Pts >13 w/ HIV Dx	6		1			2			
<pre># w/CD4 only # w/viral load only</pre>		16.7 16.7	0		+16.7 +16.7	0 0.0	) +16.7 ) +16.7		

# w/both	1	16.7	1 100.0	-83.3	2 100.0	-83.3
TOTAL # w/ any tests	3	50.0	1 100.0	-50.0	2 100.0	-50.0

Figure 2-98: Sample Report HIV Quality of Care

Figure 2-99: Sample Patient List, HIV Quality of Care

# 2.9.3 Hepatitis C Screening

#### **Denominator**

*User Population patients* born between 1945 and 1965 with no recorded Hep C diagnosis. Broken down by gender.

#### **Numerators**

Patients screened for Hepatitis C ever.

## **Logic Description**

CRS uses the following codes and taxonomies to define the denominator and numerators.

Subject Defined	CPI COdes		LOINC Codes	Taxonomy
Hepatitis C		V POV or Problem		
diagnosis		<b>List</b> : 070.41,		
(documented		070.44, 070.51,		
anytime prior to the		070.54, 070.70-		
end of the Report		070.71		
Period)				

Subject Defined	ICPT Codes	 LOINC Codes	Taxonomy
Hepatitis C Screening	86803	Yes	BGP HEP C TEST TAX

# **Key Logic Changes from CRS Version 12.0**

New topic.

# **Patient List Description**

List of patients with documented Hepatitis C screening ever, if any.

DU November 25, 2012 Page 258  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000										
Hepatitis C Screening	ıg									
	REPORT PERIOD	%			CHG from PREV YR %			CHG from BASE %		
User Pop Pts w/ no Hep C	790		628			551				
# w/Hep C Screening	48	6.1	33	5.3	+0.8	22	4.0	+2.1		
Male User Pop Pts w/no Hep C	371		292			253				
# w/Hep C Screening	24	6.5	17	5.8	+0.6	11	4.3	+2.1		
Female User Pop Pts w/ no Hep C	419		336			298				
# w/Hep C screening	24	5.7	16	4.8	+1.0	11	3.7	+2.0		

Figure 2-100: Sample Report Hepatitis C Screening

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Hepatitis C Screening: List of patients with documented Hepatitis C screening ever, if any.

PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR

```
PATIENT1, MARY 000001 COMMUNITY #1 F 50

UP 08/17/01 Lab Test

PATIENT2, TANYA 000002 COMMUNITY #1 F 52

UP

PATIENT15, JOHN 000015 COMMUNITY #2 M 65

UP 02/03/99 CPT 86803

PATIENT16, HAROLD 000016 COMMUNITY #2 M 66

UP 08/20/11 Lab Test
```

Figure 2-101: Sample Patient List, Hepatitis C Screening

# 2.9.4 Chlamydia Screening

## **Denominators**

Female Active Clinical patients ages 16 through 25.

- a. Female Active Clinical 16 through 20.
- b. Female Active Clinical 21 through 25.

Female User Population patients ages 16 through 25.

- a. Female User Population 16 through 20.
- b. Female User Population 21 through 25.

### **Numerator**

Patients tested for Chlamydia during the Report Period.

# **Logic Description**

Age is calculated at beginning of the Report Period. The following codes are used to determine a test for Chlamydia.

Subject Defined	CPI Codes		LOINC Codes	Taxonomy
Chlamydia Test	86631, 86632, 87110, 87270, 87320, 87490-92, 87810, 3511F	<b>V POV</b> : V73.88, V73.98	Yes	BGP CHLAMYDIA TESTS TAX

# **Key Logic Changes from CRS Version 12.0**

Deleted codes 16602-5, 45079-1, 45082-5, 45083-3, 45106-2, 45107-0, 45108-8, 45112-0, 45113-8, 45114-6, 45115-3, 56909-5, 56910-3, 56911-1, 57287-5, 57679-3, 57680-1, and added codes 560-3, 4993-2, 6349-5, 6354-5, 6355-2, 21613-5, 31777-6, 36902-5, 36903-3, 43304-5, 43404-3, 45076-7, 47211-8, 47212-6, 49096-1 to LOINC taxonomy for Chlamydia Test.

# **Patient List Description**

List of patients with documented Chlamydia screening, if any.

## **Measure Source**

HP 2020 STD-4, annual screening for genital Chlamydia—females enrolled in commercial MCOs (aged 25 years and under); STD-3, annual screening for genital Chlamydia—females enrolled in Medicaid MCOs (aged 25 years and under).

# **Measure Past Performance and Long-Term Targets**

Performance	Percent
HP 2020 goal for Females 16 through 20 with Medicaid (STD-3.1)	57.9%
HP 2020 goal for Females 21 through 24 with Medicaid (STD-3.2)	65.3%
HP 2020 goal for Females 16 through 20 with Commercial Health Insurance (STD-4.1)	44.1%
HP 2020 goal for Females 21 through 24 with Commercial Health Insurance (STD-4.2)	47.9%

DU *** IHS 2012 Sel	ected		mber 25, res with		nity Speci:	fied Rep		age 260		
DEMO INDIAN HOSPITAL Report Period: Jan 01, 2012 to Dec 31, 2012										
Previous Year Period: Jan 01, 2011 to Dec 31, 2011										
Baseli	Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Chlamydia Testing										
	PORT				CHG from PREV YR %					
Female Active Clinical 16-25	166		143			128				
# w/Chlamydia Screen	53	31.9	49	34.3	-2.3	43	33.6	-1.7		
A. Female Active Clinic	al 70		55			57				
# w/Chlamydia Screen	24	34.3	16	29.1	+5.2	23	40.4	-6.1		
B. Female Active Clinic 21-25	al 96		88			71				
# w/Chlamydia Screen	29	30.2	33	37.5	-7.3	20	28.2	+2.0		
Female User Population 16-25	287		255			239				
# w/Chlamydia Screen	69	24.0	58	22.7	+1.3	51	21.3	+2.7		

A. Female User Populat. 16-20	ion 139		118			119			
# w/Chlamydia Screen	32	23.0	19	16.1	+6.9	25	21.0	+2.0	
B. Female User Population 21-25 148 137 120									
# w/Chlamydia Screen	37	25.0	39	28.5	-3.5	26	21.7	+3.3	

Figure 2-102: Sample Report Chlamydia Testing

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Chlamydia Testing: List of patients with documented Chlamydia screening, if
any.
PATIENT NAME
                       HRN COMMUNITY
                                            SEX AGE
DENOMINATOR
                              NUMERATOR
PATIENT1, MELISSA ANNE 000001 COMMUNITY #1 F 16
UP,AC
PATIENT2, LISA MARIE 000002 COMMUNITY #1 F 16
                              04/04/12 Lab test
UP,AC 04/04/12 Lab test PATIENT3,CRYSTAL LEE 000003 COMMUNITY #1 F 17
UP,AC 07/25/12 Lab test
PATIENT4,DANIELLE 000004 COMMUNITY #1 F 18
UP,AC
                         06/01/12 CPT 87490
06/01/12 CPT 87490
PATIENT5, KELLYE 000005 COMMUNITY #1 F 19
UP,AC
```

Figure 2-103: Sample Patient List, Chlamydia Testing

# 2.9.5 Sexually Transmitted Infection Screening

#### **Denominators**

Number of key sexually transmitted infections (STI) incidents for Active Clinical patients that occurred during the period 60 days prior to the beginning of the Report Period through the first 300 days of the Report Period. Key STIs defined as Chlamydia, Gonorrhea, HIV/AIDS, and Syphilis. Two or more key STIs on the same visit will be counted once. Broken down by gender.

Chlamydia screenings needed for key STI incidents for Active Clinical patients that occurred during the defined period. Broken down by gender.

Gonorrhea screenings needed for key STI incidents for Active Clinical patients that occurred during the defined period. Broken down by gender.

HIV/AIDS screenings needed for key STI incidents for Active Clinical patients that occurred during the defined period. Broken down by gender.

Syphilis screenings needed for key STI incidents for Active Clinical patients that occurred during the defined period. Broken down by gender.

Number of key sexually transmitted infections (STI) incidents for User Population patients that occurred during the period 60 days prior to the beginning of the Report Period through the first 300 days of the Report Period. Key STIs defined as Chlamydia, gonorrhea, HIV/AIDS, and syphilis. Two or more key STIs on the same visit will be counted once. Broken down by gender.

Chlamydia screenings needed for key STI incidents for *User Population patients* that occurred during the defined period. Broken down by gender.

Gonorrhea screenings needed for key STI incidents for *User Population patients* that occurred during the defined period. Broken down by gender.

HIV/AIDS screenings needed for key STI incidents for User Population patients that occurred during the defined period. Broken down by gender.

Syphilis screenings needed for key STI incidents for *User Population patients* that occurred during the defined period. Broken down by gender.

#### **Numerators**

No denominator; count only. The total count of *Active Clinical patients* who were diagnosed with one or more key STIs during the period 60 days prior to the Report Period through the first 300 days of the Report Period. Broken down by gender.

No denominator; count only. The total count of separate *key STI incidents for Active Clinical patients* during the defined period. Broken down by gender.

*Number of complete screenings*, defined as all screenings necessary for a specific STI incident(s), performed from one month prior to the date of relevant STI incident through two months after.

**Note**: This numerator does *not* include refusals.

Number of documented screening refusals.

*Number of needed Chlamydia screenings* performed from one month prior to the date of first STI diagnosis of each incident through two months after.

**Note**: This numerator does *not* include refusals.

Number of documented screening refusals.

*Number of needed Gonorrhea screenings* performed from one month prior to the date of first STI diagnosis of each incident through two months after.

**Note**: This numerator does *not* include refusals.

Number of documented screening refusals.

*Number of needed HIV/AIDS screenings* performed from one month prior to the date of first STI diagnosis of each incident through two months after.

**Note**: This numerator does *not* include refusals.

Number of documented screening refusals.

*Number of needed Syphilis screenings* performed from one month prior to the date of first STI diagnosis of each incident through two months after.

**Note**: This numerator does *not* include refusals.

Number of documented screening refusals.

No denominator; count only. Total count of *User Population patients* who were diagnosed with one or more key STIs during the period 60 days prior to the Report Period through the first 300 days of the Report Period. Broken down by gender.

No denominator; count only. Total count only of *separate key STI incidents for User Population patients* during the defined period. Broken down by gender.

## **Logic Description**

Key STIs are Chlamydia, Gonorrhea, HIV/AIDS, and Syphilis. Key STI diagnoses are defined with the following codes.

STI	ICD and Other Codes
Chlamydia	<b>V POV</b> : 079.88, 079.98, 099.41, 099.50-099.59
Gonorrhea	<b>V POV</b> : 098.0-098.89
HIV/AIDS	<b>V POV</b> : 042, 042.0-044.9, 079.53, 795.71, V08
Syphilis	<b>V POV</b> : 090.0-093.9, 094.1-097.9

Logic for Identifying Patients Diagnosed with Key STI:

Any patient with one or more diagnoses of any of the key STIs defined above during the period 60 days prior to the beginning of the Report Period through the first 300 days of the Report Period.

Logic for Identifying Separate Incidents of Key STIs:

One patient may have one or multiple occurrences of one or multiple STIs during the year, except for HIV. An occurrence of HIV is only counted if it is the initial HIV diagnosis for the patient ever. Incidents of an STI are identified beginning with the date of the first key STI diagnosis (see definition above) occurring between 60 days prior to the beginning of the Report Period through the first 300 days of the Report Period. A second incident of the same STI (other than HIV) is counted if another diagnosis with the same STI occurs two months or more after the initial diagnosis. A different STI diagnosis that occurs during the same 60-day time period as the first STI counts as a separate incident.

Example of Patient with Multiple Incidents of Single STI:

Visit	Total Incidents
08/01/10: Patient screened for Chlamydia	0
08/08/10: Patient diagnosed with Chlamydia	1
10/15/10: Patient diagnosed with Chlamydia	2
10/25/10: Follow-up for Chlamydia	2
11/15/0: Patient diagnosed with Chlamydia	2
03/01/11: Patient diagnosed with Chlamydia	3

Denominator Logic for Needed Screenings:

One patient may need multiple screening tests based on one or more STI incidents occurring during the time period.

To be included in the needed screening tests denominator, the count will be derived from the number of separate STI incidents and the type(s) of screenings recommended for each incident. The recommended screenings for each key STI are listed below.

STI	Screenings Needed
Chlamydia	Gonorrhea, HIV/AIDS, Syphilis
Gonorrhea	Chlamydia, HIV/AIDS, Syphilis
HIV/AIDS	Chlamydia, Gonorrhea, Syphilis
Syphilis	Chlamydia, Gonorrhea, HIV/AIDS

"Needed" screenings are recommended screenings that are further evaluated for contraindications. The following are reasons that a recommended screening is identified as not needed (i.e., contraindicated).

- 1. The patient has a documented STI diagnosis corresponding to the screening type in the same time period. For example, a patient with both a Chlamydia and a gonorrhea diagnosis on the same visit does not need the recommended Chlamydia screening based on the gonorrhea diagnosis.
- 2. Only one screening for each type of STI is needed during the relevant time period, regardless of the number of different STI incidents identified. For example, if a patient is diagnosed with Chlamydia and Gonorrhea on the same visit, only one screening each is needed for HIV/AIDS and Syphilis.
- 3. A patient with HIV/AIDS diagnosis prior to any STI diagnosis that triggers a recommended HIV/AIDS screening does not need the screening ever.

## Numerator Logic:

To be counted in the numerator, each needed screening in the denominator must have a corresponding laboratory test or test refusal documented in the period from one month prior to the relevant STI diagnosis date through two months after the STI incident.

T7	OTT	•		1 (* 1	• . 1	. 1	C 11 '	
Kes	$I \sim I I$	screenings	are	detined	xx/1fh	the	tollowing	codes
170		SCICCIIIIZS	arc	ucilicu	WILLI	uic	10110 WILLS	coucs.

<b>STI</b>	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy			
Chlamydia	86631–86632, 87110, 87270, 87320, 87490– 87492, 87810, 3511F	<b>POV</b> : V73.88, V73.98	Yes	BGP CHLAMYDIA TESTS TAX			
Gonorrhea	87590–87592, 87850, 3511F		Yes	BKM GONORRHEA TEST TAX			
HIV/AIDS	86689, 86701– 86703, 87390– 87391, 87534– 87539		Yes	BGP HIV TEST TAX			
Syphilis	86592–86593, 86781, 87285, 3512F		Yes	BKM FTA-ABS TESTS TAX or BKM RPR TESTS TAX			
Refusal of any screening		Any refusal type (REF, NMI, etc.) for any of the four screening tests as defined above during the specified time period.					

Logic Examples

Example of Patient with Single Diagnosis of Single STI:

08/01/10:	Patient screened for Chlamydia
08/08/10:	Patient diagnosed with Chlamydia–3 screens needed: Gonorrhea, HIV/AIDS, Syphilis
08/13/10:	Patient screened for Gonorrhea, HIV/AIDS, Syphilis
Result:	Result: Denominator: 1 key STI incident, Numerator: 1 complete screening.

# Example of Patient with Multiple Diagnoses of Single STI:

08/01/10:	Patient screened for Chlamydia
08/08/10:	Patient diagnosed with Chlamydia (Incident #1)-3 screens needed: Gonorrhea, HIV/AIDS, Syphilis
12/01/10:	Patient screened for Chlamydia
12/08/10:	Patient diagnosed with Chlamydia (Incident #2) –3 screens needed: Gonorrhea, HIV/AIDS, Syphilis
Result:	Result: Denominator: 2 key STI incidents, Numerator: 1 complete screening (1 each of 3 types)

# Example of Patient with Single Diagnosis of Multiple STIs:

10/15/10:	Patient screened for Chlamydia, Gonorrhea, HIV/AIDS, Syphilis
10/18/10:	Patient diagnosed with Chlamydia-3 screens needed: Gonorrhea, HIV/AIDS, Syphilis
10/20/10:	Patient diagnosed with Syphilis-removes needed screen for Syphilis (see above)
Result:	Result: Denominator: 2 key STI incidents, Numerator: 1 complete screening (prior to triggering diagnoses but within timeframe)

# Example of Patient with Multiple Diagnoses of Multiple STIs:

06/15/05:	Patient diagnosed with HIV/AIDS
08/01/10:	Patient screened for Chlamydia and Gonorrhea
08/08/10:	Patient diagnosed with Chlamydia and Gonorrhea (Incident #1)–1 screen needed: Syphilis (HIV/AIDS not needed since prior diagnosis)
08/08/10	Patient screened for HIV/AIDS and Syphilis–since only the Syphilis screen is needed, the HIV/AIDS screen is not counted at all
12/01/10:	Patient screened for Chlamydia
12/08/10	Patient diagnosed with Chlamydia (Incident #2) –2 screens needed: Gonorrhea and Syphilis
12/10/10	Patient screened for Syphilis

Result:	Result: Denominator: 2 key STI incidents, Numerator: 1 complete	1
	screening	

# **Key Logic Changes from CRS Version 12.0**

- 1. Added codes 49580-4, 49718-0, 49890-7, 49905-3, 50624-6, 50790-5, 53379-4, 53825-6, 53923-9, 54086-4, 57182-8, 57974-8, 57975-5, 58900-2, 59052-1, 59419-2, 62456-9, 62469-2, 68961-2, 69353-1, 69354-9 to LOINC taxonomy for HIV Screening.
- 2. Deleted codes 16602-5, 45079-1, 45082-5, 45083-3, 45106-2, 45107-0, 45108-8, 45112-0, 45113-8, 45114-6, 45115-3, 56909-5, 56910-3, 56911-1, 57287-5, 57679-3, 57680-1, and added codes 560-3, 4993-2, 6349-5, 6354-5, 6355-2, 21613-5, 31777-6, 36902-5, 36903-3, 43304-5, 43404-3, 45076-7, 47211-8, 47212-6, 49096-1 to LOINC taxonomy for Chlamydia Test.

## **Patient List Description**

List of patients diagnosed with one or more STIs during the defined time period with related screenings.

## **Measure Source**

None

# **Measure Past Performance and Long-Term Targets**

None

DU November 25, 2012 Page 266  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Sexually Transmitted I	Infection (S	STI) Screening (	(con't)					
_	REPORT PERIOD	PREV YR PERIOD			CHG from BASE			
Active Clinical Pts w/ Key STI Dx	41	13	+28	10	+31			
Male Active Clinical F w/ Key STI Dx	ots 10	7	+3	8	+2			
Female Active Clinical w/ Key STI Dx		6	+25	2	+29			
Total # Key STI Incide Active Clinical Pts		13	+31	10	+34			

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

Total # Male AC Key STI Incidents	10		7		+3	8		+2	
Total # Female AC Key STI Incidents	34		6		+28	2		+32	
# Key STI Incidents for AC Pts	43		13			10			
# Complete Screens Performed-No Refusals # Documented	7	16.3	0	0.0	+16.3	0	0.0	+16.3	
Refusals	3	7.0	0	0.0	+7.0	0	0.0	+7.0	
# Key STI Incidents for Male AC Pts	10		7			8			
# Complete Screens Performed-No Refusals	1	10.0	0	0.0	+10.0	0	0.0	+10.0	
# Documented Refusals	0	0.0	0		+0.0	0	0.0	+0.0	

Figure 2-104: Sample Report Sexually Transmitted Infection (STI) Screening

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Sexually Transmitted Infection (STI) Screening: List of patients diagnosed with one or more STIs during the defined time period with related screenings. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT1, DIANE 000001 COMMUNITY #1 F 15 UP; AC Visit 1) 02/12/12 POV: HIV 042. 1) CHL-N, GC-N, SYP-N PATIENT2, LEIGHANN 000002 COMMUNITY #1 F 18 UP; AC Visit 1) 11/02/11 POV: GC 098.89 1) CHL-N, HIV-Y 12/02/11 CPT [87390], SYP-N PATIENT3, WHITNEY 000003 COMMUNITY #1 F 25 UP; AC Visit 1) 06/17/12 POV: CHL 078.89 1) GC-Y 06/17/12 Lab [HGB], HIV-N, SYP-N PATIENT4, NANCY 000004 COMMUNITY #1 F 29 UP; AC Visit 1) 03/01/12 POV: CHL 079.88 1) GC-Y 02/15/12 CPT [87592], HIV-Contraind Prior DX 04/11/07 POV: HIV [079.53], SYP-Y 04/01/12 CPT [87285] PATIENT5, JOHN 000005 COMMUNITY #1 M 40 UP; AC Visit 1) 06/15/12 POV: GC 098.89; 2) 07/15/12 POV: HIV 042. 1) CHL-N, HIV-N, SYP-N; 2) CHL-N, GC-N, SYP-N 000006 COMMUNITY #1 M 42 PATIENT6, NORMAN UP; AC Visit 1) 10/11/12 POV: CHL 079.98, 10/11/12 POV: GC 098.891) HIV-N, SYP-N

Figure 2-105: Sample Patient List, Sexually Transmitted Infection (STI) Screening

# 2.10 Other Clinical Measures Topics

# 2.10.1 Osteoporosis Management

#### **Denominators**

Female Active Clinical patients ages 67 and older who had a new fracture occurring six months (182 days) prior to the Report Period through the first six months of the Report Period with no osteoporosis screening or treatment in year prior to the fracture.

Female User Population patients ages 67 and older who had a new fracture occurring 6 months (182 days) prior to the Report Period through the first 6 months of the Report Period with no osteoporosis screening or treatment in year prior to the fracture.

#### **Numerator**

Patients treated or tested for osteoporosis after the fracture.

## **Logic Description**

Age is calculated at the beginning of the Report Period. Fractures do not include fractures of finger, toe, face, or skull. CRS will search for the first (i.e., earliest) fracture during the period six months (182) days prior to the beginning of the Report Period and the first six months of the Report Period. If multiple fractures are present, only the first fracture will be used.

*Index Episode Start Date definition*: The Index Episode Start Date is the date the fracture was diagnosed. If the fracture was diagnosed at an outpatient visit (Service Category A, S, or O), the Index Episode Start Date is equal to the Visit Date. If diagnosed at an inpatient visit (Service Category H), the Index Episode Start Date is equal to the Discharge Date.

#### **Denominator Exclusions**

- 1. Patients receiving osteoporosis screening or treatment in the year (365 days) prior to the Index Episode Start Date. Osteoporosis screening or treatment is defined as a Bone Mineral Density (BMD) test (see below for codes) or receiving any osteoporosis therapy medication (see below for codes).
- 2. Patients with a fracture diagnosed at an outpatient visit, which also had a fracture within 60 days prior to the Index Episode Start Date.
- 3. Patients with a fracture diagnosed at an inpatient visit, which also had a fracture within 60 days prior to the ADMISSION DATE.

Osteoporosis Treatment and Testing definition: (1) For fractures diagnosed at an outpatient visit: a nondiscontinued prescription within 6 months (182 days) of the Index Episode Start Date (i.e., visit date) or B) a BMD test within 6 months of the Index Episode Start Date. (2) For fractures diagnosed at an inpatient visit, a BMD test performed during the inpatient stay.

CRS uses the following codes to define fracture and BMD test.

Subject Defined	CPT Codes	ICD and Other Codes
Fracture Codes	21800 through21825, 22305 through 22314, 22316 through 22324, 22520, 22521, 22523, 22524, 23500 through 23515, 23570 through 23630, 23665 through 23680, 24500 through 24585, 24620, 24635, 24650 through 24685, 25500–25609, 25611 (old code), 25620 (old code), 25622-25652, 25680, 25685, 27193 through 27248, 27254, 27500 through 27514, 27520 through 27540, 27750 through 27828, S2360, S2362	<b>V POV</b> : 733.1*, 805*–806*, 807.0*–807.4, 808*–815*, 818*–825*, 827*, 828* <b>V Procedure</b> : 79.01–79.03, 79.05–79.07, 79.11–79.13, 79.15–79.17, 79.21–79.23, 79.25–79.27, 79.31–79.33, 79.35–79.37, 79.61–79.63, 79.65–79.67, 81.65-81.66.
BMD Test Codes	77078, 76070 (old code), 77079, 76071 (old code), 77080, 76075 (old code), 77081, 76076 (old code), 77083, 76078 (old code), 76977, 78350, 78351, G0130	V POV: V82.81 V Procedure: 88.98

Treatment medication codes are defined with medication taxonomy BGP HEDIS OSTEOPOROSIS MEDS. (Medications are: Alendronate, Alendronate-Cholecalciferol (Fosomax Plus D), Calcium carbonate-risedronate, Ibandronate (Boniva), Risedronate, Zoledronic acid, Calcitonin, Denosumab, Raloxifene, Estrogen, Injectable Estrogens, and Teriparatide.) Medications must not have a comment of RETURNED TO STOCK.

# **Key Logic Changes from CRS Version 12.0**

- 1. Updated 6 months to be 182 days.
- 2. Updated BGP HEDIS OSTEOPOROSIS DRUGS medications to include Calcium carbonate-risedronate, Zoledronic acid, and Denosumab.

#### **Patient List Description**

List of female patients with new fracture who have had osteoporosis treatment or testing, if any.

#### **Measure Source**

**HEDIS** 

## **Measure Past Performance and Long-Term Targets**

None

```
DU
                          November 25, 2012
                                                               Page 277
      *** IHS 2012 Selected Measures with Community Specified Report ***
                          DEMO INDIAN HOSPITAL
               Report Period: Jan 01, 2012 to Dec 31, 2012
            Previous Year Period: Jan 01, 2011 to Dec 31, 2011
               Baseline Period: Jan 01, 2000 to Dec 31, 2000
Osteoporosis Management
                                      PREV YR % PERIOD BASE %
                   REPORT % PREV YR % CHG from BASE
PERIOD PERIOD PREV YR % PERIOD
Female Active Clinical Pts
67 and older
w/fracture
# w/osteoporosis treatment
                      3 37.5 0 0.0 +37.5 0 0.0 +37.5
or testing
Female User Pop Pts
67 and older
w/fracture
                                     0
                                                          0
# w/osteoporosis treatment
or testing 4 \ 44.4 \ 0 \ 0.0 \ +44.4 \ 0 \ 0.0 \ +44.4
```

Figure 2-106: Sample Report Osteoporosis Management

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Osteoporosis Management: List of female patients with new fracture who have had osteoporosis treatment or testing, if any. DENOMINATOR HRN PATIENT NAME COMMUNITY SEX AGE NUMERATOR PATIENT1, ALWENA 000001 COMMUNITY #1 F 68 UP,AC FX: 01/01/12 CPT 2252 PATIENT2,SYBIL 000002 COMMUNITY #1 F 69 FX: 01/01/12 CPT 22524 FX: 02/10/12 CPT 22524 TX: 02/10/12 CPT G0130 UP,AC PATIENT3, ELIZABETH 000003 COMMUNITY #1 F 78 UP,AC FX: 02/15/12 CPT S2362 PATIENT4, KATIE 000004 COMMUNITY #1 F 80 UP,AC FX: 02/05/12 PROC 81.66 PATIENTS, LINDSAY 000005 COMMUNITY #1 F 81 FX: 02/01/12 DX 733.13 TX: 02/15/12 CPT 77081

PATIENT6, ELIZABETH	000006 COMMUNITY #1 F 86
UP,AC	FX: 01/15/11 DX 733.13 TX: 01/31/12 CPT 77081

Figure 2-107: Sample Patient List, Osteoporosis Management

# 2.10.2 Osteoporosis Screening in Women

#### **Denominators**

Female Active Clinical patients ages 65 and older without a documented history of osteoporosis.

Female User Population patients ages 65 and older without a documented history of osteoporosis.

#### **Numerators**

Patients who had osteoporosis screening documented in the past two years.

**Note**: This numerator does *not* include refusals.

Patients with documented refusal in past year.

# **Logic Description**

Age is calculated at the beginning of the Report Period.

Osteoporosis definition: No osteoporosis diagnosis ever (POV 733.\*).

CRS uses the following codes to define osteoporosis screening.

Subject Defined	V Radiology or CPT Codes	ICD and Other Codes
Osteoporosis	Central DEXA: 77080, 76075 (old	V Procedure: 88.98 (Quantitative CT)
Screening (any	code)	V POV: V82.81 Special screening for other
test documented in the past two	Peripheral DEXA: 77081, 76076 (old code)	conditions, Osteoporosis
years)	<b>SEXA</b> : G0130	
	Central CT: 77078, 76070 (old code)	
	Peripheral CT: 77079, 76071 (old	
	code)	
	US Bone Density: 76977	

Subject Defined	V Radiology or CPT Codes	ICD and Other Codes
Osteoporosis Screening Refusal	Refusal (in past year): CPT or V Radiology: Central DEXA: 77080 or 76075 (old code); Peripheral DEXA: 77081 or 76076 (old code); SEXA: G0130; Central CT: 77078 or 76070 (old code); Peripheral CT: 77079 or 76071 (old code); US Bone Density: 76977	

# **Key Logic Changes from CRS Version 12.0**

None

# **Patient List Description**

List of female patients ages 65 and older with osteoporosis screening, if any.

#### **Measure Source**

None

# **Measure Past Performance and Long-Term Targets**

None

DU November 25, 2012 Page 279  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Osteoporosis Scree	ning in Wo	men							
					CHG from PREV YR %				
Female Active Clin									
Pts =>65	54		29			29			
<pre># w/osteoporosis s in past 2 years</pre>	creening								
-No Refusals		11.1	0	0.0	+11.1	0	0.0	+11.1	
# w/ Osteoporosis	_	2 7	0	0 (	) +3.7	0	0 0	+3.7	
Refusal	2	3.7	U	0.0	) +3./	U	0.0	+3.7	
Female User Pop									
Pts =>65	111		79			80			
# w/osteoporosis s in past 2 years	creening								

-No Refusals 6	5.4	0	0.0	+5.4	0	0.0	+5.4
<pre># w/ Osteoporosis Screening Refusals 2</pre>	1.8	0	0.0	+1.8	0	0.0	+1.8

Figure 2-108: Sample Report, Osteoporosis Screening in Women

UP-User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Osteoporosis Screening in Women: List of female patients ages 65 and older with osteoporosis screening or refusal, if any. PATIENT NAME DENOMINATOR HRN COMMUNITY SEX AGE NUMERATOR PATIENT1, SHERRY 000001 COMMUNITY #1 F 68
UP, AC 05/15/12 Refused Proc
PATIENT2, APRIL 000002 COMMUNITY #1 F 68
UP, AC 04/01/12 CPT G0130
PATIENT3, JACKIE 000003 COMMUNITY #1 F 69
UP, AC 08/21/12 RAD CT. BONE M 05/15/12 Refused Proc 88.98 08/21/12 RAD CT, BONE MIN DENSITY, 1/+, APPEND UP,AC 08/21/12 RAD CT,BONE N PATIENT4,PAULINE 000004 COMMUNITY #1 F 70 UP,AC PATIENTS, SHANNON 000005 COMMUNITY #1 F 72 UP,AC PATIENT6, TINA MARIE 000006 COMMUNITY #1 F 78 UP,AC 04/15/12 CPT 77081

Figure 2-109: Sample Patient List, Osteoporosis Screening in Women

# 2.10.3 Rheumatoid Arthritis Medication Monitoring

#### **Denominator**

Active Clinical patients ages 16 and older diagnosed with rheumatoid arthritis (RA) prior to the Report Period and with at least two RA-related visits any time during the Report Period who were prescribed maintenance therapy medication chronically during the Report Period.

#### **Numerator**

Patients who received appropriate monitoring of chronic medication during the Report Period.

#### **Logic Description**

Age is calculated at the beginning of the Report Period.

RA defined as diagnosis (POV or Problem List) 714.\* prior to the Report Period, and at least two RA POVs during the Report Period.

For all maintenance therapy medications *except* intramuscular gold, each medication must be prescribed within the past 465 days of the end of the Report Period (i.e., the Medication Period) and the sum of the days supply equal to or greater than (=>)348. This means the patient must have been on the medication at least 75% of the Medication Period. Two examples are shown below to illustrate this logic. *All* medications must not have a comment of RETURNED TO STOCK.

Example of Patient Not on Chronic Medication (not included in Denominator):

Report Period: January 1 through December 31, 2012

Medication Period: 465 days from end of Report Period (December 31, 2012): September 22, 2011 through December 31, 2012

#### Medication Prescribed:

Diclofenac: 1st Rx: Oct 15, 2011, Days Supply=90; 2nd Rx: Jan 01, 2012: Days Supply=90; 3rd Rx: Mar 15, 2012: Days Supply=90.

Total Days Supply=270. 270 is not greater than (>)348. Patient is not considered on chronic medication and is not included in the denominator.

Example of Patient on Chronic Medication (included in Denominator):

Report Period: January 1 through December 31, 2012

Medication Period: 465 days from end of Report Period (December 31, 2012): September 22, 2011 through December 31, 2012

#### Medications Prescribed:

Sulfasalazine: 1st Rx: Sep 30, 2011, Days Supply=90; 2nd Rx: December 30, 2011, Days Supply=90; 3rd Rx: March 15, 2012 Days Supply=180.

Total Days Supply=360. 360 is greater than (>348. Patient is considered on chronic medication and is included in denominator.

The days' supply requirement may be met with a single prescription or from a combination of prescriptions for the same medication that were filled during the Medication Period. However, for all medications, there must be at least one prescription filled during the Report period.

**Note:** If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

For intramuscular gold, the patient must have 12 or more prescriptions during the Report Period.

Appropriate monitoring of rheumatoid arthritis medications is defined with lab tests and varies by medication, as shown in the table below. If patient is prescribed two or more types of medications, patient must meet criteria for all of the medications.

Maintenance Therapy Medications Definition

• Medications shown in table below. *Except* for Gold, Intramuscular, all medications requiring more than one of each type of test during the Report Period, there must be a minimum of ten days between tests. For example, if a Sulfasalazine test was performed on March 1, March 7, and March 21, 2012, the March 7 test will not be counted since it was performed only six days after the March 1 test.

Medication	Required Monitoring Tests
Gold, Intramuscular	CBC and urine Protein on same day as each injection during Report Period
Azathrioprine or Sulfasalazine	4 CBCs during the Report Period
Leflunomide or Methotrexate	6 each of CBC, Serum Creatinine, and Liver Function Tests during the Report Period
Cyclosporin	CBC, Liver Function Tests, and Potassium within past 180 days from Report Period end date 12 Serum Creatinine tests during the Report Period
Gold, Oral or Penicillamine	4 each of CBC and Urine Protein during the Report Period
Mycophenolate	CBC within past 180 days from Report Period end date

The medications in the above table are defined with medication taxonomies: BGP RA IM GOLD MEDS, BGP RA AZATHIOPRINE MEDS, BGP RA LEFLUNOMIDE MEDS, BGP RA METHOTREXATE MEDS, BGP RA CYCLOSPORINE MEDS, BGP RA ORAL GOLD MEDS, BGP RA MYCOPHENOLATE MEDS, BGP RA PENICILLAMINE MEDS, BGP RA SULFASALAZINE MEDS.

 NSAID Medications: All of the following medications must have Creatinine, Liver Function Tests, and CBC during the Report Period: Diclofenac, Etodolac, Indomethacin, Ketorolac, Sulindac, Tolmetin, Meclofenamate, Mefanamic Acid, Nabumetone, Meloxicam, Piroxicam, Fenoprofen, Flurbiprofen, Ibuprofen, Ketoprofen, Naproxen, Oxaprozin, Aspirin, Choline Magnesium Trisalicylate, Diflunisil, Magnesium Salicylate, Celocoxib. All of these medications *except* aspirin are defined with medication taxonomy BGP RA OA NSAID MEDS. Aspirin defined with medication taxonomy DM AUDIT ASPIRIN DRUGS.  Glucocorticoid Medications: Dexamethasone, Methylprednisolone, Prednisone, Hydrocortisone, Betamethasone, Prednisonolone, Triamcinolone. These medications defined with medication taxonomy BGP RA GLUCOCORTICOIDS MEDS. Glucocorticoids must have a glucose test, which must be performed during the Report Period.

Example of Patient Not Included in Numerator:

Medications Prescribed and Required Monitoring:

- Gold, Oral, last Rx June 15, 2012. Requires CBC and Urine Protein within past 90 days of Report Period end date.
- CBC performed on December 1, 2012, which is within past 90 days of Report Period end date of December 31, 2012. No Urine Protein performed during that period. Patient is not in numerator.

Example of Patient Included in Numerator:

Medications Prescribed and Required Monitoring:

- Diclofenac, last Rx Sep 1, 2012. Requires LFT and CBC during Report Period.
- Mycophenolate, last Rx March 10, 2012. Requires CBC within past 180 days from Report Period end date.
- LFT and CBC performed during Report Period. CBC performed November 1, 2012, which is within past 180 days of Report Period end date of December 31, 2012. Patient is in numerator.

Monitoring Test	CPT Codes	LOINC Codes	Taxonomy
CBC	85025, 85027	Yes	BGP CBC TESTS
Urine Protein		Yes	DM AUDIT URINE PROTEIN TAX
Serum Creatinine	82540, 82565-75	Yes	DM AUDIT CREATININE TAX
Liver Function Tests-ALT	84460	Yes	DM AUDIT ALT TAX
Liver Function Tests-AST	84450	Yes	DM AUDIT AST TAX
Liver Function	80076	Yes	BGP LIVER FUNCTION TESTS
Glucose	82947, 82948, 82950, 82951, 82952, 82962	Yes	DM AUDIT GLUCOSE TESTS TAX
Potassium	84132	Yes	BGP POTASSIUM TESTS

# **Key Logic Changes from CRS Version 12.0**

- 1. Added code 48134-1 to LOINC taxonomy for ALT.
- 2. Added codes 59826-8 and 62425-4 to LOINC taxonomy for Creatinine.

- 3. Deleted codes 55394-1, 55479-0, 55480-8, 55481-6, 55482-4, 55483-2, 55484-0, 55485-7, 55486-5, 55487-3, 55492-3, 55493-1, 55494-9, 55495-6, 55496-4, 55497-2, 55498-0, 55499-8, 55505-2, 55507-8, 55508-6, 55510-2 and added codes 21004-7, 49688-5, 49689-3, 50608-9, 50667-5, 51596-5, 53928-8, 53929-6, 56751-1, 57350-1, 57971-4, 57972-2, 59157-8, 59791-4, 59792-2, 59793-0, 59794-8, 59795-5, 59796-3, 59797-1, 59812-8, 59813-6, 59814-4, 59815-1 to LOINC taxonomy for Glucose.
- 4. Added codes 13874-3, 13875-0, 14630-8, 15015-1, 15348-6, 15349-4, 1779-8, 17858-2, 1971-1, 2322-6, 2323-4, 2324-2, 27403-5, 33898-8, 33899-6, 44786-2, 48134-1, 48136-6, 53432-1, 54500-4, 58768-3 to LOINC taxonomy for Liver Function.
- 5. Added LOINC codes 12812-4, 12813-2, 22760-3, 51618-7, 59010-9 to LOINC taxonomy for Potassium.
- 6. Added codes 16285-9, 21028-6, 29899-2, 29951-1, 34183-4, 34184-2, 35560-2, 35561-0, 38528-6, 40857-5, 49002-9, 50209-6, 50749-1, 53121-0, 53229-1, 58431-8, 58447-4, 58992-9, 60678-0, 66481-3, 6889-0, 6890-8, 9405-2, 9406-0, 9829-3, 9831-9 to LOINC taxonomy for Urine Protein.

## **Patient List Description**

List of RA patients age 16 and older prescribed maintenance therapy medication with monitoring laboratory tests, if any. The numerator values for patients who meet the measure are prefixed with YES and patients who did not meet the measure are prefixed with NO The chronic medications and all laboratory tests the patient *did* have are displayed.

#### **Measure Source**

None

# **Measure Past Performance and Long-Term Targets**

None

```
DU
                             November 25, 2012
                                                                      Page 284
       *** IHS 2012 Selected Measures with Community Specified Report ***
                             DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
              Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Rheumatoid Arthritis Medication Monitoring
                                  PREV YR
                     REPORT
                                              % CHG from BASE
                                                                    % CHG from
                     PERIOD
                                  PERIOD
                                                PREV YR % PERIOD
                                                                        BASE %
```

Active Clinical Pts =>16 w/RA DX and maintenance								
therapy RX	3		0			0		
# w/RA chronic med monitoring	2	66.7	0	0.0	+66.7	0	0.0	+66.7

Figure 2-110: Sample Report, Rheumatoid Arthritis Medication Monitoring

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Rheumatoid Arthritis Medication Monitoring: List of RA patients 16 and
older prescribed maintenance therapy medication with monitoring lab tests,
if any. The numerator values for patients who meet the measure are
prefixed with "YES:" and patients who did not meet the measure are prefixed with "NO:". The chronic medications and all lab tests the patient
DID have are displayed.
                       HRN COMMUNITY
PATIENT NAME
                                              SEX AGE
DENOMINATOR
                              NUMERATOR
PATIENT1, RUTH 000001 COMMUNITY #1 F 64
YES: NSAID: 10/21/12 (PATIENT2, SHANNON 000002 COMMUNITY #1 F 72
                               YES: NSAID: 10/21/12 CREAT, 09/22/12 CBC, 05/21/12 LFT
                            YES: Glucocorticoids: 12/02/12 Glucose
AC YES: Glucocorticolds: PATIENT34, CATHERINE 000034 COMMUNITY #3 F 50
                 NO: Glucocorticoids: does not have Glucose
```

Figure 2-111: Sample Patient List, Rheumatoid Arthritis Medication Monitoring

# 2.10.4 Osteoarthritis Medication Monitoring

#### Denominator

Active Clinical patients ages 40 and older diagnosed with osteoarthritis (OA) prior to the Report Period and with at least two OA-related visits any time during the Report Period and prescribed maintenance therapy medication chronically during the Report Period.

#### Numerator

Patients who received appropriate monitoring of chronic medication during the Report Period.

## **Logic Description**

Age is calculated at the beginning of the Report Period.

OA defined as diagnosis (POV or Problem List) 715.\* prior to the Report period, and at least two OA POVs during the Report Period.

For all maintenance therapy medications, each medication must be prescribed within the past 465 days of the end of the Report Period (i.e., the Medication Period) and the sum of the days supply equal to or greater than (=>)348. This means the patient must have been on the medication at least 75% of the Medication Period. Two examples are shown below to illustrate this logic. Medications must not have a comment of RETURNED TO STOCK.

Example of Patient Not on Chronic Medication (not included in Denominator):

- Report Period: January 1 through December 31, 2012
- Medication Period: 465 days from end of Report Period (December 31, 2012): September 22, 2011 through December 31, 2012
- Medication Prescribed:
  - Diclofenac: 1st Rx: October 15, 2011, Days Supply=90; 2nd Rx: January 1, 2012: Days Supply=90; 3rd Rx: March 15, 2012: Days Supply=90.
  - Total Days Supply=270. 270 is not greater than (>)348. Patient is not considered on chronic medication and is not included in the denominator.

Example of Patient on Chronic Medication (included in Denominator):

- Report Period: January 1 through December 31, 2012
- Medication Period: 465 days from end of Report Period (December 31, 2012): September 22, 2011 through December 31, 2012
- Medication Prescribed:
  - Etodolac: 1st Rx: September 30, 2011, Days Supply=90; 2nd Rx:
     December 30, 2011, Days Supply=90; 3rd Rx: March 15, 2012: Days Supply =180.
  - Total Days Supply=360. 360 is greater than (>)348. Patient is considered on chronic medication and is included in denominator.

The days supply requirement may be met with a single prescription or from a combination of prescriptions for the same medication that were filled during the Medication Period. However, for all medications, there must be at least one prescription filled during the Report Period.

Note: If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

Appropriate monitoring of OA medications is defined with laboratory tests and varies by medication, as shown below.

Maintenance Therapy Medications Defined with the Following NSAID Medications: Diclofenac, Etodolac, Indomethacin, Ketorolac, Sulindac, Tolmetin, Meclofenamate, Mefanamic Acid, Nabumetone, Meloxicam, Piroxicam, Fenoprofen, Flurbiprofen, Ibuprofen, Ketoprofen, Naproxen, Oxaprozin, Aspirin, Choline Magnesium Trisalicylate, Diflunisil, Magnesium Salicylate, Celocoxib. All of these medications, except aspirin, are defined with medication taxonomy BGP RA OA NSAID MEDS. Aspirin defined with medication taxonomy DM AUDIT ASPIRIN DRUGS

All NSAID medications must have Creatinine, Liver Function Tests and CBC during the Report Period.

Example of Patient Not Included in Numerator:

- Medication Prescribed and Required Monitoring:
  - Diclofenac, last Rx June 15, 2012. Requires Creatinine, LFT and CBC during Report Period. Only the LFT was performed during Report Period. Patient is not in numerator.

Example of Patient Included in Numerator:

- Medications Prescribed and Required Monitoring:
  - Diclofenac, last Rx September 1, 2012. Requires Creatinine, LFT and CBC during Report Period. Creatinine, LFT, and CBC performed during Report Period. Patient is in numerator.

CRS uses the following codes to define the monitoring tests.

Monitoring Test	11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	LOINC Codes	Taxonomy
Serum Creatinine	82540, 82565-82575	Yes	DM AUDIT CREATININE TAX
CBC	85025, 85027	Yes	BGP CBC TESTS
Liver Function Tests-ALT	84460	Yes	DM AUDIT ALT TAX
Liver Function Tests-AST	84450	Yes	DM AUDIT AST TAX
Liver Function	80076	Yes	BGP LIVER FUNCTION TESTS

## **Key Logic Changes from CRS Version 12.0**

- 1. Added code 48134-1 to LOINC taxonomy for ALT.
- 2. Added codes 59826-8 and 62425-4 to LOINC taxonomy for Creatinine.
- 3. Added codes 13874-3, 13875-0, 14630-8, 15015-1, 15348-6, 15349-4, 1779-8, 17858-2, 1971-1, 2322-6, 2323-4, 2324-2, 27403-5, 33898-8, 33899-6, 44786-2, 48134-1, 48136-6, 53432-1, 54500-4, 58768-3 to LOINC taxonomy for Liver Function.

## **Patient List Description**

List of OA patients 40 and older prescribed maintenance therapy medication with monitoring laboratory tests, if any. The numerator values for patients who meet the measure are prefixed with YES and patients who did not meet the measure are prefixed with NO. All laboratory tests the patient did have are displayed.

#### **Measure Source**

None

## Measure Past Performance and Long-Term Targets

None

```
DU
                            November 25, 2012
                                                                    Page 287
       *** IHS 2012 Selected Measures with Community Specified Report ***
                            DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
             Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Osteoarthritis Medication Monitoring
                   REPORT % PREV YR % CHG from BASE
                                                                 % CHG from
                    PERIOD
                                PERIOD
                                              PREV YR % PERIOD
                                                                     BASE %
Active Clinical Pts =>40
w/OA DX and maintenance
                                       6
therapy RX
                                                              4
# w/OA chronic
 med monitoring
                         2 66.7
                                       3 50.0
                                                  +16.7
                                                              2 50.0
                                                                        +16.7
```

Figure 2-112: Sample Report, Osteoarthritis Medication Monitoring

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient
Osteoarthritis Medication Monitoring: List of OA patients 40 and older

prescribed maintenance therapy medication with monitoring lab tests, if any. The numerator values for patients who meet the measure are prefixed with "YES:" and patients who did not meet the measure are prefixed with "NO:". All lab tests the patient DID have are displayed.

PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR

PATIENT1,RUTH 000001 COMMUNITY #1 F 64
AC 451 days of NSAID YES: 10/21/12 CREAT, 09/22/12 CBC, 05/21/12 LFT PATIENT2,JACKIE 000002 COMMUNITY #1 F 69
AC 472 days of NSAID YES: 10/30/12 CREAT, 08/06/12 CBC, 10/30/12 LFT PATIENT15,RAYMOND 000015 COMMUNITY #2 M 84
AC 804 days of NSAID NO: 09/12/12 CREAT

Figure 2-113: Sample Patient List, Osteoarthritis Medication Monitoring

#### 2.10.5 Asthma

#### **Denominators**

All *Active Clinical patients*. Broken down by age groups (under 14, 15 to 34, 35 to 64, and 65 and older).

Patients who have had two asthma-related visits during the Report Period or with persistent asthma. Broken down by age groups (under 14, 15 to 34, 35 to 64, and 65 and older).

#### **Numerators**

Patients who have had two asthma-related visits during the Report Period or with persistent asthma.

Patients from Numerator 1 who have been hospitalized at any hospital for asthma during the Report Period.

Patients from Numerator 1 who have visited the ER or Urgent Care for asthma during the Report Period.

Patients from Numerator 1 who have a Severity of 1.

Patients from Numerator 1 who have a Severity of 2.

Patients from Numerator 1 who have a Severity of 3.

Patients from Numerator 1 who have a Severity of 4.

Patients from Numerator 1 who have no documented Severity.

#### **Logic Description**

Age is calculated at beginning of Report Period.

Asthma visits definition: Diagnosis (POV) 493.\*.

Persistent asthma definition: Any of the following:

- Active entry in PCC Problem List for 493.\* with Severity of 2, 3 or 4 at *any* time before the end of the Report Period, *or*
- Most recent visit-related asthma entry (i.e., V Asthma) with Severity of 2, 3, or 4 documented *any* time before the end of the Report Period.

Severity definition: Severity of 1, 2, 3 or 4 in an active entry in the PCC Problem List for 493.\* or in V Asthma.

Hospitalizations definition: Service Category H with primary POV 493.\*.

ER and Urgent Care definition: Clinic codes 30 or 80 with primary POV 493.\*.

# **Key Logic Changes from CRS Version 12.0**

None

# **Patient List Description**

List of patients diagnosed with asthma and any asthma-related hospitalizations.

#### **Measure Source**

HP 2020 RD-2

# **Measure Past Performance and Long-Term Targets**

Measure	Target
HP1998 baseline for hospitalizations for asthma:	
Under 5	45.6 per 10,000
5-64	12.5 per 10,000
65 and older	17.7 per 10,000
HP 2020 goal for hospitalizations for asthma:	
Under 5	18.1 per 10,000
5-64	8.6 per 10,000
65 and older	20.3 per 10,000

```
DU
                             November 25, 2012
                                                                     Page 289
       *** IHS 2012 Selected Measures with Community Specified Report ***
                             DEMO INDIAN HOSPITAL
                 Report Period: Jan 01, 2012 to Dec 31, 2012
             Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Asthma (con't)
                    REPORT
                                  PREV YR
                                             % CHG from BASE
                                                                    % CHG from
                                  PERIOD
                                                PREV YR % PERIOD
                                                                       BASE %
                    PERIOD
```

Total Active Clinical									
Patients	1,646		1,224			1,101			
# w/asthma	58	3.5	42	3.4	+0.1	25	2.3	+1.3	
A. Under 15	28	48.3	22	52.4	-4.1	17	68.0	-19.7	
B. 15-34	7	12.1	7	16.7	-4.6	3	12.0	+0.1	
C. 35-64	15	25.9	8	19.0	+6.8	3	12.0	+13.9	
D. 65 and older	8	13.8	5	11.9	+1.9	2	8.0	+5.8	
D. 05 and Older	0	13.0	5	11.9	T1.9	4	0.0	T3.0	
# w/asthma	58		42			25			
# w/asthma									
hospitalization	2	3.4	2	4.8	-1.3	2	8.0	-4.6	
A. Under 15	1	50.0	0	0.0	+50.0	1		+0.0	
B. 15-34	0	0.0	1	50.0	-50.0	0	0.0	+0.0	
C. 35-64	0	0.0	0	0.0	+0.0	1	50.0	-50.0	
D. 65 and older	1	50.0	1	50.0	+0.0	0	0.0	+50.0	
# w/ ER/UC									
visit	6	10.3	6	14.3	-3.9	9	36.0	-25.7	
A. Under 15	2	33.3	3		-16.7	7	77.8	-44.4	
B. 15-34	0	0.0	2	33.3	-33.3	1	11.1	-11.1	
C. 35-64	2	33.3	0	0.0	+33.3	1	11.1	+22.2	
D. 65 and older	2	33.3	1	16.7	+16.7	0	0.0	+33.3	
# w/ Severity 1	3	5.2	0	0.0	+5.2	0	0.0	+5.2	
# w/ Severity 2	7	12.1	3	7.1	+4.9	0	0.0	+12.1	
# w/ Severity 3	4	6.9	0	0.0	+6.9	0	0.0	+6.9	
# w/ Severity 4	6	10.3	2	4.8	+5.6	0	0.0	+10.3	
# w/ No Severity	38	65.5	37	88.1	-22.6	~	100.0	-34.5	

Figure 2-114: Sample Report, Asthma

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Asthma: List of patients diagnosed with asthma and any asthma-related hospitalizations/ER/Urgent Care visits. PATIENT NAME PATIENT NAME DENOMINATOR HRN COMMUNITY SEX AGE NUMERATOR PATIENT1, GENEVA 000001 COMMUNITY #1 F 47 Severity 4 on visit 02/02/11; ER/UC: 11/02/12; AC Severity: 4 PATIENT2, JACKIE 000002 COMMUNITY #1 F 69 Severity 2 on PL; Severity: 2 000003 COMMUNITY #1 F 70 PATIENT3, PAULINE 2 Dx PCC: 03/01/12, 03/03/12; ER/UC: 10/01/12; AC Severity: 1 PATIENT4, WILLIAM R 000004 COMMUNITY #1 M 7 2 Dx PCC: 05/05/12, 06/06/12; Hospital: 05/05/12; ER/UC: 06/06/12 PATIENT5, ZACHARY 000005 COMMUNITY #1 M 11 2 Dx PCC: 03/20/12, 08/08/12 000042 COMMUNITY #2 F 4 PATIENT42, JOSEPHINE

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures
May 2012

AC 2 Dx PCC: 07/01/12, 09/19/12; Severity: 2

Figure 2-115: Sample Patient List, Asthma

#### 2.10.6 Asthma Assessments

#### **Denominators**

Active Clinical patients ages 5 and older with persistent asthma within the year prior to the beginning of the Report Period and during the Report Period, without a documented history of emphysema or chronic obstructive pulmonary disease (COPD). Broken down by age groups (5 through 14, 15 through 34, 35 through 64, and greater than (>)65).

#### **Numerator**

Patients with asthma management plan during the Report Period.

Patients with severity documented at any time before the end of the Report Period.

Patients with control documented during the Report Period.

Patients who were assessed for number of symptom free days during the Report Period.

Patients with number of symptom free days score of 0 through 5.

Patients with number of symptom free days score of 6 through 12.

Patients with number of symptom free days score of 13 through 14.

Patients who were assessed for number of school/work days missed during the Report Period.

Patients with number of school/work days missed score of 0 through 2.

Patients with number of school/work days missed score of 3 through 7.

Patients with number of school/work days missed score of 8 through 14.

#### **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

*Emphysema definition:* Any visit at any time on or before the end of the Report Period with POV codes: 492.\*, 506.4, 518.1, 518.2.

COPD definition: Any visit at any time on or before the end of the Report Period with POV codes: 491.20, 491.21, 491.22, 493.2\*, 496, 506.4.

#### Persistent asthma definition:

- 1. Meeting any of the following four criteria below within the year prior to the beginning of the Report Period *and* during the Report Period:
  - a. At least one visit to Clinic Code 30 (Emergency Medicine) with primary diagnosis 493\* (asthma)
  - b. At least one acute inpatient discharge with Primary Diagnosis 493.\*. Acute inpatient discharge defined as Service Category of H
  - c. At least four outpatient visits, defined as Service Categories A, S, or O, with primary or secondary diagnosis of 493.\* *and* at least two asthma medication dispensing events (see definition below)
  - d. At least four asthma medication dispensing events (see definition below). If the sole medication was leukotriene modifiers, then *must* also have at least one visit with POV 493.\* in the same year as the leukotriene modifier (i.e., during the Report Period or within the year prior to the beginning of the Report Period.)
- 2. Meeting any of the following criteria below:
  - a. Active entry in PCC Problem List for 493.\* with Severity of 2, 3 or 4 at any time before the end of the Report Period, or
  - b. Most recent visit-related asthma entry (i.e., V Asthma) with Severity of 2, 3, or 4 documented any time before the end of the Report Period.

Dispensing event definition: One prescription of an amount lasting 30 days or less. For RXs longer than 30 days, divide the days' supply by 30 and round down to convert. For example, a 100-day RX is equal to three dispensing events (100/30 = 3.33, rounded down to 3). Also, two different RXs dispensed on the same day are counted as two different dispensing events. Inhalers should also be counted as one dispensing event.

**Note:** If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

Asthma medication codes for denominator defined with medication taxonomies: BGP HEDIS ASTHMA MEDS, BGP HEDIS ASTHMA LEUK MEDS, BGP HEDIS ASTHMA INHALED MEDS. Medications are: Antiasthmatic Combinations (Dyphylline-Guaifenesin, Guaifenesin-Theophylline, Potassium Iodide-Theophylline), Antibody Inhibitor (Omalizumab), Inhaled Steroid Combinations (Budesonide-Formoterol, Fluticasone-Salmeterol, Formoterol-Mometasone), Inhaled Corticosteroids (Belclomethasone, Budesonide, Ciclesonide CFC Free, Flunisolide, Fluticasone CFC Free, Mometasone, Triamcinolone), Lekotriene Modifiers (Montelukast, Zafirlukast, Zileuton), Long-Acting, Inhaled Beta-2 Agonists (Aformoterol, Formoterol, Indacaterol, Salmeterol), Mast Cell Stabilizers (Cromolyn, Nedocromil), Methylxanthines (Aminophylline, Dyphylline, Oxtriphylline, Theophylline), Short-Acting, Inhaled Beta-2 Agonists (Albuterol, Levalbuterol, Metaproterenol, Pirbuterol). Medications must not have a comment of RETURNED TO STOCK.

Asthma management plan definition: Patient Education code ASM-SMP.

Severity documented definition:

Meeting any of the following criteria below:

- 1. Active entry in PCC Problem List for 493.\* with Severity of 2, 3 or 4 at ANY time before the end of the Report Period or
- 2. Most recent visit-related asthma entry (i.e. V Asthma) with Severity of 2, 3, or 4 documented ANY time before the end of the Report Period.

Control documented definition: POV 493.\* with Asthma Control recorded in the V Asthma file.

*Number of symptom free days definition:* The most recent V Measurement documented during the Report Period.

*Number of school/work days missed definition:* The most recent V Measurement documented during the Report Period.

# **Key Logic Changes from CRS Version 12.0**

- 1. Updated medications to add Formoterol-Mometasone to Inhaled Steroid Combinations.
- 2. Updated medications to add Ciclesonide CFC Free to Inhaled Corticosteroids.
- 3. Updated medications to add Indacaterol to Long-Acting, Inhaled Beta-2 Agonists.

# **Patient List Description**

List of asthmatic patients with assessments, if any.

#### **Measure Source**

None

# **Measure Past Performance and Long-term Targets**

None

DU November 25, 2012 Page 295 *** IHS 2012 Selected Measures with Community Specified Report ***									
			INDIAN H						
	Report Period: Jan 01, 2012 to Dec 31, 2012								
Previous Year Period: Jan 01, 2011 to Dec 31, 2011									
Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Asthma Assessments									
	REPORT PERIOD		PREV YR PERIOD		CHG from BA			CHG from BASE %	
Active Clinical									
Pts =>5 w/ persister	nt								
asthma	29		11			5			
# w/management plan	1	3.4	0	0.0	+3.4	0	0.0	+3.4	
# w/severity	1.0	F0 6	-	45 5	.12.0	1	00 0	. 20. 6	
documented # w/control	Ι/	58.6	5	45.5	+13.2	Τ	20.0	+38.6	
documented	3	10.3	0	0.0	+10.3	0	0.0	+10.3	
# w/# symptom free	5	10.5	J	0.0	110.5	O	0.0	110.5	
days	3	10.3	0	0.0	+10.3	0	0.0	+10.3	
# w/# symptom free									
days 0-5	1	3.4	0	0.0	+3.4	0	0.0	+3.4	
# w/# symptom free									
days 6-12	1	3.4	0	0.0	+3.4	0	0.0	+3.4	
# w/# symptom free	1	2 4	0	0.0	. 2 4	0	0.0	. 2 4	
days 13-14 # w/# school/work	1	3.4	0	0.0	+3.4	0	0.0	+3.4	
days missed	3	10.3	0	0.0	+10.3	0	0.0	+10.3	
# w/# school/work	3	10.5	0	0.0	110.5	J	0.0	110.5	
days missed 0-2	1	3.4	0	0.0	+3.4	0	0.0	+3.4	
# w/# school/work									
days missed 3-7	1	3.4	0	0.0	+3.4	0	0.0	+3.4	

# w/# school/work days missed 8-14 1 3.4 0 0.0 +3.4 0 0.0 +3.4	# w/# school/work days missed 8-14	1	3.4	0	0.0	+3.4	0	0.0	+3.4	
--	---------------------------------------	---	-----	---	-----	------	---	-----	------	--

Figure 2-116: Sample Report, Asthma Assessments

DU *** IHS 2012 Selected	DEMO INDIA	ith Communit AN HOSPITAL			e 95					
Previous Year	riod: Jan 01 Period: Jan eriod: Jan (	n 01, 2011 t	to Dec 31, 2							
Asthma Assessments (con't)										
Active Clinical Pts =>5 w/Persistent Asthma										
CURRENT REPORT PERIOD Active Clinical Pts =>5	5-14	15-34	35-64	65+						
w/persistent asthma	11	6	6	6						
# w/management plan % w/managment plan	1 9.1	0.0	0.0	0.0						
<pre># w/severity documented % w/severity documented</pre>		3 50.0	6 100.0	1 16.7						
% w/control documented % w/control documented	0.0	1 16.7	1 16.7	1 16.7						
# w/# symptom free days % w/# symptom free days	1 9.1	0.0	0.0	2 33.3						
<pre># w/# symptom free days 0-5 % w/# symptom free days 0-5</pre>		0.0	0.0	1 16.7						
# w/ $#$ symptom free days 6-12 % w/ $#$ symptom free days 6-12		0.0	0.0	0.0						
# w/# symptom free days 13-1 % w/# symptom free days 13-1		0.0	0.0	1 16.7						
<pre># w/# school/work days missed % w/# school/work days</pre>	1	0	0	2						
missed	9.1	0.0	0.0	33.3						
<pre># w/# school/work days missed 0-2 % w/# school/work days</pre>	1	0	0	0						
missed 0-2	9.1	0.0	0.0	0.0						
<pre># w/# school/work days missed 3-7 % w/# school/work days</pre>	0	0	0	1						
missed 3-7	0.0	0.0	0.0	16.7						
# w/# school/work days missed 8-14	0	0	0	1						

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
% w/# school/work days
missed 8-14 0.0 0.0 0.0 16.7
```

Figure 2-117: Sample Age Breakdown Report, Asthma Assessments

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Asthma Assessments: List of asthmatic patients with assessments, if any.
PATIENT NAME HRN COMMUNITY
DENOMINATOR NUMERATOR
                                         SEX AGE
PATIENT1, GENEVA 000001 COMMUNITY #1 F 47
UP, AC Severity 4 in V Asthma 02/02/11 Severity: 4; Symptom Free Days: 03/01/12 [12];
Days Missed: 03/01/12 [0]
PATIENT2, JACKIE 000002 COMMUNITY #1 F 69
UP,AC Severity >1 on PL for 493.00 Severity: 2
PATIENT3, PAULINE 000003 COMMUNITY #1 F 70
UP,AC Severity >1 on PL for 493.00 Mgmt Plan: 06/01/12; Severity: 3
PATIENT4, WILLIAM R 000004 COMMUNITY #1 M 7
UP,AC 4 meds
PATIENTS, ZACHARY 000005 COMMUNITY #1 M 11
AC Severity 4 in V Asthma 04/04/12 Severity: 4; Control: 05/06/12
PATIENT42, JOSEPHINE 000042 COMMUNITY #2 F 4
AC DX ON HOSP/OR ER ON 05/05/11 DX ON HOSP/OR ER ON 06/03/12 Control: 10/03/12;
Symptom Free Days: 07/01/12 [3]; Days Missed: 07/01/12 [3]
```

Figure 2-118: Sample Patient List, Asthma Assessments

# 2.10.7 Asthma Quality of Care

#### **Denominators**

Active Clinical patients ages 5 through 56 with persistent asthma within the year prior to the beginning of the Report Period and during the Report Period, without a documented history of emphysema or chronic obstructive pulmonary disease (COPD). Broken down by age groups (5 through 9, 10 through 17, and 18 through 56).

*User Population patients* ages 5 through 56 with persistent asthma within the year prior to the beginning of the Report Period and during the Report Period, without a documented history of emphysema and chronic COPD. Broken down by age groups (5 through 9, 10 through 17, and 18 through 56).

#### Numerator

Patients who had at least one dispensed prescription for preferred asthma therapy medication during the Report Period.

# **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

Emphysema definition: Any visit at any time on or before the end of the Report Period with POV codes: 492.\*, 506.4, 518.1, 518.2.

COPD definition: Any visit at any time on or before the end of the Report Period with POV codes: 491.20, 491.21, 491.22, 493.2\*, 496, 506.4.

Persistent asthma definition:

- 4. Meeting any of the following four criteria below within the year prior to the beginning of the Report Period *and* during the Report Period:
  - a. At least one visit to Clinic Code 30 (Emergency Medicine) with primary diagnosis 493\* (asthma)
  - b. At least one acute inpatient discharge with Primary Diagnosis 493.\*. Acute inpatient discharge defined as Service Category of H
  - c. At least four outpatient visits, defined as Service Categories A, S, or O, with primary or secondary diagnosis of 493.\* *and* at least two asthma medication dispensing events (see definition below)
  - d. At least four asthma medication dispensing events (see definition below). If the sole medication was leukotriene modifiers, then *must* also have at least one visit with POV 493.\* in the same year as the leukotriene modifier (i.e., during the Report Period or within the year prior to the beginning of the Report Period.)
- 5. Meeting any of the following criteria below:
  - a. Active entry in PCC Problem List for 493.\* with Severity of 2, 3 or 4 at any time before the end of the Report Period, or
  - b. Most recent visit-related asthma entry (i.e., V Asthma) with Severity of 2, 3, or 4 documented any time before the end of the Report Period.

Dispensing event definition: One prescription of an amount lasting 30 days or less. For RXs longer than 30 days, divide the days' supply by 30 and round down to convert. For example, a 100-day RX is equal to three dispensing events (100/30 = 3.33, rounded down to 3). Also, two different RXs dispensed on the same day are counted as two different dispensing events. Inhalers should also be counted as one dispensing event.

**Note:** If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

Asthma medication codes for denominator defined with medication taxonomies: BGP HEDIS ASTHMA MEDS, BGP HEDIS ASTHMA LEUK MEDS, BGP HEDIS ASTHMA INHALED MEDS. Medications are: Antiasthmatic Combinations (Dyphylline-Guaifenesin, Guaifenesin-Theophylline, Potassium Iodide-Theophylline), Antibody Inhibitor (Omalizumab), Inhaled Steroid Combinations (Budesonide-Formoterol, Fluticasone-Salmeterol, Formoterol-Mometasone), Inhaled Corticosteroids (Belclomethasone, Budesonide, Ciclesonide CFC Free, Flunisolide, Fluticasone CFC Free, Mometasone, Triamcinolone), Lekotriene Modifiers (Montelukast, Zafirlukast, Zileuton), Long-Acting, Inhaled Beta-2 Agonists (Aformoterol, Formoterol, Indacaterol, Salmeterol), Mast Cell Stabilizers (Cromolyn, Nedocromil), Methylxanthines (Aminophylline, Dyphylline, Oxtriphylline, Theophylline), Short-Acting, Inhaled Beta-2 Agonists (Albuterol, Levalbuterol, Metaproterenol, Pirbuterol). Medications must not have a comment of RETURNED TO STOCK.

*To be included in the numerator*, patient must have a non-discontinued prescription for preferred asthma therapy (see list of medications below) during the Report Period.

Preferred asthma therapy medication codes for numerator defined with medication taxonomy: BGP HEDIS PRIMARY ASTHMA MEDS Medications are:
Antiasthmatic Combinations (Dyphylline-Guaifenesin, Guaifenesin-Theophylline, Potassium Iodide-Theophylline), Antibody Inhibitor (Omalizumab), Inhaled Steroid Combinations (Budesonide-Formoterol, Fluticasone-Salmeterol, Formoterol-Mometasone), Inhaled Corticosteroids (Belclomethasone, Budesonide, Ciclesonide, Flunisolide, Fluticasone CFC Free, Mometasone, Triamcinolone), Lekotriene Modifiers (Montelukast, Zafirlukast, Zileuton), Mast Cell Stabilizers (Cromolyn, Nedocromil), Methylxanthines (Aminophylline, Dyphylline, Oxtriphylline, Theophylline). Medications must not have a comment of RETURNED TO STOCK.

# **Key Logic Changes from CRS Version 12.0**

- 1. Updated medications to add Formoterol-Mometasone to Inhaled Steroid Combinations.
- 2. Updated medications to add Ciclesonide CFC Free to Inhaled Corticosteroids.
- 3. Updated medications to add Indacaterol to Long-Acting, Inhaled Beta-2 Agonists.

4. Updated BGP HEDIS PRIMARY ASTHMA MEDS medications to add Formoterol-Mometasone to Inhaled Steroid Combinations and Ciclesonide CFC Free to Inhaled Corticosteroids.

# **Patient List Description**

List of asthmatic patients with preferred asthma therapy medications, if any.

#### **Measure Source**

None

# **Measure Past Performance and Long-Term Targets**

None

DU November 25, 2012 Page 292  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000  Asthma Quality of Care (con't)									
riserinia gaarrey or ea	REPORT PERIOD	%			CHG from PREV YR %			CHG from BASE %	
Active Clinical Pts w/persistent asthma	5-56		10			5			
<pre># w/ preferred asthm control med</pre>		33.3	5	50.0	-16.7	3	60.0	-26.7	
A. Active Clinical ages 5-9	11		3			1			
# w/ preferred asthm control med		27.3	1	33.3	-6.1	1	100.0	-72.7	
B. Active Clinical ages 10-17	2		2			1			
# w/ preferred asthm control med		100.0	2	100.0	+0.0	0	0.0	+100.0	
C. Active Clinical ages 18-56	8		5			3			
# w/ preferred asthm control med		25.0	2	40.0	-15.0	2	66.7	-41.7	
User Pop Pts 5-56 w/persistent									

asthma	21	11		6	
# w/ preferred asthma control med	7 33.3	5 45.5	-12.1	3 50.0	-16.7
A. User Pop ages 5-9	11	4		1	
<pre># w/ preferred asthma control med</pre>	3 27.3	1 25.0	+2.3	1 100.0	-72.7
B. User Pop ages 10-17	2	2		1	
<pre># w/ preferred asthma   control med</pre>	2 100.0	2 100.0	+0.0	0 0.0	+100.0
C. User Pop ages 18-56	8	5		4	
<pre># w/ preferred asthma control med</pre>	2 25.0	2 40.0	-15.0	2 50.0	-25.0

Figure 2-119: Sample Report, Asthma Quality of Care

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Asthma Quality of Care: List of asthmatic patients with preferred asthma therapy medications, if any. PATIENT NAME COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT1, ZACHARY 000011 COMMUNITY F 5 UP,AC,Severity 4 in V Asthma 02/02/11 PATIENT12, TINA DANIELLE 000012 COMMUNITY F 6 UP,AC,Severity >1 on PL for 493.00,NUM: 06/01/12, MOMETASONE/FORMOTEROL 100/5MCG INH PATIENT13, THERESA LYNN 000013 COMMUNITY M 47 UP, AC, Severity 2 in V Asthma 03/03/12, NUM: 06/01/12, FLUTICASONE PROPIONATE 110MCG INHALER PATIENT36, NATHAN BRADLEY 000014 COMMUNITY M 16 UP,AC,DX ON HOSP/OR ER ON 09/26/11,4 POVS AND 2 MEDSNUM: 09/19/12, FLUTICASONE PROPIONATE 110MCG INHALER PATIENT37, JANELLE MARIE 000015 COMMUNITY F 50 UP,AC,Severity 2 in V Asthma 09/04/11 PATIENT38, THOMAS ELLIS 000016 COMMUNITY M 6 UP,AC,4 meds

Figure 2-120: Sample Patient List, Asthma Quality of Care

# 2.10.8 Medication Therapy for Persons with Asthma

#### **Denominators**

Active Clinical patients ages 5-50 with persistent asthma within the year prior to the beginning of the Report Period and during the Report Period, without a documented history of emphysema or chronic obstructive pulmonary disease (COPD).

Active Clinical patients ages 5 and older with persistent asthma within the year prior to the beginning of the Report Period and during the Report Period, without a documented history of emphysema or chronic obstructive pulmonary disease (COPD). Broken down by age groups (5 through 14, 15 through 34, 35 through 64, and greater than (>) 65).

Active Clinical patients ages five and older with persistent asthma within the year prior to the beginning of the Report Period and during the Report Period, without a documented history of emphysema or chronic obstructive pulmonary disease (COPD) who had 2 or more prescriptions for a LABA during the Report Period. Broken down by age groups (5 through 14, 15 through 34, 35 through 64, and greater than (>) 65).

#### **Numerators**

Suboptimal Control: Patients who were dispensed more than three canisters of a short-acting beta2 agonist inhaler during the same 90-day period during the Report Period.

Absence of Controller Therapy: Patients who were dispensed more than three canisters of short acting beta2 agonist inhalers over a 90-day period and who did not receive controller therapy during the same 90-day period.

Patients who were prescribed two or more controller therapy medications during the Report Period.

Patients who were prescribed two or more inhaled corticosteroid medications during the Report Period.

Patients who were not prescribed two or more inhaled corticosteroid medications during the Report Period.

# **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

*Emphysema definition:* Any visit at any time on or before the end of the Report Period with POV codes: 492.\*, 506.4, 518.1, 518.2.

COPD definition: Any visit at any time on or before the end of the Report Period with POV codes: 491.20, 491.21, 491.22, 493.2\*, 496, 506.4.

Persistent asthma definition:

- 5. Meeting any of the following four criteria below within the year prior to the beginning of the Report Period *and* during the Report Period:
  - a. At least one visit to Clinic Code 30 (Emergency Medicine) with primary diagnosis 493\* (asthma)
  - b. At least one acute inpatient discharge with Primary Diagnosis 493.\*. Acute inpatient discharge defined as Service Category of H
  - c. At least four outpatient visits, defined as Service Categories A, S, or O, with primary or secondary diagnosis of 493.\* *and* at least two asthma medication dispensing events (see definition below)
  - d. At least four asthma medication dispensing events (see definition below). If the sole medication was leukotriene modifiers, then *must* also have at least one visit with POV 493.\* in the same year as the leukotriene modifier (i.e., during the Report Period or within the year prior to the beginning of the Report Period.)
- 6. Meeting any of the following criteria below:
  - a. Active entry in PCC Problem List for 493.\* with Severity of 2, 3 or 4 at any time before the end of the Report Period, or
  - b. Most recent visit-related asthma entry (i.e., V Asthma) with Severity of 2, 3, or 4 documented any time before the end of the Report Period.

Dispensing event definition: One prescription of an amount lasting 30 days or less. For RXs longer than 30 days, divide the days' supply by 30 and round down to convert. For example, a 100-day RX is equal to three dispensing events (100/30 = 3.33, rounded down to 3). Also, two different RXs dispensed on the same day are counted as two different dispensing events. Inhalers should also be counted as one dispensing event.

**Note:** If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

Asthma medication codes for denominator defined with medication taxonomies: BGP HEDIS ASTHMA MEDS, BGP HEDIS ASTHMA LEUK MEDS, BGP HEDIS ASTHMA INHALED MEDS. Medications are: Antiasthmatic Combinations (Dyphylline-Guaifenesin, Guaifenesin-Theophylline, Potassium Iodide-Theophylline), Antibody Inhibitor (Omalizumab), Inhaled Steroid Combinations (Budesonide-Formoterol, Fluticasone-Salmeterol, Formoterol-Mometasone), Inhaled Corticosteroids (Belclomethasone, Budesonide, Ciclesonide CFC Free, Flunisolide, Fluticasone CFC Free, Mometasone, Triamcinolone), Lekotriene Modifiers (Montelukast, Zafirlukast, Zileuton), Long-Acting, Inhaled Beta-2 Agonists (Aformoterol, Formoterol, Indacaterol, Salmeterol), Mast Cell Stabilizers (Cromolyn, Nedocromil), Methylxanthines (Aminophylline, Dyphylline, Oxtriphylline, Theophylline), Short-Acting, Inhaled Beta-2 Agonists (Albuterol, Levalbuterol, Metaproterenol, Pirbuterol). Medications must not have a comment of RETURNED TO STOCK.

To be included in the Suboptimal Control and Absence of Controller Therapy numerators, patient must have one or more non-discontinued prescriptions for short acting Beta2 Agonist inhalers totaling at least four canisters in one 90 day period. Short acting Beta2 Agonist inhaler medications defined with medication taxonomy BGP PQA SABA MEDS. (Medications are: Albuterol, Levalbuterol, Pirbuterol). Medications must not have a comment of RETURNED TO STOCK.

#### Controller Therapy definition:

At least one non-discontinued prescription of controller therapy medications during the same 90 day period.

Controller therapy medications defined with medication taxonomy BGP PQA CONTROLLER MEDS. (Medications are: Beclomethasone, Budesonide, Budesonide-Formoterol, Ciclesonide, Cromolyn, Flunisolide, Fluticasone, Fluticasone-Salmeterol, Formoterol, Mometasone, Mometasone-Formoterol, Montelukast, Nedocromil, Salmeterol, Theophylline, Triamcinolone, Zafirlukast, Zileuton). Medications must not have a comment of RETURNED TO STOCK.

Inhaled corticosteroid medications defined with medication taxonomy BGP ASTHMA INHALED STEROIDS. (Medications are: Mometasone (Asmanex), Beclovent, Qvar, Vancenase, Vanceril, Vanceril DS, Bitolerol (Tornalate), Pulmicort, Pulmicort Respules, Pulmicort Turbohaler, Salmeterol/fluticasone (Advair), Triamcinolone (Azmacort), Fluticasone (Flovent), Budesonide-Formoterol (Symbicort).) Medications must not have a comment of RETURNED TO STOCK.

Long-Acting Beta-2 Agonist (LABA) medications defined with medication taxonomy BGP ASTHMA LABA MEDS. (Medications are: Aformoterol, Formoterol, Salmeterol.) Medications must not have a comment of RETURNED TO STOCK.

# **Key Logic Changes from CRS Version 12.0**

- 1. Updated medications to add Formoterol-Mometasone to Inhaled Steroid Combinations.
- 2. Updated medications to add Ciclesonide CFC Free to Inhaled Corticosteroids.
- 3. Updated medications to add Indacaterol to Long-Acting, Inhaled Beta-2 Agonists.

# **Patient List Description**

List of patients with asthma with suboptimal control and controller therapy, if any.

#### **Measure Source**

POA (Pharmacy Quality Alliance)

# **Measure Past Performance and Long-term Targets**

None

November 25, 2012 Page 299  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Medication Therapy for Persons with Asthma									
REPORT PERIOD	% PREV YR PERIOD		BASE PERIOD						
Active Clinical ages 5-50 w/ asthma 19	8		5						
<pre># w/ Suboptimal Control # w/ Absence of Controller</pre>	5.3 0	0.0 +5.3	0 0	.0 +5.3					
	100.0 0	0.0 +100.0	0 0	.0 +100.0					

Active Clinical Pts =>5 w/persistent asthma	29		11			5		
<pre># w/ 2 or more controller Rx # w/ 2 or more inhaled</pre>	10	34.5	5	45.5	-11.0	3	60.0	-25.5
steroid Rx	3	10.3	3	27.3	-16.9	0	0.0	+10.3
Active Clinical =>5 w/persistent asthma and								
LABA Rx	4		0			0		
# w/o 2 or more inhaled steroid Rx	3	75.0	0	0.0	+75.0	0	0.0	+75.0

Figure 2-121: Sample Report, Medication Therapy for Persons with Asthma

DU November 25, 2012 Page 95  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000  Medication Therapy for Persons with Asthma (con't)										
Medication Therapy for Persons with Asthma (con't)										
A CURRENT REPORT PERIOD	w/persist	ical Pts =>5 tent asthma 15-34		65+						
Active Clinical Pts =>5 w/persistent asthma	11	6	6	6						
# w/ 2 or more controller Rx % w/ 2 or more controller Rx		2 33.3	1 16.7	1 16.7						
<pre># w/ 2 or more inhaled   steroid Rx % w/ 2 or more inhaled</pre>	3	0	0	0						
steroid Rx	27.3	0.0	0.0	0.0						
PREVIOUS REPORT PERIOD Active Clinical Pts =>5										
w/persistent asthma	4	2	3	1						
# w/ 2 or more controller Rx % w/ 2 or more controller Rx		1 50.0	1 33.3	0.0						
<pre># w/ 2 or more inhaled steroid Rx % w/ 2 or more inhaled</pre>	1	1	1	0						
steroid Rx	25.0	50.0	33.3	0.0						
CHANGE FROM PREVIOUS YR % # w/ 2 or more controller Rx # w/ 2 or more inhaled	+4.5	-16.7	-16.7	+16.7						
steroid Rx	-22.7	-50.0	-33.3	+0.0						

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

BASELINE REPORT PERIOD					
Active Clinical Pts =>5 w/persistent asthma	2	2	1	0	
w/persistene asenna	2	2	_	O	
# w/ 2 or more controller Rx	1	1	1	0	
% w/ 2 or more controller Rx	50.0	50.0	100.0	0.0	
#/ 2 inhalad					
# w/ 2 or more inhaled steroid Rx	0	0	0	0	
% w/ 2 or more inhaled	Ŭ	· ·	· ·	ŭ	
steroid Rx	0.0	0.0	0.0	0.0	
CHANGE EDOM DAGELINE VD 4					
CHANGE FROM BASELINE YR % # w/ 2 or more controller Rx	+4 5	-16 7	-83 3	+16 7	
# w/ 2 or more inhaled	14.5	10.7	03.3	110.7	
steroid Rx	-22.7	-50.0	-100.0	+0.0	

Figure 2-122: Sample Age Breakdown Report, Medication Therapy for Persons with Asthma

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Medication Therapy for Persons with Asthma: List of patients with asthma with asthma medications, if any. HRN PATIENT NAME COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT1, GWEN 000001 COMMUNITY #1 F 5 AC, Severity 4 in V Asthma 02/02/11 PATIENT2, ALICE 000002 COMMUNITY #1 F 6 AC, Severity >1 on PL for 493.00 SABA: 06/15/12 ALBUTEROL 90MCG/INHALATION MDI(4) PATIENT3, GENEVA 000003 COMMUNITY #1 F 47 AC, Severity 2 in V Asthma 03/03/12 2+ CONT: 06/01/12 FLUTICASONE PROPIONATE 110MCG INHALER, 10/15/12 FLUTICASONE PROPIONATE 110MCG INHALER; 2+ STEROID: 06/01/12 FLUTICASONE PROPIONATE 110MCG INHALER, 10/15/12 FLUTICASONE PROPIONATE 110MCG INHALER PATIENT22, MELANIE 000022 COMMUNITY #1 F 47 AC, Severity >1 on PL for 493.00 PATIENT27, RANDALL 000027 COMMUNITY #1 M 6 AC, Severity >1 on PL for 493.00 LABA2+ CONT: 03/03/12 MOMETASONE/FORMOTEROL 100/5MCG  $\mathtt{INH},\ 05/01/12\ \mathtt{MOMETASONE}/\mathtt{FORMOTEROL}\ 100/\mathtt{5MCG}\ \mathtt{INH};\ 2+\ \mathtt{STEROID}\colon\ 03/03/12$ MOMETASONE/FORMOTEROL 100/5MCG INH, 05/01/12 MOMETASONE/FORMOTEROL 100/5MCG INH

Figure 2-123: Sample Patient List, Medication Therapy for Persons with Asthma

# 2.10.9 Community-Acquired Pneumonia (CAP): Assessment of Oxygen Saturation

#### Denominator

*Number of visits for User Population patients* ages 18 and older diagnosed with community-acquired bacterial pneumonia at an outpatient visit during the Report Period.

#### **Numerators**

Number of visits where patients had oxygen saturation documented and reviewed.

Number of visits where patients refused oxygen saturation assessment.

Number of visits where patients did not have their oxygen saturation documented and reviewed.

# **Logic Description**

Age of the patient is calculated at the beginning of the report period.

If a patient has more than one visit for community-acquired bacterial pneumonia during the report period, each visit will be counted as long as it has been more than 45 days since the date of the prior visit. For example, a patient was diagnosed on January 1, 2012 and 35 days later he was diagnosed again with pneumonia. That second diagnosis does not count as a separate visit. However, if the patient were diagnosed again on February 16, 2012 (46 days after onset), that diagnosis counts as a separate visit. Because RPMS does not store the date of onset, visit date will be used as a surrogate for onset date.

CRS uses the following codes and taxonomies to define the denominator and numerators.

Subject Defined	ICD and Other Codes
Community-Acquired Bacterial Pneumonia (Non-CHS outpatient visit, defined as visit type not equal to "C" and service category of "A" for Ambulatory, "S" for Day Surgery, or "O" for Observation)	V POV: 481, 482.0, 482.1, 482.2, 482.30, 482.31, 482.32, 482.39, 482.40, 482.41, 482.42, 482.49, 482.81, 482.82, 482.83, 482.84, 482.89, 482.9, 483.0, 483.1, 483.8, 485, 486, 487.0

Subject Defined			LOINC Codes	Taxonomy
Oxygen Saturation Assessment (any of the arterial blood gas (ABG) or pulse oximetry tests performed at the visit)	94760-94762, 82803, 82805, 82810, or 3028F or 3028F, where 3028F has no modifier of 1P, 2P, 3P, or 8P	Saturation	Yes	BGP CMS ABG TESTS

Refusal of Oxygen Saturation Assessment definition: Patients whose oxygen saturation was not assessed due to a patient refusal of assessment on visit date. Refusal is defined as refusal of any of the tests listed above.

*No Assessment definition*: Patients whose oxygen saturation was not assessed or refused.

## **Key Logic Changes from CRS Version 12.0**

Added codes 19224-5, 20081-6, 20564-1, 24339-4, 24340-2, 24344-4, 2708-6, 2709-4, 2710-2, 2711-0, 28643-5, 44612-0, 44613-8, 44614-6, 44616-1, 51972-8, 51973-6, 51974-4, 59405-1, 59406-9, 59407-7, 59408-5, 59409-3, 59410-1, 59411-9, 59412-7, 59413-5, 59414-3, 59415-0, 59416-8, 59417-6, 59418-4, 68363-1, 8839-3 to LOINC taxonomy for Arterial Blood Gas.

# **Patient List Description**

List of patients with community-acquired bacterial pneumonia, with oxygen saturation assessment or documented reason for no assessment, if any.

#### Measure Source

CMS PQRI Measure #57

# **Measure Past Performance and Long-Term Targets**

None

```
DU
                            November 25, 2012
                                                                   Page 301
      *** IHS 2012 Selected Measures with Community Specified Report ***
                           DEMO INDIAN HOSPITAL
                Report Period: Jan 01, 2012 to Dec 31, 2012
             Previous Year Period: Jan 01, 2011 to Dec 31, 2011
               Baseline Period: Jan 01, 2000 to Dec 31, 2000
Community-Acquired Pneumonia (CAP): Assessment of Oxygen Saturation (con't)
                   REPORT % PREV YR % CHG from BASE
                                                                  % CHG from
                             PERIOD
                   PERIOD
                                              PREV YR % PERIOD
                                                                    BASE %
# Pneumonia Visits for
```

User Pop Pts 18+	53		12			8			
# Visits w/ O2 Sat Assmt # Visits w/ Refusal		43.4		8.3	+35.1 +7.5		25.0 0.0	+18.4 +7.5	
# Visits w/ No O2 Sat Assmt	26	49.1	11	91.7	-42.6	6	75.0	-25.9	

Figure 2-124: Sample Report, Community-Acquired Pneumonia (CAP): Assessment of Oxygen Saturation

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Community-Acquired Pneumonia (CAP): Assessment of Oxygen Saturation: List of
patients with community-acquired bacterial pneumonia, with oxygen saturation
assessment or documented reason for no assessment, if any.
                        HRN
                                 COMMUNITY
PATIENT NAME
 DENOMINATOR
                               NUMERATOR
PATIENT1,GENEVA 000001 COMMUNITY #1 F 27
UP,1) 11/25/12 482.81 1) 11/25/12 O2 SAT: CPT 3028F
PATIENT2,JACKIE 000002 COMMUNITY #1 F 29
UP,1) 06/15/12 482.89
                                1) 06/15/12 02 SAT: LAB BLOOD GASES
PATIENT3, PAULINE 000003 COMMUNITY #1 F 38
UP,1) 05/31/12 482.0 1) 05/31/12 None PATIENT4,WILLIAM 000004 COMMUNITY #1 M 38
UP,1) 05/31/12 482.0; 2) 08/01/12 482.49; 3) 09/17/12 487.0 1) 05/31/12 None; 2)
08/01/12 02 SAT: CPT 82805; 3) 09/17/12 02 SAT: CPT 82810
PATIENT5, ZACHARY LEE 000005 COMMUNITY #1 M 36
UP,1) 09/01/12 482.83; 2) 12/01/12 482.83 1) 09/01/12 Refused CPT 94761; 2) 12/01/12
Refused O2 SAT MEAS
```

Figure 2-125: Sample Patient List, Community-Acquired Pneumonia (CAP): Assessment of Oxygen Saturation

# 2.10.10 Chronic Kidney Disease Assessment

#### **Denominators**

Active Clinical patients ages 18 and older with serum creatinine test during the Report Period.

*User Population patients* ages 18 and older with serum creatinine test during the Report Period.

#### **Numerators**

Patients with Estimated GFR.

- a. Patients with GFR less than (<) 60.
- b. Patients with normal GFR (i.e., greater than or equal to (>=) 60).

### **Logic Description**

Age is calculated at beginning of the Report Period.

For the GFR less than (<) 60 numerator, CRS will include GFR results containing a numeric value less than 60 or with a text value of "less than (<) 60". For the normal GFR (greater than or equal to (>=) 60) numerator, CRS will include GFR results containing a numeric value equal to or greater than 60 or with a text value of "60"

CRS uses the following codes and taxonomies to define the denominator and numerators.

Subject Defined		ICD and Other Codes	LOINC Codes	Taxonomy
Creatinine test	82540, 82565-75		Yes	DM AUDIT CREATININE TAX
Estimated GFR test			Yes	BGP GPRA ESTIMATED GFR TAX

### **Key Logic Changes from CRS Version 12.0**

- 1. Added codes 59826-8 and 62425-4 to LOINC taxonomy for Creatinine.
- 2. Added codes 50384-7 and 69405-9 to LOINC taxonomy for Estimated GFR.

#### **Patient List Description**

List of patients with Creatinine test, with GFR and value, if any.

#### **Measure Source**

None

### **Measure Past Performance and Long-Term Targets**

```
DU
                            November 25, 2012
                                                                   Page 303
       *** IHS 2012 Selected Measures with Community Specified Report ***
                            DEMO INDIAN HOSPITAL
                Report Period: Jan 01, 2012 to Dec 31, 2012
             Previous Year Period: Jan 01, 2011 to Dec 31, 2011
                Baseline Period: Jan 01, 2000 to Dec 31, 2000
Chronic Kidney Disease Assessment (con't)
                   REPORT
                            % PREV YR
                                          % CHG from BASE
                                                                 % CHG from
                    PERIOD
                                PERIOD
                                              PREV YR % PERIOD
                                                                    BASE %
Active Clinical Pts
```

=> 18 with Serum Creatinine test	271	258		221	
w/Est GFR A. # w/ GFR <60 B. # w/Normal GFR	189 69 52 1	.9.2 30	12.8 +57.0 11.6 +7.	6 15 6.	8 +12.4
(>=60) User Pop Pts =>18 with Serum Creatinine	137 5 331	311	0.8 +49.	262	0 +50.6
# w/ Est GFR A. # w/GFR <60 B. # w/Normal GFR (>=60)	221 6 55 1 165 4	.6.6 30		0 15 5.	

Figure 2-126: Sample Report, Chronic Kidney Disease Assessment

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Chronic Kidney Disease Assessment: List of patients with Creatinine test, with GFR and value, if any.

PATIENT NAME HRN COMMUNITY SEX AGE

DENOMINATOR NUMERATOR

PATIENT1, SHERISA 000001 COMMUNITY #1 F 18
UP, AC 08/16/12 GFR: 78
PATIENT2, CAITLYN 000002 COMMUNITY #1 F 22
UP, AC
PATIENT3, HALEY DEBRA 000003 COMMUNITY #1 F 25
UP, AC 07/09/12 GFR: >60
PATIENT4, HELENE MARIE 000004 COMMUNITY #1 F 29
UP, AC 11/20/12 GFR: 114
PATIENT5, MARTHA 000005 COMMUNITY #1 F 30
UP

Figure 2-127: Sample Patient List, Chronic Kidney Disease Assessment

## 2.10.11 Prediabetes/Metabolic Syndrome

#### **Denominators**

Active Clinical patients ages 18 and older diagnosed with prediabetes/metabolic syndrome without a documented history of diabetes.

*User Population patients* ages 18 and older diagnosed with prediabetes/metabolic syndrome without a documented history of diabetes.

#### **Numerators**

All Screenings: Patients with all screenings (BP, LDL, fasting glucose or A1c, tobacco screening, BMI, lifestyle counseling, and depression screening).

*BP Assessed:* Patients with Blood Pressure documented at least twice during the Report Period.

LDL Assessed: Patients with LDL completed, regardless of result, during the Report Period.

Fasting Glucose or A1c Assessed: Patients with fasting glucose test or A1c assessed, regardless of result, during the Report Period.

Patients with A1c less than (<) 5.7.

Patients with A1c equal to or greater than (=>) 5.7 and less than (<) 6.5.

Patients with A1c equal to or greater than (=>) 6.5.

Patients with no A1c during the Report Period.

*Tobacco Use Assessed:* Patients who have been screened for tobacco use during the Report Period.

BMI Available: Patients for whom a BMI could be calculated.

**Note**: This numerator does *not* include refusals.

*Lifestyle Counseling:* Patients who have received any lifestyle adaptation counseling, including medical nutrition therapy, or nutrition, exercise or other lifestyle education during the Report Period.

Depression Screening: Patients screened for depression or diagnosed with a mood disorder at any time during the Report period, including documented refusals in past year.

### **Logic Description**

Age is calculated at beginning of the Report Period.

Prediabetes/Metabolic Syndrome defined as:

- 1. Diagnosis of prediabetes/metabolic syndrome, defined as: Two visits during the Report Period with POV 277.7, *or*
- 2. One each of at least three different conditions listed below, occurring during the Report Period except as otherwise noted:

- BMI equal to or greater than (=>) 30 or Waist Circumference greater than (>)40 inches for men or greater than (>)35 inches for women
- Triglyceride value greater than or equal to (>=) 150
- HDL value less than (<) 40 for men or less than (<) 50 for women
- Patient diagnosed with hypertension *or* mean BP value equal to or greater than (=>) 130/85 where systolic is equal to or greater than (=>) 130 *or* diastolic is equal to or greater than (=>) 85
- Fasting Glucose value equal to or greater than (=>) 100 and less than (<) 126

**Note:** Waist circumference and fasting glucose values will be checked last.

Definition for patients without diabetes: No diabetes diagnosis ever (POV 250.00–250.93).

*BMI definition*: CRS calculates BMI at the time the report is run, using NHANES II. For 18 and under, a height and weight must be taken on the same day any time during the Report Period. For 19 through 50, height and weight must be recorded within last five years, not required to be on the same day. For over 50, height and weight within last two years, not required to be recorded on same day.

Hemoglobin A1c definition: Searches for most recent A1c test with a result during the Report Period. If more than one A1c test is found on the same day and/or the same visit and one test has a result and the other does not, the test with the result will be used. If an A1c test with a result is not found, CRS searches for the most recent A1c test without a result. Without result is defined as A1c documented but with no value.

BP definition: CRS uses mean of last three BPs documented on non-ER visits during the Report Period. If three BPs are not available, uses mean of last two non-ER BPs. If a visit contains more than one BP, the lowest BP will be used, defined as having the lowest systolic value. The mean Systolic value is calculated by adding the last three (or two) systolic values and dividing by three (or two). The mean Diastolic value is calculated by adding the diastolic values from the last three (or two) blood pressures and dividing by three (or two).

For the BP documented numerator, if CRS is not able to calculate a mean BP, it will search for CPT 0001F, 2000F, 3074F through 3080F or POV V81.1 documented on non-ER visit during the Report Period.

*Hypertension*: Diagnosis of (POV or problem list) 401.\* occurring prior to the Report Period, and at least one hypertension POV during the Report Period.

CRS uses the following codes and taxonomies to define the denominator and numerators.

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Triglyceride (requires a non-null, numeric result)			Yes	DM AUDIT TRIGLYCERIDE TAX
HDL (requires a non-null, numeric result)			Yes	DM AUDIT HDL TAX
Fasting Glucose- Denominator Definition (requires a non-null, numeric result)			Yes	DM AUDIT FASTING GLUCOSE TESTS
Fasting Glucose- Numerator Definition		<b>V POV</b> : 790.21	Yes	DM AUDIT FASTING GLUCOSE TESTS
Hemoglobin A1c	83036, 83037, 3044F-3046F, 3047F (old code)		Yes	DM AUDIT HGB A1C TAX
LDL	80061, 83700, 83701, 83704, 83715 (old code), 83716 (old code), 83721, 3048F, 3049F, 3050F		Yes	DM AUDIT LDL CHOLESTEROL TAX
Estimated GFR			Yes	BGP GPRA ESTIMATED GFR TAX
Quantitative Urinary Protein Assessment	82042, 82043, or 84156		Yes	BGP QUANT URINE PROTEIN

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
End Stage Renal Disease	36145, 36147, 36800, 36810, 36815, 36818, 36819, 36820, 36821, 36831- 36833, 50300, 50320, 50340, 50360, 50365, 50370, 50380, 90951-90970 or old codes 90918- 90925, 90935, 90937, 90939 (old code), 90940, 90945, 90947, 90989, 90993, 90997, 90999, 99512, G0257, G0308-G0327 (old codes), G0392 (old code), G0393 (old code), or S9339	<b>V POV</b> : 585.5, 585.6, V42.0, V45.1 (old code), V45.11, V45.12, or V56.* <b>V Procedure</b> : 38.95, 39.27, 39.42, 39.43, 39.53, 39.93-39.95, 54.98, or 55.6*		

Subject Defined	ICPI COMP6	ICD and Other Codes	LOINC Codes	Taxonomy
Tobacco Screening	D1320, 99406, 99407, G0375 (old code), G0376 (old code), 1034F, 1035F, 1036F, 1000F, G8455- G8457 (old codes), G8402 (old code) or G8453 (old code)	Any health factor for category Tobacco, TOBACCO (SMOKING), TOBACCO (SMOKELESS – CHEWING/DIP), or TOBACCO V POV or current Active Problem List: 305.1, 305.1* (old codes), 649.00-649.04, V15.82 Patient education codes: containing "TO-" or "-TO" or "-SHS", 305.1, 305.1* (old codes), 649.00-649.04, V15.82, D1320, 99406, 99407, G0375 (old code), G0376 (old code), G0376 (old code), 1034F, 1035F, 1036F, 1000F, G8455-G8457 (old codes), G8402 (old code) or G8453 (old code) Dental code: 1320		
Lifestyle Counseling – Medical Nutrition Counseling	97802-97804, G0270, G0271	Primary or secondary provider codes: 07, 29 Clinic codes: 67 (dietary) or 36 (WIC)		
Lifestyle Counseling – Nutrition Education		V POV: V65.3 dietary surveillance and counseling <i>or</i> Patient education codes: ending "-N" (nutrition) or "-MNT" (medical nutrition therapy) (or old code "-DT" (diet)) or containing V65.3, 97802-97804, G0270, or G0271.		

Subject Defined	CPT Codes	ICD and Other Codes	LOINC Codes	Taxonomy
Lifestyle Counseling – Exercise Education		V POV: V65.41 exercise counseling or Patient education codes: ending "-EX" (exercise) or containing V65.41.		
Lifestyle Counseling – Related Exercise and Nutrition Education		Patient education codes: ending "-LA" (lifestyle adaptation) or containing "OBS-" (obesity) or 278.00 or 278.01.		
Depression Screening		V Exam: Exam Code 36 V POV: V79.0 CPT: 1220F BHS Problem Code: 14.1 (Screening for Depression) V Measurement in PCC or BHS: PHQ2 or PHQ9 Refusals: Exam Code 36		
Mood Disorders		At least two visits in PCC or BHS during Report Period for: Major Depressive Disorder, Depressive Disorder, Depressive Disorder NOS, Bipolar I or II Disorder, Cyclothymic Disorder NOS, Mood Disorder Due to a General Medical Condition, Substance-induced Mood Disorder, or Mood Disorder NOS (see codes below).  V POV: 296.*, 291.89, 292.84, 293.83, 300.4, 301.13, or 311 BHS POV: 14, 15		

### **Key Logic Changes from CRS Version 12.0**

- 1. Added codes 11054-4, 12771-2, 16616-5, 2095-8, 26015-8, 26016-6, 26017-4, 27340-9, 32309-7, 44733-4, 44915-7, 47220-9, 47221-7, 48090-5, 50409-2, 55607-6, 9322-9, 9830-1, 9832-7, 9833-5 to LOINC taxonomy for HDL.
- 2. Added codes 11054-4, 13459-3, 14155-6, 16615-7, 16616-5, 43394-6, 44711-0, 44915-7, 50193-2, 53133-5, 56036-7 to LOINC taxonomy for LDL.

### **Patient List Description**

List of patients age 18 and older with Prediabetes/Metabolic Syndrome with assessments received, if any. The denominator column displays the condition the patient met, either the diagnosis of 277.7 or the three conditions the patient met (e.g. BMI=35,TG=155,HDL=35).

#### **Measure Source**

"IHS Guidelines for Care of Adults with Prediabetes and/or the Metabolic Syndrome in Clinical Settings (April 2005)"

### Measure Past Performance and Long-Term Targets

DU November 25, 2012 Page 309  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000										
Prediabetes/Metaboli	c Syndro	ome								
	REPORT PERIOD		PREV YR PERIOD		CHG from PREV YR %			CHG from BASE %		
Active Clinical Pts w/PreDiabetes/ Met Syn	=>18		40			29				
# w/ All screenings	1	2.0	0	0.0	+2.0	0	0.0	+2.0		
# w/ BP documented				85.0	+15.0	27	93.1	+6.9		
# w/LDL done # w/ fasting	34	66.7	27	67.5	-0.8	18	62.1	+4.6		
glucose or Alc	12	23.5	8	20.0	+3.5	2	6.9	+16.6		
# w/A1c <5.7 # w/A1c =>5.7	4	7.8	6	15.0	-7.2	1	3.4	+4.4		
and <6.5	5	9.8	1	2.5	+7.3	0	0.0	+9.8		
# w/ A1c =>6.5		3.9		0.0	+3.9			+0.5		
# w/no Alc	40	78.4	33	82.5	-4.1	27	93.1	-14.7		
# w/Tobacco Screenin	q									
w/in 1 yr # w/BMI calculated	_	94.1	33	82.5	+11.6	21	72.4	+21.7		

-No Refusals # w/lifestyle adaptation		94.1	40	100.0	-5.9	29	100.0	-5.9	
counseling	24	47.1	15	37.5	+9.6	8	27.6	+19.5	
<pre># w/Depression screening DX, or refusal</pre>	•	19.6	1	2.5	+17.1	1	3.4	+16.2	

Figure 2-128: Sample Report, Prediabetes/Metabolic Syndrome

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Prediabetes/Metabolic Syndrome: List of patients 18 and older with
Prediabetes/Metabolic Syndrome with assessments received, if any.
                    HRN COMMUNITY SEX AGE
PATIENT NAME
                        NUMERATOR
DENOMINATOR
PATIENT1, HALEY DEBRA 000001 COMMUNITY #1 F 25
UP, AC, BMI=33.64; TRIG=271; HDL=45.4; HTN DX: 01/13/12 2 BPs; TOB: 01/13/12 305.1-DP;
BMI: 33.64; LIFE: 12/12/12 97804-HM;
PATIENT2, CYNTHIA 000002 COMMUNITY #1 F 36
UP,AC,TRIG=166; HDL=38.7; BP=131/80 2 BPs; LDL: 11/21/12 125; TOB: 07/09/12 NEVER
SMOKED; BMI: 28.35;

SMOKED; BMI: 28.35;

O00003 COMMUNITY #1 F 39
UP,BMI=34.97; TRIG=194; BP=149/84 2 BPs; LDL: 06/12/12 CPT 83704; TOB: 05/14/12
CURRENT SMOKER, STATUS UNKNOWN; BMI: 34.97; DEPR: 11/03/12 POV 296.7 + 11/30/12 POV
296.7
PATIENT4, ANNA LINDA 000004 COMMUNITY #1 F 44
UP, AC, 277.7 on 03/15/12; 04/15/12 2 BPs;
PATIENT5, DARLENE T 000005 COMMUNITY #1 F 54
UP,AC,BMI=35.37; TRIG=276; HDL=35.6 (ALL:) 2 BPs; LDL: 10/03/12 106; A1C: 5.2; TOB:
10/03/12 NEVER SMOKED; BMI: 35.37; LIFE: 06/06/12 Prv 29; DEPR: DEP SCRN 05/03/12
```

Figure 2-129: Sample Patient List, Prediabetes/Metabolic Syndrome

# 2.10.12 Proportion of Days Covered by Medication Therapy

#### **Denominators**

Active Clinical patients ages 18 and older who had two or more prescriptions for beta-blockers during the Report Period.

Active Clinical patients ages 18 and older who had two or more prescriptions for RAS Antagonists during the Report Period.

Active Clinical patients ages 18 and older who had two or more prescriptions for calcium channel blockers (CCB) during the Report Period.

Active Clinical patients ages 18 and older who had two or more prescriptions for biguanides during the Report Period.

Active Clinical patients ages 18 and older who had two or more prescriptions for sulfonylureas during the Report Period.

Active Clinical patients ages 18 and older who had two or more prescriptions for thiazolidinediones during the Report Period.

Active Clinical patients ages 18 and older who had two or more prescriptions for statins during the Report Period.

Active Clinical patients ages 18 and older who had two or more prescriptions for antiretroviral agents during the Report Period.

#### **Numerators**

Patients with proportion of days covered (PDC) greater than or equal to (>=)80% during the Report Period.

Patients with a gap in medication therapy greater than or equal to (>=)30 days.

Patients with proportion of days covered (PDC) greater than or equal to (>=)90% during the Report Period.

### **Logic Description**

Age is calculated at the beginning of the report period.

To be included in the denominator, patients must have at least two prescriptions for that particular type of medication on two unique dates of service at any time during the Report Period. Medications must not have a comment of RETURNED TO STOCK.

The Index Prescription Start Date is the date when the medication was first dispensed within the Report Period. This date must be greater than 90 days from the end of the Report Period to be counted in the denominator.

The medications in the measures are defined with medication taxonomies: BGP PQA BETA BLOCKER MEDS, BGP PQA RASA MEDS, BGP PQA CCB MEDS, BGP PQA BIGUANIDE MEDS, BGP PQA SULFONYLUREA MEDS, BGP PQA THIAZOLIDINEDIONE MEDS, BGP PQA STATIN MEDS, BGP PQA ANTIRETROVIRAL MEDS.

For each PDC numerator:

Proportion of days covered = # of days the patient was covered by at least one drug in the class / # of days in the patient's measurement period.

#### Measurement Period definition:

The patient's measurement period is defined as the number of days between the Index Prescription Start Date and the end of the Report Period. When calculating the number of days the patient was covered by at least one drug in the class, if prescriptions for the same drug overlap, the prescription start date for the second prescription will be adjusted to be the day after the previous fill has ended.

Note: If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e. visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4.

### **Example of Proportion of Days Covered:**

- Report Period: January 1 through December 31, 2012
- 1st Rx is Index Rx Start Date: 3/1/12, Days Supply=90
- Rx covers patient through 5/29/12
- 2nd Rx: 5/26/12, Days Supply=90
- Rx covers patient through 8/27/12
- 3rd Rx: 9/11/12, Days Supply=180
- Gap = (9/11/12 8/27/12) = 15 days
- Rx covers patient through 3/8/13
- Patient's measurement period: 3/1/12 through 12/31/12 = 306 Days
- Days patient was covered: 3/1/12 through 8/27/12 + 9/11/12 through 12/31/12 = 292 Days
- PDC = 292 / 306 = 95%

#### For each Gap numerator:

CRS will calculate whether a gap in medication therapy of 30 or more days has occurred between each consecutive medication dispensing event during the Report Period. A gap is calculated as the days not covered by the days supply between consecutive medication fills.

#### **Example of Medication Gap >=30 Days:**

- Report Period: January 1 through December 31, 2012
- 1st Rx: 4/1/12, Days Supply=30

- Rx covers patient through 4/30/12
- 2nd Rx: 7/1/12, Days Supply=90
- Gap #1 = (7/1/12 4/30/12) = 61 days
- Rx covers patient through 9/28/12
- 3rd Rx: 10/1/12, Days Supply=90
- Gap #2 = (10/1/12 9/28/12) = 2 days
- Rx covers patient through 12/29/12
- Gap #1 greater than or equal to (>=)30 days, therefore patient will be included in the numerator for that medication.

## **Key Logic Changes from CRS Version 12.0**

- 1. Renamed BGP PQA ACEI ARB MEDS to BGP PQA RASA MEDS.
- 2. Changed ACEI/ARB to RAS Antagonists.

### **Patient List Description**

List of patients 18 and older prescribed medication therapy medication with proportion of days covered and gap days.

#### **Measure Source**

PQA (Pharmacy Quality Alliance)

### **Measure Past Performance and Long-Term Targets**

None

DU November 25, 2012 Page 314  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012									
		iod: Jan 01	-	•					
Basel	ine Perio	d: Jan 01,	2000 to 1	Dec 31, 20	00				
Proportion of Days Cov	ered by M	edication Th	erapy						
_				~ 5		0			
	EPORT : ERIOD	PREV YR		G irom BA EV YR % PE			HG from BASE %		
-	EKTOD	FERTOD	FIC.	EV IX 6 FE	KIOD		ADE 6		
Active Clinical Pts									
w/beta-blockers	53	44			37				
# w/ PDC >=80%	31 58	.5 24	54 5	+3 9	22	59 5	-1 0		
11, ===	27 50			-1.3			+10.4		
Active Clinical Pts									

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

w/ RAS Antagonists	97		80			74		
# w/ PDC >=80% # w/ gap >=30 days	60 45	61.9 46.4	55 32	68.8 40.0	-6.9 +6.4	39 42	52.7 56.8	+9.2 -10.4
Active Clinical Pts w/ CCBs	56		48			55		
# w/ PDC >=80% # w/ gap >=30 days	34 30	60.7 53.6	30 20	62.5 41.7	-1.8 +11.9	37 22	67.3 40.0	-6.6 +13.6
Active Clinical Pts w/ biguanides	30		26			11		
# w/ PDC >=80% # w/ gap >=30 days	12 19		18 10	69.2 38.5	-29.2 +24.9	3 8	27.3 72.7	+12.7 -9.4
Active Clinical Pts w/ sulfonylureas	7		6			7		
# w/ PDC >=80% # w/ gap >=30 days	3 5	42.9 71.4	1 5	16.7 83.3	+26.2 -11.9	4	57.1 42.9	-14.3 +28.6
Active Clinical Pts w/ thiazolidinediones	20		15			4		
# w/ PDC >=80% # w/ gap >=30 days	13 8		10 7	66.7 46.7	-1.7 -6.7	2 1	50.0 25.0	+15.0 +15.0
Active Clinical Pts w/ statins	60		49			37		
# w/ PDC >=80% # w/ gap >=30 days	43 24	71.7 40.0	33 19	67.3 38.8	+4.3 +1.2	25 16	67.6 43.2	+4.1 -3.2
Active Clinical Pts w/ antiretrovial agents		2	0			1		
# w/ PDC >=90%	1	50.0	0	0.0	+50.0	0	0.0	+50.0

Figure 2-130: Sample Report, Proportion of Days Covered by Medication Therapy

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Proportion of Days Covered by Medication Therapy: List of patients 18 and older prescribed medication therapy medication with proportion of days covered and gap days. HRN COMMUNITY PATIENT NAME SEX AGE DENOMINATOR NUMERATOR Patient75,PAULA KAY 000075 COMMUNITY #1 F 34 CCB: IXRD: 03/24/12 [282] Days=228 >80 GAP=52 AC CCB: IXRD: 03/24/12 [2 Patient76,CRSCT 000076 COMMUNITY #1 F 36 CCB: IXRD: 06/01/12 [213] Days=180 >80 GAP=31 Patient77, CRSAC 000077 COMMUNITY #1 F 44

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
AC RASA: IXRD: 06/05/12 [209] Days=60 <80 GAP=118

Patient78,DEBORA ELLEN 000078 COMMUNITY #1 F 45

AC BB: IXRD: 07/23/12 [161] Days=126 <80; RASA: IXRD: 01/29/12 [336] Days=267 <80 GAP=31; BIG: IXRD: 01/29/12 [336] Days=272 >80

Patient79,STELLA LYNN 000079 COMMUNITY #1 F 46

AC BB: IXRD: 01/21/12 [344] Days=299 >80 GAP=38; CCB: IXRD: 01/21/12 [344] Days=299 >80 GAP=38; CCB: IXRD: 01/21/12 [344] Days=299 >80 GAP=38

Patient80,TARA MARIE 000080 COMMUNITY #1 F 51

AC BB: IXRD: 08/25/12 [128] Days=56 <80 GAP=70; RASA: IXRD: 01/15/12 [350] Days=314 >80; CCB: IXRD: 01/15/12 [350] Days=218 <80 GAP=103

Patient81,CRSNK 000081 COMMUNITY #1 F 51

AC SULF: IXRD: 09/01/12 [121] Days=120 >80
```

Figure 2-131: Sample Patient List, Proportion of Days Covered by Medication Therapy

### 2.10.13 Medications Education

#### **Denominators**

Active Clinical patients with medications dispensed at their facility during the Report Period.

All *User Population patients* with medications dispensed at their facility during the Report Period.

#### **Numerator**

Patients who were provided patient education about their medications in any location.

Patients who refused patient education about their medications in any location.

### **Logic Description**

Patients receiving medications at their facility are identified by any entry in the VMed file for your facility. The purpose of this definition is to ensure that sites are not being held responsible for educating patients about medications received elsewhere that may be recorded in RPMS. CRS assumes that the appropriate facility is the one the user has logged onto to run the report.

**Note:** If a site's system identifier, i.e., ASUFAC code, has changed during the period between the Baseline start date and the Current Year end date, due to compacting/contracting or other reasons, your report may display zeros (0s) or very low counts for some time periods.

CRS uses the following patient education codes to define the numerator:

Medication Education	Any Patient Education code containing "M-" or "-M" (medication)
	or
	DMC-IN (Diabetes Medicine-Insulin)
	FP-DPO (Family Planning–Depot Medroxyprogesterone Injections
	FP-OC (Family Planning-Oral Contraceptives)
	FP-TD (Family Planning-Transdermal (Patch))
	*-NEB (*Nebulizer)
	*-MDI (*Metered Dose Inhalers)
Refusal	Any refusal in the past year with Patient Education codes containing "M-" or "-M" or PFE codes DMC-IN, FP-DPO, FP-OC, *-NEB, *-MDI, or FP-TD
	In the past year, any Patient Education code containing "M-" or "-M" or PFE codes DMC-IN, FP-DPO, FP-OC, *-NEB, *-MDI, or FP-TD with a level of understanding of "refused".

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of patients receiving medications with med education, if any.

### **Measure Source**

None

## **Measure Past Performance and Long-Term Targets**

Measure	Target
IHS 2020 Goal	75.0%

DU November 25, 2012 Page 316  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Medications Education (con't)  REPORT % PREV YR % CHG from BASE % CHG from PERIOD PERIOD PREV YR % PERIOD BASE %									
Active Clinical Pts receiving medications 757 631 592									
<pre># receiving medication educ # refusals</pre>	490	64.7	268 0		+22.3			+51.0 +0.4	

User Pop Pts receiving medications	981		800			753			
<pre># receiving   medication educ # refusals</pre>	599 3	61.1	306 0	38.3	+22.8	87 0	11.6	+49.5 +0.3	

Figure 2-132: Sample Report, Medications Education

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Medications Education: List of patients receiving medications with med education or refusal, if any PATIENT NAME HRN
DENOMINATOR PATIENT NAME COMMUNITY SEX AGE NUMERATOR PATIENT1, ANDREA MARY 000001 COMMUNITY #1 F 0 UP,AC PATIENT2, VIRGINIA A 000002 COMMUNITY #1 F 0 03/10/11 M-I UP 03/10/11 M-I PATIENT4,MISTY 000004 COMMUNITY #1 F 5 UP,AC 05/16/11 M-DI PATIENT5, RITA ANN 000005 COMMUNITY #1 F 15 07/05/11 M-I UP,AC PATIENT6, DIANE LOUISE 000006 COMMUNITY #1 F 15 UP 08/21/11 M-I PATIENT7,ALICIA 000007 COMMUNITY #1 F 15 UP,AC PATIENT8, ALYSHA 000008 COMMUNITY #1 F 16 02/15/11 Refused M-DI UP,AC PATIENT9, SHELLY 000009 COMMUNITY #1 F 18
UP, AC 03/12/11 PP-M UP,AC 03/12/11 PP-M

Figure 2-133: Sample Patient List, Medications Education

## 2.10.14 Medication Therapy Management Services

#### **Denominators**

Active Clinical patients equal to or greater than (=>)18 with medications dispensed at their facility during the Report Period.

#### **Numerator**

Patients who received medication therapy management (MTM) during the Report Period.

### **Logic Description**

Age is calculated at the beginning of the report period.

Patients receiving medications at their facility are identified by any entry in the VMed file for your facility.

*Medication Therapy Management (MTM) definition*: 1) CPT codes 99605-99607 or 2) Clinic codes: D1, D2.

### **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients greater than or equal to (>=) 18 receiving medications with medication therapy management, if any.

#### **Measure Source**

None

### Measure Past Performance and Long-Term Targets

```
DH
                           November 25, 2012
                                                                Page 316
      *** IHS 2012 Selected Measures with Community Specified Report ***
                           DEMO INDIAN HOSPITAL
                Report Period: Jan 01, 2012 to Dec 31, 2012
             Previous Year Period: Jan 01, 2011 to Dec 31, 2011
               Baseline Period: Jan 01, 2000 to Dec 31, 2000
Medications Therapy Management Services (con't)
                   REPORT % PREV YR % CHG from BASE
                                                              % CHG from
                   PERIOD
                              PERIOD
                                            PREV YR % PERIOD
                                                                 BASE %
Active Clinical Pts
=>18 receiving
                      594
                                    472
                                                         424
medications
# w/MTM
                       5 0.8
                                     0.0
                                                +0.8
                                                         0 0.0
                                                                     +0.8
```

Figure 2-134: Sample Report, Medications Therapy Management Services

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

Medications Education: List of patients receiving medications with med education or refusal, if any (con't)
```

PATIENT NAME DENOMINATOR	HRN COMMUNITY NUMERATOR	SEX	AGE
PATIENT5, RITA ANN	000005 COMMUNITY #1		18
AC	06/01/12 CPT 9		
PATIENT6, DIANE LOUISE	000006 COMMUNITY #1	F	20
AC	07/28/12 CPT 9	9606	
PATIENT7, ALICIA	000007 COMMUNITY #1	F	21
AC			
PATIENT8, ALYSHA	000008 COMMUNITY #1	F	25
AC	04/01/12 Cl D1		
PATIENT9, SHELLY AC	000009 COMMUNITY #1 07/01/12 Cl D2	F	52

Figure 2-135: Sample Patient List, Medications Therapy Management Services

## 2.10.15 Self Management (Confidence)

#### **Denominators**

Active Clinical patients assessed for confidence in managing their health problems during the Report Period.

#### **Numerator**

Patients who are very confident in managing their health problems during the Report Period.

### **Logic Description**

Confidence in managing health problems definition: Any health factor for category CONFIDENCE IN MANAGING HEALTH PROBLEMS.

*Very confident definition*: The most recent health factor in the CONFIDENCE IN MANAGING HEALTH PROBLEMS category of VERY SURE.

#### **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients who are confident in managing their health problems.

### **Measure Source**

### Measure Past Performance and Long-Term Targets

Measure	Target
IHS 2020 Goal	75.0%

```
DU
                          November 25, 2012
                                                              Page 316
      *** IHS 2012 Selected Measures with Community Specified Report ***
                          DEMO INDIAN HOSPITAL
               Report Period: Jan 01, 2012 to Dec 31, 2012
            Previous Year Period: Jan 01, 2011 to Dec 31, 2011
               Baseline Period: Jan 01, 2000 to Dec 31, 2000
Self Management (Confidence) (con't)
                  REPORT % PREV YR % CHG from BASE
                                                             % CHG from
                            PERIOD
                                          PREV YR % PERIOD
                  PERIOD
                                                               BASE %
Active Clinical Pts assessed
for confidence
                                    1
                     4 50.0
                                    0 0.0 +50.0
# very confident
                                                         0.0
                                                                  +50.0
```

Figure 2-136: Sample Report, Medications Education

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Self Management (Confidence): List of patients who are confident in managing their health problems. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR PATIENT5, RITA ANN 000005 COMMUNITY #1 F 18 06/01/12 PATIENT6, DIANE LOUISE 000006 COMMUNITY #1 F 20 07/28/12 PATIENT7, ALICIA 000007 COMMUNITY #1 F 21 AC PATIENT8, ALYSHA 000008 COMMUNITY #1 F 25

Figure 2-137: Sample Patient List, Medications Education

## 2.10.16 Public Health Nursing

#### **Patient-Related Measures**

#### **Denominator**

All *User Population patients*.

#### **Numerators**

For User Population only, the number of patients in the denominator served by Public Health Nurses (PHNs) in any setting, including Home.

For User Population only, the number of patients in the denominator served by a PHN driver/interpreter in any setting.

For User Population only, the number of patients in the denominator served by PHNs in a HOME setting.

For User Population only, the number of patients in the denominator served by a PHN driver/interpreter in a HOME Setting.

#### **Visit-Related Measures**

#### **Denominators**

Number of visits to User Population patients by PHNs in any setting, including Home

- Number of visits to patients ages 0 to 28 days (Neonate) in any setting.
- Number of visits to patients ages 29 days tp12 months (infants) in any setting.
- Number of visits to patients ages 1 through 64 years in any setting
- Number of visits to patients ages 65 and older (Elders) in any setting
- Number of PHN driver/interpreter (Provider Code 91) visits

Number of visits to User Population patients by PHNs in Home setting

- Number of Home visits to patients age 0 to 28 days (Neonate)
- Number of Home visits to patients age 29 days to 12 months (Infants)
- Number of Home visits to patients ages 1 through 64 years
- Number of Home visits to patients aged 65 and over (Elders).
- Number of PHN driver/interpreter (Provider Code 91) visits in a HOME setting.

#### **Numerator**

No numerator: count of visits only

#### **Logic Description**

PHN visit is defined as any visit with primary or Secondary Provider Code 13 or 91. Home visit defined as: (1) Clinic 11 and a primary or Secondary Provider Code 13 or 91 or (2) Location Home (as defined in Site Parameters) and a primary or Secondary Provider Code 13 or 91.

## **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients with PHN visits documented.

Numerator codes in patient list: All PHN = Number of PHN visits in any setting; Home = Number of PHN visits in home setting; Driver All = Number of PHN driver/interpreter visits in any setting; Driver Home = Number of PHN driver/interpreter visits in home setting.

#### **Measure Source**

None

### **Measure Past Performance and Long-Term Targets**

Performance	All PHN visits	PHN Home Visits
IHS FY 2005 Performance	438,376	Not Reported
IHS FY 2004 Performance	423,379	192,121
IHS FY 2003 Performance	359,089	160,650
IHS FY 2002 Performance	343,874	156,263

November 25, 2012 Page 317  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Public Health Nursing	g (con't)							
	REPORT PERIOD		PREV YR PERIOD		CHG from PREV YR %			-
All User Population patients	2,896		2,456			2,346		
<pre># served by PHNs in any Setting # served by PHN drive interpreter - in</pre>		0.4	13	0.5	-0.1	13	0.6	-0.1
any Setting # served by PHNs in	0	0.0	0	0.0	+0.0	0	0.0	+0.0
a Home Setting # served by PHN		0.0	1	0.0	+0.0	0	0.0	+0.0
drivers/interpreters in Home Setting		0.0	0	0.0	+0.0	0	0.0	+0.0
Total # PHN Visits -								

Any Setting	18	16	+2	19	-1
A. Ages 0-28 days	0	0	+0	0	+0
B. Ages 29 days - 12 months	1	3	-2	0	+1
C. Ages 1-64 years	16	13	+3	19	-3
D. Ages 65+	1	0	+1	0	+1
E. Driver/Interpreter visits - any setting	0	0	+0	0	+0
Total # PHN Visits - Home Setting	3	1	+2	0	+3
A. Ages 0-28 days	0	0	+0	0	+0
B. Ages 29 days- 12 months	0	1	-1	0	+0
C. Ages 1-64 years	3	0	+3	0	+3
D. Ages 65+	0	0	+0	0	+0
E. Driver/interpreter visits - Home Setting	0	0	+0	0	+0

Figure 2-138: Sample Report, Public Health Nursing

UP-User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Public Health Nursing: List of patients with PHN visits documented HRN COMMUNITY PATIENT NAME SEX AGE DENOMINATOR NUMERATOR PATIENT1, HELENE MARIE 000001 COMMUNITY #1 F 29 2 all PHN; 0 home; 0 driver all; 0 driver home UP 2 all PHN; 0 home; PATIENT2, KATHLEEN 000002 COMMUNITY #1 F 38 UP 3 all PHN; 3 home; 0 0 PATIENT40, ERIKA SUE 000040 COMMUNITY #2 F 37 3 all PHN; 3 home; 0 driver all; 0 driver home 1 all PHN; 0 home; 0 driver all; 0 driver home PATIENT41, DANIEL RAY 000041 COMMUNITY #2 M 0 1 all PHN; 0 home; 0 driver all; 0 driver home

Figure 2-139: Sample Patient List, Public Health Nursing

## 2.10.17 Breastfeeding Rates

#### **Denominators**

Active Clinical patients who are 30 to 394 days old

Active Clinical patients who are 30 to 394 days old who were screened for infant feeding choice at the age of *two months* (45 to 89 days) (PART Denominator)

Active Clinical patients who are 30 to 394 days old who were screened for infant feeding choice at the age of six months (165 to 209 days)

Active Clinical patients who are 30 to 394 days old who were screened for infant feeding choice at the age of *nine months* (255 to 299 days)

Active Clinical patients who are 30 to 394 days old who were screened for infant feeding choice at the age of *one year* (350 to 394 days)

#### **Numerators**

Patients who were screened for infant feeding choice at least once

Patients who were screened for infant feeding choice at the age of *two months* (45 to 89 days)

Patients who were screened for infant feeding choice at the age of *six months* (165 to 209 days)

Patients who were screened for infant feeding choice at the age of *nine months* (255 to 299 days)

Patients who were screened for infant feeding choice at the age of *one year* (350 to 394 days)

Patients who, at the age of *two months* (45 to 89 days), were either exclusively or mostly breastfed (PART Numerator)

Patients who, at the age of *six months* (165 to 209 days), were either exclusively or mostly breastfed

Patients who, at the age of *nine months* (255–299 days), were either exclusively or mostly breastfed

Patients who, at the age of *one year* (350 to 394 days), were either exclusively or mostly breastfed

### **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

Infant feeding choice definition: The documented feeding choice from the file V Infant Feeding Choice that is closest to the exact age that is being assessed will be used. For example, if a patient was assessed at 45 days old as half breastfed and half formula and assessed again at 65 days old as mostly breastfed, the mostly breastfed value will be used since it is closer to the exact age of two months (i.e., 60 days). Another example is a patient who was assessed at 67 days as mostly breastfed and again at 80 days as mostly formula. In this case, the 67 days value of mostly breastfed will be used. The other exact ages are 180 days for six months, 270 days for nine months, and 365 days for one year.

In order to be included in the age-specific screening numerators, the patient must have been screened at the specific age range. For example, if a patient was screened at six months and was exclusively breastfeeding but was not screened at two months, then the patient will only be counted in the six months numerator.

### **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients 30 to 394 days old, with infant feeding choice value, if any.

```
Note: "DO" represents "Days Old."
```

#### Measure Source

HP 2020, MICH-21.4 Exclusive breastfeeding-through three months, MICH-21.5 Exclusive breastfeeding-through six months.

#### **Measure Past Performance and Long-Term Targets**

Performance	Percent
IHS FY 2011 Performance	26.7%
IHS FY 2010 Performance	33%
IHS FY 2008 Performance	28%
HP 2020 goal for breastfeeding through 3 months of age	44.3%
HP 2020 goal for breastfeeding through 6 months of age	23.7%

```
DU November 25, 2012 Page 321

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012
```

					l to Dec 31,			
Breastfeeding Rates								
	REPORT PERIOD				CHG from PREV YR %			
Active Clinical Pts 30-394 days	46		30			34		
<pre># w/infant feeding   choice screening # w/screening @</pre>	11	23.9	0	0.0	+23.9	1	2.9	+21.0
2 mos	4	8.7	0	0.0	+8.7	1	2.9	+5.8
<pre># w/screening @ 6 mos</pre>	3	6.5	0	0.0	+6.5	0	0.0	+6.5
<pre># w/screening @ 9 mos</pre>	4	8.7	0	0.0	+8.7	0	0.0	+8.7
# w/screening @ 1 yr	3	6.5	0	0.0	+6.5	0	0.0	+6.5
AC Pts 30-394 days screened @ 2 mos (PART)	4		0			1		
# @ 2 mos exclusive/ mostly breastfed (PART)		100.0	0	0.0	+100.0	1	100.0	+0.0
AC Pts 30-394 days screened @ 6 mos	3		0			0		
# @ 6 mos exclusive/mostly breastfed	2	66.7	0	0.0	+66.7	0	0.0	+66.7
AC Pts 30-394 days screened at 9 mos	4		0			0		
# @ 9 mos exclusive/mostly breastfed	3	75.0	0	0.0	+75.0	0	0.0	+75.0
AC Pts 30-394 days screened @ 1 yr	3		0			0		
# @ 1 year exclusive/mostly breastfed	2	66.7	0	0.0	+66.7	0	0.0	+66.7

Figure 2-140: Sample Report, Breastfeeding Rates

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
Breastfeeding Rates: List of patients 30-394 days old, with infant feeding choice value, if any.

PATIENT NAME HRN COMMUNITY SEX AGE

DENOMINATOR NUMERATOR

PATIENT1, AMANDA DEBRA 000001 COMMUNITY #1 F 0

AC Scrn: 33 DO, 02/09/11 MOSTLY BREASTFEEDING

PATIENT2, LEROY JAMES 000002 COMMUNITY #1 M 1

AC Scrn: 2 MOS: 48 DO, 01/20/11 EXCLUSIVE BREASTFEEDING;

6 MOS: 178 DO, 05/30/11 EXCLUSIVE BREASTFEEDING; 9 MOS: 276 DO, 09/05/11 EXCLUSIVE BREASTFEEDING;

BREASTFEEDING; 1 YR: 382 DO, 12/20/11 MOSTLY BREASTFEEDING

PATIENT3, TERRY SCOTT 000003 COMMUNITY #1 M 0

AC Scrn: 6 MOS: 187 DO, 08/11/11 EXCLUSIVE BREASTFEEDING

PATIENT11, STEVEN CODY 000011 COMMUNITY #2 M 0

Scrn: 2 MOS: 60 DO, 11/03/11 MOSTLY BREASTFEEDING
```

Figure 2-141: Sample Patient List, Breastfeeding Rates

### 2.10.18 Use of High-Risk Medications in the Elderly

#### **Denominators**

Active Clinical patients ages 65 and older. Broken down by gender and age groups (65 through 74, 75 through 84, greater than (>) 85).

User Population patients ages 65 and older. Broken down by gender.

#### **Numerators**

Patients who received at least one high-risk medication for the elderly during the Report Period. (GPRA Developmental Numerator)

Patients who received at least two different high-risk medications for the elderly during the Report Period. (GPRA Developmental Numerator)

#### **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

*Medication definitions*: High-risk medications for the elderly (i.e., potentially harmful drugs) defined with medication taxonomies:

- BGP HEDIS ANTIANXIETY MEDS (Includes combination drugs) (Aspirin-Meprobamate, Meprobamate)
- BGP HEDIS ANTIEMETIC MEDS ((Scopolamine, Trimethobenzamide)
- BGP HEDIS ANALGESIC MEDS (Includes combination drugs) (Ketorolac)

• BGP HEDIS ANTIHISTAMINE MEDS (Includes combination drugs) (APAP/dextromethorphan/diphenhydramine,

APAP/diphenhydramine/phenylephrine,

APAP/diphenhydramine/pseudoephedrine, Acetaminophen-diphenhydramine, Carbetapentane/diphenhydramine/phenylephrine,

Codeine/phenylephrine/promethazine, Codeine-promethazine, Cyproheptadine,

Dexchlorpheniramine, Dexchlorpheniramine/dextromethorphan/PSE,

Dexchlorpheniramine/guaifenesin/PSE,

Dexchlorpheniramine/hydrocodone/phenylephrine,

Dexchlorpheniramine/methscopolamine/PSE, Dexchlorpheniramine-pseudoephedrine, Dextromethorphan-promethazine, Diphenhydramine, Diphenhydramine/hydrocodone/phenylephrine, Diphenhydramine-magnesium salicylate, Diphenhydramine-phenylephrine, Diphenhydramine-pseudoephedrine, Hydroxyzine hydrochloride, Hydroxyzine pamoate, Phenylephrine-promethazine, Promethazine)

- BGP HEDIS ANTIPSYCHOTIC MEDS (Thioridazine)
- BGP HEDIS AMPHETAMINE MEDS (Amphetamine-dextroamphetamine, Benzphetamine, Dexmethylphenidate, Dextroamphetamine, Diethylproprion, Methamphetamine, Methylphenidate, Phendimetrazine, Phenteramine)
- BGP HEDIS BARBITURATE MEDS (Butabarbital, Mephobarbital, Pentobarbital, Phenobarbital, Secobarbital)
- BGP HEDIS BENZODIAZEPINE MEDS (Includes combination drugs)
   (Amitriptyline-Chlordiazepoxide, Chlordiazepoxide, Chlordiazepoxide-clidinium, Diazepam, Flurazepam)
- BGP HEDIS CALCIUM CHANNEL MEDS (Nifedipine short acting only)
- BGP HEDIS GASTRO ANTISPASM MED (Dicyclomine, Propantheline)
- BGP HEDIS BELLADONNA ALKA MEDS (Includes combination drugs)
   (Atropine, Atropine/CPM/hyoscyamine/PE/scopolamine,
   Atropine/hyoscyamine/PB/scopolamine, Atropine-difenoxin, Atropine-diphenoxylate, Atropine-edrophonium, Belladonna,
   Belladonna/ergotamine/phenobarbital,
   Butabarbital/hyoscyamine/phenazopyridine, Hyoscyamine,
   Hyoscyamine/methenam/m-blue/phenyl salicyl)
- BGP HEDIS SKL MUSCLE RELAX MED (Includes combination drugs) (ASA/caffeine/orphenadrine, ASA/carisoprodol/codeine, Aspirin-carisoprodol, Aspirin-methocarbamol, Carisoprodol, Chlorzoxazone, Cyclobenzaprine, Metaxalone, Methocarbamol, Orphenadrine)

- BGP HEDIS ORAL ESTROGEN MEDS (Includes combination drugs) (Conjugated estrogen, Conjugated estrogen-medroxyprogesterone, Esterified estrogen, Esterified e
- BGP HEDIS ORAL HYPOGLYCEMIC RX (Chlorpropamide)
- BGP HEDIS NARCOTIC MEDS (Includes combination drugs)
   (ASA/caffeine/propoxyphene, Acetaminophen-pentazocine, Acetaminophen-propoxyphene, Belladonna-opium, Meperidine, Meperidine-promethazine, Naloxone-pentazocine, Pentazocine, Propoxyphene hydrochloride, Propoxyphene napsylate)
- BGP HEDIS VASODILATOR MEDS (Dipyridamole-short acting only, Ergot mesyloid, Isoxsuprine)
- BGP HEDIS OTHER MEDS AVOID ELD (Includes androgens and anabolic steroids, thyroid drugs, and urinary anti-infectives) (Methyltestosterone, Nitrofurantoin, Nitrofurantoin macrocrystals, Nitrofurantoin macrocrystalsmonohydrate, Thyroid desiccated).

**Note:** For each medication, the days supply must be >0. If the medication was started and then discontinued, CRS will recalculate the # Days Prescribed by subtracting the prescription date (i.e., visit date) from the V Medication Discontinued Date. Example: Rx Date=11/15/2012, Discontinued Date=11/19/2012, Recalculated # Days Prescribed=4. Medications must not have a comment of RETURNED TO STOCK.

#### **Key Logic Changes from CRS Version 12.0**

- 1. Updated BGP HEDIS AMPHETAMINE MEDS medications to remove Pemoline.
- 2. Updated BGP HEDIS ANALGESIC MEDS medications to remove Acetaminophen-diphenhydramine and diphenhydramine-magnesium salicylate.
- 3. Updated BGP HEDIS ANTIHISTAMINE MEDS medications to remove Atropine/CPM/hyoscyamine/PE/PPA/scopolamine and Tripelennamine.
- 4. Updated BGP HEDIS ANTIPSYCHOTIC MEDS medications to remove Mesoridazine.
- 5. Updated BGP HEDIS BARBITURATE MEDS medications to remove Amobarbital

- 6. Updated BGP HEDIS BELLADONNA ALKA MEDS medications to remove Belladonna/caffeine/ergotamine/pentobarbital, Digestive enzymes/hyoscyamine/phenyltoloxamine, and Hyoscyamine-phenobarbital.
- 7. Updated BGP HEDIS SKL MUSCLE RELAX MED medications to remove Aspirin-meprobamate.
- 8. Updated BGP HEDIS VASODILATOR MEDS medications to remove Cyclandelate.

### **Patient List Description**

List of patients 65 and older with at least one prescription for a potentially harmful drug.

#### **Measure Source**

**HEDIS** 

### **Measure Past Performance and Long-Term Targets**

DU November 25, 2012 Page 324  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Use of High-Risk Medications in the Elderly  REPORT % PREV YR % CHG from BASE % CHG from  PERIOD PERIOD PREV YR % PERIOD BASE %								
Active Clinical Pts =>65	116		64			65		
<pre># w/exposure to at   least 1 high-risk med   (GPRA Dev.) # w/exposure to</pre>	23	19.8	12	18.8	+1.1	18	27.7	-7.9
multiple high-risk meds (GPRA Dev.)	11	9.5	1	1.6	+7.9	8	12.3	-2.8
Male Active Clinical =>65 53 28 27								
# w/exposure to at least 1 high-risk med (GPRA Dev.) 10 18.9 4 14.3 +4.6 6 22.2 -3.4 # w/exposure to multiple high-risk								

meds (GPRA Dev.)	4	7.5	0	0.0	+7.5	2	7.4	+0.1	
Female Active Clinical =>65	63		36			38			
<pre># w/exposure to at   least 1 high-risk   med (GPRA Dev.) # w/exposure to   multiple high-risk   meds (GPRA Dev.)</pre>		20.6		22.2	-1.6		31.6	-10.9 -4.7	
User Pop Pts =>65	222		149			143			
<pre># w/exposure to at   least 1 high-risk   med # w/exposure to   multiple high-risk</pre>	25	11.3	13	8.7	+2.5	18	12.6	-1.3	
meds	11	5.0	2	1.3	+3.6	8	5.6	-0.6	

Figure 2-142: Sample Report, Drugs to be Avoided in the Elderly

DU	November 25,	2012		Page 326								
*** IHS 2012 Selected	*** IHS 2012 Selected Measures with Community Specified Report ***											
	DEMO INDIAN HOSPITAL											
Report Period: Jan 01, 2012 to Dec 31, 2012												
Previous Year Period: Jan 01, 2011 to Dec 31, 2011												
Baseline Period: Jan 01, 2000 to Dec 31, 2000												
Use of High-Risk Medications in the Elderly (con't)												
J J												
ACTIVE CI	LINICAL PATIENT											
	Age Distribution											
	65-74	75-84	85+									
CURRENT REPORT PERIOD												
AC Patients 65+	70	36	10									
110 1 00 1011010 00 1	, •	3.0										
# w/exposure to at least												
1 high-risk med	15	6	2									
% w/exposure to at least												
1 high-risk med	21.4	16.7	20.0									
# w/exposure to multiple												
high-risk meds	8	2	1									
% w/exposure to multiple	0	2	_									
high-risk meds	11.4	5.6	10.0									
PREVIOUS YEAR PERIOD												
AC Patients 65+	39	19	6									
# w/exposure to at least	7	4	1									
<pre>1 high risk med % w/exposure to at least</pre>	7	4	1									
1 high-risk med	17.9	21.1	16.7									
1 111511 11511 med	17.5	21.1	10.7									

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

<pre># w/exposure to multiple</pre>				
high-risk meds	1	0	0	
% w/exposure to multiple				
high-risk meds	2.6	0.0	0.0	
CHANGE FROM PREV YR %				
w/exposure to at least				
1 high risk med	+3.5	-4.4	+3.3	
w/exposure to multiple				
high-risk meds	+8.9	+5.6	+10.0	

Figure 2-143: Sample Report, Drugs to be Avoided in the Elderly

```
UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic
PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease;
CHD-Active Coronary Heart Disease; HR=High Risk Patient
Use of High Risk Medications in the Elderly: List of patients 65 and older
with at least one high-risk medication.
PATIENT NAME
                     HRN COMMUNITY
                                         SEX AGE
DENOMINATOR
                          NUMERATOR
PATIENT1, JONELLE 000001 COMMUNITY #1 F 69
UP,AC 2 drugs: 08/04/12 ESTERIFIED ESTROGENS 0.625MG TAB (ORAL ESTROGEN);
08/04/12 PROPOXYPHENE-N 100MG/APAP 650MG TAB (NARCOTIC)
PATIENT2, PAULINE 000002 COMMUNITY #1 F 70
UP,AC 1 drug:11/02/12 PROPOXYPHENE-N 100MG/APAP 650MG TAB (NARCOTIC)
PATIENT3, NADINE 000003 COMMUNITY #1 F 82
UP,AC 2 drugs: 09/25/12 DIAZEPAM 5MG TAB (BENZODIAZEPINE); 09/25/12
PROPOXYPHENE-N 100MG/APAP 650MG TAB (NARCOTIC)
PATIENT4, JESSE NATHAN 000004 COMMUNITY #1 M 77
           1 drug:08/27/122 CYCLOBENZAPRINE HCL 10MG TAB (SKL MUSCLE)
```

Figure 2-144: Sample Patient List, Drugs to be Avoided in the Elderly

#### 2.10.19 Functional Status Assessment in Elders

#### Denominator

Active Clinical patients ages 55 and older. Broken down by gender.

#### **Numerator**

Patients screened for functional status at any time during the Report Period.

#### **Logic Description**

Age is calculated at the beginning of the Report Period.

Functional status screening definition: Any non-null values in V Elder Care for (1) at least one of the following ADL fields: toileting, bathing, dressing, transfers, feeding, or continence and (2) at least one of the following IADL fields: finances, cooking, shopping, housework/chores, medications or transportation during the Report Period.

### **Key Logic Changes from CRS Version 12.0**

None

### **Patient List Description**

List of patients equal to or greater than (=>) 55 with functional status codes, if any. The following are the abbreviations used in the Numerator column:

- TLT-Toileting
- BATH–Bathing
- DRES–Dressing
- XFER–Transfers
- FEED–Feeding
- CONT-Continence
- FIN–Finances
- COOK–Cooking
- SHOP–Shopping
- HSWK–Housework/Chores
- MEDS–Medications
- TRNS–Transportation

#### **Measure Source**

None

### Measure Past Performance and Long-Term Targets

```
DU November 25, 2012 Page 328

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012

Previous Year Period: Jan 01, 2011 to Dec 31, 2011

Baseline Period: Jan 01, 2000 to Dec 31, 2000

Functional Status Assessment in Elders
```

	EPORT ERIOD	જ	PREV YR PERIOD	%	CHG from PREV YR %		%	CHG from BASE %
Active Clinical Pts =>55	271		162			127		
# w/functional status screening	2	0.7	0	0.0	+0.7	0	0.0	+0.7
Male Active Clinical =>55	135		77			60		
# w/functional status screening	1	0.7	0	0.0	+0.7	0	0.0	+0.7
Female Active Clinical =>55	136		85			67		
# w/functional status screening	1	0.7	0	0.0	+0.7	0	0.0	+0.7

Figure 2-145: Sample Report, Functional Status Assessment in Elders

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Functional Status Assessment in Elders: List of patients => 55 with functional status codes, if any. HRN COMMUNITY SEX AGE NUMERATOR PATIENT NAME DENOMINATOR PATIENT1, GLENDA JOYCE 000001 COMMUNITY #1 F 57 AC PATIENT2, NADINE 000002 COMMUNITY #1 F 61 PATIENT3, CHARLOTTE MAE 000003 COMMUNITY #1 F 64 YES: 02/24/12 BATH, CONT, COOK, DRES, FEED, FIN, HSWK, MEDS, SHOP, TLT, TRNS, XFER PATIENT4, KATHERINE ANN 000004 COMMUNITY #1 F 66 YES: 07/11/12 BATH, FIN PATIENT5, ANNA MARIE 000005 COMMUNITY #1 F 66 AC PATIENT6, DIANA 000006 COMMUNITY #1 F 67 PATIENT7, PEGGY ANN 000007 COMMUNITY #1 F 70 NO: 05/20/12 FIN

Figure 2-146: Sample Patient List, Functional Status Assessment in Elders

#### 2.10.20 Fall Risk Assessment in Elders

#### **Denominators**

Active Clinical patients ages 65 and older. Broken down by gender.

User Population patients ages 65 and older. Broken down by gender.

#### **Numerators**

Patients who have been screened for fall risk or with a fall-related diagnosis in the past year.

**Note**: This numerator does *not* include refusals.

- a. Patients who have been screened for fall risk in the past year
- b. Patients with a documented history of falling in the past year
- c. Patients with a fall-related injury diagnosis in the past year
- d. Patients with abnormality of gait/balance or mobility diagnosis in the past year

Patients with a documented refusal of fall risk screening exam in the past year

### **Logic Description**

Age of the patient is calculated at the beginning of the Report Period.

Fall risk screening/fall related diagnosis is defined as any of the codes in the table below.

Subject Defined	ICD and Other Codes	Exam Code	E Codes (Injury)
Fall Risk Exam	<b>CPT</b> : 1100F, 1101F, 3288F	V Exam: 37 (Fall Risk)	
History of Falling	V POV: V15.88 (Personal History of Fall)		
Fall-related Injury			V POV (Cause Codes #1-3): E880.*, E881.*, E883.*, E884.*, E885.*, E886.*, E888.*
Abnormality of Gait/Balance or Mobility	<b>V POV</b> : 781.2, 781.3, 719.7, 719.70 (old code), 719.75–719.77 (old codes), 438.84, 333.99, 443.9		
Refusal		V Exam: 37 (Fall Risk)	

## **Key Logic Changes from CRS Version 12.0**

None

## **Patient List Description**

List of patients 65 years or older with fall risk assessment, if any.

### **Measure Source**

HP 2010 15–28 Reduce hip fractures among older adults.

## **Measure Past Performance and Long-Term Targets**

None

DU November 25, 2012 Page 331  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Fall Risk Assessment in	n Elde	rs (con	't)						
Active Clinical Pts									
65+	116		64			65			
# w/ fall risk screen/									
Dx-No Refusals A. # w/ fall risk	14	12.1	8	12.5	-0.4	8	12.3	-0.2	
screen	5	4.3	0	0.0	+4.3	0	0.0	+4.3	
B. # w/ history	1	0.0	0	0 0	. 0 . 0	0	0 0	. 0 . 0	
of fall C. # w/ fall injury		0.9 1.7	0		+0.9 +0.2	0 3	0.0 4.6	+0.9 -2.9	
D. # w/ abnormal	_	,	-	1.0	. 0.2	3	1.0	2.9	
gait	6		•	10.9	-5.8		7.7		
# w/ refusal	3	2.6	0	0.0	+2.6	0	0.0	+2.6	
Male Active Clinical									
65+	53		28			27			
# w/ fall risk screen/									
Dx-No Refusals	6	11.3	3	10.7	+0.6	2	7.4	+3.9	
A. # w/ fall risk screen	2	3.8	0	0.0	+3.8	0	0.0	+3.8	
B. # w/ history	۷	3.0	U	0.0	тэ.о	U	0.0	тэ.о	
of fall	1	1.9	0	0.0	+1.9	0	0.0	+1.9	
C. # w/ fall injury	0	0.0	0	0.0	+0.0	1	3.7	-3.7	
D. # w/ abnormal gait	3	5.7	3	10.7	-5.1	1	3.7	+2.0	
# w/ refusal		1.9			+1.9				
Female Active Clinical									
65+	63		36			38			
# w/ fall risk screen/									

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

Dx-No Refusals A. # w/ fall risk	8	12.7	5	13.9	-1.2	6	15.8	-3.1
screen	3	4.8	0	0.0	+4.8	0	0.0	+4.8
<pre>B. # w/ history   of fall</pre>	0	0.0	0	0.0	+0.0	0	0.0	+0.0
C. # w/ fall injury D. # w/ abnormal	2	3.2	1	2.8	+0.4	2	5.3	-2.1
gait	3	4.8		11.1	-6.3	4	10.5	-5.8
# w/ refusal	2	3.2	0	0.0	+3.2	0	0.0	+3.2

Figure 2-147: Sample Report, Fall Risk Assessment in Elders

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Fall Risk Assessment in Elders: List of patients 65 years or older with fall risk assessment, if any. PATIENT NAME HRN COMMUNITY SEX AGE
DENOMINATOR NUMERATOR PATIENT NAME PATIENT1, SHERRY 000001 COMMUNITY #1 F 68 UP,AC PATIENT2, LORETTA LYNN 000002 COMMUNITY #1 F 78 UP,AC Refused 03/03/12 Ex 37
PATIENT17,NICOLE 000017 COMMUNITY #2 F 71 Refused 03/03/12 Ex 37 UP,AC Abnormal Gait: 11/25/12 POV 443.9 PATIENT18, VERONICA 000018 COMMUNITY #2 F 72 Screen: 03/03/12 CPT 1100F PATIENT19, STEPHANIE 000019 COMMUNITY #2 F 76 Fall Injury: 11/10/12 E-CODE E883.9 UP,AC

Figure 2-148: Sample Patient List, Fall Risk Assessment in Elders

#### 2.10.21 Palliative Care

#### **Denominators**

Active Clinical patients ages 18 and older with two or more types of cancer documented during the Report Period. Broken down by gender and age groups (18-54, greater than (>)55).

#### **Numerators**

No denominator; count only. The total number of *Active Clinical patients* with at least one palliative care visit during the Report Period. Broken down by age groups (less than (<) 18, 18 through 54, greater than (>) 55).

No denominator; count only. The total number of palliative care visits for *Active Clinical patients* during the Report Period. Broken down by age groups (less than (<) 18, 18 through 54, greater than (>)55).

Patients with at least two palliative care visits during the Report Period.

### **Logic Description**

Age is calculated at the beginning of the Report Period.

Palliative care visit definition: POV V66.7.

Cancer Types:

Cancer Type	ICD Codes
Melanoma	V POV: 172*
Breast	<b>V POV</b> : 174*, 175*, 239.3
Colon	<b>V POV</b> : 153*, 154*, 235.2
Gyn	<b>V POV</b> : 180*, 182*, 183*, 184*, 236.1, 236.2
Prostate	<b>V POV</b> : 185* 236.5
Testes/Male GU	<b>V POV</b> : 186*, 187.3, 187.4, 187.9, 236.4, 236.6
Head and Neck	<b>V POV</b> : 140–149.9, 160*, 161*, 162*, 195.0
Urinary Tract	<b>V POV</b> : 188*, 189*, 236.7, 236.91, 239.4, 239.5
Non-melanomatous skin cancer	<b>V POV</b> : 173*, 238.2
Non-colon GI	<b>V POV</b> : 150–152.9, 155–159.9, 235*, 239.0
Lung	<b>V POV</b> : 162*, 235.9, 239.1
Brain	<b>V POV</b> : 190–192.9, 237.5, 237.6, 239.6
Bones/soft tissue	<b>V POV</b> : 170*, 171*, 238.1, 238.2
Endocrine	<b>V POV</b> : 193, 194*, 237.0, 237.4, 239.7
Pleura/mediastinum	<b>V POV</b> : 163*, 164*
Non-specific site	<b>V POV</b> : 195*, 199*, 238.8, 238.9, 239.8, 239.9
Lymph node spread	<b>V POV</b> : 196*
Secondary cancer	<b>V POV</b> : 196*, 197*

### **Patient List Description**

List of patients with a palliative care visit.

### **Key Logic Changes from CRS Version 12.0**

None

#### **Measure Source**

None

### **Measure Past Performance and Long-Term Targets**

DU November 25, 2012 Page 334  *** IHS 2012 Selected Measures with Community Specified Report ***  DEMO INDIAN HOSPITAL  Report Period: Jan 01, 2012 to Dec 31, 2012  Previous Year Period: Jan 01, 2011 to Dec 31, 2011  Baseline Period: Jan 01, 2000 to Dec 31, 2000								
Palliative Care								
		EV YR C			HG from ASE			
Total # of Patients w/At Least 1 Palliative Care Visit	40	0	+40	0	+40			
A. Total # of Patients <18 w/At Least 1 Palliat Care Visit	cive 1	0	+1	0	+1			
B. Total # of Patients 18 w/At Least 1 Palliative Care Visit	3-54 25	0	+25	0	+25			
C. Total # of Patients 59 W/At Least 1 Palliative Care Visit	5+	0	+14	0	+14			
Total # of Palliative Care Visits	62	0	+62	0	+62			
A. Total # of Palliative Care Visits-Pts <18	2	0	+2	0	+2			
B. Total # of Palliative Care Visits-Pts 18-54	38	0	+38	0	+38			
C. Total # of Palliative Care Visits-Pts 55+	22	0	+22	0	+22			
Active Clinical Pts 18+ w/ 2+ types of cancer	28	3		3				
# w/ 2+ Palliative Care Visits	14 50.0	0 0.0	+50.0	0 0.0	+50.0			

Figure 2-149: Sample Report, Palliative Care

UP=User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient

CRS Clinical Performance Measure Logic Manual for FY 2012 Clinical Measures May 2012

```
Palliative Care: List of patients with a palliative care visit, if any.
                           COMMUNITY
PATIENT NAME
                     HRN
                                       SEX AGE
DENOMINATOR
                          NUMERATOR
PATIENT1, JOHN 000012 Community #1 M 57
                          1 visit: 05/01/12
PATIENT2, ROBERT 000013 Community #1 M 59
                           2 visits: 01/25/12, 05/10/12
AC, CAN
PATIENT3, JAMES 000014 Community #2 M 67
AC, CAN
                          0 visits:
PATIENT4, TONYA 000015 Community #3 F 78
                          1 visit: 06/01/12
PATIENT5, RITA ANN 000016 Community #3 F 96
                          2 visits: 06/01/12; 06/07/12
PATIENT6, Clifford
                     000017 Community #3 M 24
AC, CAN
                          3 visits: 01/25/12, 05/10/12, 08/01/12
```

Figure 2-150: Sample Patient List, Palliative Care

#### 2.10.22 Annual Wellness Visit

#### **Denominators**

Active Clinical patients ages 65 and older. Broken down by gender.

#### **Numerators**

Patients with at least one Annual Wellness Exam in the past 15 months.

### **Logic Description**

Age is calculated at the beginning of the Report Period.

Annual Wellness Exam: CPT G0438, G0439, G0402.

#### **Patient List Description**

List of patients with an annual wellness visit in the past 15 months.

### **Key Logic Changes from CRS Version 12.0**

None

#### **Measure Source**

None

#### **Measure Past Performance and Long-Term Targets**

```
DU November 25, 2012 Page 337
*** IHS 2012 Selected Measures with Community Specified Report ***
```

DEMO INDIAN HOSPITAL Report Period: Jan 01, 2012 to Dec 31, 2012 Previous Year Period: Jan 01, 2011 to Dec 31, 2011 Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Annual Wellness Visit									
	REPORT PREV YR CHG from BASE PERIOD PERIOD PREV YR PERIOD						_	HG from ASE	
Active Clinical Pts 65+	116		64			65			
# w/ Annual Wellness Exam	2	1.7	0	0.0	+1.7	0	0.0	+1.7	
Male Active Clinical Pts 65+	53		28			27			
# w/ Annual Wellness Exam	0	0.0	0	0.0	+0.0	0	0.0	+0.0	
Female Active Clinical Pts 65+	L 63		36			38			
# w/ Annual Wellness Exam	2	3.2	0	0.0	+3.2	0	0.0	+3.2	

Figure 2-151: Sample Report, Annual Wellness Visit

UP-User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Annual Wellness Visit: List of patients with an annual wellness visit in the past 15 months, if any. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR Patient1,DENISE 000001 Community #1 F 65 12/31/11 G0402 Patient2, MELISSA GAYLE 000002 Community #1 F 66 Patient3, JESSICA DAWN 000003 Community #1 F 67 02/22/12 G0438 Patient4, RUTH ALICE 000004 Community #1 F 69 Patient5, BRYSON DEWAY 000005 Community #1 F 72 Patient6, BRITTNEY ANN 000006 Community #1 F 73 05/31/12 G0439 AC Patient7,MARK 000007 Community #1 M 67 Patient8, HOWIE 000008 Community #1 M 72 10/01/11 G0402

Figure 2-152: Sample Patient List, Annual Wellness Visit

## 2.10.23 Goal Setting

#### **Denominators**

*User Population patients* who received patient education during the report period.

#### **Numerators**

Number of patients who set at least one goal during the Report Period.

Number of patients who met at least one goal during the Report Period.

### **Logic Description**

Patient education codes must be the standard national patient education codes, which are included in the Patient and Family Education Protocols and Codes (PEPC) manual published each year. If codes are found that are not in the table, they will not be reported on (i.e. locally-developed codes).

Numerator Logic:

For Goal Set, the patient education code must have a "GS" value documented during the Report Period.

For Goal Met, the patient education code must have a "GM" value documented during the Report Period but the patient is not required to have set a goal during the Report Period.

### **Patient List Description**

List of User Population patients who received patient education during the Report Period with goal setting information.

## **Key Logic Changes from CRS Version 12.0**

None

#### Measure Source

None

### Measure Past Performance and Long-Term Targets

```
DU November 25, 2012 Page 338

*** IHS 2012 Selected Measures with Community Specified Report ***

DEMO INDIAN HOSPITAL

Report Period: Jan 01, 2012 to Dec 31, 2012
```

Previous Year Period: Jan 01, 2011 to Dec 31, 2011 Baseline Period: Jan 01, 2000 to Dec 31, 2000									
Goal Setting									
	REPORT PERIOD	PREV PERIC		CHG from PREV YR	BASE PERIOD	_	HG from ASE		
# User Pop w/ Pat I	Ed 1,024	8	358		644				
# w/ goal set # w/ goal met		0.8 0.6	0 0.0 0 0.0		0 0		+0.8 +0.6		

Figure 2-153: Sample Report, Goal Setting

UP-User Pop; AC=Active Clinical; AD=Active Diabetic; AAD=Active Adult Diabetic PREG=Pregnant Female; IMM=Active IMM Pkg Pt; IHD=Active Ischemic Heart Disease; CHD-Active Coronary Heart Disease; HR=High Risk Patient Goal Setting: List of User Population patients who received patient education during the Report Period with goal setting information. PATIENT NAME HRN COMMUNITY SEX AGE DENOMINATOR NUMERATOR Patient1, Paula 000001 Community #1 F 34 UP GS: 11/17/12 Patient2, PENNY 000002 Community #1 F 43 UP Patient3,RITA 000003 Community #1 F 64 GS: 04/15/12, GM: 06/15/12 UP Patient4, HARRY 000004 Community #1 M 50 GM: 10/30/12 Patient5,ROSS 000005 Community #1 M 55 Patient6,FELIPE 000006 Community #1 M 57 GS: 09/10/12 000007 Community #1 M 67 Patient7,MARK Patient8, CATHERINE 000008 Community #2 F 72 GM: 07/30/12

Figure 2-154: Sample Patient List, Goal Setting

# **Contact Information**

If you have any questions or comments regarding this distribution, please contact the OIT Help Desk (IHS).

**Phone:** (505) 248-4371 or (888) 830-7280 (toll free)

**Fax:** (505) 248-4363

Web: http://www.ihs.gov/GeneralWeb/HelpCenter/Helpdesk/index.cfm

Email: support@ihs.gov