

Final Revisions to the Primary National Ambient Air Quality Standard for Nitrogen Dioxide (NO₂)



General Overview

Office of Air and Radiation
Office of Air Quality Planning and Standards
January 2010



Overview of the Final Rule

- On January 22, 2010 EPA strengthened the primary national ambient air quality standard (NAAQS) for nitrogen dioxide (NO₂) to increase protection of public health by:
 - adding a 1-hour NO₂ standard at 100 parts per billion (ppb); and
 - retaining the annual average NO₂ standard at a level of 53 ppb
- To determine compliance with the revised NO₂ standard, EPA also is making changes to the NO₂ air quality monitoring network requirements.
 - Monitoring is needed to measure:
 - Peak, short-term concentrations primarily near major roads in urban areas
 - Highest concentrations of NO₂ that occur over wider community areas, and
 - Concentrations impacting vulnerable and susceptible individuals



Overview of the Final Rule (cont.)

- These revisions are consistent with recommendations of the majority of the Clean Air Scientific Advisory Committee (CASAC) panel.
- This action does not impact the secondary NO₂ standard, set to protect public welfare.
 - It is an annual average standard set at 53 ppb
 - Under a separate review, EPA is considering the need for changes to the secondary NO₂ standard

For more information go to http://www.epa.gov/air/nitrogenoxides



Final NO₂ Standards

- EPA determined that the existing primary annual average NO₂ standard of 53 ppb alone is not sufficient to protect public health with an adequate margin of safety
- EPA is setting a new 1-hour NO₂ that defines the maximum allowable concentration anywhere in an area - primarily near major roads
 - Set at a level of 100 ppb
 - Expressed as the 3-year average of the 98th percentile of the annual distribution of daily maximum 1-hour average concentrations
- EPA is retaining the current annual average NO₂ standard of 53 ppb
- This suite of primary standards will:
 - Limit short-term exposures to peak NO₂ concentrations, which often occur near major roads and could worsen asthma symptoms
 - Maintain community-wide NO₂ concentrations below levels associated with respiratoryrelated emergency department visits and hospital admissions



Updating the Monitoring Network

- The monitoring networks for NAAQS pollutants focus on monitoring in locations of maximum concentrations
- EPA is requiring changes to the monitoring network that will capture short-term NO₂ concentrations such as those that occur near roads, community-wide NO₂ concentrations, and low income or minority at-risk communities

Near Road

• At least one monitor would be located near a major road in any urban area with a population greater than or equal to 500,000 people.

Community-Wide

- A minimum of one monitor would be placed in any urban area with a population greater than or equal to 1 million people to assess community-wide concentrations
- A second monitor would be required near a major road in areas with either:
 - population greater than or equal to 2.5 million people, or
 - one or more road segments with an annual average daily traffic count greater than or equal to 250,000 vehicles

Susceptible and Vulnerable Communities

 Working with the states, EPA Regional Administrators will site at least 40 additional NO2 monitors to help protect communities that are susceptible and vulnerable to NO2 -related health effects



Updating the Monitoring Network

- EPA is requiring all new NO2 monitors to begin operating no later than January 1, 2013
- EPA estimates the revised NO₂ monitoring requirements will lead to:
 - 126 NO₂ monitoring sites near major roads in 102 urban areas.
 - 53 additional monitoring sites to assess community-wide levels across wider urban areas.
 - 40 monitors in low income or minority at-risk communities.



Setting the Air Quality Standard for NO₂

- The Clean Air Act requires EPA to set two types of national ambient air quality standards (NAAQS) for "criteria" air pollutants:
 - Primary standards to protect public health with an adequate margin of safety
 - Secondary standards to protect public welfare (visibility, wildlife, crops, vegetation, national monuments and buildings)
- EPA has set NAAQS for six common air pollutants:

Nitrogen dioxide

- Particulate matter

Carbon monoxide

Ground-level ozone (smog)

Lead

Sulfur dioxide

- The law requires EPA to review the scientific information and the standards for each pollutant every five years, and to obtain advice from the Clean Air Scientific Advisory Committee (CASAC) on each review
- Different considerations apply to setting NAAQS than to achieving them
 - Setting NAAQS: based on scientific evidence of health and environmental effects
 - Achieving NAAQS: account for cost, technical feasibility, time needed to attain
- EPA set the annual average NO₂ standard of 53 ppb in 1971
 - EPA reviewed the NO₂ standard in 1985 and 1996 and decided to retain the 53 ppb annual average standard




NO₂ is the Indicator for Entire NOx Group of Gases

- NO₂ is one of a group of highly reactive gasses known as oxides of nitrogen (NOx)
 - Other oxides of nitrogen include nitrous acid and nitric acid
- NO₂ is the component of NOx of greatest interest and serves as the indicator for the entire NOx family
- NOx forms when fuel is burned at high temperatures
- Control measures that reduce NO₂ can generally be expected to reduce population exposures to all NOx gases
 - This may have the important co-benefit of reducing the formation of ozone and fine particles both of which pose significant public health threats



Sources of NO_x Pollution

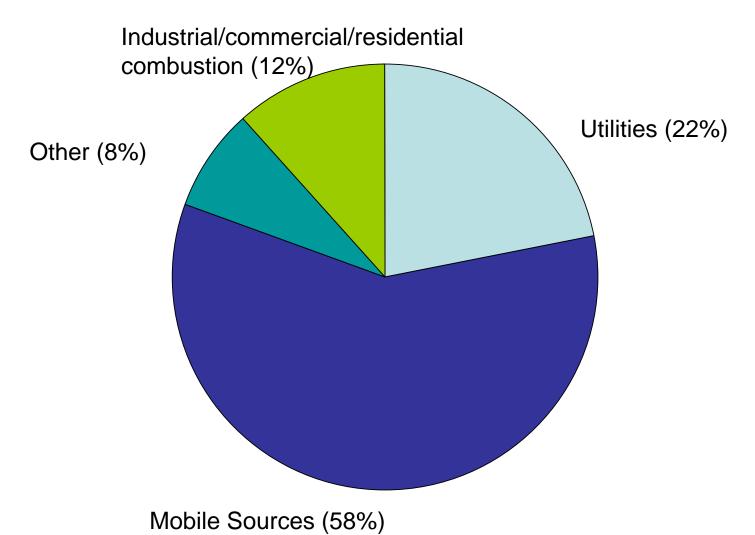



Reducing NO_x Pollution in the U.S.

- All areas in the U.S. comply with the current (1971) NO₂ standards
 - Annual average ambient NO₂ concentrations, as measured at community-wide monitors, have decreased by more than 40% since 1980
 - The range of current annual average NO₂ concentrations is approximately 10-20 ppb
- EPA, states and tribes have been working together since the 1970's to reduce emissions of NOx from a range of sources. Key efforts include:
 - Emission Standards for Motor Vehicles and Power Plants
 - Regulating Regional Transport of NOx
- EPA anticipates NO_x concentrations will continue to decrease as a result of mobile source regulations
 - Tier 2 standards for light-duty vehicles began phasing in in 2004, and new NO_x standards for heavy-duty engines are phasing in between 2007 and 2010 model years
 - As these standards continue to be phased in, NO_x from motor vehicles are expected to be lower



New Health Evidence in this Review

- Current scientific evidence links short-term NO₂ exposures, ranging from 30 minutes to 24 hours, with an array of adverse respiratory effects including increased asthma symptoms, worsened control of asthma, and an increase in respiratory illnesses and symptoms.
 - These health effects have been associated with exposure to the range of NO₂ levels across an area, which includes both the higher short-term exposures than can occur on or near major roadways, and the lower concentrations that can occur away from such roadways.
- Studies also show a connection between short-term exposure and increased visits
 to emergency departments and hospital admissions for respiratory illnesses,
 particularly in at-risk populations including children, the elderly, and asthmatics.



Near and On Roadway NO₂ Exposures

- NO₂ concentrations on or near major roads are appreciably higher than those measured at monitors in the current network
 - In-vehicle concentrations can be 2-3 times higher than measured at nearby community-wide monitors
 - Near-roadway concentrations have been measured to be approximately 30 to 100% higher than those measured away from major roads
- Individuals who spend time on or near major roads can experience short-term NO2 exposures considerably higher than measured by the current network, which are of particular concern for at-risk populations, including people with asthma, children, and the elderly.



CASAC Recommendations

- The Clean Air Scientific Advisory Committee (CASAC) provides independent advice to the EPA Administrator on the NAAQS
- The majority of the CASAC panel supported EPA's proposal to:
 - Focus on protecting against short-term maximum concentrations in an area
 - Set a 1-hour standard at a level no higher than 100 ppb
- In light of evidence suggesting an association between long-term exposures to NO₂ and adverse health effects, CASAC also recommended retaining the current annual standard of 53 ppb
 - Evidence is too limited to suggest any change to the level of the annual average standard



Nitrogen Oxides Also Contribute to the Formation of Fine Particle Pollution and Ozone

- NOx react with ammonia, moisture, and other compounds to form small particles, exposure to which results in health effects including:
 - Premature death
 - Effects on breathing and the respiratory system,
 - Damage to lung tissue,
 - Small particles that penetrate deeply into sensitive parts of the lungs and can cause or worsen respiratory disease, such as emphysema and bronchitis, and aggravate existing heart disease
- NOx is also a precursor of ground-level ozone
 - Ozone is formed when NOx and volatile organic compounds (VOC) react in the presence of heat and sunlight
 - Children, the elderly, people with lung diseases such as asthma, and people who work
 or exercise outside are susceptible to adverse effects of ozone such as damage to lung
 tissue and reduction in lung function



Implementation Schedule

Milestone	Date
State Designation Recommendations to EPA	January 2011: One year following promulgation (Based on existing network data)
Designations	January 2012: EPA designates all/most areas as "unclassifiable" (because near road monitors not in place)
New NO ₂ Monitoring Network	January 1, 2013: All monitors operating
Next NO ₂ NAAQS Review Completed	January 2015: Anticipated time frame
Nonattainment Re- Designations (discretionary)	January 2016/2017 (depending on date that sites become operational)
Attainment Date	January 2021/2022 (5 years after date of nonattainment designations)