

Public Law 94-409  
94th Congress

An Act

To provide that meetings of Government agencies shall be open to the public, and for other purpose .

Sept. 13, 1976

[S. 5]

*Be it enacted by the Senate and House of Representatives of the United States of America in Congress assembled*, That this Act may be cited as the "Government in the Sunshine Act".

Government in  
the Sunshine Act.  
5 USC 552b note.

DECLARATION OF POLICY

SEC. 2. It is hereby declared to be the policy of the United States that the public is entitled to the fullest practicable information regarding the decisionmaking processes of the Federal Government. It is the purpose of this Act to provide the public with such information while protecting the rights of individuals and the ability of the Government to carry out its responsibilities.

5 USC 552b note.

OPEN MEETINGS

SEC. 3. (a) Title 5, United States Code, is amended by adding after section 552a the following new section:

**“§ 552b. Open meetings**

5 USC 552b.  
Definitions.

“(a) For purposes of this section—

“(1) the term ‘agency’ means any agency, as defined in section 552(e) of this title, headed by a collegial body composed of two or more individual members, a majority of whom are appointed to such position by the President with the advice and consent of the Senate, and any subdivision thereof authorized to act on behalf of the agency;

5 USC 552.

“(2) the term ‘meeting’ means the deliberations of at least the number of individual agency members required to take action on behalf of the agency where such deliberations determine or result in the joint conduct or disposition of official agency business, but does not include deliberations required or permitted by subsection (d) or (e); and

“(3) the term ‘member’ means an individual who belongs to a collegial body heading an agency.

(b) Members shall not jointly conduct or dispose of agency business other than in accordance with this section. Except as provided in subsection (c), every portion of every meeting of an agency shall be open to public observation.

“(c) Except in a case where the agency finds that the public interest requires otherwise, the second sentence of subsection (b) shall not apply to any portion of an agency meeting, and the requirements of subsections (d) and (e) shall not apply to any information pertaining to such meeting otherwise required by this section to be disclosed to the public, where the agency properly determines that such portion or portions of its meeting or the disclosure of such information is likely to—

“(1) disclose matters that are (A) specifically authorized under criteria established by an Executive order to be kept secret in the

interests of national defense or foreign policy and (B) in fact properly classified pursuant to such Executive order;

“(2) relate solely to the internal personnel rules and practices of an agency;

5 USC 552.

“(3) disclose matters specifically exempted from disclosure by statute (other than section 552 of this title), provided that such statute (A) requires that the matters be withheld from the public in such a manner as to leave no discretion on the issue, or (B) establishes particular criteria for withholding or refers to particular types of matters to be withheld;

“(4) disclose trade secrets and commercial or financial information obtained from a person and privileged or confidential;

“(5) involve accusing any person of a crime, or formally censuring any person;

“(6) disclose information of a personal nature where disclosure would constitute a clearly unwarranted invasion of personal privacy;

“(7) disclose investigatory records compiled for law enforcement purposes, or information which if written would be contained in such records, but only to the extent that the production of such records or information would (A) interfere with enforcement proceedings, (B) deprive a person of a right to a fair trial or an impartial adjudication, (C) constitute an unwarranted invasion of personal privacy, (D) disclose the identity of a confidential source and, in the case of a record compiled by a criminal law enforcement authority in the course of a criminal investigation, or by an agency conducting a lawful national security intelligence investigation, confidential information furnished only by the confidential source, (E) disclose investigative techniques and procedures, or (F) endanger the life or physical safety of law enforcement personnel;

“(8) disclose information contained in or related to examination, operating, or condition reports prepared by, on behalf of, or for the use of an agency responsible for the regulation or supervision of financial institutions;

“(9) disclose information the premature disclosure of which would—

“(A) in the case of an agency which regulates currencies, securities, commodities, or financial institutions, be likely to (i) lead to significant financial speculation in currencies, securities, or commodities, or (ii) significantly endanger the stability of any financial institution; or

“(B) in the case of any agency, be likely to significantly frustrate implementation of a proposed agency action, except that subparagraph (B) shall not apply in any instance where the agency has already disclosed to the public the content or nature of its proposed action, or where the agency is required by law to make such disclosure on its own initiative prior to taking final agency action on such proposal; or

“(10) specifically concern the agency's issuance of a subpoena, or the agency's participation in a civil action or proceeding, an action in a foreign court or international tribunal, or an arbitration, or the initiation, conduct, or disposition by the agency of a particular case of formal agency adjudication pursuant to the procedures in section 554 of this title or otherwise involving a determination on the record after opportunity for a hearing.

5 USC 554.

“(d)(1) Action under subsection (c) shall be taken only when a majority of the entire membership of the agency (as defined in subsection (a)(1)) votes to take such action. A separate vote of the agency members shall be taken with respect to each agency meeting a portion or portions of which are proposed to be closed to the public pursuant to subsection (c), or with respect to any information which is proposed to be withheld under subsection (c). A single vote may be taken with respect to a series of meetings, a portion or portions of which are proposed to be closed to the public, or with respect to any information concerning such series of meetings, so long as each meeting in such series involves the same particular matters and is scheduled to be held no more than thirty days after the initial meeting in such series. The vote of each agency member participating in such vote shall be recorded and no proxies shall be allowed.

Recorded voting.

“(2) Whenever any person whose interests may be directly affected by a portion of a meeting requests that the agency close such portion to the public for any of the reasons referred to in paragraph (5), (6), or (7) of subsection (c), the agency, upon request of any one of its members, shall vote by recorded vote whether to close such meeting.

“(3) Within one day of any vote taken pursuant to paragraph (1) or (2), the agency shall make publicly available a written copy of such vote reflecting the vote of each member on the question. If a portion of a meeting is to be closed to the public, the agency shall, within one day of the vote taken pursuant to paragraph (1) or (2) of this subsection, make publicly available a full written explanation of its action closing the portion together with a list of all persons expected to attend the meeting and their affiliation.

Copies,  
availability.

“(4) Any agency, a majority of whose meetings may properly be closed to the public pursuant to paragraph (4), (8), (9)(A), or (10) of subsection (c), or any combination thereof, may provide by regulation for the closing of such meetings or portions thereof in the event that a majority of the members of the agency votes by recorded vote at the beginning of such meeting, or portion thereof, to close the exempt portion or portions of the meeting, and a copy of such vote, reflecting the vote of each member on the question, is made available to the public. The provisions of paragraphs (1), (2), and (3) of this subsection and subsection (e) shall not apply to any portion of a meeting to which such regulations apply: *Provided*, That the agency shall, except to the extent that such information is exempt from disclosure under the provisions of subsection (c), provide the public with public announcement of the time, place, and subject matter of the meeting and of each portion thereof at the earliest practicable time.

Meeting closure,  
regulation.

“(e)(1) In the case of each meeting, the agency shall make public announcement, at least one week before the meeting, of the time, place, and subject matter of the meeting, whether it is to be open or closed to the public, and the name and phone number of the official designated by the agency to respond to requests for information about the meeting. Such announcement shall be made unless a majority of the members of the agency determines by a recorded vote that agency business requires that such meeting be called at an earlier date, in which case the agency shall make public announcement of the time, place, and subject matter of such meeting, and whether open or closed to the public, at the earliest practicable time.

Public  
announcement.Scheduling,  
public  
announcement.

“(2) The time or place of a meeting may be changed following the public announcement required by paragraph (1) only if the agency publicly announces such change at the earliest practicable time. The

Scheduling  
changes, public  
announcement.

subject matter of a meeting, or the determination of the agency to open or close a meeting, or portion of a meeting, to the public, may be changed following the public announcement required by this subsection only if (A) a majority of the entire membership of the agency determines by a recorded vote that agency business so requires and that no earlier announcement of the change was possible, and (B) the agency publicly announces such change and the vote of each member upon such change at the earliest practicable time.

Scheduling notice, publication in Federal Register.

“(3) Immediately following each public announcement required by this subsection, notice of the time, place, and subject matter of a meeting, whether the meeting is open or closed, any change in one of the preceding, and the name and phone number of the official designated by the agency to respond to requests for information about the meeting, shall also be submitted for publication in the Federal Register.

Closed meetings, certification.

“(f) (1) For every meeting closed pursuant to paragraphs (1) through (10) of subsection (c), the General Counsel or chief legal officer of the agency shall publicly certify that, in his or her opinion, the meeting may be closed to the public and shall state each relevant exemptive provision. A copy of such certification, together with a statement from the presiding officer of the meeting setting forth the time and place of the meeting, and the persons present, shall be retained by the agency. The agency shall maintain a complete transcript or electronic recording adequate to record fully the proceedings of each meeting, or portion of a meeting, closed to the public, except that in the case of a meeting, or portion of a meeting, closed to the public pursuant to paragraph (8), (9) (A), or (10) of subsection (c), the agency shall maintain either such a transcript or recording, or a set of minutes. Such minutes shall fully and clearly describe all matters discussed and shall provide a full and accurate summary of any actions taken, and the reasons therefor, including a description of each of the views expressed on any item and the record of any rollcall vote (reflecting the vote of each member on the question). All documents considered in connection with any action shall be identified in such minutes.

Transcripts, recordings or minutes.


Public availability.

“(2) The agency shall make promptly available to the public, in a place easily accessible to the public, the transcript, electronic recording, or minutes (as required by paragraph (1)) of the discussion of any item on the agenda, or of any item of the testimony of any witness received at the meeting, except for such item or items of such discussion or testimony as the agency determines to contain information which may be withheld under subsection (c). Copies of such transcript, or minutes, or a transcription of such recording disclosing the identity of each speaker, shall be furnished to any person at the actual cost of duplication or transcription. The agency shall maintain a complete verbatim copy of the transcript, a complete copy of the minutes, or a complete electronic recording of each meeting, or portion of a meeting, closed to the public, for a period of at least two years after such meeting, or until one year after the conclusion of any agency proceeding with respect to which the meeting or portion was held, whichever occurs later.

Retention.

Publication in Federal Register. Regulations.

“(g) Each agency subject to the requirements of this section shall, within 180 days after the date of enactment of this section, following consultation with the Office of the Chairman of the Administrative Conference of the United States and published notice in the Federal Register of at least thirty days and opportunity for written comment by any person, promulgate regulations to implement the requirements

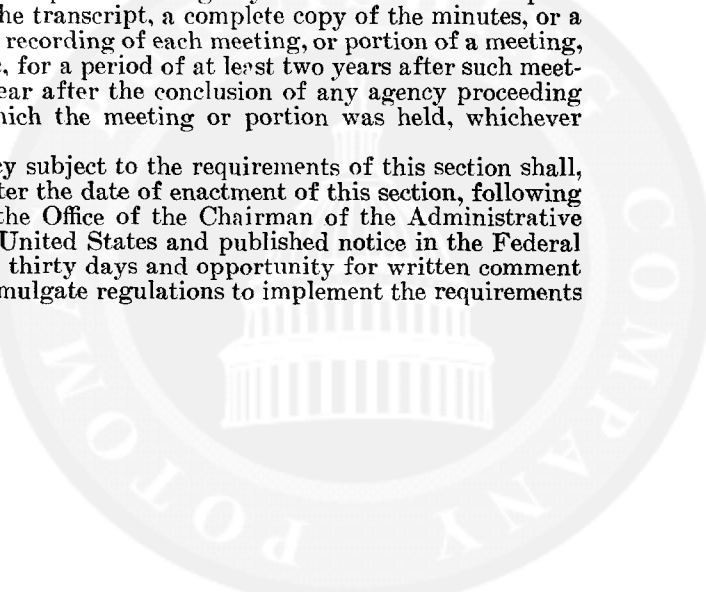

of subsections (b) through (f) of this section. Any person may bring a proceeding in the United States District Court for the District of Columbia to require an agency to promulgate such regulations if such agency has not promulgated such regulations within the time period specified herein. Subject to any limitations of time provided by law, any person may bring a proceeding in the United States Court of Appeals for the District of Columbia to set aside agency regulations issued pursuant to this subsection that are not in accord with the requirements of subsections (b) through (f) of this section and to require the promulgation of regulations that are in accord with such subsections.

Judicial  
proceeding.

“(h) (1) The district courts of the United States shall have jurisdiction to enforce the requirements of subsections (b) through (f) of this section by declaratory judgment, injunctive relief, or other relief as may be appropriate. Such actions may be brought by any person against an agency prior to, or within sixty days after, the meeting out of which the violation of this section arises, except that if public announcement of such meeting is not initially provided by the agency in accordance with the requirements of this section, such action may be instituted pursuant to this section at any time prior to sixty days after any public announcement of such meeting. Such actions may be brought in the district court of the United States for the district in which the agency meeting is held or in which the agency in question has its headquarters, or in the District Court for the District of Columbia. In such actions a defendant shall serve his answer within thirty days after the service of the complaint. The burden is on the defendant to sustain his action. In deciding such cases the court may examine in camera any portion of the transcript, electronic recording, or minutes of a meeting closed to the public, and may take such additional evidence as it deems necessary. The court, having due regard for orderly administration and the public interest, as well as the interests of the parties, may grant such equitable relief as it deems appropriate, including granting an injunction against future violations of this section or ordering the agency to make available to the public such portion of the transcript, recording, or minutes of a meeting as is not authorized to be withheld under subsection (c) of this section.

Jurisdiction.

Civil actions.

Relief.

“(2) Any Federal court otherwise authorized by law to review agency action may, at the application of any person properly participating in the proceeding pursuant to other applicable law, inquire into violations by the agency of the requirements of this section and afford such relief as it deems appropriate. Nothing in this section authorizes any Federal court having jurisdiction solely on the basis of paragraph (1) to set aside, enjoin, or invalidate any agency action (other than an action to close a meeting or to withhold information under this section) taken or discussed at any agency meeting out of which the violation of this section arose.

Inquiry.

“(i) The court may assess against any party reasonable attorney fees and other litigation costs reasonably incurred by any other party who substantially prevails in any action brought in accordance with the provisions of subsection (g) or (h) of this section, except that costs may be assessed against the plaintiff only where the court finds that the suit was initiated by the plaintiff primarily for frivolous or dilatory purposes. In the case of assessment of costs against an agency, the costs may be assessed by the court against the United States.

Litigation costs,  
assessment.

“(j) Each agency subject to the requirements of this section shall annually report to Congress regarding its compliance with such requirements, including a tabulation of the total number of agency

Report to  
Congress.

meetings open to the public, the total number of meetings closed to the public, the reasons for closing such meetings, and a description of any litigation brought against the agency under this section, including any costs assessed against the agency in such litigation (whether or not paid by the agency).

5 USC 552. “(k) Nothing herein expands or limits the present rights of any person under section 552 of this title, except that the exemptions set forth in subsection (c) of this section shall govern in the case of any request made pursuant to section 552 to copy or inspect the transcripts, recordings, or minutes described in subsection (f) of this section. The requirements of chapter 33 of title 44, United States Code, shall not apply to the transcripts, recordings, and minutes described in subsection (f) of this section.

44 USC 3301 *et seq.*

“(l) This section does not constitute authority to withhold any information from Congress, and does not authorize the closing of any agency meeting or portion thereof required by any other provision of law to be open.

“(m) Nothing in this section authorizes any agency to withhold from any individual any record, including transcripts, recordings, or minutes required by this section, which is otherwise accessible to such individual under section 552a of this title.”.

5 USC 552a.

5 USC prec. 500.

(b) The chapter analysis of chapter 5 of title 5, United States Code, is amended by inserting:

“552b. Open meetings.”

immediately below:

“552a. Records about individuals.”.

#### EX PARTE COMMUNICATIONS

SEC. 4. (a) Section 557 of title 5, United States Code, is amended by adding at the end thereof the following new subsection:

“(d) (1) In any agency proceeding which is subject to subsection (a) of this section, except to the extent required for the disposition of ex parte matters as authorized by law—


“(A) no interested person outside the agency shall make or knowingly cause to be made to any member of the body comprising the agency, administrative law judge, or other employee who is or may reasonably be expected to be involved in the decisional process of the proceeding, an ex parte communication relevant to the merits of the proceeding;

“(B) no member of the body comprising the agency, administrative law judge, or other employee who is or may reasonably be expected to be involved in the decisional process of the proceeding, shall make or knowingly cause to be made to any interested person outside the agency an ex parte communication relevant to the merits of the proceeding;

“(C) a member of the body comprising the agency, administrative law judge, or other employee who is or may reasonably be expected to be involved in the decisional process of such proceeding who receives, or who makes or knowingly causes to be made, a communication prohibited by this subsection shall place on the public record of the proceeding:

“(i) all such written communications;

“(ii) memoranda stating the substance of all such oral communications; and

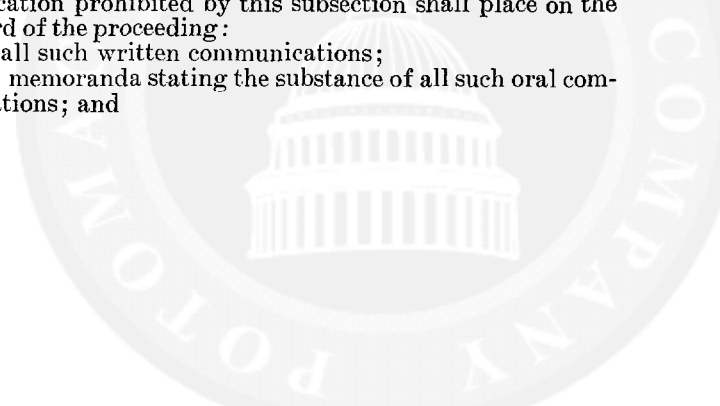

“(iii) all written responses, and memoranda stating the substance of all oral responses, to the materials described in clauses (i) and (ii) of this subparagraph;

“(D) upon receipt of a communication knowingly made or knowingly caused to be made by a party in violation of this subsection, the agency, administrative law judge, or other employee presiding at the hearing may, to the extent consistent with the interests of justice and the policy of the underlying statutes, require the party to show cause why his claim or interest in the proceeding should not be dismissed, denied, disregarded, or otherwise adversely affected on account of such violation; and

“(E) the prohibitions of this subsection shall apply beginning at such time as the agency may designate, but in no case shall they begin to apply later than the time at which a proceeding is noticed for hearing unless the person responsible for the communication has knowledge that it will be noticed, in which case the prohibitions shall apply beginning at the time of his acquisition of such knowledge.

Applicability.

“(2) This subsection does not constitute authority to withhold information from Congress.”.

(b) Section 551 of title 5, United States Code, is amended—

(1) by striking out “and” at the end of paragraph (12);

(2) by striking out the “act.” at the end of paragraph (13) and inserting in lieu thereof “act; and”; and

(3) by adding at the end thereof the following new paragraph:

“(14) ‘ex parte communication’ means an oral or written communication not on the public record with respect to which reasonable prior notice to all parties is not given, but it shall not include requests for status reports on any matter or proceeding covered by this subchapter.”.

“Ex parte communication.”

(c) Section 556(d) of title 5, United States Code, is amended by inserting between the third and fourth sentences thereof the following new sentence: “The agency may, to the extent consistent with the interests of justice and the policy of the underlying statutes administered by the agency, consider a violation of section 557(d) of this title sufficient grounds for a decision adverse to a party who has knowingly committed such violation or knowingly caused such violation to occur.”.

5 USC 557.

#### CONFORMING AMENDMENTS

SEC. 5. (a) Section 410(b)(1) of title 39, United States Code, is amended by inserting after “Section 552 (public information).” the words “section 552a (records about individuals), section 552b (open meetings).”.

(b) Section 552(b)(3) of title 5, United States Code, is amended to read as follows:

“(3) specifically exempted from disclosure by statute (other than section 552b of this title), provided that such statute (A) requires that the matters be withheld from the public in such a manner as to leave no discretion on the issue, or (B) establishes particular criteria for withholding or refers to particular types of matters to be withheld;”.

(c) Subsection (d) of section 10 of the Federal Advisory Committee Act is amended by striking out the first sentence and inserting in lieu thereof the following: “Subsections (a)(1) and (a)(3) of this section shall not apply to any portion of an advisory committee meeting where

5 USC app. I.

the President, or the head of the agency to which the advisory committee reports, determines that such portion of such meeting may be closed to the public in accordance with subsection (c) of section 552b of title 5, United States Code.”.

## EFFECTIVE DATE

5 USC 552b note. **SEC. 6. (a)** Except as provided in subsection (b) of this section, the provisions of this Act shall take effect 180 days after the date of its enactment.

**(b)** Subsection (g) of section 552b of title 5, United States Code, as added by section 3(a) of this Act, shall take effect upon enactment.

Approved September 13, 1976.

---

**LEGISLATIVE HISTORY:**

**HOUSE REPORTS:** No. 94-880, Pt. 1 and No. 94-880, Pt. 2, accompanying H.R. 11656 (Comm. on Government Operations) and No. 94-1441 (Comm. of Conference).

**SENATE REPORTS:** No. 94-354 (Comm. on Government Operations), No. 94-381 (Comm. on Rules and Administration) and No. 94-1178 (Comm. of Conference).

**CONGRESSIONAL RECORD:**

Vol. 121 (1975): Nov. 5, 6, considered and passed Senate.

Vol. 122 (1976): July 28, considered and passed House, amended, in lieu of H.R. 11656.

Aug. 31, House and Senate agreed to conference report.

**WEEKLY COMPILATION OF PRESIDENTIAL DOCUMENTS:**

Vol. 12, No. 38 (1976): Sept. 13, Presidential statement.