HEALTHCARE COST AND UTILIZATION PROJECT — HCUP A FEDERAL-STATE-INDUSTRY PARTNERSHIP IN HEALTH DATA

Sponsored by the Agency for Healthcare Research and Quality

INTRODUCTION TO

THE HCUP NATIONWIDE INPATIENT SAMPLE (NIS)

2010

These pages provide only an introduction to the NIS package.

For full documentation and notification of changes, visit the HCUP User Support (HCUP-US) Website at http://www.hcup-us.ahrq.gov.

Issued June 2012

Agency for Healthcare Research and Quality Healthcare Cost and Utilization Project (HCUP) 540 Gaither Road, 5th Floor Rockville, Maryland 20850

Phone: (866) 290-HCUP (4287)
Fax: (301) 427-1430
E-mail: hcup@ahrq.gov
Website: http://www.hcup-us.ahrq.gov

NIS Data and Documentation Distributed by:

HCUP Central Distributor Phone: (866) 556-4287 (toll-free) Fax: (866) 792-5313

E-mail: HCUPDistributor@ahrq.gov

Table of Contents

SUMMARY OF DATA USE LIMITATIONS	1
HCUP CONTACT INFORMATION	2
WHAT'S NEW IN THE 2010 NATIONWIDE INPATIENT SAMPLE (NIS)?	3
UNDERSTANDING THE NIS	4
ABSTRACT	5
INTRODUCTION TO THE HCUP NATIONWIDE INPATIENT SAMPLE (NIS)	6
Overview of NIS Data	6
NIS Data Sources, Hospitals, and Inpatient Stays	
State-Specific Restrictions	
NIS Data Elements	
Getting Started	
Copying and Decompressing the ASCII Files Downloading and Running the Load Programs	
NIS Documentation	10
HCUP On-Line Tutorials	
HOW TO USE THE NIS FOR DATA ANALYSIS	
Calculating National Estimates	11
Studying Trends	
Choosing Data Elements for Analysis	12
Hospital-Level Data Elements	13
Constructing Patient Population Characteristics	14
ICD-9-CM Diagnosis and Procedure Codes	15
Missing Values	15
Variance Calculations	16
Computer Software for Variance Calculations	17
Longitudinal Analyses	18
Discharge Subsamples	18
SAMPLING OF HOSPITALS	19
Sampling of Hospitals Included in the NIS	19
The NIS Hospital Universe	
Stratification Data Elements	
Hospital Sampling Frame	21
Hospital Sample Design	23
Design Considerations	23
Overview of the Sampling ProcedureSubsamples	
Change to Hospital Sampling Procedure Beginning with the 1998 NIS	

i

Zero-Weight Hospitals	24
Final Hospital Sample	25
SAMPLE WEIGHTS	26
Hospital Weights	26
Discharge Weights	27
APPENDIX I: TABLES AND FIGURES	I-1
Table 1: 2010 Data Sources for the NIS	I-1
Table 2: Number of NIS States, Hospitals, and Discharges, by Year	I-3
Table 3. Summary of NIS Releases	I-4
Table 4. Summary of NIS Data Sources, Hospitals, and Inpatient Stays, 1988-2	010I-6
Table 5. NIS Related Reports and Database Documentation Available on HCUF	P-USI-9
Figure 1: Hospital Universe, by Year	I-10
Figure 2: NIS States, by Region	I-11
Table 6: All States, by Region	I-11
Table 7: Bed Size Categories, by Region	I-12
Figure 3: NIS Hospital Sampling Frame, by Year	I-13
Figure 4: Number of Hospitals in the 2010 Universe, Frame, and Sample for Fra	
Part A: Arkansas – Montana	
Part B: North Carolina – Wyoming	I-15
Table 8: Number of Hospitals and Discharges in 2010 AHA Universe, Frame, ar NIS, by State	
Figure 5: Number of Hospitals Sampled, by Year	I-18
Figure 6: Number of NIS Discharges, Unweighted, by Year	I-19
Figure 7: Number of NIS Discharges, Weighted, by Year	I-20
Figure 8: Number of Hospitals in the 2010 Universe, Frame, Sample, Target, ar	
Surplus, by Region	
Figure 9: Percentage of U.S. Population in the 2010 NIS States, by Region	
Figure 10: Number of Discharges in the 2010 NIS, by State	
APPENDIX II: STATE-SPECIFIC RESTRICTIONS	
APPENDIX III: DATA ELEMENTS	
Table 1. Data Elements in the NIS Inpatient Core Files	
Table 2. Data Elements in the NIS Hospital Weights Files	
Table 3. Data Elements in the NIS Disease Severity Measures Files	
Table 4. Data Elements in the NIS Diagnosis and Procedure Groups Files	III-10

HCUP NATIONWIDE INPATIENT SAMPLE (NIS) SUMMARY OF DATA USE LIMITATIONS

***** REMINDER *****

All users of the NIS must take the on-line Data Use Agreement (DUA) training session, sign a Data Use Agreement, and send a copy to AHRQ.[†]

Authorized users of HCUP data agree to the following limitations:[‡]

- Will not use the data for any purpose other than research or aggregate statistical reporting.
- Will not re-release any data to unauthorized users.
- Will not identify or attempt to identify any individual. Will not report any statistics
 where the number of observations (i.e., individual discharge records) in any
 given cell of tabulated data is less than or equal to 10.
- Will not link HCUP data to data from another source that identifies individuals.
- Will not report information that could identify individual establishments (e.g., hospitals).
- Will not use the data concerning individual establishments for commercial or competitive purposes involving those establishments.
- Will not use the data to determine rights, benefits, or privileges of individual establishments.
- Will not identify or attempt to identify any establishment when its identity has been concealed on the database.
- Will not contact establishments included in the data.
- Will not attribute to data contributors any conclusions drawn from the data.
- Will not use data elements from the proprietary severity adjustment software packages (3M APR-DRGs, HSS APS-DRGs, and Thomson Reuters Disease Staging) for any commercial purpose or to disassemble, decompile, or otherwise reverse engineer the proprietary software.
- Must acknowledge the "Healthcare Cost and Utilization Project (HCUP)," as described in the Data Use Agreement, in reports.

Any violation of the limitations in the Data Use Agreement is punishable under Federal law by a fine of up to \$10,000 and up to 5 years in prison. Violations may also be subject to penalties under State statutes.

[†] The on-line Data Use Agreement training session and the Data Use Agreement are available on the HCUP User Support (HCUP-US) Website at http://www.hcup-us.ahrq.gov. [‡] Specific provisions are detailed in the Data Use Agreement for Nationwide Inpatient Sample.

HCUP CONTACT INFORMATION

The NIS Data Use Agreement Training Tool and the Data Use Agreement are available on the AHRQ-sponsored HCUP User Support (HCUP-US) Website:

http://www.hcup-us.ahrq.gov

After completing the on-line training tool, please submit signed data use agreements to HCUP at:

Agency for Healthcare Research and Quality Healthcare Cost and Utilization Project (HCUP) 540 Gaither Road, 5th Floor Rockville, Maryland 20850

Phone: (866) 290-HCUP (4287)

Fax: (301) 427-1430

Website: http://www.ahrq.gov/data/hcup/

For technical assistance:

Visit the HCUP-US Website at

http://www.hcup-us.ahrq.gov

Or for issues related to reading and loading the files contact the HCUP Central Distributor at

Phone: (866) 556-4287 (toll-free between the hours of 9 a.m. and 5 p.m. (ET). If the HCUP Central Distributor is not immediately available, please leave a message on voice mail, and your call will be returned within one business day.)

Fax: (866) 792-5313

E-mail: <u>HCUPDistributor@ahrq.gov</u>

For other issues send an e-mail to HCUP User Support at

hcup@ahrq.gov

WHAT'S NEW IN THE 2010 NATIONWIDE INPATIENT SAMPLE (NIS)?

- The 2010 NIS contains two new States: Alaska and Mississippi. However New Hampshire data was not available in time to be included in the 2010 NIS.
- The following data elements were added to the Core File beginning with the 2010 NIS:
 - Transfer out indicator (TRAN_OUT)
- The following data elements were dropped from the Core File beginning with the 2010 NIS:
 - Re-identified Physician Numbers (MDNUM1_R and MDNUM2_R).
- The following data elements were dropped from the Severity File beginning with the 2010 NIS:
 - All-Payer Severity-adjusted DRG (APSDRG)
 - All-Payer Severity-adjusted DRG: Charge Weight (APSDRG_Charge_Weight)
 - All-Payer Severity-adjusted DRG: Length of Stay Weight (APSDRG_LOS_Weight)
 - All-Payer Severity-adjusted DRG: Mortality Weight (APSDRG_Mortality_Weight)
- Effective July 1, 2010, Uniform Billing standards (UB-04) discontinued the value indicating an ED admission from the data element for point of origin (PointOfOriginUB04). Instead hospitals are to use a condition code of "P7". However, only a few State Partners currently provide this data element. The most reliable way to identify ED admissions in the HCUP databases is to use the data element HCUP_ED. This data element considers various pieces of information to identify if a patient had ED services. These include a revenue code in the range 450-459 indicating ED services, a positive ED charge, a CPT code indicating ED physician services, an admission source of ED, a point of origin of ED, or a P7 condition code. The coding of admission source, point of origin, and P7 condition code varies by State and, sometimes, even varies across hospitals in a State. The HCUP_ED data element considers all possible evidence of ED services. Unfortunately, the following seven States have only partial ED admission information available in HCUP_ED for 2010: Colorado, Maine, Michigan, Montana, New Mexico, Ohio, and Wyoming.
- Beginning with the 2010 NIS, the files are encrypted.

UNDERSTANDING THE NIS

This document, Introduction to the NIS, 2010, summarizes the content of the NIS and describes the development of the NIS sample and weights. Cumulative information for all previous years is included to provide a longitudinal view of the database. Important considerations for data analysis are provided along with references to detailed reports. In-depth documentation for the NIS is available on the HCUP User Support (HCUP-US) Website (www.hcup-us.ahrq.gov).

HEALTHCARE COST AND UTILIZATION PROJECT — HCUP A FEDERAL-STATE-INDUSTRY PARTNERSHIP IN HEALTH DATA

Sponsored by the Agency for Healthcare Research and Quality

The Agency for Healthcare Research and Quality and the staff of the Healthcare Cost and Utilization Project (HCUP) thank you for purchasing the HCUP Nationwide Inpatient Sample (NIS).

HCUP Nationwide Inpatient Sample (NIS)

ABSTRACT

The Nationwide Inpatient Sample (NIS) is part of the Healthcare Cost and Utilization Project (HCUP), sponsored by the Agency for Healthcare Research and Quality (AHRQ), formerly the Agency for Health Care Policy and Research.

The NIS is a database of hospital inpatient stays. Researchers and policy makers use the NIS to identify, track, and analyze national trends in health care utilization, access, charges, quality, and outcomes.

The NIS is the largest all-payer inpatient care database that is publicly available in the United States, containing data from approximately 8 million hospital stays from about 1,000 hospitals sampled to approximate a 20-percent stratified sample of U.S. community hospitals. The NIS is drawn from those States participating in HCUP. For 2010, these States comprise over 96 percent of the U.S. population. Weights are provided to calculate national estimates. See Table 1 in Appendix I for a list of the statewide data organizations participating in the NIS. The number of sample hospitals and discharges by State and year are available in Table 2 in Appendix I.

The NIS is available yearly, beginning with 1988, allowing analysis of trends over time. (Analyses of time trends are recommended from 1993 forward. For NIS data 1997 and earlier, revised weights should be used to make estimates comparable to later data. Refer to NIS Trends Weights Files and the report, Using the HCUP Nationwide Inpatient Sample to Estimate Trends, available on the HCUP User Support (HCUP-US) Website, for details.)

The NIS includes charge information for all patients, regardless of payer, including persons covered by Medicare, Medicaid, private insurance, and the uninsured. For Medicare, the NIS includes Medicare Advantage patients, a population that is missing from Medicare claims data but that comprises as much as 20 percent of Medicare beneficiaries. The NIS' large sample size enables analyses of rare conditions, such as specific types of cancer; uncommon treatments, such as organ transplantation; and special patient populations, such as the uninsured.

Inpatient stay records in the NIS include clinical and resource use information typically available from discharge abstracts. Hospital and discharge weights are provided for producing national estimates. The NIS can be linked to hospital-level data from the American Hospital Association (AHA) Annual Survey Database (Health Forum, LLC @ 2011) and county-level data from the Bureau of Health Professions' Area Resource File, except in those States that do not allow the release of hospital identifiers. In 2010, 19 of the 45 States do not include the hospital name and

18 of these do not include the AHA hospital identifier. Thus 40% of hospitals in the NIS do not include AHA hospital identifiers and cannot be linked to other data sources at the hospital level.

Beginning in 1998, the NIS differs from previous NIS releases: some data elements were dropped; some were added; for some data elements, the coding was changed; and the sampling and weighting strategy was revised to improve the representativeness of the data. (See the report, *Changes in the NIS Sampling and Weighting Strategy for 1998*, available on the HCUP-US Website, which describes these changes.) Periodically, new data elements are added to the NIS and some are dropped; see Appendix III for a summary of data elements and when they are effective.

Access to the NIS is open to users who sign data use agreements. Uses are limited to research and aggregate statistical reporting.

For more information on the NIS, please visit the AHRQ-sponsored HCUP-US Website at http://www.hcup-us.ahrq.gov.

INTRODUCTION TO THE HCUP NATIONWIDE INPATIENT SAMPLE (NIS)

Overview of NIS Data

The Nationwide Inpatient Sample (NIS) contains all-payer data on hospital inpatient stays from States participating in the Healthcare Cost and Utilization Project (HCUP). Each year of the NIS provides information on approximately 8 million inpatient stays from about 1,000 hospitals. All discharges from sampled hospitals are included in the NIS database.

The NIS contains clinical and resource use information included in a typical discharge abstract. The NIS can be linked directly to hospital-level data from the American Hospital Association (AHA) Annual Survey Database (Health Forum, LLC © 2011) and to county-level data from the Health Resources and Services Administration Bureau of Health Professions' Area Resource File (ARF), except in those States that do not allow the release of hospital identifiers.

The NIS is designed to approximate a 20-percent sample of U.S. community hospitals, defined by the AHA to be "all non-Federal, short-term, general, and other specialty hospitals, excluding hospital units of institutions." Included among community hospitals are specialty hospitals such as obstetrics-gynecology, ear-nose-throat, short-term rehabilitation, orthopedic, and pediatric institutions. Also included are public hospitals and academic medical centers. Starting in 2005, the AHA included long term acute care facilities in the definition of community hospitals, therefore such facilities are included in the NIS sampling frame. These facilities provide acute care services to patients who need long term hospitalization (stays of more than 25 days). Excluded from the NIS are short-term rehabilitation hospitals (beginning with 1998 data), long-term non-acute care hospitals, psychiatric hospitals, and alcoholism/chemical dependency treatment facilities.

This universe of U.S. community hospitals is divided into strata using five hospital characteristics: ownership/control, bed size, teaching status, urban/rural location, and U.S. region.

The NIS is a stratified probability sample of hospitals in the frame, with sampling probabilities proportional to the number of U.S. community hospitals in each stratum. The frame is limited by the availability of inpatient data from the data sources currently participating in HCUP.

In order to improve the representativeness of the NIS, the sampling and weighting strategy was modified beginning with the 1998 data. The full description of this process can be found in the special report on *Changes in NIS Sampling and Weighting Strategy for 1998*. This report is available on the AHRQ-sponsored HCUP-US Website at http://www.hcup-us.ahrq.gov. To facilitate the production of national estimates, both hospital and discharge weights are provided, along with information necessary to calculate the variance of estimates. Detailed information on the design of the NIS prior to 2006 is available in the year-specific special reports on *Design of the Nationwide Inpatient Sample* found on the HCUP-US Website (http://hcup-us.ahrq.gov/db/nation/nis/nisrelatedreports.jsp). Starting with the 2006 NIS, the information on the design of the NIS was incorporated into this report.

The NIS is available yearly, beginning with 1988, allowing analysis of trends over time. (Analyses of time trends are recommended from 1993 forward. For NIS data 1997 and earlier, revised weights should be used to make estimates comparable to later data. Refer to NIS Trends Weights Files and the report, Using the HCUP Nationwide Inpatient Sample to Estimate Trends, available on the HCUP User Support (HCUP-US) Website, for details.)

See <u>Table 3</u> in <u>Appendix I</u> for a summary of NIS releases. Each release of the NIS includes:

- Data in fixed-width ASCII format on DVD or CD-ROM (prior to 2009).
- Patient-level hospital discharge abstract data for 100% of discharges from a sample of hospitals in participating States.
- Approximately 8 million inpatient records per year.
- About 1,000 hospitals per year.
- Two 10% subsamples of discharges from all NIS hospitals (only available prior to the 2005 NIS).
- Discharge-level weights to calculate national estimates for discharges.
- Hospital Weights File to produce national estimates for hospitals and to link the NIS to data from the AHA Annual Survey Database (Health Forum, LLC © 2011)
- NIS Documentation and tools including file specifications, programs for loading the ASCII data into SAS and SPSS, and value labels. Beginning in 2005, code is also provided for loading the NIS ASCII file into Stata.

NIS Data Sources, Hospitals, and Inpatient Stays

<u>Table 4</u> in <u>Appendix I</u> contains a summary of the data sources, number of hospitals, and number of unweighted and weighted inpatient stays in NIS data.

State-Specific Restrictions

Some data sources that contributed data to the NIS imposed restrictions on the release of certain data elements or on the number and types of hospitals that could be included in the database. Because of confidentiality laws, some data sources were prohibited from providing HCUP with discharge records that indicated specific medical conditions and procedures, specifically HIV/AIDS, behavioral health, and abortion. Detailed information on these Statespecific restrictions is available in Appendix II.

Contents of DVD

The NIS is distributed as fixed-width ASCII formatted data files compressed with SecureZIP[®] from PKWARE. **Beginning with the 2010 NIS**, **the files are encrypted**. Previously it was distributed on two CD-ROMs, but beginning with the 2009 NIS, it is distributed on a single DVD. The 2010 NIS includes the following compressed files:

Inpatient Core File: This inpatient discharge-level file contains data for all the discharges from a sample of hospitals in participating States. The unit of observation is an *inpatient stay record*. Refer to <u>Table 1</u> in <u>Appendix III</u> for a list of data elements in the Inpatient Core File. This file is available in all years of the NIS.

Hospital Weights File: This hospital-level file contains one observation for each hospital included in the NIS and contains weights and variance estimation data elements, as well as linkage data elements. The unit of observation is the *hospital*. The HCUP hospital identifier (HOSPID) provides the linkage between the NIS Inpatient Core files and the Hospital Weights file. A list of data elements in the Hospital Weights File is provided in <u>Table 2</u> of <u>Appendix III</u>. This file is available in all years of the NIS.

Disease Severity Measures File: This discharge-level file contains information from four different sets of disease severity measures. Information from the severity file is to be used in conjunction with the Inpatient Core file. The unit of observation is an *inpatient stay record*. The HCUP unique record identifier (KEY) provides the linkage between the Core files and the Disease Severity Measures file. Refer to <u>Table 3</u> in <u>Appendix III</u> for a list of data elements in the Severity Measures file. This file is available beginning with the 2002 NIS.

Diagnosis and Procedure Groups File: This discharge-level file contains data elements from AHRQ software tools designed to facilitate the use of the ICD-9-CM diagnostic and procedure information in the HCUP databases. The unit of observation is an *inpatient stay record*. The HCUP unique record identifier (KEY) provides the linkage between the Core file and the Diagnosis and Procedure Groups file. <u>Table 4</u> in <u>Appendix III</u> contains a list of data elements in the Diagnosis and Procedure Groups file. This file is available beginning with the 2005 NIS.

On the HCUP-US Website (http://www.hcup-us.ahrq.gov), NIS purchasers can access complete file documentation, including data element notes, file layouts, summary statistics, and related technical reports. Similarly, purchasers can also download SAS, SPSS, and Stata load programs. Available online documentation and supporting files are detailed in Appendix I, Table 5.

NIS Data Elements

All releases of the NIS contain two types of data: inpatient stay records and hospital information with weights to calculate national estimates. <u>Appendix III</u> identifies the data elements in each NIS file:

- Table 1 for the Inpatient Core files (record = inpatient stay)
- Table 2 for the Hospital Weights files (record = hospital)
- Table 3 for the Disease Severity Measures files (record = inpatient stay)
- Table 4 for the Diagnosis and Procedure Groups files (record = inpatient stay).

Not all data elements in the NIS are uniformly coded or available across all States. The tables in Appendix III are not complete documentation for the data. Please refer to the NIS documentation located on the HCUP-US Website (http://www.hcup-us.ahrq.gov) for comprehensive information about data elements and the files.

Getting Started

In order to load and analyze the NIS data on a computer, you will need the following:

- A DVD drive
- A hard drive with 15 gigabytes of space available
- A third-party zip utility such as ZIP Reader, 7-Zip, or WinZip[®]
- SAS®, SPSS®, Stata® or similar analysis software.

Copying and Decompressing the ASCII Files

To copy and decompress the data from the DVD, follow these steps:

- 1) Create a directory for the NIS on your hard drive.
- 2) Unzip each ASCII file from the DVD, saving it into the new directory using a third-party zip utility such as ZIP Reader, WinZip, or 7-Zip. Beginning with the 2010 NIS, you will be prompted to enter the encryption password (sent separately by e-mail) to decrypt each file.

NOTE: Attempts to unzip encrypted files using Windows will produce an error message similar to the following: "Compressed (Zipped) Folders Error. The password you typed is not correct. Try typing it again." The solution is to use a third-party zip utility such as ZIP Reader, 7-Zip, or WinZip rather than the built-in Windows Explorer function to open the archive. ZIP Reader may be downloaded for free at http://comm.pkware.com/download-zipreader-business.html. 7-Zip can be downloaded for free at http://www.7-zip.org/. Evaluation versions of WinZip may be downloaded from the WinZip Website at www.winzip.com.

Downloading and Running the Load Programs

Programs to load the data into SAS, SPSS, or Stata, are available on the HCUP User Support Website (HCUP-US). To download and run the load programs, follow these steps:

- 1) Go to the NIS Database Documentation page on HCUP-US at http://www.hcup-us.ahrq.gov/db/nation/nis/nisdbdocumentation.jsp.
- 2) Go to the "Load Programs" section on this page.
- 3) Click on "SAS Load Programs", "SPSS Load Programs", or "STATA Load Programs" to go to the corresponding Load Programs page.
- 4) Select and download the load programs you need. The load programs are specific to the data year. For example, the load program for the 2010 NIS Core file is linked to "Core File" under "2010 NIS". Save the load programs into the same directory as the NIS ASCII files on your computer.
- 5) Edit and run the load programs as appropriate for your environment to load and save the analysis files. For example, add directory paths for the input and output files if needed.

NIS Documentation

Year-specific NIS documentation files on the HCUP-US Website (http://www.hcup-us.ahrq.gov) provide important resources for the user. Refer to these resources to understand the structure and content of the NIS and to aid in using the database.

 To locate the NIS documentation on HCUP-US, choose "HCUP Databases" from the home page (http://www.hcup-us.ahrq.gov). The first section under Nationwide HCUP Databases is specific to the NIS.

<u>Table 5</u> in <u>Appendix I</u> details both the NIS related reports and the comprehensive NIS database documentation available on HCUP-US.

HCUP On-Line Tutorials

For additional assistance, AHRQ has created the HCUP Online Tutorial Series, a series of free, interactive courses which provide training on technical methods for conducting research with HCUP data. Topics include an HCUP Overview Course and these tutorials:

The <u>Load and Check HCUP Data</u> tutorial provides instructions on how to unzip (decompress) HCUP data, save it on your computer, and load the data into a standard statistical software package. This tutorial also describes how to verify that the data have loaded correctly.

The <u>HCUP Sampling Design</u> tutorial is designed to help users learn how to account for sample design in their work with HCUP nationwide databases.

The <u>Producing National HCUP Estimates</u> tutorial is designed to help users understand how the three nationwide databases – the NIS, NEDS, and KID – can be used to produce national and regional estimates.

The <u>Calculating Standard Errors</u> tutorial shows how to accurately determine the precision of the estimates produced from the HCUP nationwide databases. Users will learn two methods for calculating standard errors for estimates produced from the HCUP nationwide databases.

New tutorial are added periodically. The Online Tutorial Series is located on the HCUP-US Website at http://hcup-us.ahrq.gov/tech assist/tutorials.isp.

HOW TO USE THE NIS FOR DATA ANALYSIS

This section provides a brief synopsis of special considerations when using the NIS. For more details, refer to the comprehensive documentation on the HCUP-US Website (http://www.hcup-us.ahrq.gov).

• If anyone other than the original purchaser uses the NIS data, be sure to have them read and sign a Data Use Agreement, after viewing the on-line Data Use Agreement Training Tool available on the HCUP-US Website (http://www.hcup-us.ahrq.gov). A copy of the signed Data Use Agreements must be sent to AHRQ. See page 2 for the mailing address.

The NIS contains <u>discharge</u>-level records, not <u>patient</u>-level records. This means that individual patients who are hospitalized multiple times in one year may be present in the NIS multiple times. There is no uniform patient identifier available that allows a patient-level analysis with the NIS. This will be especially important to remember for certain conditions for which patients may be hospitalized multiple times in a single year. Researchers wishing to examine readmissions should use State Inpatient Databases (SID) (http://www.hcup-us.ahrq.gov/sidoverview.jsp) and accompanying Revisit Files which allow identification of readmissions for individual patients (http://www.hcup-us.ahrq.gov/toolssoftware/revisit/revisit.jsp).

Calculating National Estimates

 To produce national estimates, use one of the following discharge weights to weight discharges in the NIS Core files to the discharges from all U.S. community, nonrehabilitation hospitals. The name of the discharge weight data element depends on the year of data and the type of analysis. In order to produce national estimates, you MUST use discharge weights.

NIS Year	Name of Discharge Weight on the Core File to Use for Creating Nationwide Estimates	the Us	Name of Discharge Weight on the 10% Subsample Core File to Use for Creating Nationwide Estimates	
2005 forward	DISCWT for all analyses	•	The 10% Subsample Core File was discontinued with the 2005 NIS.	
2001-2004	 DISCWT for all analyses 	•	DISCWT10 for all analyses	
2000	 DISCWT to create nationwide estimates for all analyses except those that involve total charges. 	•	DISCWT10 to create nationwide estimates for all analyses, except those that involve total charges.	
	 DISCWTCHARGE to create nationwide estimates of total charges. 	•	DISCWTCHARGE10 to create nationwide estimates of total charges.	
1998-1999	 DISCWT for all analyses 	•	DISCWT10 for all analyses	
1988-1997	 DISCWT_U for all analyses 	•	D10CWT_U for all analyses	

- Because the NIS is a stratified sample, proper statistical techniques must be used to
 calculate standard errors and confidence intervals. For detailed instructions, refer to the
 special report <u>Calculating Nationwide Inpatient Sample Variances</u> on the <u>HCUP-US</u>
 <u>Website</u>.
- The NIS Comparison Report assesses the accuracy of NIS estimates. The updated report for the current NIS will be posted on the HCUP-US Website (www.hcup-us.ahrq.gov) as soon as it is completed.

- When creating national estimates, it is a good idea to check your estimates against other
 data sources, if available. For example, the National Hospital Discharge Survey
 (http://www.cdc.gov/nchs/nhds.htm) can provide benchmarks against which to check your
 national estimates for hospitalizations with more than 5,000 discharges.
- To ensure that you are using the weights appropriately and calculating estimates and variances accurately, check your estimates against HCUPnet, the free online query system (http://www.hcupnet.ahrq.gov). HCUPnet is a Web-based query tool for identifying, tracking, analyzing, and comparing statistics on hospitals at the national, regional, and State level. HCUPnet offers easy access to national statistics and trends and selected State statistics about hospital stays. HCUPnet generates statistics using the NIS, KID, and SID for those States that have agreed to participate. In addition, HCUPnet provides Quick Statistics ready-to-use tables on commonly requested information as well as national statistics based on the AHRQ Quality Indicators.

Studying Trends

- When studying trends over time using the NIS, be aware that the sampling frame for the NIS changes almost annually (i.e., more States have been added over time). Estimates from earlier years of the NIS may be subject to more sampling bias than later years of the NIS. In order to facilitate analysis of trends using multiple years of NIS data, an alternate set of NIS discharge and hospital weights for the 1988-1997 HCUP NIS were developed. These alternate weights were calculated in the same way as the weights for the 1998 and later years of the NIS. The report <u>Using the HCUP Nationwide Inpatient Sample to Estimate Trends</u> includes details regarding the alternate weights and other recommendations for trends analysis. Both the NIS trends report and the alternate weights are available on the HCUP-US Website under Methods Series (http://www.hcup-us.ahrq.gov/reports/methods.jsp).
- To ease the burden on researchers conducting analyses that span multiple years, NIS trends supplemental files (NIS-Trends) are available through the HCUP Central Distributor. The NIS-Trends annual files contain the alternate trend weights for data prior to 1997, in addition to renamed, recoded, and new data elements consistent with the later years of the NIS. More information on these files is available on the HCUP-US Website under NIS database documentation
 (http://www.hcup-us.ahrq.gov/db/nation/nis/nisdbdocumentation.jsp).
- Short-term rehabilitation hospitals are included in the 1988-1997 NIS, but are excluded from the NIS beginning in 1998. Patients treated in short-term rehabilitation hospitals tend to have lower mortality rates and longer lengths of stay than patients in other community hospitals. The elimination of rehabilitation hospitals may impact trends but the effect is likely small since only about 3% of community hospitals are short-term rehabilitation hospitals and not all State data sources included these hospitals. The NIS-Trends weights account for this change in NIS sampling.

Choosing Data Elements for Analysis

 For all data elements you plan to use in your analysis, first perform descriptive statistics and examine the range of values, including the number of missing cases. Summary statistics for the entire NIS are provided on the Summary Statistics page of the HCUP-US Website (http://www.hcup-us.ahrq.gov/db/nation/nis/nissummstats.isp). When you detect anomalies (such as large numbers of missing cases), perform descriptive statistics by State for that data element to detect if there are State-specific differences. Performing descriptive statistics by hospital can be helpful in detecting hospital-specific data anomalies.

- Not all data elements in the NIS are provided by each State data source. These data
 elements are provided on the NIS because they can be valuable for research purposes but
 they should be used cautiously. For example, RACE is missing for a number of States;
 thus, national estimates using RACE should be interpreted and reported with caveats.
 Check the documentation and run frequencies by State to identify if a data element is not
 available in one or more States.
- Differences exist across the State data sources in the collection of information that could not be accounted for during HCUP processing to make the data uniform. For example, the most reliable way to identify ED admissions in the HCUP databases is to use the data element HCUP_ED, which considers all possible evidence of ED services. Unfortunately, some States have only partial ED admission information available in HCUP_ED. Be sure to read State-specific notes for each data element that you use in your analysis. This information can be found on the Description of Data Elements page on the HCUP-US Website (http://www.hcup-us.ahrq.gov/db/nation/nis/nisdde.jsp).
- Data elements with "_X" suffixes contain State-specific coding (i.e., these data elements
 are provided by the data sources and have not been altered in any way). For some data
 elements (e.g., LOS_X and TOTCHG_X) this means that no edit checks have been applied.
 For other data elements (e.g., PAY1_X), the coding is specific to each State and may not
 be comparable to any other State.

Hospital-Level Data Elements

- Note that specific hospital identifiers, including the AHA identifier, are not available for 43% of hospitals in the NIS because certain States do not release hospital identifiers. This means that for those hospitals, you will not be able to link the NIS to outside data sources that require hospital-specific identifiers. However, there are hospital-level data elements for nearly all hospitals in the NIS that allow you to study certain hospital characteristics including ownership/control, teaching status, rural/urban location, bedsize, and Census region of the country.
- The sampling strategy for the NIS was redesigned in 1998 and one stratifier (hospital ownership) was redefined to reduce the number of ownership strata in some regions. This redefinition resulted in collapsed ownership categories that were useful in addressing the requirements of some HCUP Partners to protect the confidentiality of hospitals, but they were not as informative as the original data element. Thus beginning with the 1998 NIS, the data element H_CONTRL was replaced by the HOSP_CONTROL (collapsed) data element.

To facilitate analyses by hospital ownership, the data element containing hospital ownership categories without any collapsing (H_CONTRL) was restored to the Hospital File beginning with the 2008 NIS. The H_CONTRL data element contains the following three hospital ownership categories:

- 1 Government, nonfederal
- 2 Private, non-profit
- 3 Private, invest-own

Note, however, that H_CONTRL is set to missing in a few instances to satisfy HCUP Partner requirements.

The H_CONTRL values for 1998-2007 NIS hospitals are now available in the supplemental NIS Hospital Ownership File on HCUP-US at http://www.hcup-us.ahrq.gov/db/nation/nis/nisownership.jsp.

- New hospital-level data elements were added to the NIS hospital file beginning in 2007.
 These data elements, which are listed in <u>Table 2</u> of <u>Appendix III</u>, are derived from the AHA Annual Survey Database (Health Forum, LLC © 2011). While these data elements enable a greater breadth of analysis, certain limitations apply.
 - 1. Some of the new data elements pertain to nurse staffing at hospitals, which is reported as a total for the hospital/facility. Therefore, it is possible that some hospitals may also have included counts from nursing homes.
 - 2. The adjusted patient days are based on inpatient days with an adjustment made for outpatient activities, calculated as: Inpatient days * (1 + Outpatient Revenue / Inpatient Revenue).
 - 3. Data for hospitals that do not complete the AHA Annual Survey are missing from the new data elements.

A detailed description of the data elements is available on HCUP-US. Note that some HCUP States do not allow the release of this information.

Constructing Patient Population Characteristics

- Summary data elements that provide insight into the patient population can be constructed at the hospital level using HOSPID and the data elements already present in the NIS.
 Suggested summary data elements include:
 - Percentage of Hispanic discharges
 - Percentage of black discharges
 - Percentage of non-white discharges
 - Percentage of pediatric discharges
 - Percentage of discharges for adults age 65 and older
 - Percentage of discharges with an expected primary payer of Medicare
 - Percentage of discharges with an expected primary payer of Medicaid
 - Percentage of discharges with an expected primary payer of private insurance
 - Percentage of uninsured discharges (expected primary payer of self-pay and no charge)
 - Percentage of discharges with no comorbidities
 - Percentage of discharges with one or two comorbidities
 - Percentage of discharges with three or more comorbidities

ICD-9-CM Diagnosis and Procedure Codes

- ICD-9-CM diagnosis and procedure codes provide valuable insights into the reasons for
 hospitalization and what procedures patients receive, but these codes need to be carefully
 used and interpreted. ICD-9-CM codes change every October as new codes are introduced
 and some codes are retired. See the "Conversion Table" at
 http://www.cdc.gov/nchs/icd/icd9cm.htm which shows ICD-9-CM code changes over time. It
 is critical to check all ICD-9-CM code used for analysis to ensure the codes are in
 effect during the time period studied.
- Although the NIS contains up to 25 diagnoses (15 prior to the 2009 NIS) and 15 procedures, the number of diagnoses and procedures varies by State. Some States provide as many as 31 diagnoses and procedures or more, while other States provide as few as 9 diagnoses and 6 procedures. Because very few cases have more than 25 diagnoses or 15 procedures, the diagnosis and procedure vectors were truncated to save space in the NIS data files. Two data elements are provided which tell you exactly how many diagnoses and procedures were on the original records (NDX and NPR). See the notes on diagnoses (http://www.hcup-us.ahrq.gov/db/vars/dxn/nisnote.jsp) and procedures (http://www.hcup-us.ahrq.gov/db/vars/prn/nisnote.jsp) on the HCUP-US Web site to view the number of diagnosis and procedure fields provided by each State.
- The collection and reporting of external cause of injury (E codes) varies greatly across States. Some States have laws or mandates for the collection of E codes; others do not. Some States do not require hospitals to report E codes in the range E870-E879 "misadventures to patients during surgical and medical care" which means that these occurrences will be underreported. Be sure to read the State-specific notes on diagnoses for more details; this information can be found on the Description of Data Elements page on the HCUP-US Website (http://www.hcup-us.ahrq.gov/db/nation/nis/nisdde.jsp).

Missing Values

Missing data values can compromise the quality of estimates. If the outcome for discharges with missing values is different from the outcome for discharges with valid values, then sample estimates for that outcome will be biased and inaccurately represent the discharge population. For example, race is missing on over 11% of discharges in the 2010 NIS because some hospitals and HCUP State Partners do not supply it. (The percentage of missing race values was higher in previous years.) Therefore race-specific estimates may be biased. This is especially true for estimates of discharge totals by race. Another set of data elements that are missing are hospital identifiers, which allow you to link to other datasets with the AHA hospital identifier. In 2010, about 40% of hospitals were missing specific identifiers.

There are several techniques available to help overcome this bias. One strategy is to use imputation to replace missing values with acceptable values. Another strategy is to use sample weight adjustments to compensate for missing values. Descriptions of such data preparation and adjustment are outside the scope of this report; however, it is recommended that researchers evaluate and adjust for missing data, if necessary.

On the other hand, if the cases with and without missing values are assumed to be similar with respect to their outcomes, no adjustment may be necessary for estimates of means and rates. This is because the non-missing cases would be representative of the missing cases. However,

some adjustment may still be necessary for the estimates of totals. Sums of data elements (such as aggregate charges) containing missing values would be incomplete because cases with missing values would be omitted from the calculations.

Variance Calculations

It may be important for researchers to calculate a measure of precision for some estimates based on the NIS sample data. Variance estimates must take into account both the sampling design and the form of the statistic. The sampling design consisted of a stratified, single-stage cluster sample. A stratified random sample of hospitals (clusters) was drawn and then *all* discharges were included from each selected hospital. **To accurately calculate variances** from the NIS, you must use appropriate statistical software and techniques. For details, see the special report, <u>Calculating Nationwide Inpatient Sample Variances</u>. This report is available on the HCUP-US Website at http://www.hcup-us.ahrg.gov/db/nation/nis/nisrelatedreports.jsp.

If hospitals inside the frame are similar to hospitals outside the frame, the sample hospitals can be treated as if they were randomly selected from the entire universe of hospitals within each stratum. Standard formulas for a stratified, single-stage cluster sample without replacement could be used to calculate statistics and their variances in most applications.

A multitude of statistics can be estimated from the NIS data. Several computer programs are listed below that calculate statistics and their variances from sample survey data. Some of these programs use general methods of variance calculations (e.g., the jackknife and balanced half-sample replications) that take into account the sampling design. However, it may be desirable to calculate variances using formulas specifically developed for some statistics.

These variance calculations are based on finite-sample theory, which is an appropriate method for obtaining cross-sectional, nationwide estimates of outcomes. According to finite-sample theory, the intent of the estimation process is to obtain estimates that are precise representations of the nationwide population at a specific point in time. In the context of the NIS, any estimates that attempt to accurately describe characteristics and interrelationships among hospitals and discharges during a specific year should be governed by finite-sample theory. Examples of this would be estimates of expenditure and utilization patterns or hospital market factors.

Alternatively, in the study of hypothetical population outcomes not limited to a specific point in time, the concept of a "superpopulation" may be useful. Analysts may be less interested in specific characteristics from the finite population (and time period) from which the *sample* was drawn than they are in hypothetical characteristics of a conceptual "superpopulation" from which any particular finite *population* in a given year might have been drawn. According to this superpopulation model, the nationwide population in a given year is only a snapshot in time of the possible interrelationships among hospital, market, and discharge characteristics. In a given year, all possible interactions between such characteristics may not have been observed, but analysts may wish to predict or simulate interrelationships that may occur in the future.

Under the finite-population model, the variances of estimates approach zero as the sampling fraction approaches one. This is the case because the population is defined at that point in time, and because the estimate is for a characteristic as it existed when sampled. This is in contrast to the superpopulation model, which adopts a stochastic viewpoint rather than a deterministic viewpoint. That is, the nationwide population in a particular year is viewed as a random sample

of some underlying superpopulation over time. Different methods are used for calculating variances under the two sample theories. The choice of an appropriate method for calculating variances for nationwide estimates depends on the type of measure and the intent of the estimation process.

Computer Software for Variance Calculations

The hospital weights are useful for producing hospital-level statistics for analyses that use the *hospital* as the unit of analysis, while the discharge weights are useful for producing discharge-level statistics for analyses that use the *discharge* as the unit of analysis. The discharge weights may be used to estimate nationwide population statistics.

In most cases, computer programs are readily available to perform these calculations. Several statistical programming packages allow weighted analyses. For example, nearly all SAS procedures incorporate weights. In addition, several statistical analysis programs have been developed to specifically calculate statistics and their standard errors from survey data. Version eight or later of SAS contains procedures (PROC SURVEYMEANS and PROC SURVEYREG) for calculating statistics based on specific sampling designs. STATA and SUDAAN are two other common statistical software packages that perform calculations for numerous statistics arising from the stratified, single-stage cluster sampling design. Examples of the use of SAS, SUDAAN, and STATA to calculate NIS variances are presented in the special report, Calculating Nationwide Inpatient Sample Variances. This report is available on the HCUP-US Website at http://www.hcup-us.ahrq.gov/db/nation/nis/nisrelatedreports.jsp. For an excellent review of programs to calculate statistics from survey data, visit the following Website: http://www.hcup-med.harvard.edu/statistics/survey-soft/.

The NIS database includes a Hospital Weights file with data elements required by these programs to calculate finite population statistics. The file includes hospital identifiers (Primary Sampling Units or PSUs), stratification data elements, and stratum-specific totals for the numbers of discharges and hospitals so that finite-population corrections can be applied to variance estimates.

In addition to these subroutines, standard errors can be estimated by validation and cross-validation techniques. Given that a very large number of observations will be available for most analyses, it may be feasible to set aside a part of the data for validation purposes. Standard errors and confidence intervals can then be calculated from the validation data.

If the analytic file is too small to set aside a large validation sample, cross-validation techniques may be used. For example, ten-fold cross-validation would split the data into ten subsets of equal size. The estimation would take place in ten iterations. In each iteration, the outcome of interest is predicted for one-tenth of the observations by an estimate based on a model fit to the other nine-tenths of the observations. Unbiased estimates of error variance are then obtained by comparing the actual values to the predicted values obtained in this manner.

Finally, it should be noted that a large array of hospital-level data elements are available for the entire universe of hospitals, including those outside the sampling frame. For instance, the data elements from the AHA surveys and from the Medicare Cost Reports are available for nearly all hospitals in the U.S., although hospital identifiers are suppressed in the NIS for a number of States. For these States it will not be possible to link to outside hospital-level data sources. To the extent that hospital-level outcomes correlate with these data elements, they may be used to sharpen regional and nationwide estimates.

As a simple example, the number of Cesarean sections performed in each hospital would be correlated with their total number of deliveries. The figure for Cesarean sections must be obtained from discharge data, but the number of deliveries is available from AHA data. Thus, if a regression model can be fit predicting this procedure from deliveries based on the NIS data, that regression model can then be used to obtain hospital-specific estimates of the number of Cesarean sections for all hospitals in the AHA universe.

Longitudinal Analyses

Hospitals that continue in the NIS for multiple consecutive years are a subset of the hospitals in the NIS for any one of those years. Consequently, longitudinal analyses of hospital-level outcomes may be biased, if they are based on any subset of NIS hospitals limited to continuous NIS membership. In particular, such subsets would tend to contain fewer hospitals that opened, closed, split, merged, or changed strata. Further, the sample weights were developed as annual, cross-sectional weights, rather than longitudinal weights. Therefore, different weights might be required, depending on the statistical methods employed by the analyst.

One approach to consider in hospital-level longitudinal analyses is to use repeated-measure models that allow hospitals to have missing values for some years. However, the data are not actually missing for some hospitals, such as those that closed during the study period. In any case, the analyses may be more efficient (e.g., produce more precise estimates) if they account for the potential correlation between repeated measures on the same hospital over time, yet incorporate data from all hospitals in the sample during the study period.

Discharge Subsamples

Prior to the 2005 NIS, two non-overlapping 10% subsamples of NIS discharges were provided each year for analytic purposes. Beginning with the 2005 NIS, 10% subsamples are no longer provided. However, users may still draw their own subsamples, if desired. One use of 10% subsamples would be to validate models and obtain unbiased estimates of standard errors. That is, one subsample may be used to estimate statistical models, while the other subsample may be used to test the fit of those models on new data. This is a very important analytical step, particularly in exploratory studies, where one runs the risk of fitting noise in the data.

It is well known that the percentage of variance explained by a regression, R², is generally overestimated by the data used to fit a model. The regression model could be estimated from the first subsample and then applied to the second subsample. The squared correlation between the actual and predicted value in the second subsample is an unbiased estimate of the model's true explanatory power when applied to new data.

SAMPLING OF HOSPITALS

Sampling of Hospitals Included in the NIS

The NIS Hospital Universe

The hospital universe is defined as all hospitals located in the U.S. that are open during any part of the calendar year and designated as community hospitals in the AHA Annual Survey Database (Health Forum, LLC © 2011). The AHA defines community hospitals as follows: "All non-Federal, short-term, general, and other specialty hospitals, excluding hospital units of institutions." Starting in 2005, the AHA included long term acute care facilities in the definition of community hospitals. These facilities provide acute care services to patients who need long term hospitalization (stays of more than 25 days). Consequently, Veterans Hospitals and other Federal facilities (Department of Defense and Indian Health Service) are excluded. Beginning with the 1998 NIS, we excluded short-term rehabilitation hospitals from the universe because the type of care provided and the characteristics of the discharges from these facilities were markedly different from other short-term hospitals. Figure 1 in Appendix I displays the number of universe hospitals for each year based on the AHA Annual Survey Database (Health Forum, LLC © 2011).

For more information on how hospitals in the data set were mapped to hospitals as defined by the AHA, refer to the special report, *HCUP Hospital Identifiers*. For a list of all data sources, refer to Table 1 in Appendix I. Detailed information on the design of the NIS prior to 2006 is available in the year-specific special reports on Design of the Nationwide Inpatient Sample found on the HCUP-US Website. Starting with the 2006 NIS, the design information was incorporated into this report.

Hospital Merges, Splits, and Closures

All U.S. hospital entities designated as community hospitals in the AHA hospital file, except short-term rehabilitation hospitals, were included in the hospital universe. Therefore, when two or more community hospitals merged to create a new community hospital, the original hospitals and the newly-formed hospital were all considered separate hospital entities in the universe during the year they merged. Similarly, if a community hospital split, the original hospital and all newly-created community hospitals were treated as separate entities in the universe during the year this occurred. Finally, community hospitals that closed during a given year were included in the hospital universe, as long as they were in operation during some part of the calendar year.

Stratification Data Elements

Given the increase in the number of contributing States, the NIS team evaluated and revised the sampling and weighting strategy for 1998 and subsequent data years, in order to best represent the U.S. This included changes to the definitions of the strata data elements, the exclusion of rehabilitation hospitals from the NIS hospital universe, and a change to the calculation of hospital universe discharges for the weights. A full description of this process can be found in the special report on Changes in NIS Sampling and Weighting Strategy for 1998. This report is available on the HCUP-US Website at

http://www.hcup-us.ahrq.gov/db/nation/nis/nisrelatedreports.jsp. (A description of the sampling procedures and definitions of strata data elements used from 1988 through 1997 can be found in the special report: <u>Design of the HCUP Nationwide Inpatient Sample</u>, 1997. This report is also available on the HCUP-US Website.)

The NIS sampling strata were defined based on five hospital characteristics contained in the AHA hospital files. Beginning with the 1998 NIS, the stratification data elements were defined as follows:

- Geographic Region Northeast, Midwest, West, and South. This is an important stratification data element because practice patterns have been shown to vary substantially by region. For example, lengths of stay tend to be longer in East Coast hospitals than in West Coast hospitals. Figure 2 highlights the NIS States by region, and Table 6 lists the States that comprise each region. Both can be found in Appendix I.
- 2. Control government non-Federal (public), private not-for-profit (voluntary), and private investor-owned (proprietary). Depending on their control, hospitals tend to have different missions and different responses to government regulations and policies. When there were enough hospitals of each type to allow it, we stratified hospitals as public, voluntary, and proprietary. We used this stratification for Southern rural, Southern urban non-teaching, and Western urban non-teaching hospitals. For smaller strata the Midwestern rural and Western rural hospitals we used a collapsed stratification of public versus private, with the voluntary and proprietary hospitals combined to form a single "private" category. For all other combinations of region, location, and teaching status, no stratification based on control was advisable, given the number of hospitals in these cells.
- 3. Location urban or rural. Government payment policies often differ according to this designation. Also, rural hospitals are generally smaller and offer fewer services than urban hospitals. Beginning with the 2004 NIS, we changed the classification of urban or rural hospital location for the sampling strata to use the newer Core Based Statistical Area (CBSA) codes, rather than the older Metropolitan Statistical Area (MSA) codes. The CBSA groups are based on 2000 Census data, whereas the MSA groups were based on 1990 Census data. Also, the criteria for classifying the counties differ. For more information on the difference between CBSAs and MSAs, refer to the U.S. Census Bureau Website (http://www.census.gov/population/www/metroareas/metroarea.html).

Previously, we classified hospitals in a MSA as urban hospitals, while we classified hospitals outside a MSA as rural hospitals. Beginning with the 2004 NIS, we categorized hospitals with a CBSA type of *Metropolitan* or *Division* as urban, while we designated hospitals with a CBSA type of *Micropolitan* or *Rural* as rural. This change contributed to a slight decline in the number of hospitals that were classified as rural and a corresponding increase in the number of hospitals categorized as urban. For the 2003 NIS, 44.9% of hospitals in the AHA universe were classified as rural hospitals; for 2004, only 41.3% of AHA universe hospitals were classified as rural.

4. Teaching Status – teaching or non-teaching. The missions of teaching hospitals differ from non-teaching hospitals. In addition, financial considerations differ between these two hospital groups. Currently, the Medicare Diagnosis Related Group (DRG) payments are uniformly higher to teaching hospitals. Prior to the 1998 NIS, we considered a hospital to be a teaching hospital if it had any residents or interns and met one of the following two criteria:

- Residency training approval by the Accreditation Council for Graduate Medical Education (ACGME)
- Membership in the Council of Teaching Hospitals (COTH).

Beginning with the 1998 NIS, we considered a hospital to be a teaching hospital if it met any one of the following three criteria:

- Residency training approval by the Accreditation Council for Graduate Medical Education (ACGME)
- Membership in the Council of Teaching Hospitals (COTH)
- A ratio of full-time equivalent interns and residents to beds of .25 or higher.³
- 5. Bed Size small, medium, and large. Bed size categories were based on the number of hospital beds and were specific to the hospital's region, location, and teaching status, as shown in Table 7 in Appendix I. We chose the bed size cutoff points so that approximately one-third of the hospitals in a given region, location, and teaching status combination would fall within each bed size category (small, medium, or large). We used different cutoff points for rural, urban non-teaching, and urban teaching hospitals because hospitals in those categories tend to be small, medium, and large, respectively. For example, a medium-sized teaching hospital would be considered a rather large rural hospital. Further, the size distribution is different among regions for each of the urban/teaching categories. For example, teaching hospitals tend to be smaller in the West than they are in the South. Using differing cutoff points in this manner avoids strata containing small numbers of hospitals.

We did not split rural hospitals according to teaching status, because rural teaching hospitals were rare. For example, in 2010, rural teaching hospitals comprised less than 2% of the total hospital universe. We defined the bed size categories within location and teaching status because they would otherwise have been redundant. Rural hospitals tend to be small; urban non-teaching hospitals tend to be medium-sized; and urban teaching hospitals tend to be large. Yet it was important to recognize gradations of size within these types of hospitals. For example, in serving rural discharges, the role of "large" rural hospitals (particularly rural referral centers) often differs from the role of "small" rural hospitals.

To further ensure geographic representativeness, implicit stratification data elements included State and three-digit ZIP Code (the first three digits of the hospital's five-digit ZIP Code). The hospitals were sorted according to these data elements prior to systematic random sampling. Detailed information on the design of the NIS prior to 2006 is available in the year-specific special reports on *Design of the Nationwide Inpatient Sample* found on the <u>HCUP-US Website</u>. Starting with the 2006 NIS, the design information was incorporated into this report.

Hospital Sampling Frame

The *universe* of hospitals was established as all community hospitals located in the U.S. with the exception, beginning in 1998, of short-term rehabilitation hospitals. However, some hospitals do not supply data to HCUP. Therefore, we constructed the NIS *sampling frame* from the subset of universe hospitals that released their discharge data to AHRQ for research use. The number of State Partners contributing data to the NIS has expanded over the years, as shown in <u>Table 2</u>

of <u>Appendix I</u>. As a result, the number of hospitals included in the NIS sampling frame has also increased over the years, as depicted in Figure 3, also in Appendix I.

The list of the entire frame of hospitals was composed of all AHA community hospitals in each of the frame States that could be matched to the discharge data provided to HCUP. If an AHA community hospital could not be matched to the discharge data provided by the data source, it was eliminated from the sampling frame (but not from the target universe).

Figure 4 in Appendix I illustrates the number of hospitals in the universe, frame, and sample and the percentage of universe hospitals in the frame for each State in the sampling frame for 2010. In most cases, the difference between the universe and the frame represents the difference in the number of community, non-rehabilitation hospitals in the 2010 AHA Annual Survey Database (Health Forum, LLC © 2011) and the hospitals for which data were supplied to HCUP that could be matched to the AHA data.

The largest discrepancy between HCUP data and AHA data is in Texas. As is evident in Figure 4 (Appendix I). Certain Texas State-licensed hospitals are exempt from statutory reporting requirements. Exempt hospitals include:

- Hospitals that do not seek insurance payment or government reimbursement
- Rural providers.

The Texas statute that exempts rural providers from the requirement to submit data defines a hospital as a rural provider if it:

- (I) Is located in a county that:
 - (A) Has a population estimated by the United States Bureau of the Census to be not more than 35,000 as of July 1 of the most recent year for which county population estimates have been published; or
 - (B) Has a population of more than 35,000, but does not have more than 100 licensed hospital beds and is not located in an area that is delineated as an urbanized area by the United States Bureau of the Census; and
- (II) Is not a State-owned hospital or a hospital that is managed or directly or indirectly owned by an individual, association, partnership, corporation, or other legal entity that owns or manages one or more other hospitals.

These exemptions apply primarily to smaller rural public hospitals and, as a result, these facilities are less likely to be included in the sampling frame than other Texas hospitals. While the number of hospitals omitted appears sizable, those available for the NIS include over 97% of inpatient discharges from Texas universe hospitals because excluded hospitals tend to have relatively few discharges.

Similar to Texas, because smaller Louisiana hospitals are not required to submit data to the Louisiana Department of Health and Hospitals, a significant portion of Louisiana hospitals are omitted from the sampling frame. However, because excluded hospitals tend to have relatively few discharges, those available for the NIS include about 90% of inpatient discharges from Louisiana universe hospitals.

Refer to <u>Table 8</u> of <u>Appendix I</u> for a full list of the number of hospitals, and discharges included in the 2010 AHA universe, frame, and NIS by State. Fewer hospitals may be in a State's frame than in the universe because data is not always received from every hospital and hospitals are sometimes excluded because of State requirements.

Hospital Sample Design

Design Considerations

The NIS is a stratified probability sample of hospitals in the frame, with sampling probabilities calculated to select 20% of the universe of U.S. community, non-rehabilitation hospitals contained in each stratum. This sample size was determined by AHRQ based on their experience with similar research databases. The overall design objective was to select a sample of hospitals that accurately represents the target universe, which includes hospitals outside the frame (i.e., having zero probability of selection). Moreover, this sample was to be geographically dispersed, yet drawn only from data supplied by HCUP Partners.

It should be possible, for example, to estimate DRG-specific average lengths of stay across all U.S. hospitals using weighted average lengths of stay, based on averages or regression coefficients calculated from the NIS. Ideally, relationships among outcomes and their correlates estimated from the NIS should accurately represent all U.S. hospitals. It is advisable to verify your estimates against other data sources, if available, because not all States contribute data to the NIS. Table 2 in Appendix I lists the number of NIS States, hospitals, and discharges by year. For example, the National Hospital Discharge Survey (http://www.cdc.gov/nchs/nhds.htm) can provide benchmarks against which to check your national estimates for hospitalizations with more than 5,000 cases.

The *NIS Comparison Report* assesses the accuracy of NIS estimates by providing a comparison of the NIS with other data sources. The most recent report is available on the HCUP-US Website (http://www.hcup-us.ahrg.gov/db/nation/nis/nisrelatedreports.jsp).

The NIS team considered alternative stratified sampling allocation schemes. However, allocation proportional to the number of hospitals was preferred for several reasons:

- AHRQ researchers wanted a simple, easily understood sampling methodology. The
 concept that the NIS sample could represent a "miniaturization" of the hospital universe
 was appealing. There were, however, obvious geographic limitations imposed by data
 availability.
- AHRQ statisticians considered other optimal allocation schemes, including sampling hospitals with probabilities proportional to size (number of discharges). They ultimately concluded that sampling with probability proportional to the number of hospitals was preferable. While this approach was admittedly less efficient, the extremely large sample sizes yield reliable estimates. Furthermore, because the data are to be used for purposes other than producing nationwide estimates, (e.g., regression modeling), it is critical that all hospital types, including small hospitals, are adequately represented.

Overview of the Sampling Procedure

To further ensure accurate geographic representation, we implicitly stratified the hospitals by State and three-digit ZIP Code (the first three digits of the hospital's five-digit ZIP Code). This

was accomplished by sorting by three-digit ZIP Code within each stratum prior to drawing a systematic random sample of hospitals.

After stratifying the universe of hospitals, we sorted hospitals by stratum, the three-digit ZIP Code within each stratum, and by a random number within each three-digit ZIP Code. These sorts ensured further geographic generalizability of hospitals within the frame States, as well as random ordering of hospitals within three-digit ZIP Codes. Generally, three-digit ZIP Codes that are proximal in value are geographically near one another within a State. Furthermore, the U.S. Postal Service locates regional mail distribution centers at the three-digit level. Thus, the boundaries tend to be a compromise between geographic size and population size.

We then drew a systematic random sample of up to 20% of the total number of U.S. hospitals within each stratum. If too few frame hospitals appeared in a cell, we selected all frame hospitals for the NIS, subject to sampling restrictions specified by States. To simplify variance calculations, we drew at least two hospitals from each stratum. If fewer than two frame hospitals were available in a stratum, we merged it with an "adjacent" cell containing hospitals with similar characteristics.

Subsamples

Prior to the 2005 NIS, we drew two non-overlapping 10% subsamples of discharges from the NIS file for each year. The subsamples were selected by drawing every tenth discharge, starting with two different starting points (randomly selected between 1 and 10). Having a different starting point for each of the two subsamples guaranteed that they would not overlap. Discharges were sampled so that 10% of each hospital's discharges in each quarter were selected for each of the subsamples. The two samples could be combined to form a single, generalizable 20% subsample of discharges. Beginning with the 2005 NIS, 10% subsamples are no longer provided. However, users may still draw their own subsamples, if desired.

Change to Hospital Sampling Procedure Beginning with the 1998 NIS

Beginning with the 1998 NIS sampling procedures, all frame hospitals within a stratum have an equal probability of selection for the sample, regardless of whether they appeared in prior NIS samples. This deviates from the procedure used for earlier samples, which maximized the longitudinal component of the NIS series.

Further description of the sampling procedures for earlier releases of the NIS can be found in the special report: <u>Design of the HCUP Nationwide Inpatient Sample</u>, <u>1997</u>. This report is available on the HCUP-US Website at

http://www.hcup-us.ahrq.gov/db/nation/nis/nisrelatedreports.jsp. For a description of the development of the new sample design for 1998 and subsequent data years, see the special report: *Changes in NIS Sampling and Weighting Strategy for 1998*. This report is available on the HCUP-US Website.

Zero-Weight Hospitals

Beginning with the 1993 NIS, the NIS samples no longer contain zero-weight hospitals. For a description of zero-weight hospitals in the 1988-1992 samples, refer to the special report: <u>Design of the HCUP Nationwide Inpatient Sample, Release 1</u>. This report is available on the HCUP-US Website at http://www.hcup-us.ahrg.gov/db/nation/nis/nisrelatedreports.isp.

Final Hospital Sample

In <u>Appendix I</u>, we present three figures describing the final hospital sample. <u>Figure 5</u> depicts the numbers of hospitals sampled each year, while <u>Figure 6</u> presents the numbers of discharges in each year of the NIS. The number of discharges in the sample may vary slightly depending on the hospitals selected for the NIS in any given year. For the 1988-1992 NIS, zero-weight hospitals were maintained to provide a longitudinal sample. Therefore, two figures exist for each of these years: one number for the regular NIS sample and another number for the total sample.

Figure 7 displays the weighted number of discharges sampled each year. Note that this number decreased from 35,408,207 in 1997 to 34,874,001 in 1998, a difference of 534,206 (1.5%). This slight decline is associated with two changes to the 1998 NIS design: the exclusion of community, rehabilitation hospitals from the hospital universe, and a change to the calculation of hospital universe discharges for the weights. Prior to 1998, we calculated discharges as the sum of total facility admissions (AHA data element ADMTOT), which includes long-term care admissions, plus births (AHA data element BIRTHS) reported for each U.S. community hospital in the AHA Annual Survey Database (Health Forum, LLC © 2011).

Beginning in 1998, we calculate discharges as the sum of hospital admissions (AHA data element ADMH) plus births for each U.S. community, non-rehabilitation hospital. This number is more consistent with the number of discharges we receive from the State data sources. We also substitute total facility admissions, if the number of hospital admissions is missing. Without these changes, the weighted number of discharges for 1998 would have been 35,622,743. The exclusion of community, rehabilitation hospitals reduced the number of universe hospitals by 177 and the number of weighted discharges by 214,490. The change in the calculation of discharges reduced the weighted number of discharges by 534,252.

The small declines in both the number of discharges in the sample and the weighted number of discharges for 2009 and 2010 are not related to any change in the sampling or weighting strategy. The reduction in the number of discharges is consistent with the information from the AHA Annual Survey of Hospitals.

<u>Figure 8</u> presents a summary of the 2010 NIS hospital sample by geographic region and the number of:

- Universe hospitals (Universe)
- Frame hospitals (Frame)
- Sampled hospitals (Sample)
- Target hospitals (Target = 20% of the universe)
- Surplus hospitals (Surplus = Sample Target).

<u>Figure 9</u> summarizes the estimated U.S. population by geographic region. For each region, the figure reveals:

- The estimated U.S. population
- The estimated population of States in the 2010 NIS
- The percentage of estimated U.S. population included in NIS States.

Figure 10 depicts the number of discharges in the 2010 sample for each State.

Special consideration was needed to handle the Massachusetts data in the 2006 and the 2007 NIS. Fourth quarter data from sampled hospitals in Massachusetts were unavailable for inclusion in the 2006 and the 2007 NIS. To account for the missing quarter of data, we sampled one fourth of the Massachusetts NIS discharges from the first three quarters and modified the records to represent the fourth quarter. To ensure a representative sample, we sorted the Massachusetts NIS discharges by hospital, discharge quarter, Clinical Classifications Software (CCS) diagnosis group for the principal diagnosis, gender, age, and a random number before selecting every fourth record. The following describes the adjustments made to the selected Massachusetts NIS records:

- 1. We relabeled the discharge quarter (DQTR) to four and saved the original discharge quarter in a new data element (DQTR_X).
- 2. We adjusted the admission month (AMONTH) by the number of months corresponding to the change in the discharge quarter.
- We adjusted the total charges (TOTCHG and TOTCHG_X) using quarter-specific adjustment factors calculated as the mean total charges in the fourth quarter for all Northeastern NIS States (excluding Massachusetts) divided by the mean total charges in the first, second, or third quarter for all Northeastern NIS States (excluding Massachusetts).

We then adjusted the discharge weights for the Massachusetts records to appropriately account for the shifting of quarter one through three discharges to quarter four.

SAMPLE WEIGHTS

To obtain nationwide estimates, we developed discharge weights using the AHA universe as the standard. These were developed separately for hospital- and discharge-level analyses. Hospital-level weights were developed to extrapolate NIS sample hospitals to the hospital universe. Similarly, discharge-level weights were developed to extrapolate NIS sample discharges to the discharge universe.

Hospital Weights

Hospital weights to the universe were calculated by post-stratification. For each year, hospitals were stratified on the same data elements that were used for sampling: geographic region, urban/rural location, teaching status, bed size, and control. The strata that were collapsed for sampling were also collapsed for sample weight calculations. Within each stratum s, each NIS sample hospital's universe weight was calculated as:

 $W_s(universe) = N_s(universe) \div N_s(sample)$

where W_s (universe) was the hospital universe weight, and N_s (universe) and N_s (sample) were the number of community hospitals within stratum s in the universe and sample, respectively. Thus, each hospital's universe weight (HOSPWT) is equal to the number of universe hospitals it represents during that year. Because 20% of the hospitals in each stratum were sampled when possible, the hospital weights are usually near five.

Discharge Weights

The calculations for discharge-level sampling weights were similar to the calculations for hospital-level sampling weights. The discharge weights are usually constant for all discharges within a stratum. The only exceptions are for strata with sample hospitals that, according to the AHA files, were open for the entire year but contributed less than a full year of data to the NIS. For those hospitals, we *adjusted* the number of observed discharges by a factor of $4 \div Q$, where Q was the number of calendar quarters for which the hospital contributed discharges to the NIS. For example, when a sample hospital contributed only two quarters of discharge data to the NIS, the *adjusted* number of discharges was double the observed number. This adjustment was performed only for weighting purposes. The NIS data set includes only the actual (unadjusted) number of observed discharges.

With that minor adjustment, each discharge weight is essentially equal to the number of AHA universe discharges that each sampled discharge represents in its stratum. This calculation was possible because the number of total discharges was available for every hospital in the universe from the AHA files. Each universe hospital's AHA discharge total was calculated as the sum of newborns and hospital discharges.

Discharge weights to the universe were calculated by post-stratification. Hospitals were stratified just as they were for universe hospital weight calculations. Within stratum *s*, for hospital *i*, each NIS sample discharge's universe weight was calculated as:

 $DW_{is}(universe) = [DN_{s}(universe) \div ADN_{s}(sample)] * (4 \div Q_{i})$

where DW_{is} (universe) was the discharge weight; DN_s (universe) represented the number of discharges from community hospitals in the universe within stratum s; ADN_s (sample) was the number of adjusted discharges from sample hospitals selected for the NIS; and Q_i represented the number of quarters of discharge data contributed by hospital i to the NIS (usually $Q_i = 4$). Thus, each discharge's weight (DISCWT) is equal to the number of universe discharges it represents in stratum s during that year. Because all discharges from 20% of the hospitals in each stratum were sampled when possible, the discharge weights are usually near five.

Appendix I: Tables and Figures

Table 1: 2010 Data Sources for the NIS*

State	Data Organization	
AK	Alaska State Hospital and Nursing Home Association	
AR	Arkansas Department of Health	
AZ	Arizona Department of Health Services	
CA	Office of Statewide Health Planning & Development	
СО	Colorado Hospital Association	
СТ	Connecticut Hospital Association	
FL	Florida Agency for Health Care Administration	
GA	Georgia Hospital Association	
HI	Hawaii Health Information Corporation	
IA	Iowa Hospital Association	
IL	Illinois Department of Public Health	
IN	Indiana Hospital Association	
KS	Kansas Hospital Association	
KY	Kentucky Cabinet for Health and Family Services	
LA	Louisiana Department of Health and Hospitals	
MA	Division of Health Care Finance and Policy	
MD	Health Services Cost Review Commission	
ME	Maine Health Data Organization	
MI	Michigan Health & Hospital Association	
MN	Minnesota Hospital Association	
МО	Hospital Industry Data Institute	
MS	Mississippi Department of Health	

New Hampshire data was not available in time to be included in the 2010 NIS.

State	Data Organization		
MT	MHA - An Association of Montana Health Care Providers		
NC	North Carolina Department of Health and Human Services		
NE	Nebraska Hospital Association		
NJ	New Jersey Department of Health		
NM	New Mexico Department of Health		
NV	Nevada Department of Health and Human Services		
NY	New York State Department of Health		
ОН	Ohio Hospital Association		
ОК	Oklahoma State Department of Health		
OR	Oregon Association of Hospitals and Health Systems		
PA	Pennsylvania Health Care Cost Containment Council		
RI	Rhode Island Department of Health		
SC	South Carolina State Budget & Control Board		
SD	South Dakota Association of Healthcare Organizations		
TN	Tennessee Hospital Association		
TX	Texas Department of State Health Services		
UT	Utah Department of Health		
VT	Vermont Association of Hospitals and Health Systems		
VA	Virginia Health Information		
WA	Washington State Department of Health		
WI	Wisconsin Department of Health Services		
WV	West Virginia Health Care Authority		
WY	Wyoming Hospital Association		

Return to Introduction

Table 2: Number of NIS States, Hospitals, and Discharges, by Year

Calendar Year	States in the Frame	Number of States	Sample Hospitals	Sample Discharges
1988	California, Colorado, Florida, Iowa, Illinois, Massachusetts, New Jersey, and Washington	8	758	5,265,756
1989	Added Arizona, Pennsylvania, and Wisconsin	11	875	6,110,064
1990	No new additions	11	861	6,268,515
1991	No new additions	11	847	6,156,188
1992	No new additions	11	838	6,195,744
1993	Added Connecticut, Kansas, Maryland, New York, Oregon, and South Carolina	17	913	6,538,976
1994	No new additions	17	904	6,385,011
1995	Added Missouri and Tennessee	19	938	6,714,935
1996	No new additions	19	906	6,542,069
1997	Added Georgia, Hawaii, and Utah	22	1012	7,148,420
1998	No new additions	22	984	6,827,350
1999	Added Maine and Virginia	24	984	7,198,929
2000	Added Kentucky, North Carolina, Texas, and West Virginia	28	994	7,450,992
2001	Added Michigan, Minnesota, Nebraska, Rhode Island, and Vermont	33	986	7,452,727
2002	Added Nevada, Ohio, and South Dakota; Dropped Arizona	35	995	7,853,982
2003	Added Arizona, Indiana, and New Hampshire; Dropped Maine	37	994	7,977,728
2004	Added Arkansas; Dropped Pennsylvania	37	1,004	8,004,571
2005	Added Oklahoma; Dropped Virginia	37	1,054	7,995,048
2006	Added Virginia	38	1,045	8,074,825
2007	Added Maine and Wyoming	40	1,044	8,043,415
2008	Added Louisiana and Pennsylvania	42	1,056	8,158,381
2009	Added Montana and New Mexico	44	1,050	7,810,762
2010	Added Alaska and Mississippi; Dropped New Hampshire ²	45	1,051	7,800,441

Return to Introduction

 2 New Hampshire data was not available in time to be included in the 2010 NIS.

Table 3. Summary of NIS Releases

Data from	Media/Format Options	Structure of Releases		
1988-1992 • 8 States in 1988	On CD-ROM,	5 years of data in a 6-CD set, compressed files		
• 11 States in 1989-1992	In ASCII format	Two 10% subsamples of discharges for each year		
1993 • 17 States				
1994 • 17 States				
1995 • 19 States				
1996 • 19 States		1 year of data in a 2-CD set, compressed files		
1997 • 22 States	On CD-ROM, In ASCII format	Two 10% subsamples of discharges for each year		
1998 • 22 States				
1999 • 24 States				
2000 • 28 States				
2001 • 33 States				
2002 • 35 States		1 year of data in a 2-CD set, compressed files		
2003 • 37 States	On CD-ROM, In ASCII format	Two 10% subsamples of discharges for each year		
2004 • 37 States		A companion file with four different sets of severity measures		

Data from	Media/Format Options	Structure of Releases
2005 • 37 States		
2006 • 38 States	On CD-ROM,	1 year of data in a 2-CD set, compressed files
2007 • 40 States	In ASCII format	A companion file with four different sets of severity measures, and also diagnosis and procedure groups
2008 • 42 States		
2009		1 year of data on a DVD-ROM,
 44 States 		compressed files
	On DVD-ROM	
2010 • 45 States	In ASCII format	A companion file with four different sets of severity measures, and also diagnosis and procedure groups

Return to Introduction

Table 4. Summary of NIS Data Sources, Hospitals, and Inpatient Stays, 1988-2010

Year	Data Sources	Number of Hospitals	Number of Discharges in the NIS, Unweighted	Number of Discharges in the NIS, Weighted for National Estimates
1988	CA CO FL IL IA MA NJ WA	759	5,265,756	35,171,448
1989	AZ CA CO FL IL IA MA NJ PA WA WI (Added AZ, PA, WI)	882	6,110,064	35,104,645
1990	AZ CA CO FL IL IA MA NJ PA WA WI (No change)	871	6,268,515	35,215,397
1991	AZ CA CO FL IL IA MA NJ PA WA WI (No change)	859	6,156,188	35,036,492
1992	AZ CA CO FL IL IA MA NJ PA WA WI (No change)	856	6,195,744	35,011,385
1993	AZ CA CO CT FL IL IA KS MD MA NJ NY OR PA SC WA WI (Added CT, KS, MD, NY, OR, SC)	913	6,538,976	34,714,530
1994	AZ CA CO CT FL IL IA KS MD MA NJ NY OR PA SC WA WI (No change)	904	6,385,011	34,622,203
1995	AZ CA CO CT FL IL IA KS MD MA MO NJ NY OR PA SC TN WA WI (Added MO, TN)	938	6,714,935	34,791,998
1996	AZ CA CO CT FL IL IA KS MD MA MO NJ NY OR PA SC TN WA WI (No change)	906	6,542,069	34,874,386
1997	AZ CA CO CT FL GA HI IL IA KS MD MA MO NJ NY OR PA SC TN UT WA WI (Added GA, HI, UT)	1,012	7,148,420	35,408,207
1998	AZ CA CO CT FL GA HI IL IA KS MD MA MO NJ NY OR PA SC TN UT WA WI (No change)	984	6,827,350	34,874,001
1999	AZ CA CO CT FL GA HI IL IA KS MD MA ME MO NJ NY OR PA SC TN UT VA WA WI (Added ME, VA)	984	7,198,929	35,467,673
2000	AZ CA CO CT FL GA HI IL IA KS KY MD MA ME MO NC NJ NY OR PA SC TN TX UT VA WA WI WV (Added KY, NC, TX, WV)	994	7,450,992	36,417,565

Year	Data Sources	Number of Hospitals	Number of Discharges in the NIS, Unweighted	Number of Discharges in the NIS, Weighted for National Estimates
2001	AZ CA CO CT FL GA HI IL IA KS KY MD MA ME MI MN MO NC NE NJ NY OR PA RI SC TN TX UT VA VT WA WI WV (Added MI, MN, NE, RI, VT)	986	7,452,727	37,187,641
2002	CA CO CT FL GA HI IL IA KS KY MD MA ME MI MN MO NC NE NJ NY NV OH OR PA RI SC SD TN TX UT VA VT WA WI WV (Added NV, OH, SD; AZ data were not available)	995	7,853,982	37,804,021
2003	AZ CA CO CT FL GA HI IL IN IA KS KY MD MA MI MN MO NC NE NH NJ NY NV OH OR PA RI SC SD TN TX UT VA VT WA WI WV (Added AZ, IN, NH; ME data were not available)	994	7,977,728	38,220,659
2004	AR AZ CA CO CT FL GA HI IL IN IA KS KY MD MA MI MN MO NC NE NH NJ NY NV OH OR RI SC SD TN TX UT VA VT WA WI WV (Added AR; PA data were not available)	1,004	8,004,571	38,661,786
2005	AR AZ CA CO CT FL GA HI IL IN IA KS KY MD MA MI MN MO NC NE NH NJ NY NV OH OK OR RI SC SD TN TX UT VT WA WI WV (Added OK; VA data were not available)	1,054	7,995,048	39,163,834
2006	AR AZ CA CO CT FL GA HI IL IN IA KS KY MD MA MI MN MO NC NE NH NJ NY NV OH OK OR RI SC SD TN TX UT VA VT WA WI WV (Added VA)	1,045	8,074,825	39,450,216
2007	AR AZ CA CO CT FL GA HI IL IN IA KS KY MD MA ME MI MN MO NC NE NH NJ NY NV OH OK OR RI SC SD TN TX UT VA VT WA WI WV WY (Added ME and WY)	1,044	8,043,415	39,541,948
2008	AR AZ CA CO CT FL GA HI IL IN IA KS LA KY MD MA ME MI MN MO NC NE NH NJ NY NV OH OK OR PA RI SC SD TN TX UT VA VT WA WI WV WY (Added LA and PA)	1,056	8,158,381	39,885,120

Year	Data Sources	Number of Hospitals	Number of Discharges in the NIS, Unweighted	Number of Discharges in the NIS, Weighted for National Estimates
2009	AR AZ CA CO CT FL GA HI IL IN IA KS LA KY MD MA ME MI MN MO MT NC NE NH NJ NM NY NV OH OK OR PA RI SC SD TN TX UT VA VT WA WI WV WY (Added NM and MT)	1,050	7,810,762	39,434,956
2010	AK AR AZ CA CO CT FL GA HI IL IN IA KS LA KY MD MA ME MI MN MO MS MT NC NE NJ NM NY NV OH OK OR PA RI SC SD TN TX UT VA VT WA WI WV WY (Added AK and MS; NH data were not available)	1,051	7,800,441	39,008,298

Table 5. NIS Related Reports and Database Documentation Available on HCUP-US

Restrictions on the Use of the NIS

Data Use Agreement for the NIS

Description of the NIS Files

- Introduction to the NIS, 2010 this document
- HCUP Quality Control Procedures describes procedures used to assess data quality
- File Specifications details data file names, number of records, record length, and record layout
- Sources of NIS Data, NIS Data Elements, and State-Specific Restrictions (included in this document beginning in 2006) – identifies the NIS data sources and restrictions on sampling and the release of data elements

Availability of Data Elements

 Availability of NIS data elements from 1988-2010

Description of Data Elements in the NIS

- Description of Data Elements details uniform coding and State-specific idiosyncrasies
- Summary Statistics lists means and frequencies on nearly all data elements
- NIS Severity Measures provides detailed documentation on the different types of measures
- HCUP Coding Practices describes how HCUP data elements are coded
- HCUP Hospital Identifiers explains data elements that characterize individual hospitals

Corrections to the NIS

- Information on corrections to the NIS data sets
- Link to NIS Trends Weights Files

Load Programs

Programs to load the ASCII data files into statistical software:

- SAS
- SPSS
- Stata

HCUP Tools: Labels and Formats

- Overview of Clinical Classifications Software (CCS), a categorization scheme that groups ICD-9-CM diagnosis and procedure codes into mutually exclusive categories
- Labels file for CCS categories
- Labels file for multiple versions of Diagnosis Related Groups (DRGs) and Major Diagnostic Categories (MDCs)
- NIS SAS format library program to create value labels
- NIS ICD-9-CM formats to label ICD-9-CM diagnoses and procedures
- NIS Severity formats to label severity data elements

NIS Related Reports

Links to HCUP-US page with various NIS related reports such as the following:

- Design of the Nationwide Inpatient Sample for 1988 to 2005 (included in this document beginning in 2006)
- Changes in NIS Sampling and Weighting Strategy for 1998
- Calculating Nationwide Inpatient Sample Variances
- Using the HCUP Nationwide Inpatient Sample to Estimate Trends
- NIS Comparison Reports (available for years in which the NIS sample changed)
- HCUP Data Quality Reports for 1988-2010
- HCUP E-Code Evaluation Report

HCUP Supplemental Files

- Cost-to-Charge Ratio files
- Hospital Market Structure (HMS) files
- NIS Trends Supplemental files

SAS File Information

• File Information for all States and years

Figure 1: Hospital Universe, by Year⁴

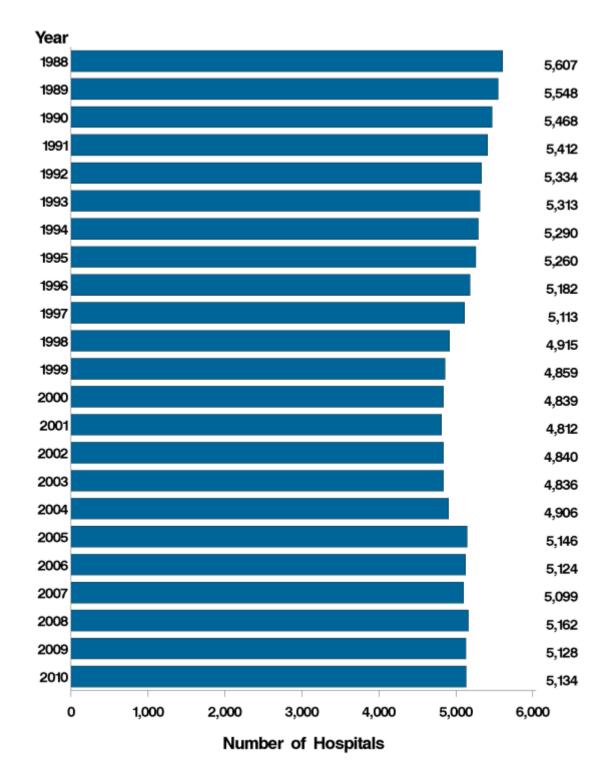


Figure 2: NIS States, by Region

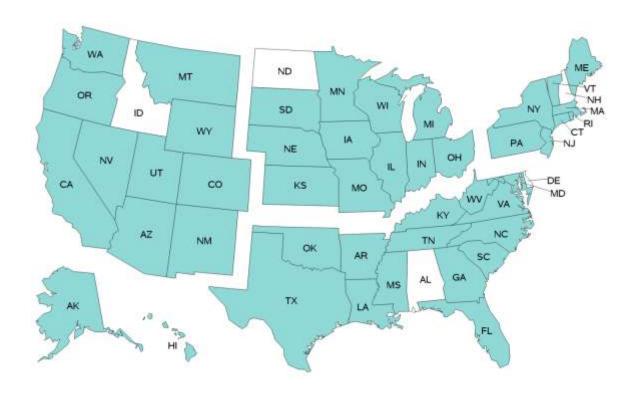


Table 6: All States, by Region³

Region	States
1: Northeast	Connecticut, Maine, Massachusetts, New Hampshire ⁴ , New Jersey, New York, Pennsylvania, Rhode Island, Vermont.
2: Midwest	Illinois, Indiana, Iowa, Kansas, Michigan, Minnesota, Missouri, Nebraska, North Dakota, Ohio, South Dakota, Wisconsin.
3: South	Alabama, Arkansas, <i>Delaware</i> , <i>District of Columbia</i> , Florida, Georgia, Kentucky, Louisiana, Maryland, Mississippi, North Carolina, Oklahoma, South Carolina, Tennessee, Texas, Virginia, West Virginia.
4: West	Alaska, Arizona, California, Colorado, Hawaii, <i>Idaho</i> , Montana, Nevada, New Mexico, Oregon, Utah, Washington, Wyoming.

Return to Introduction

Appendix I

³ States/areas in italics do not participate in HCUP.
⁴ New Hampshire participates in HCUP, but did not provide data in time for the 2010 NIS.

Table 7: Bed Size Categories, by Region

Location and Teaching	Н	lospital Bed Size			
Status	Small Medium		n Large		
	NORTHEAS	Т			
Rural	1-49	50-99	100+		
Urban, non-teaching	1-124	125-199	200+		
Urban, teaching	1-249	250-424	425+		
	MIDWEST				
Rural	1-29	30-49	50+		
Urban, non-teaching	1-74	75-174	175+		
Urban, teaching	1-249	250-374	375+		
	SOUTH				
Rural	1-39	40-74	75+		
Urban, non-teaching	1-99	100-199	200+		
Urban, teaching	1-249	250-449	450+		
WEST					
Rural	1-24	25-44	45+		
Urban, non-teaching	1-99	100-174	175+		
Urban, teaching	1-199	200-324	325+		

Figure 3: NIS Hospital Sampling Frame, by Year

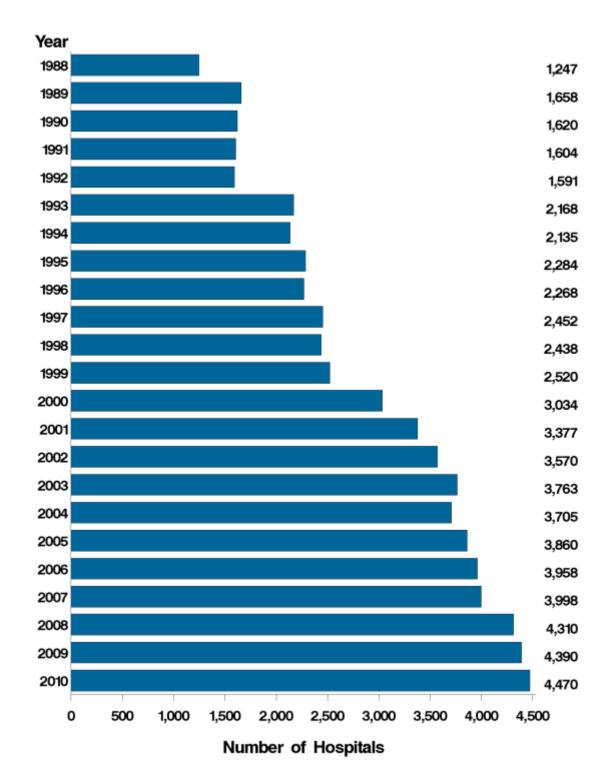


Figure 4: Number of Hospitals in the 2010 Universe, Frame, and Sample for Frame States

Part A: Arkansas – Montana

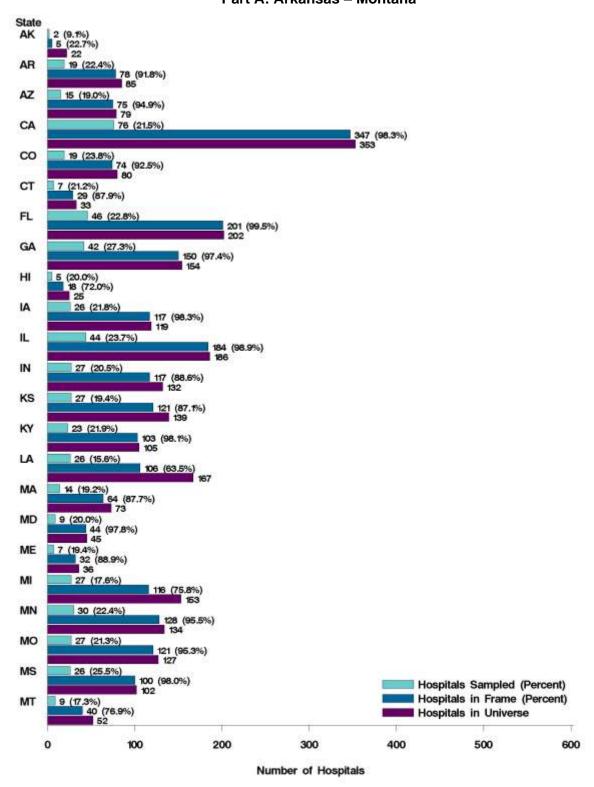


Figure 4: Number of Hospitals in the 2010 Universe, Frame, and Sample for Frame States

Part B: North Carolina – Wyoming

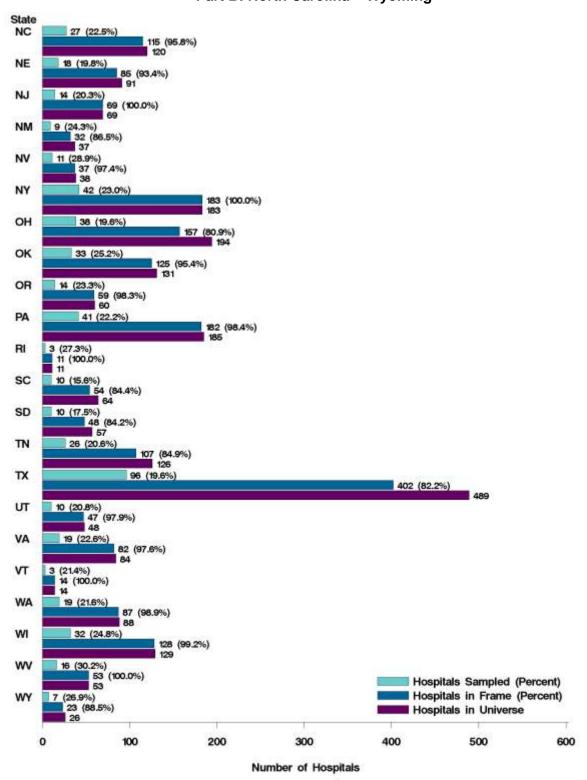


Table 8: Number of Hospitals and Discharges in 2010 AHA Universe, Frame, and NIS, by State

Number of Hospitals and Discharges in 2010 AHA Universe, Frame, and NIS, by State

AHA **Frame** NIS State Weighted Discharges Hospitals Discharges Hospitals Discharges Hospitals 0 0 0 **Non-NIS States** 234 1,338,000 0 Alaska 5 2 22 65,716 5,516 3,589 20,037 Arizona 79 808,606 75 777,165 15 153,044 737,777 **Arkansas** 78 19 85 405,441 328,314 66,500 314,228 California 353 3,939,778 347 3,827,601 76 821,069 3,866,451 Colorado 80 510,858 74 473,436 19 123,908 605,194 Connecticut 33 442,660 29 426,242 7 95,070 484,914 **Florida** 202 2,647,096 201 2,577,708 46 595,787 3,138,713 Georgia 154 150 42 1,084,377 1,052,069 245,960 1,228,990 Hawaii 5 25 116,840 18 91,553 35,753 178,226 Illinois 186 1,678,407 184 1,606,799 44 336,255 1,691,297 Indiana 132 818,017 117 785,180 27 212,504 1,066,903 Iowa 119 376,920 117 341,255 26 73,386 364,489 **Kansas** 139 351,804 121 313,945 27 67,010 339,753 Kentucky 23 157,571 105 651,319 103 615,605 785,219 Louisiana 167 726,049 106 557,907 26 135,460 691,338 Maine 36 155,602 32 74,862 7 13,733 58,085 Maryland 45 767,055 44 724,425 9 151,924 734,152 Massachusetts 73 880.712 64 839.618 14 170.373 870.411 Michigan 27 153 1,312,167 116 979,315 184,165 932,215 Minnesota 134 651,799 128 544,262 30 120,817 613,130 Mississippi 102 443,263 100 368,064 26 88,542 433,112 Missouri 127 897,743 121 879,038 27 206,704 1,040,716 Montana 52 106,992 40 100,579 9 24,916 131,753 Nebraska 91 234,865 85 194,298 18 36,920 177,159 Nevada 37 38 283,269 289,141 11 102,136 489,758 **New Jersey** 69 1,142,310 69 1,081,407 14 243,607 1,249,490 **New Mexico** 37 212,466 32 9 23,481 119,465 155,341 **New York** 183 2,731,344 183 42 517,226 2,667,265 2,573,989 **North Carolina** 120 27 286,683 1,426,158 1,153,953 115 1,117,820 Ohio 194 1,642,671 157 1,566,175 38 352,274 1,756,163

Number of Hospitals and Discharges in 2010 AHA Universe, Frame, and NIS, by State

State	AHA		Frame		NIS		
							Weighted
	Hospitals	Discharges	Hospitals	Discharges	Hospitals	Discharges	Discharges
Oklahoma	131	507,056	125	436,348	33	134,176	686,996
Oregon	60	388,546	59	373,981	14	75,033	371,218
Pennsylvania	185	1,908,197	182	1,807,078	41	409,080	2,030,358
Rhode Island	11	134,680	11	133,025	3	18,758	93,994
South Carolina	64	569,356	54	466,059	10	82,807	436,091
South Dakota	57	113,214	48	77,157	10	8,089	38,288
Tennessee	126	882,023	107	785,706	26	138,351	691,749
Texas	489	3,038,563	402	2,781,778	96	551,484	2,809,612
Utah	48	280,751	47	264,081	10	89,230	437,001
Vermont	14	54,682	14	52,965	3	26,481	125,158
Virginia	84	871,745	82	835,309	19	247,237	1,254,299
Washington	88	680,387	87	644,870	19	122,636	584,306
West Virginia	53	288,907	53	282,386	16	75,020	355,326
Wisconsin	129	656,002	128	605,828	32	164,225	819,142
Wyoming	26	56,090	23	31,613	7	11,467	62,197
Total	5,134	39,008,298	4,470	34,846,813	1,051	7,800,441	39,008,298

Figure 5: Number of Hospitals Sampled, by Year

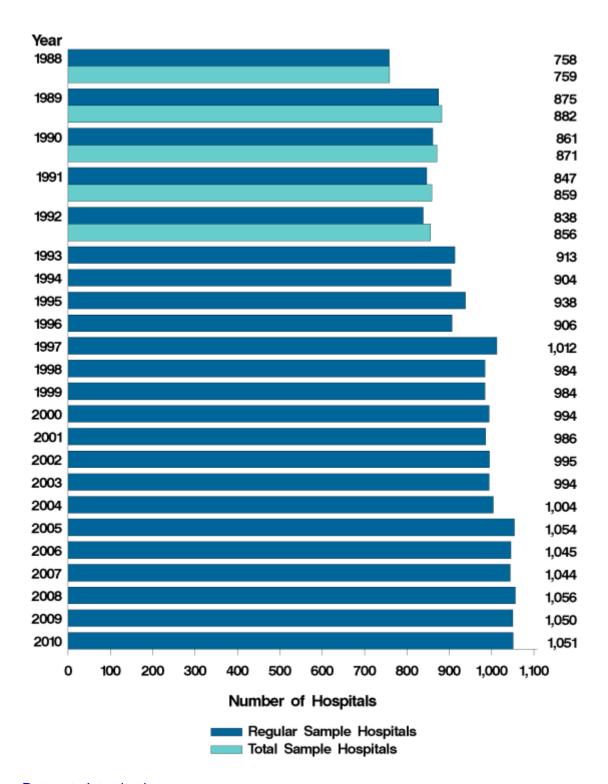


Figure 6: Number of NIS Discharges, Unweighted, by Year

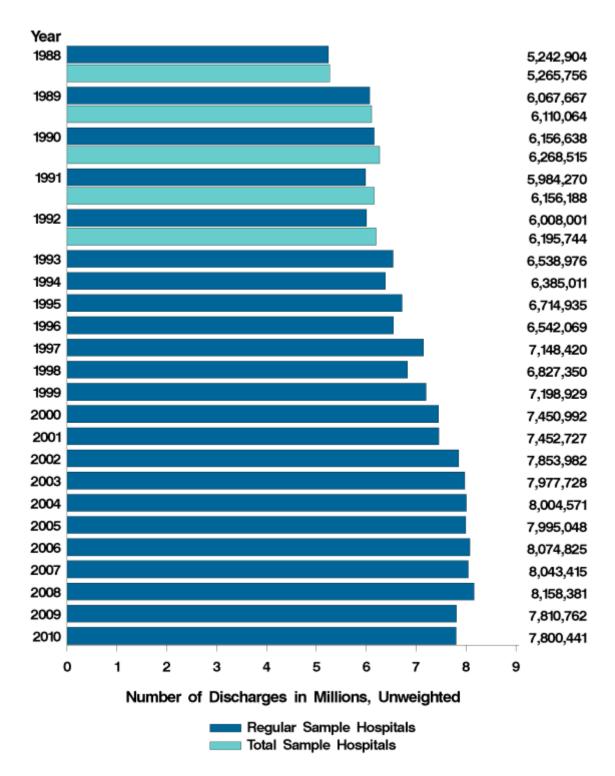


Figure 7: Number of NIS Discharges, Weighted, by Year


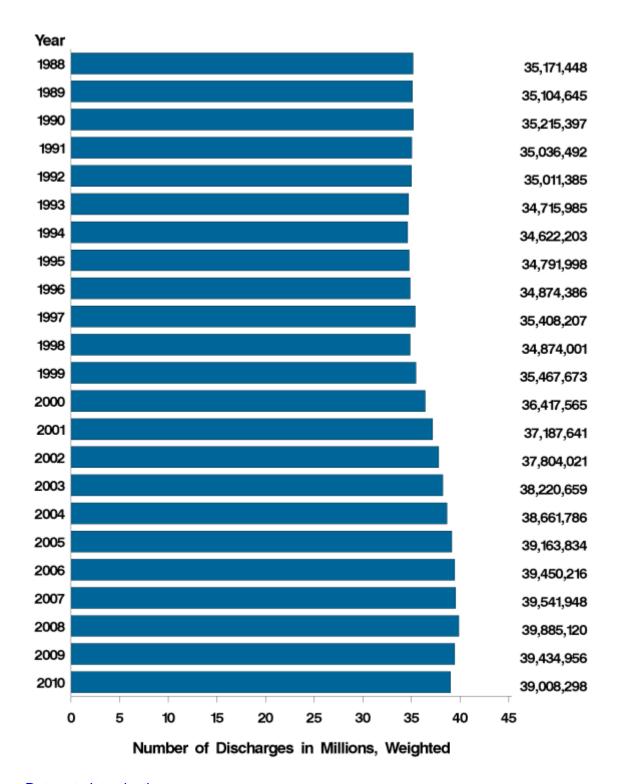



Figure 8: Number of Hospitals in the 2010 Universe, Frame, Sample, Target, and Surplus⁵, by Region

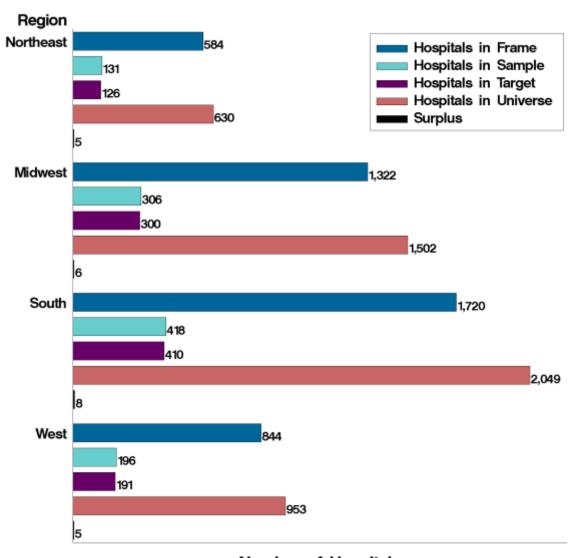

Number of Hospitals

⁵ The surplus is the difference between the actual number of hospitals sampled and the sample target.

Figure 9: Percentage of U.S. Population in the 2010 NIS States, by Region Calculated using the estimated U.S. population on July 1, 2010.⁵

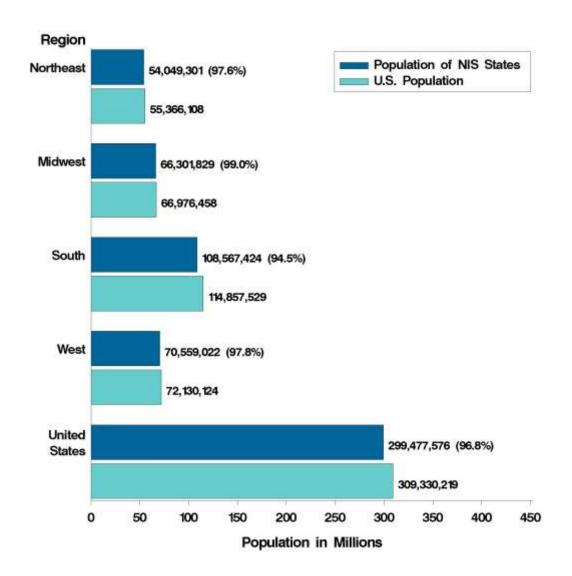

State AK 3,589 AR 66,500 AZ 153,044 CA 821,069 CO 123,908 CT 95,070 FL 595,787 GA 245,960 HI 35,753 IA 73,386 336,255 IL IN 212,504 KS 67,010 KY 157,571 LA 135,460 MA 170,373 MD 151,924 ME 13,733 MI 184,165 120,817 MN MO 206,704 88,542 MS MT 24,916 286,683 NC NE 36,920 NJ 243,607 NM 23,481 NV 102,136 NY 517,226 352,274 OH OK 134,176 OR 75,033 PA 409,080 18,758 RI SC 82,807 SD 8.089 TN 138,351 TX 551,484 UT 89,230 VA 247,237 VT 26,481 WA 122,636 WI 164,225 w 75,020 WY 11,467 0 300 400 500 600 700 900 100 200 800 1000 Number of Discharges in Thousands

Figure 10: Number of Discharges in the 2010 NIS, by State

Appendix II: State-Specific Restrictions

The table below enumerates the types of restrictions applied to the Nationwide Inpatient Sample. Restrictions include the following types:

- Confidentiality of hospitals
 - o Restricted identification of hospitals
 - o Restricted hospital structural characteristics
 - o Limitation on sampling
 - Restricted release of stratifiers
- Confidentiality of records
 - o Restricted release of age in years, or age in days
 - o Other restrictions
- Confidentiality of physicians
- Missing discharges.

For each restriction type the data sources are listed alphabetically by State. Only data sources that have restrictions are included. Data sources that do not have restrictions are not included.

Confidentiality of Hospitals - Restricted Identification of Hospitals

The following data sources required that hospitals not be identified in the NIS:

- AK: Alaska State Hospital and Nursing Home Association
- AR: Arkansas Department of Health
- GA: Georgia Hospital Association
- HI: Hawaii Health Information Corporation
- IN: Indiana Hospital Association
- KS: Kansas Hospital Association
- LA: Louisiana Department of Health and Hospitals
- ME: Maine Health Data Organization
- MI: Michigan Health & Hospital Association
- MO: Missouri Hospital Industry Data Institute
- NE: Nebraska Hospital Association
- NM: New Mexico Department of Health
- OH: Ohio Hospital Association
- OK: Oklahoma State Department of Health
- SC: South Carolina State Budget & Control Board
- SD: South Dakota Association of Healthcare Organizations
- TN: Tennessee Hospital Association
- TX: Texas Department of State Health Services
- WY: Wyoming Hospital Association

In these States the following data elements are set to missing for all hospitals:

- IDNUMBER, AHA hospital identifier without leading 6*
- AHAID, AHA hospital identifier with leading 6*
- HOSPNAME, hospital name
- HOSPCITY, hospital city
- HOSPADDR, hospital address
- HOSPZIP, hospital ZIP Code
- DSHOSPID, data source hospital identifier*
- HOSPSTCO, hospital State, modified county FIPS code*
- HFIPSSTCO, hospital State, unmodified county FIPS code*

^{*}Available in AR.

Confidentiality of Hospitals - Restricted Hospital Structural Characteristics

The following data sources restricted the identification of hospital structural characteristics:

- CO: Colorado Hospital Association
- CT: Connecticut Hospital Association
- GA: Georgia Hospital Association
- SC: South Carolina State Budget & Control Board

In these States the following data elements are set to missing for all hospitals:

- HOSP_MHSMEMBER, Multi-hospital system membership*
- HOSP_MHSCLUSTER, System cluster code*
- HOSP_RNPCT, Percentage of RNs among nurses (RNs and LPNs)
- HOSP_RNFTEAPD, RN FTEs per 1000 adjusted patient days
- HOSP_LPNFTEAPD, LPN FTEs per 1000 adjusted inpatient days
- HOSP_NAFTEAPD, Nurse aides per 1000 adjusted inpatient days
- HOSP_OPSURGPCT, Percentage of all surgeries performed in the outpatient setting.**

^{*}Available in GA.

^{**} Available in GA and SC.

Confidentiality of Hospitals - Limitation on Sampling

Limitations on sampling were required for the following data sources:

- AR: Arkansas Department of Health
 - Six hospitals were dropped from the sampling frame because they had incomplete payer information.
- MI: Michigan Health & Hospital Association
 - Reporting of total charge is limited in the Michigan data. Twenty-eight of 144 hospitals were dropped from the sampling frame because they did not report any total charges. These hospitals were fairly evenly distributed by hospital type. There were no sampling strata in the State containing only hospitals without total charges.
- SC: South Carolina State Budget & Control Board
 - Two hospitals were dropped from the sampling frame to meet additional South Carolina confidentiality requirements.

Some States limit the hospitals that can be included in the NIS. The following data sources requested that hospitals be dropped from the sampling frame whenever there were fewer than two hospitals in a sampling stratum. For more details about the number of hospitals included in the AHA Universe, Frame, and NIS for each NIS State, refer to Table 8 in Appendix I.

- AK: Alaska State Hospital and Nursing Home Association
- GA: Georgia Hospital Association
- HI: Hawaii Health Information Corporation
- IN: Indiana Hospital Association
- KS: Kansas Hospital Association
- LA: Louisiana Department of Health and Hospitals
- ME: Maine Health Data Organization
- MI: Michigan Health & Hospital Association
- MO: Missouri Hospital Industry Data Institute
- NE: Nebraska Hospital Association
- NM: New Mexico Department of Health
- OH: Ohio Hospital Association
- OK: Oklahoma State Department of Health
- SC: South Carolina State Budget & Control Board
- SD: South Dakota Association of Healthcare Organizations
- TN: Tennessee Hospital Association
- TX: Texas Department of State Health Services
- WY: Wyoming Hospital Association

Confidentiality of Hospitals - Restricted Release of Stratifiers

Stratifier data elements were restricted for the following data sources to further ensure hospital confidentiality in the NIS:

- AK: Alaska State Hospital and Nursing Home Association
- GA: Georgia Hospital Association
- HI: Hawaii Health Information Corporation
- IN: Indiana Hospital Association
- KS: Kansas Hospital Association
- LA: Louisiana Department of Health and Hospitals
- ME: Maine Health Data Organization
- MI: Michigan Health & Hospital Association
- MO: Missouri Hospital Industry Data Institute
- NE: Nebraska Hospital Association
- NM: New Mexico Department of Health
- OH: Ohio Hospital Association
- OK: Oklahoma State Department of Health
- SC: South Carolina State Budget & Control Board
- SD: South Dakota Association of Healthcare Organizations
- TN: Tennessee Hospital Association
- TX: Texas Department of State Health Services
- WY: Wyoming Hospital Association

For the above States, stratifier data elements were set to missing if the cell, as defined by the data elements below, had fewer than two hospitals in the universe of the State's hospitals:

- H CONTRL, control/ownership of hospital, without collapsing
- HOSP_CONTROL, control/ownership of hospital
- HOSP_LOCATION, location (urban/rural) of hospital
- HOSP_TEACH, teaching status of hospital
- HOSP BEDSIZE, bed size of hospital
- HOSP LOCTEACH, location/teaching status of hospital
- HOSP_MHSMEMBER, hospital is part of multiple hospital system
- HOSP_MHSCLUSTER, AHA multiple hospital system cluster code

Confidentiality of Records - Restricted Release of Age in Years, Age in Days

The following data sources restrict or limit the release of age:

- CA: Office of Statewide Health Planning and Development
 - Age in days (AGEDAY) and age in years (AGE) are suppressed for some records. In some cases, AGE is set to the midpoint of the age category.
- FL: Florida Agency for Health Care Administration
 - Age in days (AGEDAY) is set to missing on all records
- MA: Division of Health Care Finance and Policy
 - Age in days (AGEDAY) is set to missing on all records
- ME: Maine Health Data Organization
 - Age in days, (AGEDAY) is set to missing on all records
 - Age in years (AGE) is set to midpoints of five-year ranges as follows:

Maine Restriction on AGE for General Patient Population

Maine Restriction on AGE to	or General Patient Population
Age Range	New value of AGE
under 1 year	0
1-4	2
5-9	7
10-14	12
15-19	17
20-24	22
25-29	27
30-34	32
35-39	37
40-44	42
45-49	47
50-54	52
55-59	57
60-64	62
65-69	67
70-74	72
75-79	77
80-84	82
85 years & over	87
unknown	Missing (.)

- SC: South Carolina State Budget & Control Board
 - o Age in days (AGEDAY) is set to missing on all records
- TX: Texas Department of State Health Services
 - Age in days (AGEDAY) is set to missing on all records
 - Age in years (AGE) is set to the midpoints of age ranges defined by the data source. There were 22 age groups for the general patient population and 5 age groups for the HIV or alcohol/drug use patients. The age groups are shown below:

Texas Restriction on AGE for General Patient Population other than HIV or Drug/Alcohol Use Patients

than filv of Drug/F	Alconol Ose Pallenis
Age Range	New value of AGE
0	0
1-4	2
5-9	7
10-14	12
15-17	16
18-19	19
20-24	22
25-29	27
30-34	32
35-39	37
40-44	42
45-49	47
50-54	52
55-59	57
60-64	62
65-69	67
70-74	72
75-79	77
80-84	82
85-89	87
90 and above	90

Texas Restriction on AGE for HIV or Drug/Alcohol Use Patients

niv di Diug/Alco	HIV OF Drug/Alcohol Ose Fatients					
Age Range	New value of AGE					
0	0					
1-17	8					
18-44	31					
45-64	54					
65-74	69					
75 and above	75					

The HIV or drug/alcohol use patients were identified by any principal or secondary diagnosis code on the record having the first four characters equal to one of the values in the following list: '2910', '2911', '2912', '2913', '2914', '2915', '2918', '2919', '2920', '2921', '2922', '2928', '2929', '3030', '3039', '3040', '3041', '3042', '3043', '3044', '3045', '3046', '3047', '3048','3049', '3050', '3052', '3053', '3054', '3055', '3056', '3057', '3058', '3059', '7903', 'V08', and '042'.

Confidentiality of Records – Other Restrictions

The following data sources restrict or limit the release of data elements for patient confidentiality:

- CA: Office of Statewide Health Planning & Development
 - Admission month (AMONTH), gender (FEMALE), and race (RACE) are suppressed for some records.
- FL: Florida Agency for Health Care Administration
 - Admission month (AMONTH) is set to missing on all records
- MA: Division of Health Care Finance and Policy
 - NCHS-defined Patient Urban-Rural Codes (PL_NCHS2006) is set to missing on all records
- ME: Maine Health Data Organization
 - The following data elements are suppressed:
 - Admission Source, UB-92 standard coding (ASOURCEUB92)
 - Admission Source, as received from source (ASOURCE_X)
 - Disposition of patient, UB04 standard coding (DISPUB04)
 - Length of stay, as received from source (LOS_X)
 - Primary expected payer, as received from source (PAY1_X)
 - Secondary expected payer, as received from source (PAY2_X)
 - Point of origin for admission or visit, UB-04 standard coding (PointOfOriginUB04)
 - Point of origin for admission or visit, as received from source (PointOfOrigin X)
 - Total Charges, as received from source (TOTCHG_X)
- WV: West Virginia Health Care Authority
 - Admission month (AMONTH) is set to missing on all records

Missing Discharges

The following data sources may be missing discharge records for specific populations of patients:

- IA: Iowa Hospital Association
 - Beginning in data year 2001, the Iowa Hospital Association prohibits the release of two types of discharges: HIV infections (defined by MDC of 25) and behavioral health including chemical dependency care or psychiatric care (defined by a service code of BHV). These discharges were not included in the source file provided to HCUP and were therefore not included in the NIS.
- NE: Nebraska Hospital Association
 - The Nebraska Hospital Association prohibits the release of discharge records for patients with HIV diagnoses. These discharges were not included in the source file provided to HCUP and were therefore not included in the NIS.
- NY: New York State Department of Health
 - Beginning with data year 2008, the New York State Department of Health masks the hospital identifiers on abortion records. As a result, these records are not included in the NIS.

Appendix III: Data Elements

Table 1. Data Elements in the NIS Inpatient Core Files

Data elements that are *italicized* are not included in the 2010 NIS Inpatient Core files, but are only available in previous years' files.

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:			
Admission information							
Admission day	AWEEKEND	1998-2010	Admission on weekend: (0) admission on Monday-Friday, (1) admission on Saturday-Sunday	ı			
_	ADAYWK	1988-1997	Admission day of week: (1) Sunday, (2) Monday, (3) Tuesday, (4) Wednesday, etc.				
Admission month	AMONTH	1988-2010	Admission month coded from (1) January to (12) December	FL, WV			
Admission source	ASOURCE	1988-2010	Admission source, uniform coding: (1) ER, (2) another hospital, (3) another facility including long-term care, (4) court/law enforcement, (5) routine/birth/other	AK, AZ, CT, FL, GA, HI, IA, KS, KY, ME, MI, MN, MO, MT, NC, NE, OK, OR, PA, RI, SC, SD, TN, TX, UT, VT, WA, WI, WY			
	ASOURCE_X	1998-2010	Admission source, as received from data source using State-specific coding				

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
	ASOURCEUB92	2003-2010	Admission source (UB-92 standard coding). For newborn admissions (ATYPE = 4): (1) normal newborn, (2) premature delivery, (3) sick baby, (4) extramural birth; For non-newborn admissions (ATYPE NE 4): (1) physician referral, (2) clinic referral, (3) HMO referral, (4) transfer from a hospital, (5) transfer from a skilled nursing facility, (6) transfer from a another health care facility, (7) emergency room, (8) court/law enforcement, (A) transfer from a critical access hospital, (B) transfer from another home health agency, (C) readmission to same home health agency, (D) transfer from one distinct unit of the hospital to another distinct unit of the same hospital resulting in a separate claim to the payer, (E) transfer from ambulatory surgery center, (F) transfer from hospice and under hospice plan	AK, AZ, CA, CT, FL, GA, HI, IA, KS, KY, MD, ME, MI, MN, MO, MT, NC, NE, OK, OR, PA, RI, SC, SD, TN, TX, UT, VT, WA, WI, WY
	POINTOFORIGIN _X	2009-2010	Point of origin for admission or visit, as received from source	CA, MA, MD, ME
	POINTOFORIGIN _UB04	2007-2010	Point of origin for admission or visit, UB-04 standard coding. For newborn admission (ATYPE = 4): (5) Born inside this hospital, (6) Born outside of this hospital; For non-newborn admissions (ATYPE NE 4): (1) Non-health care facility point of origin, (2) Clinic, (4) Transfer from a hospital (different facility), (5) Transfer from a skilled Nursing Facility (SNF) or Intermediate Care Facility (ICF), (6) Transfer from another health care facility, (7) Emergency room, (8) Court/law enforcement, (B) Transfer from another Home Health Agency, (C) Readmission to Same Home Health Agency, (D) Transfer from one distinct unit of the hospital to another distinct unit of the same hospital resulting in a separate claim to the payer, (E) Transfer from ambulatory surgery center, (F) Transfer from hospice and is under a hospice plan of care or enrolled in a hospice program	CA, MA, MD, ME

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
Transferred into hospital	TRAN_IN	2008-2010	Transfer In Indicator: (0) not a transfer, (1) transferred in from a different acute care hospital [ATYPE NE 4 & (ASOURCE=2 or POO=4)], (2) transferred in from another type of health facility [ATYPE NE 4 & (ASOURCE=3 or POO=5,6)]	
Indicator of emergency department service	HCUP_ED	2007-2010	Indicator that discharge record includes evidence of emergency department (ED) services: (0) Record does not meet any HCUP Emergency Department criteria, (1) Emergency Department revenue code on record, (2) Positive Emergency Department charge (when revenue center codes are not available), (3) Emergency Department CPT procedure code on record, (4) Admission source of ED, (5) State-defined ED record; no ED charges available	
Admission type	ATYPE	1988-2010	Admission type, uniform coding: (1) emergency, (2) urgent, (3) elective, (4) newborn, (5) Delivery (coded in 1988-1997 data only), (5) trauma center beginning in 2003 data, (6) other	CA
	ELECTIVE	2002-2010	Indicates elective admission: (1) elective, (0) non-elective admission	
Patient demograp	ohic and location i	nformation		
Age at admission	AGE	1988-2010	Age in years coded 0-124 years	
	AGEDAY	1988-2010	Age in days coded 0-365 only when the age in years is less than 1	FL, MA, ME, SC, TX, WA
Sex of patient	FEMALE	1998-2010	Indicates gender for NIS beginning in 1998: (0) male, (1) female	
	SEX		Indicates gender for NIS prior to 1998: (1) male, (2) female	
Race of patient	RACE	1988-2010	Race, uniform coding: (1) white, (2) black, (3) Hispanic, (4) Asian or Pacific Islander, (5) Native American, (6) other	MN, OH, WA, WV

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
Location of patient's residence	PL_NCHS2006	2007-2010	Patient Location: NCHS Urban-Rural Code (V2006). This is a six-category urban-rural classification scheme for U.S. counties: (1) "Central" counties of metro areas of >=1 million population,(2) "Fringe" counties of metro areas of >=1 million population,(3) Counties in metro areas of 250,000-999,999 population,(4) Counties in metro areas of 50,000-249,999 population,(5) Micropolitan counties,(6) Not metropolitan or micropolitan counties	MA
	PL_UR_CAT4	2003-2006	Urban–rural designation for patient's county of residence: (1) large metropolitan, (2) small metropolitan, (3) micropolitan, (4) non-metropolitan or micropolitan	
Median household income for patient's ZIP Code		2003-2010	Median household income quartiles for patient's ZIP Code. For 2008, the mediar income quartiles are defined as: (1) \$1 - \$38,999; (2) \$39,000 - \$47,999; (3) \$48,000 - 62,999; and (4) \$63,000 or more.	1
	ZIPINC	1998-2002	Median household income category in files beginning in 1998: (1) \$1-\$24,999, (2) \$25,000-\$34,999, (3) \$35,000-\$44,999, (4) \$45,000 and above	
	ZIPINC4	1988-1997	Median household income category in files prior to 1998: (1) \$1-\$25,000, (2) \$25,001-\$30,000, (3) \$30,001-\$35,000, (4) \$35,001 and above	
	ZIPINC8	1988-1997	Median household income category in files prior to 1998: (1) \$1-\$15,000, (2) \$15,001-\$20,000, (3) \$20,001-\$25,000, (4) \$25,001-\$30,000, (5) \$30,001-\$35,000, (6) \$35,001-\$40,000, (7) \$40,001-\$45,000, (8) \$45,001 or more	
Payer information	1			
Primary expected payer	PAY1	1988-2010	Expected primary payer, uniform: (1) Medicare, (2) Medicaid, (3) private including HMO, (4) self-pay, (5) no charge, (6) other	

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
	PAY1_N	1988-1997	Expected primary payer, nonuniform: (1) Medicare, (2) Medicaid, (3) Blue Cross, Blue Cross PPO, (4) commercial, PPO, (5) HMO, PHP, etc., (6) self-pay, (7) no charge, (8) Title V, (9) Worker's Compensation, (10) CHAMPUS, CHAMPVA, (11) other government, (12) other	
	PAY1_X	1998-2010	Expected primary payer, as received from the data source	ME
Secondary expected payer	PAY2	1988-2010	Expected secondary payer, uniform: (1) Medicare, (2) Medicaid, (3) private including HMO, (4) self-pay, (5) no charge, (6) other	AZ, CA, FL, HI, IA, OH, OK, RI, SD, VA
	PAY2_N	1988-1997	Expected secondary payer, nonuniform: (1) Medicare, (2) Medicaid, (3) Blue Cross, Blue Cross PPO, (4) commercial, PPO, (5) HMO, PHP, etc., (6) self-pay, (7) no charge, (8) Title V, (9) Worker's Compensation, (10) CHAMPUS, CHAMPVA, (11) other government, (12) other	
	PAY2_X	1998-2010	Expected secondary payer, as received from the data source	AZ, CA, FL, HI, IA, ME, OH, OK, RI, SD, VA
Diagnosis and p	rocedure informati	on		
ICD-9-CM diagnoses	DX1 – DX25	1988-2010	Diagnoses, principal and secondary (ICD-9-CM). Beginning in 2003, the diagnosis array does not include any external cause of injury codes. These codes have been stored in a separate array ECODEn. Beginning in 2009, the diagnosis array was increased from 15 to 25.	
	NDX	1988-2010	Number of diagnoses coded on the original record	
	DSNDX	1988-1997	Number of diagnosis fields provided by the data source	
	DXSYS	1988-1997	Diagnosis coding system (ICD-9-CM)	
	DXV1 - DXV15	1988-1997	Diagnosis validity flags	

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
External causes of injury and poisoning	ECODE1 - ECODE4	2003-2010	External cause of injury and poisoning code, primary and secondary (ICD-9-CM). Beginning in 2003, external cause of injury codes are stored in a separate array ECODEn from the diagnosis codes in the array DXn. Prior to 2003, these codes are contained in the diagnosis array (DXn).	
	NECODE	2003-2010	Number of external cause of injury codes on the original record. A maximum of 4 codes are retained on the NIS.	
ICD-9-CM procedures	PR1 - PR15	1988-2010	Procedures, principal and secondary (ICD-9-CM)	
	NPR	1988-2010	Number of procedures coded on the original record	
	DSNPR	1988-1997	Number of procedure fields in this data source	
	PRSYS	1988-1997	Procedure system (1) ICD-9-CM, (2) CPT-4, (3) HCPCS/CPT-4	
	PRV1 -PRV15	1988-1997	Procedure validity flag: (0) Indicates a valid and consistent procedure code, (1) Indicates an invalid code for the discharge date	
	PRDAY1	1988-2010	Number of days from admission to principal procedure.	OH, OK, UT,
	PRDAY2 - PRDAY15	1998-2010	Number of days from admission to secondary procedures	OH, OK, UT, WI, WV
DRG information				
Diagnosis Related	DRG	1988-2010	DRG in use on discharge date	
Group (DRG)	DRG_NoPOA	2008-2010	DRG in use on discharge date, calculated without Present On Admission (POA) indicators	
	DRGVER	1988-2010	Grouper version in use on discharge date	
	DRG10	1988-1999	DRG Version 10 (effective October 1992 - September 1993)	
	DRG18	1998-2005	DRG Version 18 (effective October 2000 - September 2001)	
	DRG24	2006-2010	DRG Version 24 (effective October 2006 - September 2007)	
Major Diagnosis	MDC	1988-2010	MDC in use on discharge date	
Category (MDC)	MDC_noPOA	2009-2010	MDC in use on discharge date, calculated without Present on Admission (POA) indicators	

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
	MDC10	1988-1999	MDC Version 10 (effective October 1992 - September 1993)	
	MDC18	1998-2005	MDC Version 18 (effective October 2000 - September 2001)	
	MDC24	2006-2010	MDC Version 24 (effective October 2006 - September 2007)	

Other data elements derived from ICD-9-CM codes see also:

Table 3, Data Elements in the NIS Disease Severity Measures File and Table 4, Data Elements in the NIS Diagnosis and Procedures Groups File

Clinical Classifications Software (CCS) category	DXCCS1 – DXCCS25	1998-2010	Clinical Classifications Software (CCS) category for all diagnoses for NIS beginning in 1998. Beginning in 2009, the diagnosis array was increased from 15 to 25.
	DCCHPR1	1988-1997	CCS category for principal diagnosis for NIS prior to 1998. CCS was formerly called the Clinical Classifications for Health Policy Research (CCHPR).
	E_CCS1 - E_CCS4	2003-2010	CCS category for the external cause of injury and poisoning codes
	PRCCS1 - PRCCS15	1998-2010	CCS category for all procedures for NIS beginning in 1998
	PCCHPR1	1988-1997	CCS category for principal procedure for NIS prior to 1998. CCS was formerly called the Clinical Classifications for Health Policy Research (CCHPR).
Number of chronic conditions	NCHRONIC	2008-2010	Count of chronic conditions in the diagnosis vector
Operating room procedure indicator	ORPROC	2009-2010	Major operating room procedure indicator for the record: (0) no major operating room procedure, (1) major operating room procedure
Neonatal/ materna flag	INEOMAT	1988-2010	Assigned from diagnoses and procedure codes: (0) not maternal or neonatal, (1) maternal diagnosis or procedure, (2) neonatal diagnosis, (3) maternal and neonatal on same record
Indicates in- hospital birth	HOSPBRTH	2006-2010	Indicator that discharge record includes diagnosis of birth that occurred in the hospital: (0) Not an in-hospital birth, (1) In-hospital birth

Total charges	TOTCHG	1988-2010	Total charges, edited	
rotal onalgos	TOTCHG_X		Total charges, as received from data source	ME
Length of stay	LOS	1988-2010	Length of stay, edited	
	LOS_X	1988-2010	Length of stay, as received from data source	ME
Discharge inform	ation			
Discharge quarter	DQTR	1988-2010	Coded: (1) First quarter, Jan - Mar, (2) Second quarter, Apr - Jun, (3) Third quarter, Jul - Sep, (4) Fourth quarter, Oct - Dec	
	DQTR_X	2006-2010	Discharge quarter, as received from data source	
Discharge year	YEAR	1988-2010		
Disposition of patient (discharge status)	DISP	1988-1997	Disposition of patient, uniform coding used prior to 1998: (1) routine, (2) short-term hospital, (3) skilled nursing facility, (4) intermediate care facility, (5) another type of facility, (6) home health care, (7) against medical advice, (20) died	
	DIED	1988-2010	Indicates in-hospital death: (0) did not die during hospitalization, (1) died during hospitalization	
	DISPUB92	1998-2006	Disposition of patient, UB-92 coding: (1) routine, (2) short-term hospital, (3) skilled nursing facility, (4) intermediate care, (5) another type of facility, (6) home health care, (7) against medical advice, (8) home IV provider, (20) died in hospital, (40) died at home, (41) died in a medical facility, (42) died, place unknown, (43) alive, Federal health facility, (50) Hospice, home, (51) Hospice, medical facility, (61) hospital-based Medicare approved swing bed, (62) another rehabilitation facility, (63) long-term care hospital, (64) certified nursing facility, (65) psychiatric hospital, (66) critical access hospital (71) another institution for outpatient services, (72) this institution for outpatient services, (99)	

DISPUB04

2006-2010 Disposition of patient, UB04 standard

coding: (1) Discharged to Home or Self Care (Routine Discharge), (2) Discharged/transferred to a Short-Term Hospital for Inpatient Care, (3) Discharged/transferred to a Skilled Nursing Facility (SNF), (4) Discharged/transferred to an Intermediate Care Facility (ICF), (5) Discharged/transferred to a Designated Cancer Center or Children's Hospital (Effective 10/1/07), (5) Discharged/transferred to another type of institution not defined elsewhere (Effective prior to 10/1/07), (6) Discharged/transferred to Home under care of Organized Home Health Service Organization, (7) Left Against Medical IV provider, (9) Admitted as an inpatient

Advice or Discontinued Care. (8) home to this hospital - valid only on outpatient data, (20) Expired, (40) Expired at home,

(41) Expired in a Medical Facility, (42) Expired - place unknown, (43)

Discharged/transferred to a Federal Health Care Facility, (50) Hospice -Home, (51) Hospice - Medical Facility, (61) Discharged/transferred to a Hospital-Based Medicare approved Swing Bed. (62) Discharged/transferred to an Inpatient Rehabilitation Facility (IRF) including Rehabilitation Distinct part unit of a hospital. (63)

Discharged/transferred to a Medicare certified Long Term Care Hospital (LTCH), (64) Discharged/transferred to a Nursing Facility certified by Medicaid, but not certified by Medicare, (65) Discharged/transferred to a Psychiatric Hospital or Psychiatric distinct part unit of a hospital, (66) Discharged/transferred

to a Critical Access Hospital (CAH). (70) Discharged/transferred to another type of institution not defined elsewhere (Effective 10/1/07), (71) Another institution for outpatient services, (72)

This institution for outpatient services. (99) Discharged alive, destination

unknown

CA, MD, ME

DISPUNIFORM	1998-2010	Disposition of patient, uniform coding used beginning in 1998: (1) routine, (2) transfer to short-term hospital, (5) other transfers, including skilled nursing facility, intermediate care, and another type of facility, (6) home health care, (7) against medical advice, (20) died in hospital, (99) discharged alive, destination unknown
TRAN_OUT	2010	Transfer Out Indicator: (0) not a transfer, (1) transferred out to a different acute care hospital, (2) transferred out to another type of health facility

Weights (to calculate national estimates)

Discharge weights (weights for 1988- 1993 are on Hospital Weights file)	DISCWT	1998-2010	Discharge weight on Core file and Hospital Weights file for NIS beginning in 1998. In all data years except 2000, this weight is used to create national estimates for all analyses. In 2000 only, this weight is used to create national
			estimates for all analyses, excluding those that involve total charges.
	DISCWT_U	1993-1997	Discharge weight on Core file and Hospital Weights file for NIS prior to 1998
	DISCWTcharge	2000	Discharge weight for national estimates of total charges. In 2000 only, this weight is used to create national estimates for analyses that involve total charges.
	DISCWT10	1998-2004	Discharge weight on 10% subsample Core file for NIS from 1998 to 2004. In all data years except 2000, this weight is used to create national estimates for all analyses. In 2000 only, this weight is used to create national estimates for all analyses, excluding those that involve total charges.
	D10CWT_U	1993-1997	Discharge weight on 10% subsample Core file for NIS prior to 1998
	DISCWTcharge10	2000	Discharge weight for national estimates of total charges on 10% subsample file. In 2000 only, this weight is used to create national estimates for analyses that involve total charges.

Hospital informat	ion			
Hospital identifiers (encrypted)	DSHOSPID	1988-2010	Hospital number as received from the data source	AK, GA, HI, IN, KS, LA, ME, MI, MO NE, NM, OH, OK, SC, SD, TN, TX, WY
	HOSPID	1988-2010	HCUP hospital number (links to Hospital Weights file)	
Hospital location	HOSPST	1988-2010	State postal code for the hospital (e.g., AZ for Arizona)	
	HOSPSTCO	1988-2002	Modified Federal Information Processing Standards (FIPS) State/county code for the hospital links to Area Resource File (available from the Bureau of Health Professions, Health Resources and Services Administration). Beginning in 2003, this data element is available only on the Hospital Weights file.	
Hospital stratifier	NIS_STRATUM	1998-2010	Stratum used to sample hospitals, based on geographic region, control, location/teaching status, and bed size. Stratum information is also contained in the Hospital Weights file.	
Other identifiers				
Physician identifiers, synthetic	MDID_S	1988-2000	Synthetic attending physician number in files prior to 2001	
	MDNUM1_R	2003-2009	Re-identified attending physician number in files starting in 2003	
	MDNUM1_S	2001-2002	Synthetic attending physician number in files beginning in 2001 and discontinued in 2003	
	SURGID_S	1988-2000	Synthetic primary surgeon number in files prior to 2001	
	MDNUM2_R	2003-2009	Re-identified secondary physician number in files starting in 2003	
	MDNUM2_S	2001-2002	Synthetic secondary physician number in files beginning in 2001 and discontinued in 2003	,

Data source information	DSNUM	1988-1997	Data source number
	DSTYPE	1988-1997	Data source type: (1) State data organization, (2) Hospital association, (3) Consortia
Record identifier, synthetic	KEY	1998-2010	Unique record number for file beginning in 1998
	SEQ	1988-1997	Unique record number for NIS prior to 1998
	SEQ_SID	1994-1997	Unique record number for NIS and SID prior to 1998
	PROCESS	1988-1997	Processing number for NIS prior to 1998

Table 2. Data Elements in the NIS Hospital Weights Files

Data elements that are *italicized* are not included in the 2010 NIS Hospital Weights File, but are only available in previous years' files.

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
Discharge counts	N_DISC_U		Number of AHA universe discharges in the stratum	
	S_DISC_U	1988-2010	Number of sampled discharges in the sampling stratum (NIS_STRATUM or STRATUM)	
	S_DISC_S	1988-1997	Number of sampled discharges in the stratum STRAT_ST	
	N_DISC_F	1988-1997	Number of frame discharges in the stratum	_
	N_DISC_S	1988-1997	Number of State's discharges in the stratum	
	TOTAL_DISC	1998-2010	Total number of discharges from this hospital in the NIS	
	TOTDSCHG	1988-1997	Total number of discharges from this hospital in the NIS	
Discharge weights	DISCWT	1998-2010	Discharge weight used in the NIS beginning in 1998. In all data years except 2000, this weight is used to create national estimates for all analyses. In 2000 only, this weight is used to create national estimates for all analyses, excluding those that involve total charges.	
	DISCWT_U	1988-1997	Discharge weights used in the NIS prior to 1998.	
	DISCWT_F	1988-1997	Discharge weights to the sample frame are available only in 1988-1997	
	DISCWT_S	1988-1997	Discharge weights to the State are available only in 1988-1997)
	DISCWTcharge	2000	Discharge weight for national estimates of total charges for 2000 only.	
Discharge Year	YEAR	1988-2010	Discharge year	
Hospital	N_HOSP_F	1988-1997	Number of frame hospitals in the stratum	
counts	N_HOSP_S	1988-1997	Number of State's hospitals in the stratum	
	N_HOSP_U	1988-2010	Number of AHA universe hospitals in the stratum	
	S_HOSP_S	1988-1997	Number of sampled hospitals in STRAT_ST	-
	S_HOSP_U	1988-2010	Number of sampled hospitals in the stratum (NIS_STRATUM or STRATUM)	

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
Hospital identifiers	HOSPID	1988-2010	HCUP hospital number (links to Inpatient Core files)	
	AHAID	1988-2010	AHA hospital identifier that matches AHA Annual Survey Database (not available for all States)	AK, GA, HI, IN, KS, LA, ME, MI, MO, NE, NM, OH, OK, SC, SD, TN, TX, WY
	IDNUMBER	1988-2010	AHA hospital identifier without the leading 6 (not available for all States)	AK, GA, HI, IN, KS, LA, ME, MI, MO, NE, NM, OH, OK, SC, SD, TN, TX, WY
	HOSPNAME	1993-2010	Hospital name from AHA Annual Survey Database (not available for all States)	AK, AR, GA, HI, IN, KS, LA, ME, MI, MO, NE, NM, OH, OK, SC, SD, TN, TX, WY
Hospital location	HOSPADDR	1993-2010	Hospital address from AHA Annual Survey Database (not available for all States)	AK, AR, GA, HI, IN, KS, LA, ME, MI, MO, NE, NM, OH, OK, SC, SD, TN, TX, WY
	HOSPCITY	1993-2010	Hospital city from AHA Annual Survey Database (not available for all States)	AK, AR, GA, HI, IN, KS, LA, ME, MI, MO, NE, NM, OH, OK, SC, SD, TN, TX, WY
	HOSPST	1988-2010	Hospital State postal code for hospital (e.g., AZ for Arizona)	
	HOSPSTCO	2002-2010	Modified Federal Information Processing Standards (FIPS) State/county code	AK, GA, HI, IN, KS, LA, ME, MI, MO, NE, NM, OH, OK, SC, SD, TN, TX, WY

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
	HFIPSSTCO	2005-2010	Unmodified Federal Information Processing Standards (FIPS) State/county code for the hospital. Links to the Area Resource File (available from the Bureau of Health Professions, Health Resources and Services Administration)	AK, GA, HI, IN, KS, LA, ME, MI, MO, NE, NM, OH, OK, SC, SD, TN, TX, WY
	HOSPZIP	1993-2010	Hospital ZIP Code from AHA Annual Survey Database (not available for all States)	AK, AR, GA, HI, IN, KS, LA, ME, MI, MO, NE, NM, OH, OK, SC, SD, TN, TX, WY
Hospital characteristics	HOSP_BEDSIZE	1998-2010	Bed size of hospital (STRATA): (1) small, (2) medium, (3) large	
	H_BEDSZ	1993-1997	Bed size of hospital: (1) small, (2) medium, (3) large	_
	ST_BEDSZ	1988-1992	Bed size of hospital: (1) small, (2) medium, (3) large	
	HOSP_CONTROL	1998-2010	Control/ownership of hospital, collapsed (STRATA): (0) government or private, collapsed category, (1) government, nonfederal, public, (2) private, non-profit, voluntary, (3) private, invest-own, (4) private, collapsed category	
	H_CONTRL		Control/ownership of hospital: (1) government, nonfederal (2) private, nonprofit (3) private, investor-own	
	ST_OWNER	1988-1992	Control/ownership of hospital: (1) public (2) private, non-profit (3) private for profit	
	HOSP_ LOCATION	1998-2010	Location: (0) rural, (1) urban	
	H_LOC	1993-1997	Location: (0) rural, (1) urban	
	HOSP_ LOCTEACH	1998-2010	Location/teaching status of hospital (STRATA): (1) rural, (2) urban non-teaching, (3) urban teaching	
	HOSP_ MHSMEMBER	2007-2010	Multi-hospital system membership: (0) non-member, (1) member	CO, CT, SC
	HOSP_ MHSCLUSTER	2007-2010	Multi-hospital system cluster code: (1) centralized health system, (2) centralized physician/insurance health system, (3) moderately centralized health system, (4) decentralized health system, (5) independent hospital system, (6) unassigned	AK, CO, CT, RI, SC, VT
	HOSP_RNPCT		Percentage of RNs among all nurses (RNs and LPNs)	CO, CT, GA, SC
	HOSP_ RNFTEAPD	2007-2010	RN FTEs per 1000 adjusted inpatient days	CO, CT, GA, SC

Type of Data Element	HCUP Name	Years Available	Coding Notes	Unavailable in 2010 for:
	HOSP_ LPNFTEAPD	2007-2010	LPN FTEs per 1000 adjusted inpatient days	CO, CT, GA, SC
	HOSP_ NAFTEAPD	2007-2010	Nurse aides per 1000 adjusted inpatient days	CO, CT, GA, SC
	HOSP_ OPSURGPCT	2007-2010	Percentage of all surgeries performed in outpatient setting	CO, CT
	H_LOCTCH	1993-1997	Location/teaching status of hospital: (1) rural, (2) urban non-teaching, (3) urban teaching	
	LOCTEACH	1988-1992	Location/teaching status of hospital: (1) rural, (2) urban non-teaching, (3) urban teaching	
	HOSP_REGION	1998-2010	Region of hospital (STRATA): (1) Northeast, (2) Midwest, (3) South, (4) West	
	H_REGION	1993-1997	Region of hospital: (1) Northeast, (2) Midwest, (3) South, (4) West	
	ST_REG	1988-1992	Region of hospital: (1) Northeast, (2) Midwest, (3) South, (4) West	
	HOSP_TEACH	1998-2010	Teaching status of hospital: (0) non-teaching, (1) teaching	
	H_TCH	1993-1997	Teaching status of hospital: (0) non- teaching, (1) teaching	
	NIS_STRATUM	1998-2010	Stratum used to sample hospitals beginning in 1998; includes geographic region, control, location/teaching status, and bed size	
	STRATUM	1988-1997	Stratum used to sample hospitals prior to 1998; includes geographic region, control, location/teaching status, and bed size	
	STRAT_ST	1988-1997	Stratum for State-specific weights	_
Hospital weights	HOSPWT	1998-2010	Weight to hospitals in AHA universe (i.e., total U.S.) beginning in 1998	
	HOSPWT_U	1988-1997	Weight to hospitals in AHA universe (i.e., total U.S.) prior to 1998	
	HOSPWT_F	1988-1997	Weight to hospitals in the sample frame	
	HOSPWT_S	1988-1997	Weight to hospitals in the State	

Table 3. Data Elements in the NIS Disease Severity Measures Files

Data elements that are *italicized* are not included in the 2010 NIS Inpatient Core files, but are only available in previous years' files. All other data elements listed below are available for all States in the 2010 NIS Disease Severity Measures files.

Type of Data Element	HCUP Name	Years Available	Coding Notes
AHRQ Comorbidity Software (AHRQ)	CM_AIDS	2002-2010	AHRQ comorbidity measure: Acquired immune deficiency syndrome: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_ALCOHOL	2002-2010	AHRQ comorbidity measure: Alcohol abuse: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_ANEMDEF	2002-2010	AHRQ comorbidity measure: Deficiency anemias : (0) Comorbidity is not present, (1) Comorbidity is present
	CM_ARTH	2002-2010	AHRQ comorbidity measure: Rheumatoid arthritis/collagen vascular diseases: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_BLDLOSS	2002-2010	AHRQ comorbidity measure: Chronic blood loss anemia: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_CHF	2002-2010	AHRQ comorbidity measure: Congestive heart failure: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_CHRNLUNG	2002-2010	AHRQ comorbidity measure: Chronic pulmonary disease: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_COAG	2002-2010	AHRQ comorbidity measure: Coagulopathy: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_DEPRESS	2002-2010	AHRQ comorbidity measure: Depression: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_DM	2002-2010	AHRQ comorbidity measure: Diabetes, uncomplicated: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_DMCX	2002-2010	AHRQ comorbidity measure: Diabetes with chronic complications: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_DRUG	2002-2010	AHRQ comorbidity measure: Drug abuse: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_HTN_C	2002-2010	AHRQ comorbidity measure: Hypertension, (combine uncomplicated and complicated): (0) Comorbidity is not present, (1) Comorbidity is present
	CM_HYPOTHY	2002-2010	AHRQ comorbidity measure: Hypothyroidism: (0) Comorbidity is not present, (1) Comorbidity is present

Type of Data Element	HCUP Name	Years Available	Coding Notes
	CM_LIVER	2002-2010	AHRQ comorbidity measure: Liver disease: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_LYMPH	2002-2010	AHRQ comorbidity measure: Lymphoma : (0) Comorbidity is not present, (1) Comorbidity is present
	CM_LYTES	2002-2010	AHRQ comorbidity measure: Fluid and electrolyte disorders: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_METS	2002-2010	AHRQ comorbidity measure: Metastatic cancer: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_NEURO	2002-2010	AHRQ comorbidity measure: Other neurological disorders: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_OBESE	2002-2010	AHRQ comorbidity measure: Obesity: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_PARA	2002-2010	AHRQ comorbidity measure: Paralysis: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_PERIVASC	2002-2010	AHRQ comorbidity measure: Peripheral vascular disorders: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_PSYCH	2002-2010	AHRQ comorbidity measure: Psychoses: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_PULMCIRC	2002-2010	AHRQ comorbidity measure: Pulmonary circulation disorders: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_RENLFAIL	2002-2010	AHRQ comorbidity measure: Renal failure: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_TUMOR	2002-2010	AHRQ comorbidity measure: Solid tumor without metastasis: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_ULCER	2002-2010	AHRQ comorbidity measure: Peptic ulcer disease excluding bleeding: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_VALVE	2002-2010	AHRQ comorbidity measure: Valvular disease: (0) Comorbidity is not present, (1) Comorbidity is present
	CM_WGHTLOSS	2002-2010	AHRQ comorbidity measure: Weight loss: (0) Comorbidity is not present, (1) Comorbidity is present

Type of Data Element	HCUP Name	Years Available	Coding Notes
All Patient	APRDRG	2002-2010	All Patient Refined DRG
Refined DRG	APRDRG_Risk_	2002-2010	All Patient Refined DRG: Risk of Mortality
(3M)	Mortality		Subclass: (0) No class specified,(1) Minor
			likelihood of dying,(2) Moderate likelihood of
			dying,(3) Major likelihood of dying,(4) Extreme
			likelihood of dying
	APRDRG_Severity	2002-2010	All Patient Refined DRG: Severity of Illness
			Subclass: (0) No class specified,(1) Minor loss of
			function (includes cases with no comorbidity or complications),(2) Moderate loss of function,(3)
			Major loss of function,(4)Extreme loss of function
All-Payer	APSDRG	2002-2009	All-Payer Severity-adjusted DRG
Severity-	APSDRG	2002-2009	All-Payer Severity-adjusted DRG: Mortality Weight
adjusted	Mortality_Weight	2002-2009	All-r ayer Severity-adjusted DNG. Mortality Weight
DRG (Optum Insight)	APSDRG_LOS_ Weight	2002-2009	All-Payer Severity-adjusted DRG: Length of Stay Weight
o.g.n.,	_	0000 0000	
	APSDRG_Charge_ Weight	2002-2009	All-Payer Severity-adjusted DRG: Charge Weight
Disease	DS_DX_	2002-2010	Disease Staging: Principal Disease Category
Staging	Category1		
(Thomson Reuters)	DS_Stage1	2002-2010	Disease Staging: Stage of Principal Disease Category
	DS_LOS_Level	2002-2007	Disease Staging: Length of Stay Level: (1) Very
			low (less than 5% of patients),(2) Low (5 - 25% of
			patients),(3) Medium (25 - 75% of patients),(4)
			High (75 - 95% of patients),(5) Very high (greater
	DC 1 OC Coolo	2002-2007	than 95% of patients)
	DS_LOS_Scale	2002-2007	Disease Staging: Length of Stay Scale
	DS_Mrt_Level	2002-2007	Disease Staging: Mortality Level: (0) Extremely low - excluded from percentile calculation
			(mortality probability less than .0001), (1) Very low
			(less than 5% of patients), (2) Low (5 - 25% of
			patients), (3) Medium (25 - 75% of patients), (4)
			High (75 - 95% of patients), (5) Very high (greater
			than 95% of patients)
	DS_Mrt_Scale	2002-2007	Disease Staging: Mortality Scale
	DS_RD_Level	2002-2007	Disease Staging: Resource Demand Level: (1)
			Very low (less than 5% of patients),(2) Low (5 -
			25% of patients),(3) Medium (25 - 75% of
			patients),(4) High (75 - 95% of patients),(5) Very
	DS_RD_Scale	2002-2007	high (greater than 95% of patients) Disease Staging: Resource Demand Scale
Linkage Data	HOSPID	2002-2007	HCUP hospital identification number
Elements	KEY	2002-2010	HCUP record identifier
	NE I	2002-2010	TICOF TECOTO IDETICITE

Table 4. Data Elements in the NIS Diagnosis and Procedure Groups Files

Data elements that are *italicized* are not included in the 2010 NIS Inpatient Core files, but are only available in previous years' files. All other data elements listed below are available for all States in the 2010 NIS Diagnosis and Procedure Groups files.

Type of Data Element	HCUP Name	Years Available	Coding Notes
Clinical Classifications	CCSMGN1 – CCSMGN15	2005-2006	CCS-MHSA general category for all diagnoses
Software category for	CCSMSP1 – CCSMSP15	2005-2006	CCS-MHSA specific category for all diagnoses
Mental Health and Substance Abuse (CCS-MHSA)	ECCSMGN1 – ECCSMGN4	2005-2006	CCS-MHSA general category for all external cause of injury codes
Chronic Condition Indicator	CHRON1 – CHRON25	2005-2010	Chronic condition indicator for all diagnoses: (0) non-chronic condition, (1) chronic condition. Beginning in 2009, the diagnosis array was increased from 15 to 25.
	CHRONB1 – CHRONB25	2005-2010	Chronic condition indicator body system for all diagnoses: (1) Infectious and parasitic disease, (2) Neoplasms, (3) Endocrine, nutritional, and metabolic diseases and immunity disorders, (4) Diseases of blood and blood-forming organs, (5) Mental disorders, (6) Diseases of the nervous system and sense organs, (7) Diseases of the circulatory system, (8) Diseases of the respiratory system, (9) Diseases of the digestive system, (10) Diseases of the genitourinary system, (11) Complications of pregnancy, childbirth, and the puerperium, (12) Diseases of the skin and subcutaneous tissue, (13) Diseases of the musculoskeletal system, (14) Congenital anomalies, (15) Certain conditions originating in the perinatal period, (16) Symptoms, signs, and ill-defined conditions, (17) Injury and poisoning, (18) Factors influencing health status and contact with health services. Beginning in 2009, the diagnosis array was increased from 15 to 25.
Multi-Level Clinical Classifications Software (CCS) Category	DXMCCS1	2009-2010	Multi-level clinical classification software (CCS) for principal diagnosis. Four levels for diagnoses presenting both the general groupings and very specific conditions
	E_MCCS1	2009-2010	Multi-level clinical classification software (CCS) for first listed E Code. Four levels for E codes presenting both the general groupings and very specific conditions
	PRMCCS1	2009-2010	Multi-level clinical classification software (CCS) for principal procedure. Three levels for procedures presenting both the general groupings and very specific conditions
Procedure Class	PCLASS1 – PCLASS15	2005-2010	Procedure Class for all procedures: (1) Minor Diagnostic, (2) Minor Therapeutic, (3) Major Diagnostic, (4) Major Therapeutic

Type of Data Element	HCUP Name	Years Available	Coding Notes
Linkage Data	HOSPID	2002-2010	HCUP hospital identification number
Elements	KEY	2002-2010	HCUP record identifier

ENDNOTES

Refer to Chapter 10 in Foreman, EK, Survey Sampling Principles. New York: Dekker, 1991.

AHA Data Element Name = Description [HCUP Data Element Name].

```
BDH = Number of short-term hospital beds [B001H].
```

BDTOT = Number of total facility beds [B001].

FTRES = Number of full-time employees: interns & residents (medical & dental) [E125].

PTRES = Number of part-time employees: interns & residents (medical & dental) [E225].

MAPP8 = Council of Teaching Hospitals (COTH) indicator [A101].

MAPP3 = Residency training approval by the Accreditation Council for Graduate Medical Education (ACGME) [A102].

Prior to the 1998 NIS, we used the following SAS code to assign the NIS teaching hospital status indicator, H_TCH:

Carlson BL, Johnson AE, Cohen SB. "An Evaluation of the Use of Personal Computers for Variance Estimation with Complex Survey Data." *Journal of Official Statistics*, vol. 9, no. 4, 1993: 795-814.

We used the following American Hospital Association Annual Survey Database (Health Forum, LLC © 2011) data elements to assign the NIS Teaching Hospital Indicator:

Beginning with the 1998 NIS, we used the following SAS code to assign the teaching hospital status indicator, HOSP_TEACH:

```
/***********************************
/* FIRST ESTABLISH SHORT-TERM BEDS DEFINITION */
/* SHORT TERM BEDS */
IF BDH NE . THEN BEDTEMP = BDH ;
ELSE IF BDH =. THEN BEDTEMP = BDTOT ; /* TOTAL BEDS PROXY */
/* ESTABLISH IRB NEEDED FOR TEACHING STATUS */
/* BASED ON F-T P-T RESIDENT INTERN STATUS */
IRB = (FTRES + .5*PTRES) / BEDTEMP ;
/************************************
/* CREATE TEACHING STATUS DATA ELEMENT */
IF (MAPP8 EQ 1) OR (MAPP3 EQ 1) THEN HOSP TEACH = 1;
ELSE IF (IRB GE 0.25) THEN HOSP TEACH = 1;
ELSE HOSP TEACH = 0 ;
```

- Most AHA Annual Survey Database files do not cover a January-to-December period for every hospital. The numbers of hospitals for 1988-1991 are based on adjusted versions of the files which we created by apportioning the data from adjacent survey files across calendar years. The numbers of hospitals for later years are based on the unadjusted AHA Annual Survey Database files.
- Table 1: Annual Estimates of the Population for the United States, Regions, States, and Puerto Rico: April 1, 2000 to July 1, 2011 (NST-EST2011-01). Source: U.S. Census Bureau, Population Division. Release Date: December 2011.